



GEF

2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.4


CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: -20°C to +100°C
- Treatment: Galvanized

SS Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: -30°C to +100°C

STANDARD COMPOSITION OF VALVE

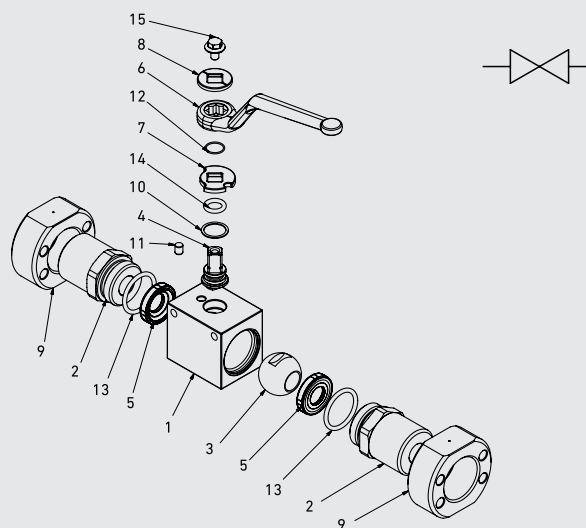

			CS Carbon Steel	SS Stainless Steel
POS	DESCRIPTION	Q.TY	MATERIAL	
1	Body	1	1,0737	1,4404
2	Adapter	2	1,0737	1,4404
3	Ball	1	1,0737	1,4404
4	Stem	1	1,0737	1,4404
5	Ball seat	2	POM	POM
6	Handle	1	ZINC	ZINC
7	Washer	1	1,0116	1,4404
8	Washer	1	1,0116	1,4404
9	Flange	2	1,0737	1,4404
10	Stem ring	1	POM	POM
11	Pin	1	1,0737	1,4404
12	Seeger	1	1,4404	1,4404
13	Adapter o-ring	2	NBR	NBR
14	Stem o-ring	1	NBR	NBR
15	Screw	1	Din 6921 8.8	Din 6921 A4




CODE DESCRIPTION STRUCTURE

GE	F3	DN13	1	1	1	1	A	B
Type and way of valve _____ GE 2-way								
Ends _____ Valves dimension of pressure (PSI) F3 Valves dimension of pressure (PSI) F6 S3000 S6000								
Size _____ from DN13 to DN25								
Body Material _____ ● 1 = 1,0737 ● 4 = 1,4404								
Adapter material _____ ● 1 = 1,0737 ● 4 = 1,4404								
Stem material _____ ● 1 = 1,0737 4 = 1,4404* ● 4 = 1,4404								
Ball Material _____ ● 1 = 1,0737 4 = 1,4404* ● 4 = 1,4404								
Seat material _____ A = POM D = PEEK* G = PA612* K = GEMPTFE* C = PTFE*								
Seal material _____ B = NBR E = FKM* F = EPDM* L = MVQ*								

*On request

- Reduced bore
- Special threads
- Pressure class up to PN6000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

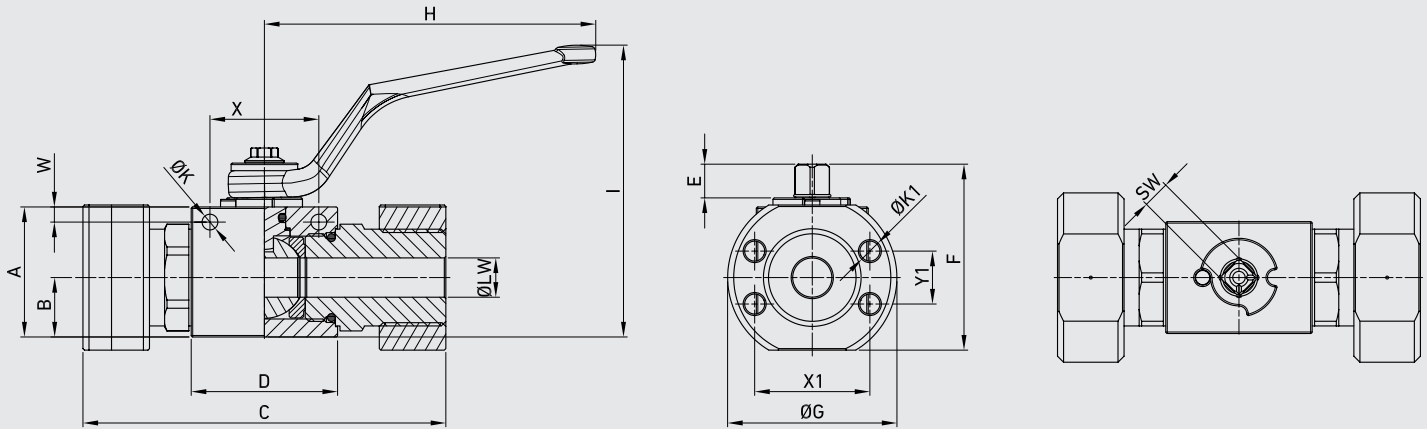

GEF SAE J518 S3000 - F61

GEF SAE J518 S3000 - F61																					CS Carbon Steel		SS Stainless Steel	
TYPE		DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	ØK*	W*	X*	ØLW	SW	WEIGHT	ITEM CODE	
GEF3	13	MPa 35	mm	43	19,7	120	48,4	11	61,5	56	110	95	M8	38,1	17,5	5,25	5	36	13	9	kg	1,504	GE2FFC0L011A000	GE2FFC0L044A000
		Psi 5075	inch	1,69	0,78	4,72	1,91	0,43	2,42	2,20	4,33	3,74		1,50	0,69	0,21	0,20	1,42	0,51	0,35	lb	3,32		
GEF3	20	MPa 35	mm	57	25,4	136	62,5	14	80,1	72	180	105	M10	47,6	22,2	6,25	6	50	20	14	kg	2,608	GE2FFC1L011A000	GE2FFC1L044A000
		Psi 5075	inch	2,24	1,00	5,35	2,46	0,55	3,15	2,83	7,09	4,13		1,87	0,87	0,25	0,24	1,97	0,79	0,55	lb	5,75		
GEF3	25	MPa 35	mm	65	29,5	148	66,5	14	89	81	180	113	M10	52,4	26,2	6,25	6	50	25	14	kg	3,891	GE2FFC2L011A000	GE2FFC2L044A000
		Psi 5075	inch	2,56	1,16	5,83	2,62	0,55	3,50	3,19	7,09	4,45		2,06	1,03	0,25	0,24	1,97	0,98	0,55	lb	8,58		
Size only for carbon steel valves with fixing holes included.																					FIXING HOLES INCLUDED			

Size only for carbon steel valves with fixing holes included.

GEF SAE J518 S3000 UNC - F61

GEF SAE J518 S3000 UNC - F61																						CS Carbon Steel		SS Stainless Steel	
TYPE		DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	ØK*	W*	X*	ØLW	SW	WEIGHT	ITEM CODE		
GEF3	13	MPa 35	mm	43	19,7	120	48,4	11	61,5	56	110	95	5/16-18	38,1	17,5	5,25	5	36	13	9	kg	1,504	GE2FUC0L011A000	GE2FUC0L044A000	
		Psi 5075	inch	1,69	0,78	4,72	1,91	0,43	2,42	2,20	4,33	3,74	UNC	1,50	0,69	0,21	0,20	1,42	0,51	0,35	lb	3,32			
GEF3	20	MPa 35	mm	57	25,4	136	62,5	14	80,1	72	180	105	3/8-16	47,6	22,2	6,25	6	50	20	14	kg	2,608	GE2FUC1L011A000	GE2FUC1L044A000	
		Psi 5075	inch	2,24	1,00	5,35	2,46	0,55	3,15	2,83	7,09	4,13	UNC	1,87	0,87	0,25	0,24	1,97	0,79	0,55	lb	5,75			
GEF3	25	MPa 35	mm	65	29,5	148	66,5	14	89	81	180	113	3/8-16	52,4	26,2	6,25	6	50	25	14	kg	3,891	GE2FUC2L011A000	GE2FUC2L044A000	
		Psi 5075	inch	2,56	1,16	5,83	2,62	0,55	3,50	3,19	7,09	4,45	UNC	2,06	1,03	0,25	0,24	1,97	0,98	0,55	lb	8,58			
Size only for carbon steel valves with fixing holes included.																						FIXING HOLES INCLUDED			

Size only for carbon steel valves with fixing holes included.

GEF SAE J518 S6000 - F62

GEF SAE J518 S6000 - F62																					CS Carbon Steel		SS Stainless Steel	
TYPE		DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	ØK*	W*	X*	ØLW	SW	WEIGHT	ITEM CODE	
GEF6	13	MPa 42	mm 43	19,7	120	48,4	11	61,5	56	110	95	M8	40,5	18,2	5,25	5	36	13	9	kg 1,504	GE2FFC6G011A000	GE2FFC6G044A000		
		Psi 6090	inch 1,69	0,78	4,72	1,91	0,43	2,42	2,20	4,33	3,74		1,59	0,72	0,21	0,20	1,42	0,51	0,35	lb 3,32				
GEF6	20	MPa 42	mm 57	25,4	136	62,5	14	80,1	72	180	105	M10	50,8	23,8	6,25	6	50	20	14	kg 2,608	GE2FFC74011A000	GE2FFC74044A000		
		Psi 6090	inch 2,24	1,00	5,35	2,46	0,55	3,15	2,83	7,09	4,13		2,00	0,94	0,25	0,24	1,97	0,79	0,55	lb 5,75				
GEF6	25	MPa 42	mm 65	29,5	148	66,5	14	89	81	180	113	M12	57,2	27,8	6,25	6	50	25	14	kg 3,891	GE2FFC83011A000	GE2FFC83044A000		
		Psi 6090	inch 2,56	1,16	5,83	2,62	0,55	3,50	3,19	7,09	4,45		2,25	1,09	0,25	0,24	1,97	0,98	0,55	lb 8,58				
Size only for carbon steel valves with fixing holes included.																					FIXING HOLES INCLUDED			

Size only for carbon steel valves with fixing holes included.

GEF SAE J518 S6000 UNC - F62

GEF SAE J518 S6000 UNC - F62																				CS Carbon Steel		SS Stainless Steel			
TYPE		DN	PN		A	B	C	D	E	F	ØG	H	I	ØK1	X1	Y1	ØK*	W*	X*	ØLW	SW	WEIGHT		ITEM CODE	
GEF6	13	MPa 42	mm 43	19,7	120	48,4	11	61,5	56	110	95	5/16-18	40,5	18,2	5,25	5	36	13	9	kg 1,504	GE2FUC6G011A000	GE2FUC6G044A000			
		Psi 6090	inch 1,69	0,78	4,72	1,91	0,43	2,42	2,20	4,33	3,74	UNC	1,59	0,72	0,21	0,20	1,42	0,51	0,35	lb 3,32					
GEF6	20	MPa 42	mm 57	25,4	136	62,5	14	75,5	72	180	105	3/8-16	50,8	23,8	6,25	6	50	20	14	kg 2,608	GE2FUC74011A000	GE2FUC74044A000			
		Psi 6090	inch 2,24	1,00	5,35	2,46	0,55	2,97	2,83	7,09	4,13	UNC	2,00	0,94	0,25	0,24	1,97	0,79	0,55	lb 5,75					
GEF6	25	MPa 42	mm 65	29,5	148	66,5	14	89	81	180	113	7/16-14	57,2	27,8	6,25	6	50	25	14	kg 3,891	GE2FUC83011A000	GE2FUC83044A000			
		Psi 6090	inch 2,56	1,16	5,83	2,62	0,55	3,50	3,19	7,09	4,45	UNC	2,25	1,09	0,25	0,24	1,97	0,98	0,55	lb 8,58					
Size only for carbon steel valves with fixing holes included.																							FIXING HOLES INCLUDED		

Size only for carbon steel valves with fixing holes included.