



50  
YEARS  
1969-2019

## GENERAL CATALOGUE



ITALIAN MANUFACTURER SINCE 1969





## COMPANY'S FOUNDATION

**GEMELS S.p.A.** was founded in 1969 as a Company specialized in the designing and manufacturing of ball valves and quick couplings from 1/4" up to 42".

**GEMELS S.p.A.** has become a worldwide leader in the industrial & hydraulic field and, since 2010, has started to focalize and to invest more and more also in the Oil & Gas field.

**GEMELS S.p.A.** has also introduced into its range new products regarding Green Power application, as ELECTRIC MOTORS and new other forthcoming projects for the electrification of equipment and machines.

## WHERE WE ARE

**GEMELS S.p.A.** is located in the middle of North Italy, less than 50 km from Milan.


Address:  
Via Gambirasio, 20/22 24069  
Trescore Balneario (Bergamo)  
ITALY

**GEMELS NORTH AMERICA INC**  
is located in Dayton, with office and warehouse supplying the American market.

Address:  
Billing Address  
1800 West Loop South  
Suite 1740 - Houston, TX 77027  
**Warehouse & Distribution Center**  
35 Watterson St.  
Dayton, OH 45417

# HEADQUARTERS

GEMELS S.p.A. covers more than 12,500 m<sup>2</sup>, between indoor and outdoor area.

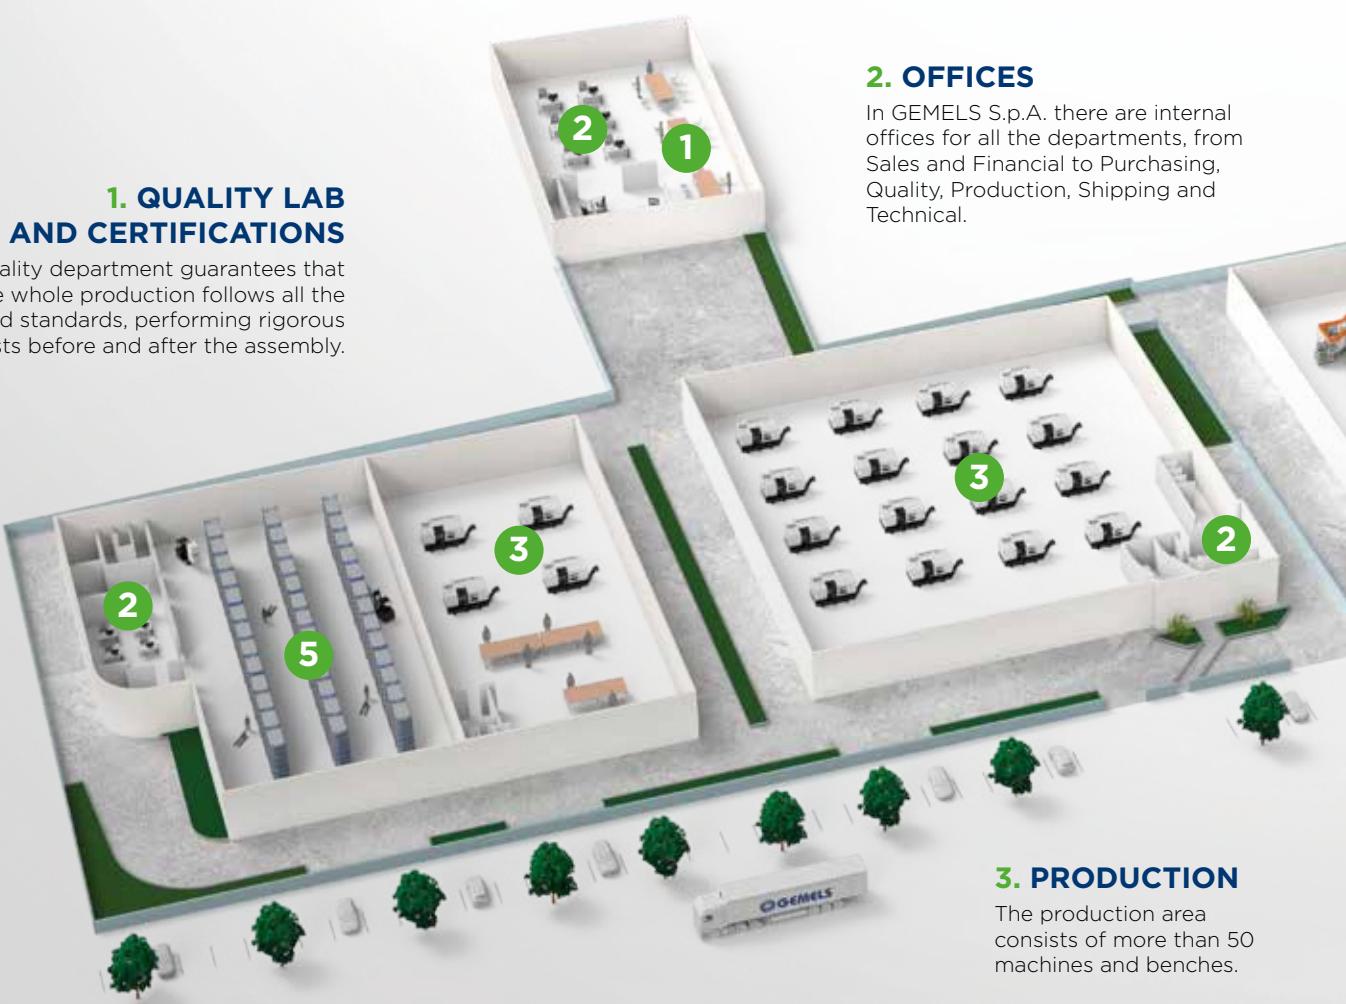

## 1. QUALITY LAB AND CERTIFICATIONS


The quality department guarantees that the whole production follows all the required standards, performing rigorous tests before and after the assembly.

## 2. OFFICES

In GEMELS S.p.A. there are internal offices for all the departments, from Sales and Financial to Purchasing, Quality, Production, Shipping and Technical.

## 3. PRODUCTION

The production area consists of more than 50 machines and benches.

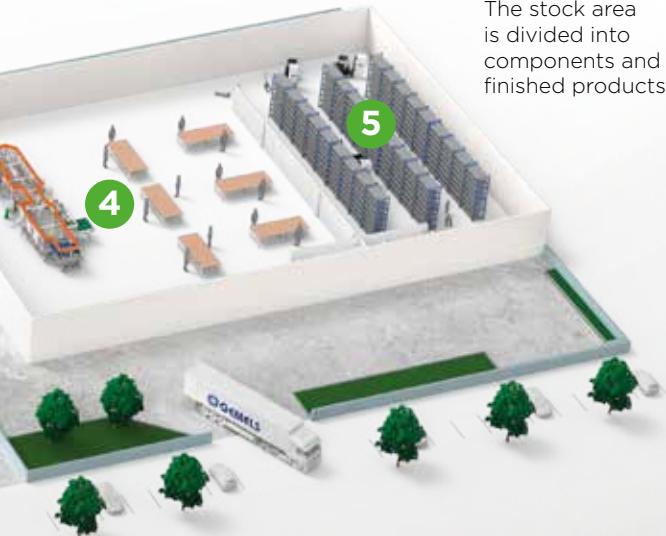

#### 4. ASSEMBLING

The assembling area includes manual and automatic lines, where valves are 100% tested.

#### 5. STOCK AND SHIPPING

The stock area is divided into components and finished products.

## OUR HISTORY

In 1969, in the center of Trescore Balneario, Angelo Facchinetti gave life to his "Officina Meccanica". In 1988 the Company changed its name in **GEMELS** and in the '90s the first ball valve model GE2 was realized. The first shipment abroad, in 1997, highlighted the first step of the internationalization process. In 2004 **GEMELS** bought two new buildings, next to the first one, to increase its production. In 2010 the Company made the first investments in the Oil&Gas market, obtaining API 6D Certification two years later. In 2015, becoming always more aware of health and safety themes, **GEMELS** obtained ISO 18001 and OHSAS 14001 Certifications. The first machine for the automatic assembly of GE valves was introduced in 2017. In 2018 **GEMELS** widened its product range by developing Quick Couplings. In 2020 the Company changed its business name from **GEMELS** to **GEMELS S.p.A.** and the first branch in USA, **Gemels North America Inc.** based in Dayton, was officially opened.



GEMELS S.p.A. is not a Community for everybody. If you like impossible challenges, if you would like to become a champion and you are an honest person, you could be part of our reality.

Our distinctive value is fully understood by those who has made a direct experience in GEMELS S.p.A..

# GLOBAL PRESENCE

## 100 COUNTRIES

**GEMELS S.p.A.** has a strong global presence with a network of distributors and partners all over the world. Reaching almost 100 countries, the Company is able to guarantee the faster solution to all the customers across the five continents.



# PHILOSOPHY

**GEMELS S.p.A.** finds its philosophy on being a Company completely different from the other ones in every aspect for its courage and honesty. This philosophy is not based on the enrichment of the Company management, but on sharing it with each colleague, who work with passion looking for a continuous improvement, growth and perfection, and his/her family. The real success of **GEMELS S.p.A.** is what we inspire in our colleagues' lives, which becomes then their personal success too. We base our philosophy on a creative long-period idea, where women hold high-profile positions, generating a chain of values that reaches their children, who, once included in the Company's reality, will bring the learned culture. The value given to people that are part of our Community is essential: they are the one who make the Company. To fully understand **GEMELS** philosophy, which is completely out of the ordinary, as far as you try, is often difficult, almost impossible.



# SUSTAINABILITY

---

For **GEMELS S.p.A.** sustainability is a priority: the Company always takes care of ESG themes (Environmental Social Governance).

**GEMELS S.p.A.** supports the basics of the European Green Deal. This agreement, among its points, not only does it deal with the problem of climate change, but also it concerns workers and communities support, guaranteeing social protection and respect for human rights. Among the various aspects related to social issues, **GEMELS S.p.A.** puts great emphasis on the topic of welfare, as well as on employee engagement, gender diversity, responsible and sustainable supply chain.



The Company values its people (PEOPLE FIRST): it has always adopted this approach, as people are the ones who make the Company. **GEMELS S.p.A.** has always worked hard to spread a 'COMPANY CULTURE', both internally and externally, that gives value and defends people, protects their mental and physical health and promotes their development.

Another goal is the female quota, currently up to 40% of the colleagues.

**GEMELS S.p.A.** philosophy follows the principles of TPS, based on lean production, 5S, pursuit of the excellence in quality and continuous improvements (kaizen).





**“ WHEN YOU WORK, REMIND: YOUR FAMILY IS WAITING FOR YOU AT HOME! ”**

## GEMELS safety

One of **GEMELS S.p.A.** main focuses is the promotion and spread of a Safety Culture in the workplace. One of our mottos is: WHEN YOU WORK, REMIND: YOUR FAMILY IS WAITING FOR YOU AT HOME!


In order to spread safety awareness to all the partners and colleagues, we have introduced some special labels on our equipment and machinery with the “**GEMELS SAFETY**” brand. These labels are printed internally by our quality and safety department. **GEMELS S.p.A.** is ISO 45001 certified.

## GEMELS Supply Support Center

Regarding the supply chain, the Company is committed to increasing awareness of themes such as the transparency and honesty of relationships. Since 2014, **GEMELS S.p.A.** has introduced a designated office with the aim of making continuous improvements to the quality of its products, thanks to a close collaboration between the suppliers and the Company: it is called GSSC (GEMELS Supply Support Center).

## GEMELS ENVIRONMENT

We are sensitive to the environmental issues and to the impact that production activities have on the environment and territory in terms of natural gas emissions, energy savings, green innovation, soil protection and biodiversity. **GEMELS S.p.A.** is committed to inspiring its workers' environmental awareness by reducing the quantity of waste produced, by optimizing recycling and by promoting the reduction of energy consumption thanks to our production cycles efficiency. The Company dedicates few hours each year to environmental and social sustainability, supporting different local and national charitable organizations. **GEMELS S.p.A.** is ISO 14001 certified.

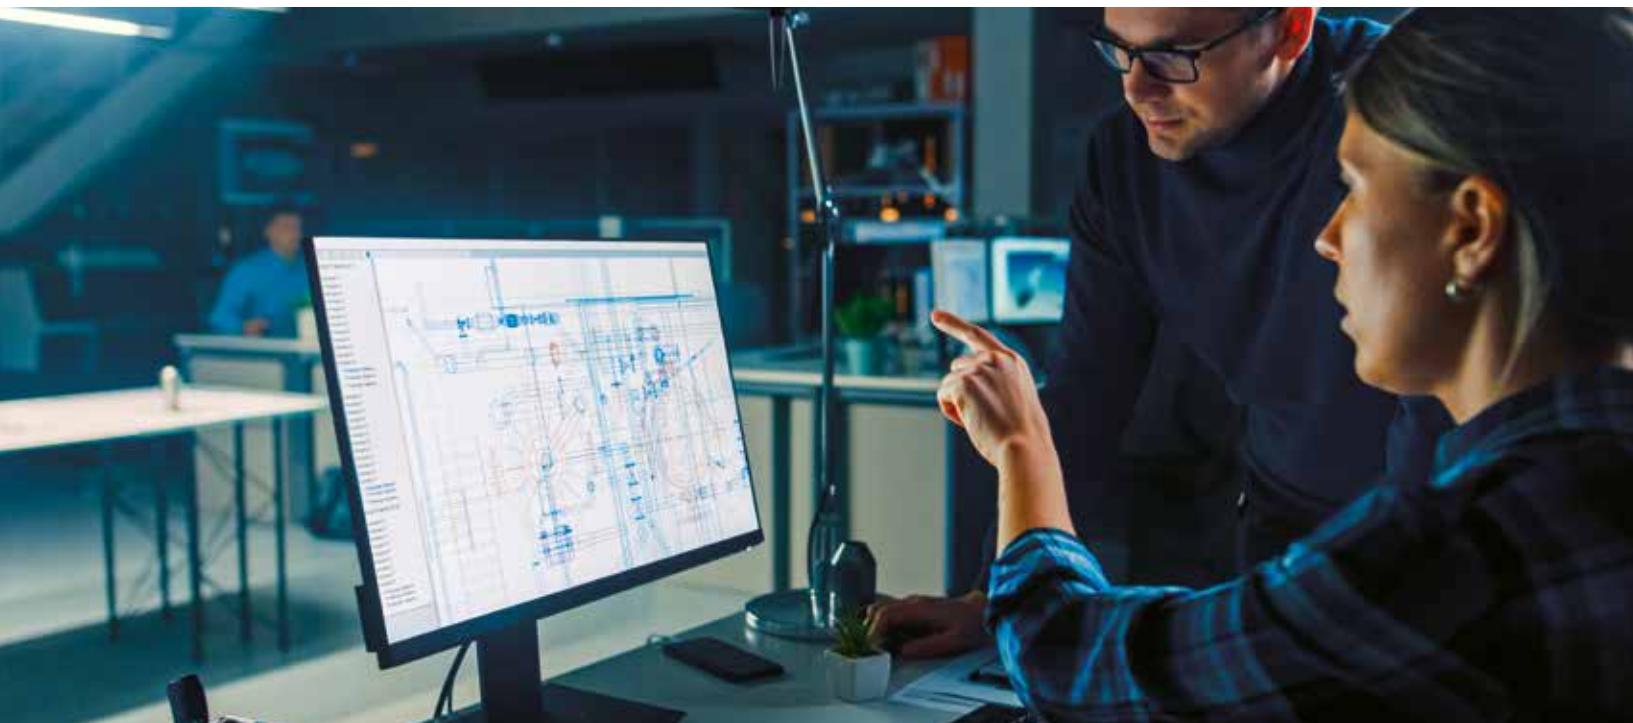

PATENT

1

## BALL VALVES WITH INTEGRATED QUICK COUPLINGS

### LEAN & COMPACT SOLUTIONS

Many components reduced to only one single item

### BETTER & GUARANTEED PERFORMANCES

One single body incorporates valve and coupling, that means no more leakages and contaminations of the system and a more uniform flow



### VARIOUS & CUSTOMIZED SOLUTIONS

Valve available in different threads and coupling standards according to request


ISO A / ISO B / FLAT FACE / N / NV / PUSH-PULL

PATENT

2

## DIRTY GAS APPLICATION

For some critical applications with dirty gas, especially in CNG field, **GEMELS S.p.A.** patented a special insert with an internal stem to avoid completely the damaging of ball seats.

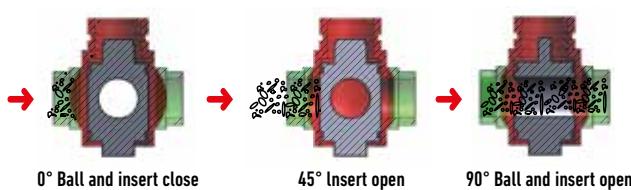

# DESIGN AND PATENT

Thanks to its philosophy, based on lean production, **GEMELS S.p.A.** has specialized over the years in the design and production of valves for special & critical applications, providing customers with lean solutions and customized valves.

Thanks to the R&D department rigorous study of advanced and innovative solutions, **GEMELS S.p.A.** has also obtained 4 patents in Italy and Europe.



PATENT  
**3**

## GEMFY

Our GEMFY Valve is studied for high-pressure application, ensuring:

- lower torque values.
- smaller & cheaper actuator.
- absence of an external bypass valve.
- more open/dose cycles.
- longer life of the ball valve.
- easier opening after long period of closing.

PATENT  
**4**

## FULLY WELDED

The patent is applicable to FULLY WELDED SBT valves, where the flanges are welded to the body (and not bolted).

The patent allows to assemble and test the valve more safely, quickly and cheaply.

Thanks to the special grooves studied, which permit mounting and testing the body and the flanges, it is possible to perform the high-pressure leak test without performing the first weld overlay.

That is both time-saving and money-saving.

# R&D

---

In **GEMELS S.p.A. R&D Department**, our technicians study innovative solutions. In the last years, the Company has been focusing on GREEN POWER ENERGY with new projects in the ELECTRIC field. **GEMELS S.p.A.** introduced three-phase synchronous ELECTRIC MOTORS and other new technological products.

## APPLICATIONS & SOLUTIONS

**GEMELS S.p.A.** electric motors are studied for different applications: agriculture, earth moving, construction, cleaning, material handling, lifting equipment, transfer carts, automotive, e-mobility and many others.

## CUSTOMIZED Series





## LEAN CUSTOMIZED



**GEMELS S.p.A.** studies and designs special lean customized solutions for its customers based on specific requests. Thanks to the close collaboration between **GEMELS S.p.A.** technical department and the engineering department of the customers, we are able to study the best and most suitable solution for the application where our products will be mounted. **GEMELS S.p.A.** can realize prototypes and samples. Our customized solutions can range over different fields, like agriculture, fire-fighting, construction and building, lifting, automotive, steel plant, heavy equipment and marine.



# QUALITY LAB

## INTERNAL LABORATORY

The main characteristic of **GEMELS S.p.A.** ball valves is the excellence in quality, which is possible thanks to the accurate selection of raw materials, staff and partners made by the management.

Moreover, in the Internal Laboratory, **GEMELS S.p.A.** qualified personnel tests the valves' lifespan, simulating critical applications and conditions with special machineries (burst test, impulse test, salt spray test, climatic room, Tridimensional check, microscope, hardness gauge, bidimensional gauge) to constantly ensure the highest quality.



QUALITY MANAGEMENT SYSTEM  
ISO 9001

HEALTH & SAFETY  
ISO 45001

ENVIRONMENTAL  
MANAGEMENT SYSTEMS  
ISO 14001

## PRODUCTS CERTIFICATIONS

- CE PED Mod. H
- UKCA PER Mod. H
- ATEX
- FIRE SAFE
- DNV
- FUGITIVE EMISSION
- TA LUFT
- SIL 3
- EAC
- CRN

# PRODUCTION

---

## MORE THAN 60.000 VALVES PER MONTH

The production area, where **GEMELS S.p.A.** produces more than 60.000 ball valves per month, consists of more than 50 machines, including automatic numerical controlled machines and semi-automatic ones, among which CNC, lathes, transfers, boring machines, machining centres etc.



MADE IN  
ITALY



These technologies and the high qualified personnel help **GEMELS S.p.A.** to achieve the quality standards and excellence, obtaining the required technical characteristics and gaining trustworthiness in the market.



The whole production follows all the required standards, performing rigorous tests after both the production and the assembly.  
After that, all valves are 100% tested using specific test benches.

# MANUAL ASSEMBLING

There is the 'historical' manual assembly line for the assembly of special models and of big size ball valves up to 42".



# AUTOMATIC ASSEMBLING

---

## ASSEMBLING AND TESTING LINE

To further guarantee the quality of our products, at the beginning of 2017 we installed a new automatic assembly line for the mounting and testing of the ball valves.






This machine permits the assembly and the relative test of all the standard valves up to 1". For each assembled valve an automatic report that shows every step of the process is made, thanks to the pictures shot by the cameras placed in each station of the machine.



# STOCK AND SHIPPING

## FAST DELIVERY

**GEMELS'** warehouse of 2.000 m<sup>2</sup> is divided between components and finished products. **GEMELS S.p.A.** is able to guarantee a wide range of products with fast delivery.

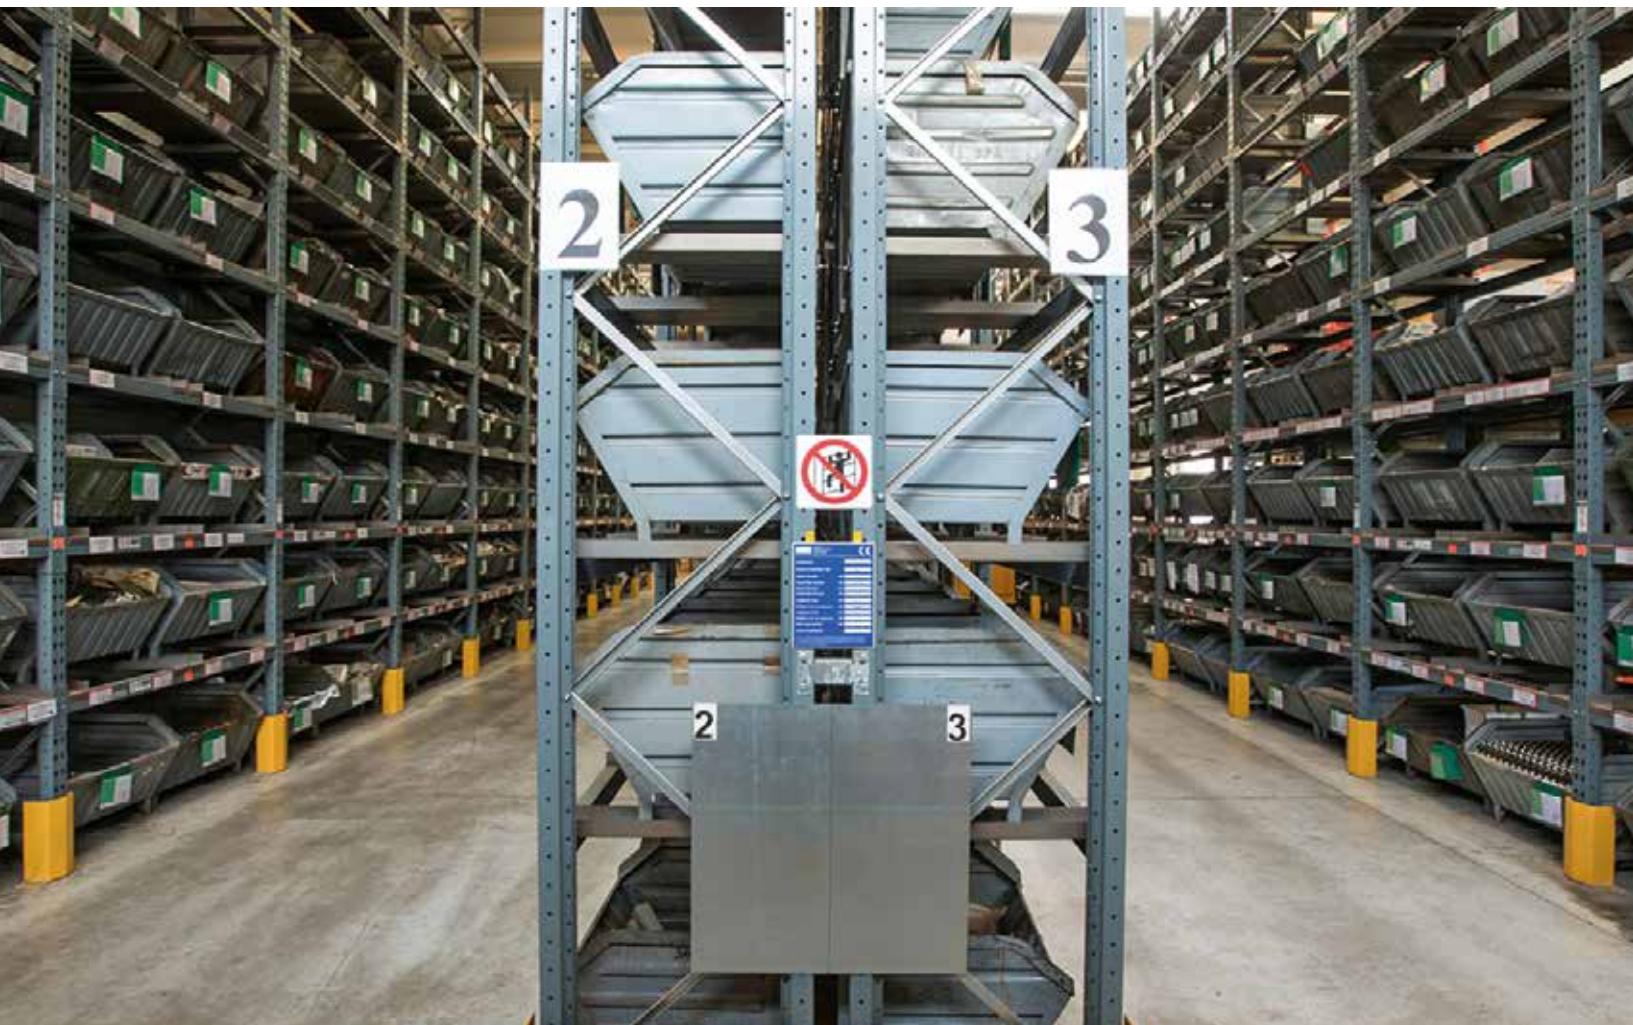

**ELECTRIC MOTORS**

**HYDRAULIC SWIVEL JOINTS  
HYDRAULIC QUICK COUPLINGS  
HYDRAULIC VALVES**

**OIL & GAS BALL VALVES**



## ELECTRIC MOTORS



## ELECTRIC MOTORS



### GREEN POWER

Modular aluminum or steel structure

- from 2 kW to 100 kW
- from 48V to 400V
- up to 10.000 RPM

page 42



## HYDRAULIC SWIVEL JOINTS



## HYDRAULIC SWIVEL JOINTS



### HSJ

- Type: HYDRAULIC SWIVEL JOINTS
- Sizes: from 2WAY up to 22WAY
- Ends: BSP, NPT, SAE, flange
- Pressure: up to PN420

page 48



## HYDRAULIC QUICK COUPLINGS



## HYDRAULIC QUICK COUPLINGS



### FLAT FACE

- Carbon Steel and Stainless Steel
- Type: Quick Couplings
- Models: ISO 16028
- Sizes: from DN6 up to DN25
- Pressure: up to PN420

page 54



### ISO B

- Carbon Steel and Stainless Steel
- Type: Quick Couplings
- Models: ISO 7241/B
- Sizes: from DN6 up to DN50
- Pressure: up to PN420

page 98



### FFAP

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 16028
- Sizes: from DN6 up to DN25
- Pressure: up to PN420

page 74



### N

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 5675
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

page 104



### ISO A

- Carbon Steel and Stainless Steel
- Type: Quick Couplings
- Models: ISO 7241/A
- Sizes: from DN6 up to DN50
- Pressure: up to PN420

page 76



### NV

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 5675
- Sizes: from DN6 up to DN25
- Pressure: up to PN350

page 108



### PUSH PULL

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 7241/A
- Sizes: from DN10 up to DN25
- Pressure: up to PN420

page 82



### BGF

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 5676
- Sizes: from DN10 up to DN13
- Pressure: up to PN210

page 112



### DV

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 7241/A - PUSH-PULL
- Sizes: from DN13 up to DN20
- Pressure: up to PN350

page 90



### VGA

- Carbon Steel and Stainless Steel
- Type: Quick Couplings
- Models: ISO 14541
- Sizes: from DN6 up to DN25
- Pressure: up to PN420

page 116

## HYDRAULIC QUICK COUPLINGS



### VGB

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 14540
- Sizes: from DN6 up to DN10
- Pressure: up to PN700

page 130



### GE2 FF\*

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling FLAT FACE
- Sizes: from DN10 up to DN25
- Pressure: up to PN420

### GE2 A\*

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling ISO A
- Sizes: from DN10 up to DN25
- Pressure: up to PN420

### GE2 PP\*

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling PUSH-PULL
- Sizes: from DN10 up to DN25
- Pressure: up to PN420

### GE2 VGA\*

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling VGA
- Sizes: from DN10 up to DN25
- Pressure: up to PN420



### DG

- Carbon Steel
- Type: Quick Couplings
- Models: ISO 15171-1
- Sizes: from DN6
- Pressure: up to PN500

page 132

page 136

\* patent





## HYDRAULIC BALL VALVES



## HYDRAULIC BALL VALVES



### CUSTOMIZED LEAN SOLUTION

page 154



### GE2 HC

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way high cycles
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 196



### GH2

- Stainless Steel
- Type: ball valve 2 way high cycles
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN1000



page 174



### GE3

- Carbon Steel and Stainless Steel
- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500

page 202



### GEM

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: DN6
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 180



### GE5

- Carbon Steel
- Type: ball valve 3 way
- Sizes: from DN6 up to DN13
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 210



### GE1

- Carbon Steel
- Type: ball valve 2 way
- Sizes: from DN6 up to DN13
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 184



### GE3K

- Carbon Steel and Stainless Steel
- Type: ball valve 3 way special seats, zero leakage
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 214



### GE2

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500

page 188



### GEF

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2 SAEJ518-1/-2
- Pressure: up to PN420 / S6000

page 218

## HYDRAULIC BALL VALVES


**GES**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: SAE J518
- Pressure: up to PN420 / S6000

page 222


**GBS**

- Carbon Steel and Stainless Steel
- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: SAE J518
- Pressure: up to PN420 / S6000

page 242


**GEF-S**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2 SAEJ518-1/-2
- Pressure: up to PN420 / S6000

page 226


**GBF-S**

- Carbon Steel and Stainless Steel
- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2, SAEJ518-1/-2
- Pressure: up to PN420 / S6000

page 246


**GB1**

- Carbon Steel and Stainless Steel
- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN420

page 230


**GV2**

- Type: ball valve 2 way
- Sizes: from DN10 up to DN32
- Ends: BSP-NPT-SAE / ISO6162-1
- O-Rings: NBR, FKM, EPDM, MVQ
- Pressure: up to PN500 / S6000
- Temp range: -20°C to +100°C

page 250


**GB3**

- Carbon Steel and Stainless Steel
- Type: ball valve 3 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT
- Pressure: up to PN350

page 234


**GV3**

- Type: ball valve 3 way
- Sizes: from DN10 up to DN32
- Ends: BSP-NPT-SAE / ISO6162-1
- O-Rings: NBR, FKM, EPDM, MVQ
- Pressure: up to PN500 / S6000
- Temp range: -20°C to +100°C

page 254


**GBF**

- Carbon Steel and Stainless Steel
- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2, SAEJ518-1/-2
- Pressure: up to PN420 / S6000

page 238


**G3K**

- Carbon Steel
- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN500

page 258

**G4K**

- Carbon Steel
- Type: ball valve 4 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN500

page 262

**GHP**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN100
- Ends: BSP-NPT
- Pressure: up to PN370

page 284

**GPK2**

- Carbon Steel
- Type: manifold
- Sizes: from DN6 up to DN50
- Ends: Drilling pattern Gemels
- Pressure: up to PN500

page 266

**KITS**

- Locking
- Handles
- Pneumatic&Electric Actuators
- Limit Switch

page 399

**GPK3**

- Carbon Steel
- Type: manifold
- Sizes: from DN6 up to DN50
- Ends: Drilling pattern Gemels
- Pressure: up to PN500

page 270

**TECH**

page 449

**GRC**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN25 up to DN125
- Ends: ISO6164 (CETOP)
- Pressure: up to PN420 / S6000

page 274

**GRS**

- Carbon Steel and Stainless Steel
- Type: ball valve 2 way
- Sizes: from DN13 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518)
- Pressure: up to PN420 / S6000

page 278



## HYDRAULIC VALVES



## HYDRAULIC VALVES



### VOSE

- Carbon Steel
- Type: Single Effect Overcenter Valve
- Sizes: DN6-DN20
- Ends: BSP-NPT-SAE
- Pressure: up to PN350

page 290



### VBP

- Carbon Steel

#### VBPSE

- Type: single pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350

#### VBPDE

- Type: double pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350

#### VBPDE CEXC

- Type: double pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350"

page 306



### VODE

- Carbon Steel
- Type: Double Effect Overcenter Valve
- Sizes: DN6-DN20
- Ends: BSP-NPT-SAE
- Pressure: up to PN350

page 294



### VRC

- Carbon Steel
- Type: Direct Acting Relief Valve with Manifold
- Sizes: DN6-DN10
- Ends: BSP-NPT-SAE
- Pressure: up to PN350

page 298



### RF

- Carbon Steel
- Type: check valve flow control
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400

page 310



### VRM

- Carbon Steel
- Type: Relief Valve in Manifold with Manometer Port
- Sizes: DN10-DN13-DN20
- Ends: BSP-NPT-SAE
- Pressure: up to PN350

page 302



### BD

- Carbon Steel
- Type: reduce flow control B-directional
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400

page 314



page 290



### VU

- Carbon Steel and Stainless Steel
- Type: check valve
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 318

## HYDRAULIC VALVES



### GEV

- Carbon Steel
- Type: shuttle valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500

page 322



### DDF

- Cast Iron
- Type: 3 ways flow dividers
- Pressure: up to PN300

page 338



### GPS

- Carbon Steel
- Type: 3-ways single pilot operated check valves with zinc-plated steel body
- Sizes: from DN6 up to DN25
- Ends: BSP
- Pressure: up to PN400

page 326



### KITS

- Locking
- Handles
- Pneumatic&Electric Actuators
- Limit Switch

page 399



### VB VUBA

- Carbon Steel
  - Type: hose break valve
  - Sizes: from DN6 up to DN25
  - Ends: BSP-NPT-SAE
  - Pressure: up to PN350
- VBF** Female insert  
**VBM** Male insert

page 328

### TECH



page 449



### SJ

- Carbon Steel
- Type: swivel joint / at 90°
- Sizes: from DN6 up to DN50
- Ends: BSP- NPT (on request)
- Pressure: up to PN400

page 332



### SJ HD


- Carbon Steel
- Type: swivel joint HD / in line
- Sizes: from DN13 up to DN32
- Ends: BSP - UNF/SAE (on request)
- Pressure: up to PN400

page 336





## OIL & GAS BALL VALVES

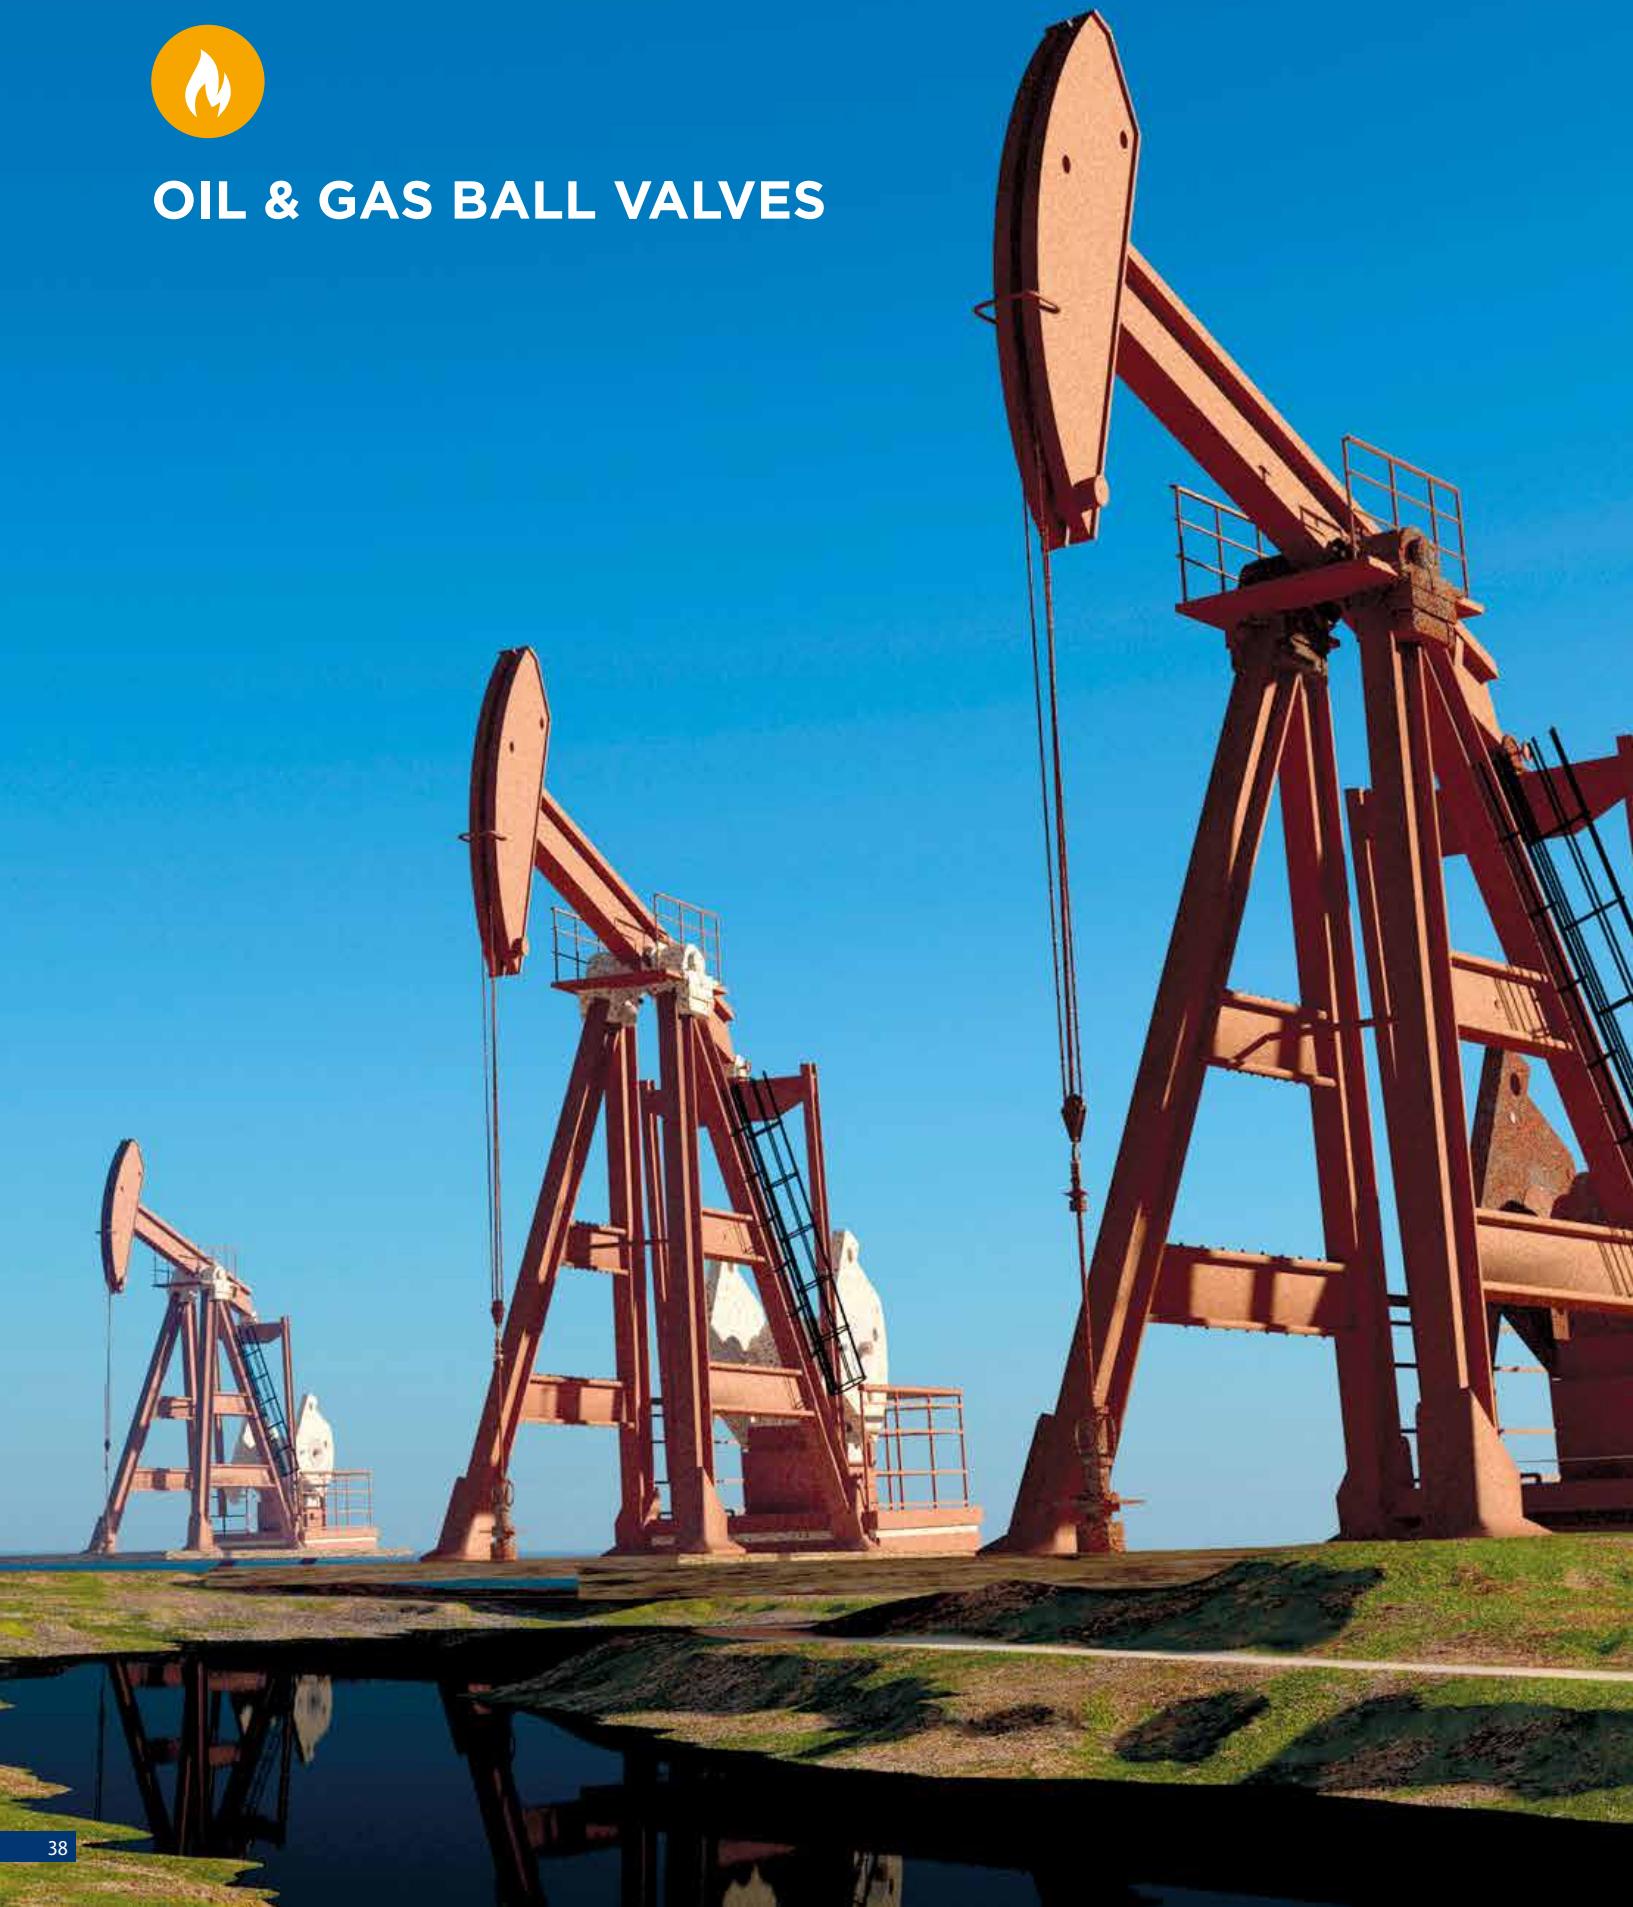

## OIL & GAS BALL VALVES



### GN

- Carbon Steel and Stainless Steel
- Type: ball valve 2way
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SW-SWXT -PE BW
- Pressure: up to PN500 / S6000

page 342



### SBT

- CS, SS, DSS, ALLOY (Forged)
- Type: ball valve Split Body Trunnion
- Sizes: from DN20 up to DN900
- Pressure: ANSI 150-2500

page 376



### GM

- Carbon Steel and Stainless Steel
- Type: ball valve 2way
- Sizes: from DN6 up to DN100
- Ends: BSP-NPT-SW-SWXT -PE BW
- Pressure: up to PN500 / S3000

page 354



### DBB

- CS, SS, DSS, ALLOY (Forged)
- Type: ball valve Double Block and Bleed
- Sizes: from DN13 up to DN200
- Pressure: ANSI 150-2500

page 390



### SBF-W

- CS, SS, DSS, ALLOY (Forged)
- Type: ball valve Split Body Floating-Wafer type
- Sizes: from DN13 up to DN150
- Pressure: ANSI150-600

page 362



### KITS

- Locking
- Handles
- Pneumatic&Electric Actuators
- Limit Switch

page 399



### SBF

- CS, SS, DSS, ALLOY (Forged)
- Type: ball valve Split Body Floating
- Sizes: from DN13 up to DN150
- Pressure: ANSI 150-2500

page 366



### TECH

page 449





## ELECTRIC POWER SUPPLY

**GEMELS** series of electric motors, designed and produced in Italy, consists in AC three-phase torque motors, available in different models with power from 2 kW to 100 kW, from 48V to 400V, and up to 10.000 RPM.

Motors can be designed for traction solutions, Hydraulic power units (pump interfaces) and with standard flanges (IEC/NEMA), air and liquid cooling, power cables with motor connection box or directly connected to the winding.



E  
L  
E  
C  
T  
R  
I  
C



# ELECTRIC MOTORS

Edition. 21.0

## CUSTOMIZED ON REQUEST

### • HIGHEST RELIABILITY

High safety and trustworthy products that operate in a defined environment without failure.

### • GREEN POWER SUPPLY

A subset of renewable energy to provide the highest environmental benefit.

### • COMPACT DIMENSIONS

Small, compatible and suitable products.

### • ENERGY SAVING

Products with a sensible reduction on consumption of energy to have higher life's quality.




[360.gemels.it](http://360.gemels.it)





ABOVE SIZES AND POWER  
ACCORDING TO REQUEST

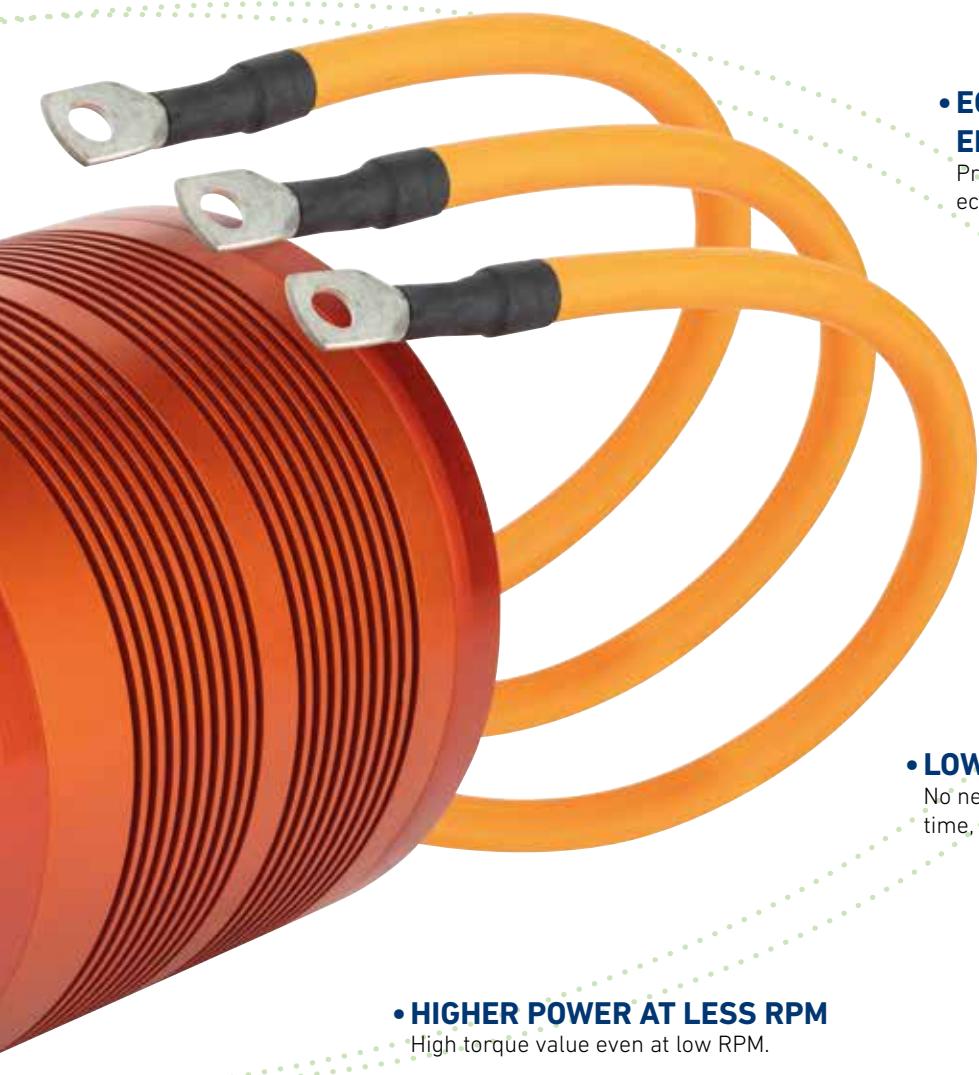

- **ECOLOGICAL ENVIRONMENTAL IMPACT**

Products focused on prevent of the ecological impact on world environment.

- **NOISE REDUCTION AND EMISSIONS-FREE**



Products without waste of pollution in the environment.

- **LOW-MAINTENANCE**

No necessity to do big maintenance, efforts, time, on the plant.

- **HIGHER POWER AT LESS RPM**

High torque value even at low RPM.

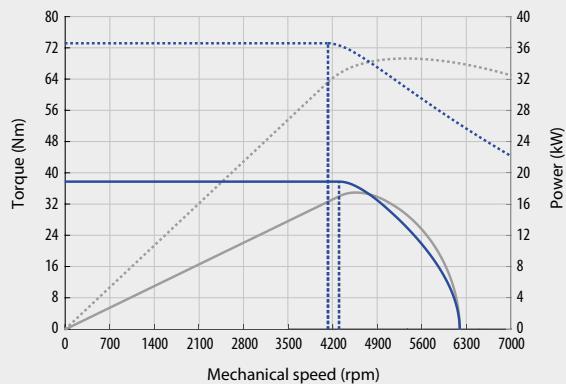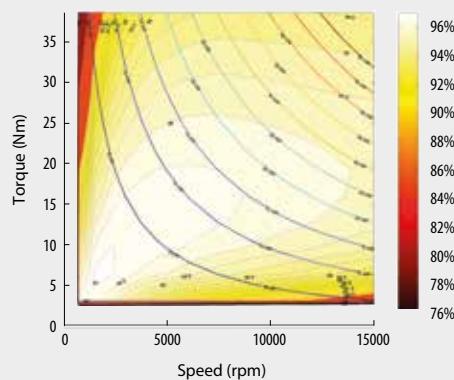**EFFICIENCY MAP**
**Diagrams**

**TECHNICAL DATA**

| TYPE  | Rated power (kW) at 48Vdc 2000RPM | Rated power (kW) at 72Vdc 3000RPM | Rated power (kW) at 96Vdc 4000RPM | Rated torque (Nm) | Cooling                              | IP                     |
|---|-----------------------------------|-----------------------------------|-----------------------------------|-------------------|--------------------------------------|------------------------|
| GEPG05_04K                                  | 2 kW                              | 3 kW                              | 4 kW                              | 10 Nm             | AIR / liquid +75% torque power value | IP54 (on request IP67) |
| GEPG05_06K                                  | 3 kW                              | 4,5 kW                            | 6 kW                              | 15 Nm             | AIR / liquid +75% torque power value | IP54 (on request IP67) |
| GEPG_H_06K<br>available with Hydraulic Pump | 3 kW                              | 4,5 kW                            | 6 kW                              | 15 Nm             | AIR / liquid +75% torque power value | IP54 (on request IP67) |
| GEPG05_10K                                  | 5 kW                              | 7 kW                              | 10 kW                             | 23 Nm             | AIR / liquid +75% torque power value | IP54 (on request IP67) |
| GEPG05_16K                                  | 8 kW                              | 12 kW                             | 16 kW                             | 38 Nm             | AIR / liquid +75% torque power value | IP54 (on request IP67) |
| GEPG_H_16K<br>available with Hydraulic Pump | 8 kW                              | 12 kW                             | 16 kW                             | 30 Nm             | AIR / liquid +75% torque power value | IP54 (on request IP67) |
| GEPG05_12K                                  | 6 kW                              | 9 kW                              | 11,5 kW                           | 28 Nm             | Liquid                               | IP54 (on request IP67) |
| GEPG05_16K                                  | 8 kW                              | 11,5 kW                           | 15,5 kW                           | 37 Nm             | Liquid                               | IP54 (on request IP67) |
| GEPG05_20K                                  | 10 kW                             | 14,5 kW                           | 19,5 kW                           | 47 Nm             | Liquid                               | IP54 (on request IP67) |
| GEPG05_24K                                  | 12 kW                             | 18 kW                             | 24 kW                             | 58 Nm             | Liquid                               | IP54 (on request IP67) |
| GEPG05_36K                                  | 18,5 kW                           | 24 kW                             | 36 kW                             | 88 Nm             | Liquid                               | IP54 (on request IP67) |
| GEPG05_42K                                  | 21 kW                             | 32 kW                             | 42 kW                             | 100 Nm            | Liquid                               | IP54 (on request IP67) |

**Technical features:** Modular aluminium or steel structure from 2kW to 42kW suitable for services HYDRAULIC UNITS 0-8000 RPM 48-400 Volt

GEP05

Modular aluminium or steel structure from 42kW to 50kW  
suitable for services - HEAVY HANDLING  
0-10000 RPM / 96 - 400 Volt

**Customized on request**

Modular aluminium or steel structure from 50kW to 100kW  
suitable for traction - HEAVY TRACTION  
0-10000 RPM / 400 Volt

# NEW PROJECT FOR GREEN POWER

...COMING SOON



READY TO GO  
GEMELS ELECTRICAL





## HYDRAULIC SWIVEL JOINTS

**GEMELS** has in its range HYDRAULIC SWIVEL JOINTS from 2WAY up to 22WAY for different application like drilling rigs, cranes, platforms and excavators. We study internally custom solutions for OEM according to their specific application.

# HYDRAULIC SWIVEL JOINTS





# HYDRAULIC SWIVEL JOINTS

Edition. 21.1

**Type**

HYDRAULIC SWIVEL JOINTS

**Sizes**

from 2WAY up to 22WAY

**Ends**

BSP, NPT, SAE, flange

**Pressure**

up to PN420



## Highest reliability

- stator: C40 - aluminium; rotor: S355J2G3 - aluminium.

## Working conditions

- mounting position: vertical;
- axial and radial loads: not allowed;
- max rotating speed: 12 rpm;
- max pressure: 420 bar;
- min/max ambient temperatures: -20°C / +60°C;
- max working temperature: 90°C;
- standard working range: -10°C ÷ 80°C;
- rotating/starting torque: according to the design model.

## Fluids

- hydraulic oil - DOT 4 - H2O

## Surface treatments

- rotor: phosphatizing with manganese - nickel plating ENP
  - hard oxidation;
- stator: hard chromium plating - nickel plating ENP
  - hard oxidation.


## Sealing components

- seals in buna N - Viton - EPDM - special Teflon rings.

## Accessories (slip ring)

- every model can be supplied with electrical swivel joint according to the requirements of the customers.

## CROSS SECTION

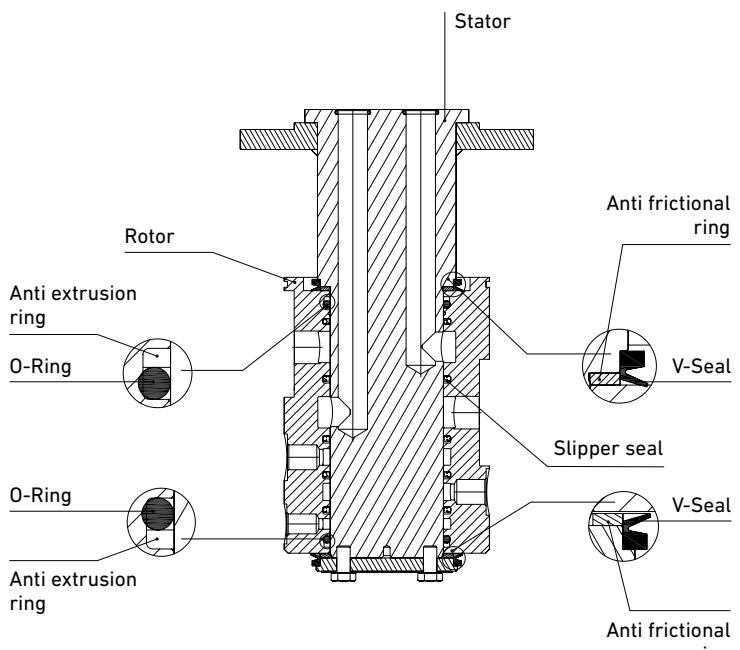

**5 WAY  
EXCAVATOR/MOBILE CRANE**

**18 WAY  
TELEHANDLER**

## ■ APPLICATIONS & SOLUTIONS



DRILLING RIGS



EXCAVATOR/MOBILE CRANE



UNDERCARRIAGES




CONCRETE MIXER PUMPS


HYDRAULIC + SLIP RING  
TELEHANDLER

SLIP RING



## ■ COMPOSITION OF HYDRAULIC SWIVEL JOINT

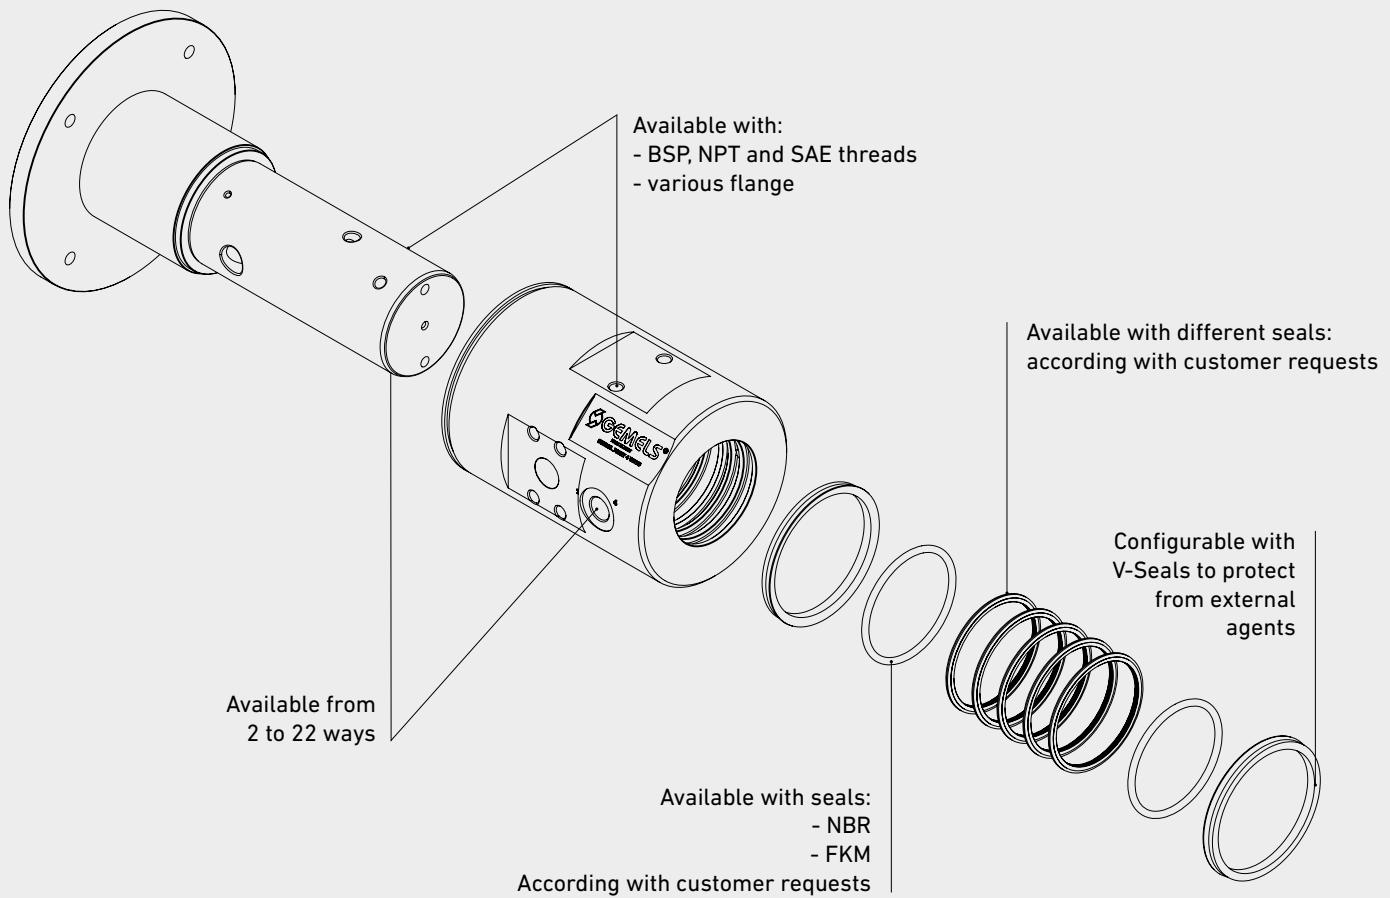

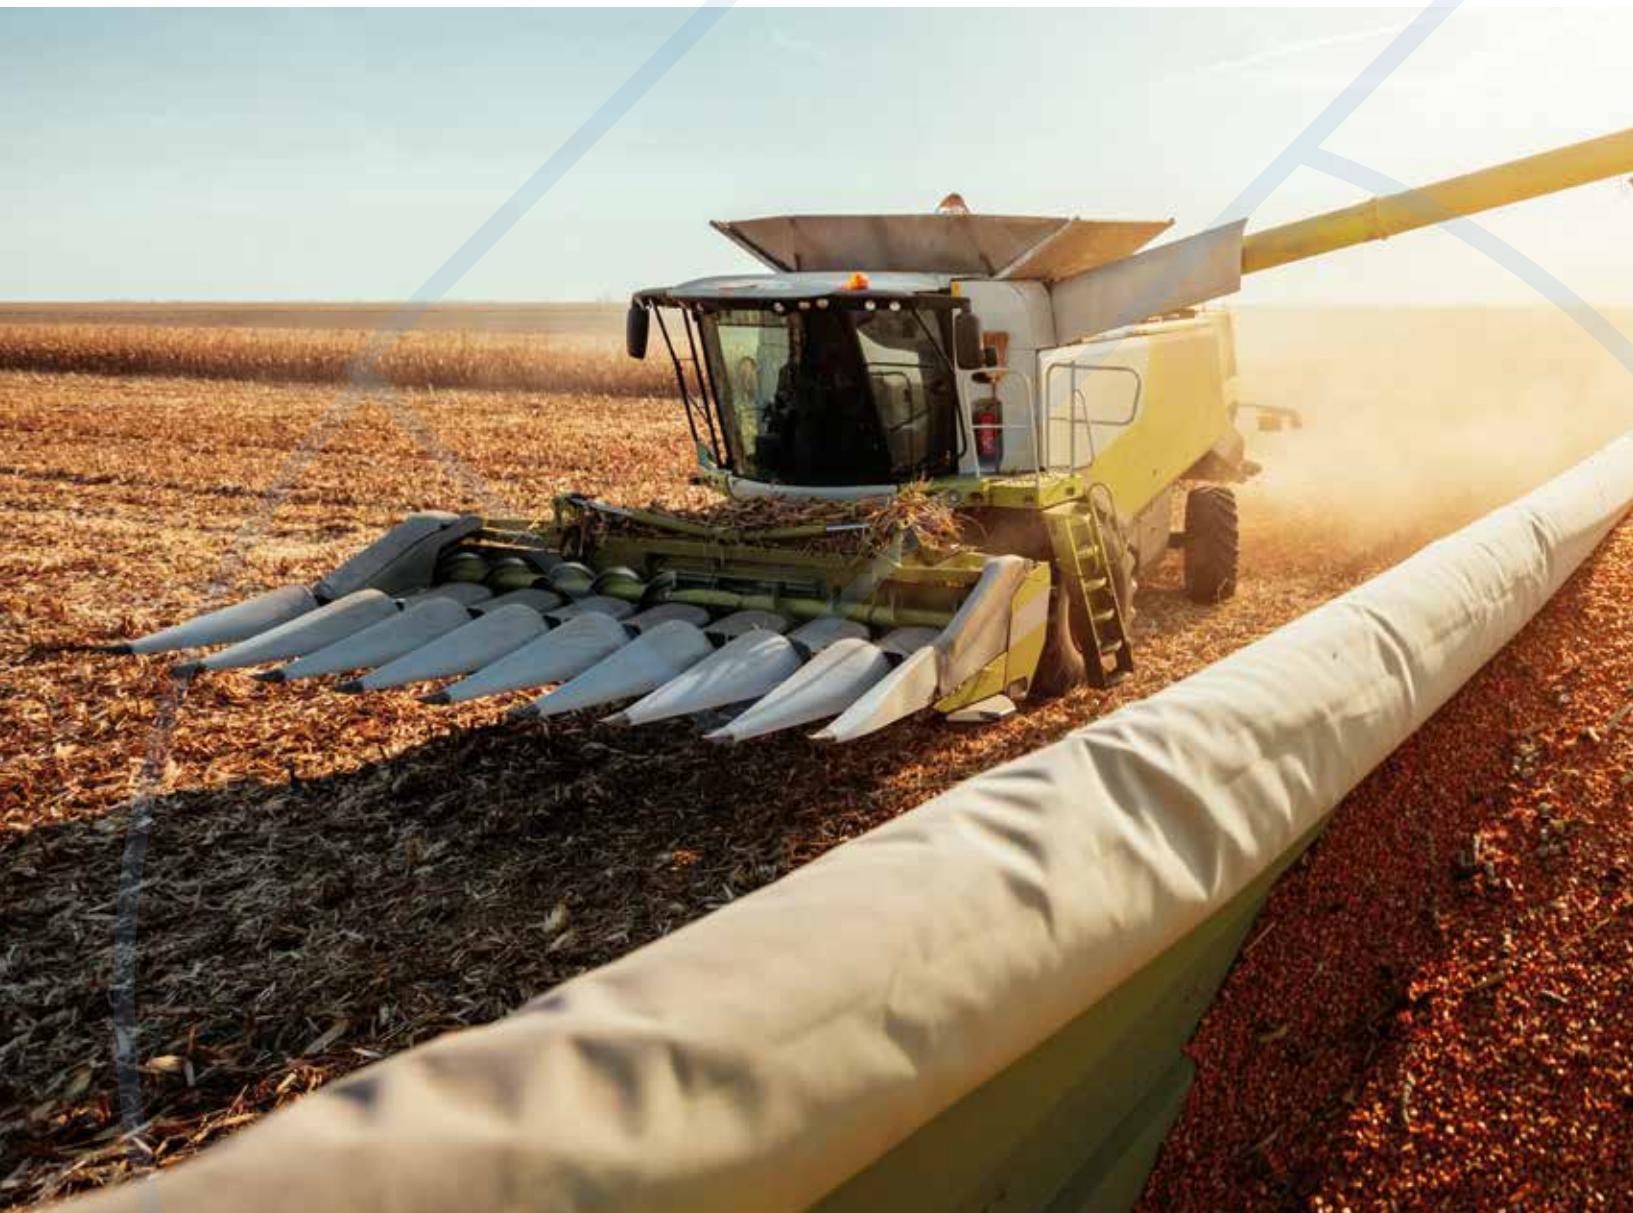



## QUICK COUPLINGS FOR DIFFERENT APPLICATIONS

**GEMELS**, known all over the world in the hydraulic and industrial field, always increases its range of products. For this reason, together with valves, **GEMELS** produces quick couplings for a large sector, such as agriculture. At the beginning, starting with ISO 7241 / A, ISO 7241 / B, ISO 16028 FLAT FACE, then to models such as ISO 5675 N and NV, PUSH-PULL, BULKHEAD, FLAT FACE CONNECTION UNDER PRESSURE and many others.

QUICK  
COUPLINGS





# FLAT FACE

## QUICK COUPLINGS

Available other different threads on request


Edition. 21.3

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 16028 FLAT FACE
- Sizes: from DN6 to DN25
- Pressure: up to PN420

### SS Stainless Steel


- Type: Quick Couplings
- Models: ISO 16028 FLAT FACE
- Sizes: from DN6 to DN25
- Pressure: up to PN420

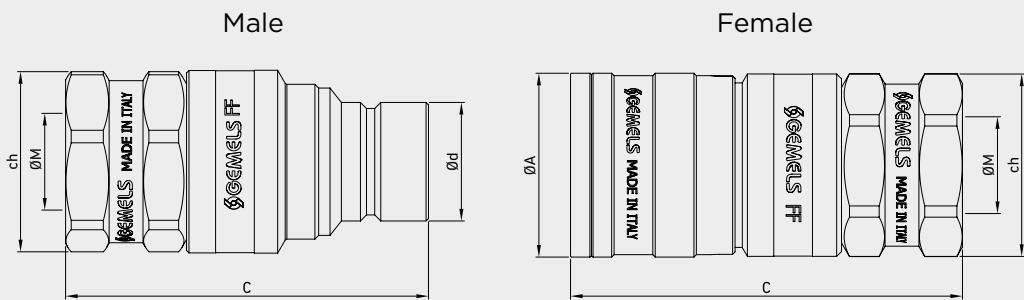

**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.

### Performance

(1/4", 3/8", 1/2", 5/8", 3/4", 1")  
Series (1/4", 3/8", 1/2", 5/8", 3/4", 1")  
200SUS (Test Fluid: Oil-200SUS)

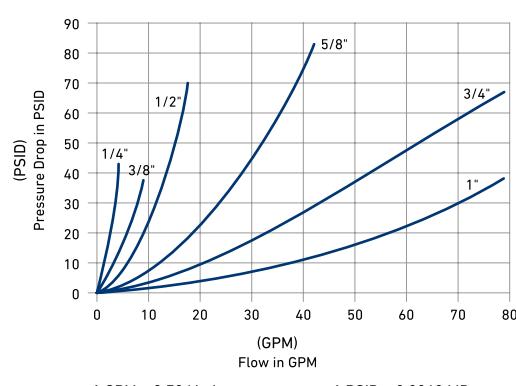

1 GPM = 3.78 l/min

1 PSID = 0.0069 MPa




## CODE DESCRIPTION STRUCTURE

|                    | QC                 | G1/2                | M/F                          | DN12,5                     | 1                          | B                                      |  |                          |
|--------------------|--------------------|---------------------|------------------------------|----------------------------|----------------------------|--|--|--------------------------|
| Type of coupling   |                    |                     |                              |                            |                            |  |  |                          |
| ISO 16028 FF       |                    |                     |                              |                            |                            |  |  |                          |
| Ends               |                    |                     |                              |                            |                            |  |  |                          |
| ISO 1179-1<br>BSPP | ISO 8434-6<br>BSPP | ASME B1.20.1<br>NPT | ISO 11926-1<br>(SAE J1926-1) | ISO 8434-1-S<br>(DIN 2353) | ISO 8434-1-L<br>(DIN 2353) | ISO 8434-1-S<br>(DIN 2353)<br>BULKHEAD | ISO 8434-1-L<br>(DIN 2353)<br>BULKHEAD | 8434-2 (SAE<br>J514) JIC |
| G 1/4              | G 1/4              | N 1/4               | SAE4                         | 8L                         | 8S                         | 8L                                     | 8S                                     | J 3/8                    |
| G 3/8              | G 3/8              | N 3/8               | SAE6                         | 10L                        | 12S                        | 10L                                    | 12S                                    | J 5/8                    |
| G 1/2              | G 1/2              | N 1/2               | SAE12                        | 12L                        | 16S                        | 12L                                    | 16S                                    | J 1/2                    |
| G 3/4              | G 3/4              | N 3/4               | SAE16                        | 15L                        | 25S                        | 15L                                    | 20S                                    | J 3/4                    |
| G 1                | G 1                | N 1                 | SAE20                        | 18L                        |                            | 18L                                    | 25S                                    | J 1                      |
| G 1 1/4            | G 1 1/4            | N 1 1/4             | SAE24                        |                            |                            |  |  |                          |
| MALE               |                    |                     |                              |                            |                            |  |  |                          |
| FEMALE             |                    |                     |                              |                            |                            |  |  |                          |
| DN/ISO             |                    |                     |                              |                            |                            |  |  |                          |
| 6,3                |                    |                     |                              |                            |                            |  |  |                          |
| 10                 |                    |                     |                              |                            |                            |  |  |                          |
| 12,5               |                    |                     |                              |                            |                            |  |  |                          |
| 16                 |                    |                     |                              |                            |                            |  |  |                          |
| 19                 |                    |                     |                              |                            |                            |  |  |                          |
| 25                 |                    |                     |                              |                            |                            |  |  |                          |
| Body Material      |                    |                     |                              |                            |                            |  |  |                          |
| ● 1 = 1,0737       |                    |                     |                              |                            |                            |  |  |                          |
| ● 4 = 1,4404       |                    |                     |                              |                            |                            |  |  |                          |
| Seal material      |                    |                     |                              |                            |                            |  |  |                          |
| ● B = NBR E = FKM* |                    |                     |                              |                            |                            |  |  |                          |
| ● E = FKM          |                    |                     |                              |                            |                            |  |  |                          |


\*On request

- Cups
- Plugs




## ■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female) FEMALE THREAD ISO 1179-1 BSPP

| TYPE                  | DN   | PN          | ØA        | C     | Ød   | ch | ØM      | WEIGHT   | ITEM CODE   | CS<br>Carbon Steel                |      |             |           |       |      |         |          |             | CS<br>Carbon Steel |                    |
|-----------------------|------|-------------|-----------|-------|------|----|---------|----------|-------------|-----------------------------------|------|-------------|-----------|-------|------|---------|----------|-------------|--------------------|--------------------|
|                       |      |             |           |       |      |    |         |          |             |                                   | TYPE | DN          | PN        | ØA    | C    | Ød      | ch       | ØM          | WEIGHT             | ITEM CODE          |
| QC FF G 1/4<br>MALE   | 6.3  | MPa 42      | mm - 48   | 16,15 | 24   |    | G1/4    | kg 0,09  | NC05G010000 | QC FF G 3/4<br>MALE               | 19   | MPa 35      | mm - 88,5 | 29,95 | 41   | G3/4    | kg 0,48  | NC05G040005 | CS<br>Carbon Steel |                    |
| Psi 6090              |      | inch - 1,89 | 0,64      | 0,94  |      |    | lb 0,20 |          |             | Psi 5075                          |      | inch - 3,48 | 1,18      | 1,61  |      | lb 1,06 |          |             |                    |                    |
| QC FF G 1/4<br>FEMALE | 10   | MPa 42      | mm 27     | 61,5  | -    | 24 |         | kg 0,151 | NC06G010000 | QC FF G 3/4<br>FEMALE             |      | MPa 35      | mm 44     | 99    | -    | 41      | kg 0,78  | NC06G040005 | CS<br>Carbon Steel |                    |
| Psi 6090              |      | inch 1,06   | 2,42      | -     | 0,94 |    | lb 0,33 |          |             | Psi 5075                          |      | inch 1,73   | 3,90      | -     | 1,61 | lb 1,72 |          |             |                    |                    |
| QC FF G 3/8<br>MALE   | 12,5 | MPa 42      | mm - 65,5 | 19,75 | 30   |    | G3/8    | kg 0,11  | NC05G020000 | QC FF G 1<br>MALE                 | 25   | MPa 35      | mm - 92   | 29,95 | 41   | G1      | kg 0,436 | NC05G050000 | CS<br>Carbon Steel |                    |
| Psi 6090              |      | inch - 2,58 | 0,78      | 1,18  |      |    | lb 0,24 |          |             | Psi 5075                          |      | inch - 3,62 | 1,18      | 1,61  |      | lb 0,96 |          |             |                    |                    |
| QC FF G 3/8<br>FEMALE | 10   | MPa 42      | mm 31     | 75    | -    | 30 |         | kg 0,29  | NC06G020000 | QC FF G 1<br>FEMALE               |      | MPa 35      | mm 44     | 103   | -    | 41      | kg 0,733 | NC06G050000 | CS<br>Carbon Steel |                    |
| Psi 6090              |      | inch 1,22   | 2,95      | -     | 1,18 |    | lb 0,64 |          |             | Psi 5075                          |      | inch 1,73   | 4,06      | -     | 1,61 | lb 1,62 |          |             |                    |                    |
| QC FF G 1/2<br>MALE   | 12,5 | MPa 42      | mm - 69,5 | 19,75 | 30   |    | G1/2    | kg 0,13  | NC05G030000 | QC FF G 1<br>MALE                 | 25   | MPa 35      | mm - 100  | 36    | 50   | G1      | kg 0,58  | NC05G050002 | CS<br>Carbon Steel |                    |
| Psi 6090              |      | inch - 2,74 | 0,78      | 1,18  |      |    | lb 0,29 |          |             | Psi 5075                          |      | inch - 3,94 | 1,42      | 1,97  |      | lb 1,28 |          |             |                    |                    |
| QC FF G 1/2<br>FEMALE | 12,5 | MPa 42      | mm 31     | 79    | -    | 30 |         | kg 0,25  | NC06G030000 | QC FF G 1<br>FEMALE               |      | MPa 35      | mm 54,5   | 100   | -    | 50      | kg 1,25  | NC06G050002 | CS<br>Carbon Steel |                    |
| Psi 6090              |      | inch 1,22   | 3,11      | -     | 1,18 |    | lb 0,55 |          |             | Psi 5075                          |      | inch 2,15   | 3,94      | -     | 1,97 | lb 2,76 |          |             |                    |                    |
| QC FF G 1/2<br>MALE   | 16   | MPa 42      | mm - 75   | 24,5  | 34   |    | G1/2    | kg 0,317 | NC05G030003 | QC FF G 1 1/4<br>MALE             | 25   | MPa 35      | mm - 103  | 36    | 50   | G1 1/4  | kg 0,696 | NC05G060000 | CS<br>Carbon Steel |                    |
| Psi 6090              |      | inch - 2,95 | 0,96      | 1,34  |      |    | lb 0,70 |          |             | Psi 5075                          |      | inch - 4,06 | 1,42      | 1,97  |      | lb 1,53 |          |             |                    |                    |
| QC FF G 1/2<br>FEMALE | 16   | MPa 42      | mm 38     | 81    | -    | 34 |         | kg 0,377 | NC06G030003 | QC FF G 1 1/4<br>FEMALE           |      | MPa 35      | mm 54,5   | 103   | -    | 50      | G1 1/4   | kg 1,323    | NC06G060000        | CS<br>Carbon Steel |
| Psi 6090              |      | inch 1,50   | 3,19      | -     | 1,34 |    | lb 0,83 |          |             | Psi 5075                          |      | inch 2,15   | 4,06      | -     | 1,97 | lb 2,92 |          |             |                    |                    |
| QC FF G 3/4<br>MALE   | 16   | MPa 42      | mm - 77,5 | 24,5  | 34   |    | G3/4    | kg 0,291 | NC05G040000 | QC FF G 1 1/2<br>MALE             | 25   | MPa 35      | mm - 103  | 36    | 55   | G1 1/2  | kg 0,75  | NC05G070000 | CS<br>Carbon Steel |                    |
| Psi 6090              |      | inch - 3,05 | 0,96      | 1,34  |      |    | lb 0,64 |          |             | Psi 5075                          |      | inch 2,15   | 4,06      | -     | 2,17 | lb 1,65 |          |             |                    |                    |
| QC FF G 3/4<br>FEMALE | 16   | MPa 42      | mm 38     | 8,5   | -    | 34 |         | kg 0,411 | NC06G040000 | QC FF G 1 1/2<br>FEMALE           |      | MPa 35      | mm 54,5   | 103   | -    | 55      | G1 1/2   | kg 1,53     | NC06G070000        | CS<br>Carbon Steel |
| Psi 6090              |      | inch 1,50   | 0,33      | -     | 1,34 |    | lb 0,91 |          |             | Psi 5075                          |      | inch 2,15   | 4,06      | -     | 2,17 | lb 3,37 |          |             |                    |                    |
| QC FF G 1/2<br>MALE   | 16   | MPa 35      | mm - 81   | 27    | 41   |    | G5/8    | kg 0,35  | NC05GA30000 | ABOVE ISO 25 G 1.1/2": ON REQUEST |      |             |           |       |      |         |          |             |                    |                    |
| Psi 5075              |      | inch - 3,19 | 1,06      | 1,61  |      |    | lb 0,77 |          |             |                                   |      |             |           |       |      |         |          |             |                    |                    |
| QC FF G 1/2<br>FEMALE | 16   | MPa 35      | mm 42     | 88    | -    | 41 |         | kg 0,49  | NC06GA30000 |                                   |      |             |           |       |      |         |          |             |                    |                    |
| Psi 5075              |      | inch 1,65   | 3,46      | -     | 1,61 |    | lb 1,08 |          |             |                                   |      |             |           |       |      |         |          |             |                    |                    |
| QC FF G 5/8<br>MALE   | 16   | MPa 35      | mm - 80   | 27    | 41   |    | G1/2    | kg 0,4   | NC05G030004 |                                   |      |             |           |       |      |         |          |             |                    |                    |
| Psi 5075              |      | inch - 3,15 | 1,06      | 1,61  |      |    | lb 0,88 |          |             |                                   |      |             |           |       |      |         |          |             |                    |                    |
| QC FF G 5/8<br>FEMALE | 16   | MPa 35      | mm 42     | 87    | -    | 41 |         | kg 0,52  | NC06G030004 |                                   |      |             |           |       |      |         |          |             |                    |                    |
| Psi 5075              |      | inch 1,65   | 3,43      | -     | 1,61 |    | lb 1,15 |          |             |                                   |      |             |           |       |      |         |          |             |                    |                    |
| QC FF G 3/4<br>MALE   | 16   | MPa 35      | mm - 83,5 | 27    | 41   |    | G3/4    | kg 0,3   | NC05G040004 |                                   |      |             |           |       |      |         |          |             |                    |                    |
| Psi 5075              |      | inch - 3,29 | 1,06      | 1,61  |      |    | lb 0,66 |          |             |                                   |      |             |           |       |      |         |          |             |                    |                    |
| QC FF G 3/4<br>FEMALE | 16   | MPa 35      | mm 42     | 91    | -    | 41 |         | kg 0,47  | NC06G040004 |                                   |      |             |           |       |      |         |          |             |                    |                    |
| Psi 5075              |      | inch 1,65   | 3,58      | -     | 1,61 |    | lb 1,04 |          |             |                                   |      |             |           |       |      |         |          |             |                    |                    |
| QC FF G 1<br>MALE     | 16   | MPa 35      | mm - 87   | 27    | 41   |    | G1      | kg 0,45  | NC05G050003 |                                   |      |             |           |       |      |         |          |             |                    |                    |
| Psi 5075              |      | inch - 3,43 | 1,06      | 1,61  |      |    | lb 0,99 |          |             |                                   |      |             |           |       |      |         |          |             |                    |                    |
| QC FF G 1<br>FEMALE   | 16   | MPa 35      | mm 42     | 95    | -    | 41 |         | kg 0,6   | NC06G050003 |                                   |      |             |           |       |      |         |          |             |                    |                    |
| Psi 5075              |      | inch 1,65   | 3,74      | -     | 1,61 |    | lb 1,32 |          |             |                                   |      |             |           |       |      |         |          |             |                    |                    |



## QUICK COUPLINGS ISO 16028 FLAT FACE (male / female) FEMALE THREAD ISO 1179-1 BSPP

| TYPE                  | DN   | PN          | ØA        | C      | Ød   | ch      | ØM       | WEIGHT      | SS                                | ITEM CODE | TYPE        | DN        | PN     | ØA   | C       | Ød       | ch          | ØM | WEIGHT | SS | ITEM CODE |  |
|-----------------------|------|-------------|-----------|--------|------|---------|----------|-------------|-----------------------------------|-----------|-------------|-----------|--------|------|---------|----------|-------------|----|--------|----|-----------|--|
|                       |      |             |           |        |      |         |          |             | Stainless Steel                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| QC FF G 1/4<br>MALE   | 6.3  | MPa 42      | mm - 48   | 16,15  | 24   | G1/4    | kg 0,09  | NC05G010001 | QC FF G 3/4<br>MALE               | 19        | MPa 35      | mm - 88,5 | 29,95  | 41   | G3/4    | kg 0,48  | NC05G04S000 |    |        |    |           |  |
| Psi 6090              |      | inch - 1,89 | 0,64      | 0,94   |      | lb 0,20 |          |             | Psi 5075                          |           | inch - 3,48 | 1,18      | 1,61   |      | lb 1,06 |          |             |    |        |    |           |  |
| QC FF G 1/4<br>FEMALE | 10   | MPa 42      | mm 27     | 61,5   | - 24 | G1/4    | kg 0,151 | NC06G010001 | QC FF G 3/4<br>FEMALE             |           | MPa 35      | mm 44     | 99     | - 41 | G3/4    | kg 0,78  | NC06G04S000 |    |        |    |           |  |
| Psi 6090              |      | inch 1,06   | 2,42      | - 0,94 |      | lb 0,33 |          |             | Psi 5075                          |           | inch 1,73   | 3,90      | - 1,61 |      | lb 1,72 |          |             |    |        |    |           |  |
| QC FF G 3/8<br>MALE   | 12,5 | MPa 42      | mm - 65,5 | 19,75  | 30   | G3/8    | kg 0,11  | NC05G020001 | QC FF G 1<br>MALE                 | 25        | MPa 35      | mm - 92   | 29,95  | 41   | G1      | kg 0,436 | NC05G050001 |    |        |    |           |  |
| Psi 6090              |      | inch - 2,58 | 0,78      | 1,18   |      | lb 0,24 |          |             | Psi 5075                          |           | inch - 3,62 | 1,18      | 1,61   |      | lb 0,96 |          |             |    |        |    |           |  |
| QC FF G 3/8<br>FEMALE | 10   | MPa 42      | mm 31     | 75     | - 30 | G3/8    | kg 0,29  | NC06G020001 | QC FF G 1<br>FEMALE               |           | MPa 35      | mm 44     | 103    | - 41 | G1      | kg 0,733 | NC06G050001 |    |        |    |           |  |
| Psi 6090              |      | inch 1,22   | 2,95      | - 1,18 |      | lb 0,64 |          |             | Psi 5075                          |           | inch 1,73   | 4,06      | - 1,61 |      | lb 1,62 |          |             |    |        |    |           |  |
| QC FF G 1/2<br>MALE   | 16   | MPa 42      | mm - 69,5 | 19,75  | 30   | G1/2    | kg 0,13  | NC05G02S000 | QC FF G 1<br>MALE                 | 25        | MPa 35      | mm - 100  | 36     | 50   | G1      | kg 0,58  | NC05G05S000 |    |        |    |           |  |
| Psi 6090              |      | inch - 2,74 | 0,78      | 1,18   |      | lb 0,29 |          |             | Psi 5075                          |           | inch - 3,94 | 1,42      | 1,97   |      | lb 1,28 |          |             |    |        |    |           |  |
| QC FF G 1/2<br>FEMALE | 16   | MPa 42      | mm 31     | 79     | - 30 | G1/2    | kg 0,25  | NC06G02S000 | QC FF G 1<br>FEMALE               |           | MPa 35      | mm 54,5   | 100    | - 50 | G1      | kg 1,25  | NC06G05S000 |    |        |    |           |  |
| Psi 6090              |      | inch 1,22   | 3,11      | - 1,18 |      | lb 0,55 |          |             | Psi 5075                          |           | inch 2,15   | 3,94      | - 1,97 |      | lb 2,76 |          |             |    |        |    |           |  |
| QC FF G 1/2<br>MALE   | 12,5 | MPa 42      | mm - 75   | 24,5   | 34   | G1/2    | kg 0,317 | NC05G030002 | QC FF G 1 1/4<br>MALE             | 25        | MPa 35      | mm - 103  | 36     | 50   | G1 1/4  | kg 0,696 | NC05G060001 |    |        |    |           |  |
| Psi 6090              |      | inch - 2,95 | 0,96      | 1,34   |      | lb 0,70 |          |             | Psi 5075                          |           | inch - 4,06 | 1,42      | 1,97   |      | lb 1,53 |          |             |    |        |    |           |  |
| QC FF G 1/2<br>FEMALE | 12,5 | MPa 42      | mm 38     | 81     | - 34 | G1/2    | kg 0,377 | NC06G030002 | QC FF G 1 1/4<br>FEMALE           |           | MPa 35      | mm 54,5   | 103    | - 50 | G1 1/4  | kg 1,323 | NC06G060001 |    |        |    |           |  |
| Psi 6090              |      | inch 1,50   | 3,19      | - 1,34 |      | lb 0,83 |          |             | Psi 5075                          |           | inch 2,15   | 4,06      | - 1,97 |      | lb 2,92 |          |             |    |        |    |           |  |
| QC FF G 3/4<br>MALE   | 16   | MPa 42      | mm - 77,5 | 24,5   | 34   | G3/4    | kg 0,291 | NC05G03S000 | QC FF G 1 1/2<br>MALE             | 25        | MPa 35      | mm - 103  | 36     | 55   | G1 1/2  | kg 0,75  | NC05G05S001 |    |        |    |           |  |
| Psi 6090              |      | inch - 3,05 | 0,96      | 1,34   |      | lb 0,64 |          |             | Psi 5075                          |           | inch - 4,06 | 1,42      | 2,17   |      | lb 1,65 |          |             |    |        |    |           |  |
| QC FF G 3/4<br>FEMALE | 16   | MPa 42      | mm 38     | 85     | - 34 | G3/4    | kg 0,411 | NC06G03S000 | QC FF G 1 1/2<br>FEMALE           |           | MPa 35      | mm 54,5   | 103    | - 55 | G1 1/2  | kg 1,53  | NC06G05S001 |    |        |    |           |  |
| Psi 6090              |      | inch 1,50   | 0,33      | - 1,34 |      | lb 0,91 |          |             | Psi 5075                          |           | inch 2,15   | 4,06      | - 2,17 |      | lb 3,37 |          |             |    |        |    |           |  |
| QC FF G 1/2<br>MALE   | 16   | MPa 35      | mm - 81   | 27     | 41   | G5/8    | kg 0,35  | NC05GA3S000 | ABOVE ISO 25 G 1.1/2": ON REQUEST |           |             |           |        |      |         |          |             |    |        |    |           |  |
| Psi 5075              |      | inch - 3,19 | 1,06      | 1,61   |      | lb 0,77 |          |             |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| QC FF G 1/2<br>FEMALE | 16   | MPa 35      | mm 42     | 88     | - 41 | G5/8    | kg 0,49  | NC06GA3S000 |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| Psi 5075              |      | inch 1,65   | 3,46      | - 1,61 |      | lb 1,08 |          |             |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| QC FF G 5/8<br>MALE   | 16   | MPa 35      | mm - 80   | 27     | 41   | G1/2    | kg 0,4   | NC05GA3S001 |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| Psi 5075              |      | inch - 3,15 | 1,06      | 1,61   |      | lb 0,88 |          |             |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| QC FF G 5/8<br>FEMALE | 16   | MPa 35      | mm 42     | 87     | - 41 | G1/2    | kg 0,52  | NC06GA3S001 |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| Psi 5075              |      | inch 1,65   | 3,43      | - 1,61 |      | lb 1,15 |          |             |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| QC FF G 3/4<br>MALE   | 16   | MPa 35      | mm - 83,5 | 27     | 41   | G3/4    | kg 0,3   | NC05G040002 |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| Psi 5075              |      | inch - 3,29 | 1,06      | 1,61   |      | lb 0,66 |          |             |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| QC FF G 3/4<br>FEMALE | 16   | MPa 35      | mm 42     | 91     | - 41 | G3/4    | kg 0,47  | NC06G040002 |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| Psi 5075              |      | inch 1,65   | 3,58      | - 1,61 |      | lb 1,04 |          |             |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| QC FF G 1<br>MALE     | 16   | MPa 35      | mm - 87   | 27     | 41   | G1      | kg 0,45  | NC05GA3S002 |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| Psi 5075              |      | inch - 3,43 | 1,06      | 1,61   |      | lb 0,99 |          |             |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| QC FF G 1<br>FEMALE   | 16   | MPa 35      | mm 42     | 95     | - 41 | G1      | kg 0,6   | NC06GA3S002 |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |
| Psi 5075              |      | inch 1,65   | 3,74      | - 1,61 |      | lb 1,32 |          |             |                                   |           |             |           |        |      |         |          |             |    |        |    |           |  |




## ■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female) MALE THREAD ISO 8434-6 BSPP

**CS**  
Carbon Steel

| TYPE                     | DN   | PN     | ØA   | C    | Ød   | ch    | ØM | ØLW          | WEIGHT        | ITEM CODE   |
|--------------------------|------|--------|------|------|------|-------|----|--------------|---------------|-------------|
| QC FF G 1/4M<br>MALE     | 6,3  | MPa 42 | mm   | -    | 53,5 | 16,15 | 24 | G1/4         | 4,7 kg 0,29   | NC05E010000 |
| Psi 6090                 |      | inch   | -    | 2,11 | 0,64 | 0,94  |    | 0,19 lb 0,64 |               |             |
| QC FF G 1/4M<br>FEMALE   | 6,3  | MPa 42 | mm   | 27   | 67   | -     | 24 | G1/4         | 4,7 kg 0,351  | NC06E010000 |
| Psi 6090                 |      | inch   | 1,06 | 2,64 | -    | 0,94  |    | 0,19 lb 0,77 |               |             |
| QC FF G 3/8M<br>MALE     | 10   | MPa 42 | mm   | -    | 72   | 19,75 | 30 | G3/8         | 7,9 kg 0,31   | NC05E020000 |
| Psi 6090                 |      | inch   | -    | 2,83 | 0,78 | 1,18  |    | 0,31 lb 0,68 |               |             |
| QC FF G 3/8M<br>FEMALE   | 10   | MPa 42 | mm   | 31   | 81,7 | -     | 30 | G3/8         | 7,9 kg 0,49   | NC06E020000 |
| Psi 6090                 |      | inch   | 1,22 | 3,22 | -    | 1,18  |    | 0,31 lb 1,08 |               |             |
| QC FF G 1/2M<br>MALE     | 10   | MPa 42 | mm   | -    | 74   | 19,75 | 30 | G1/2         | 11,1 kg 0,33  | NC05E030000 |
| Psi 6090                 |      | inch   | -    | 2,91 | 0,78 | 1,18  |    | 0,44 lb 0,73 |               |             |
| QC FF G 1/2M<br>FEMALE   | 10   | MPa 42 | mm   | 31   | 83,7 | -     | 30 | G1/2         | 11,1 kg 0,45  | NC06E030000 |
| Psi 6090                 |      | inch   | 1,22 | 3,30 | -    | 1,18  |    | 0,44 lb 0,99 |               |             |
| QC FF G 1/2M<br>MALE     | 12,5 | MPa 42 | mm   | -    | 77   | 24,5  | 34 | G1/2         | 11,1 kg 0,517 | NC05E030003 |
| Psi 6090                 |      | inch   | -    | 3,03 | 0,96 | 1,34  |    | 0,44 lb 1,14 |               |             |
| QC FF G 1/2M<br>FEMALE   | 12,5 | MPa 42 | mm   | 38   | 83   | -     | 34 | G1/2         | 11,1 kg 0,577 | NC06E030003 |
| Psi 6090                 |      | inch   | 1,50 | 3,27 | -    | 1,34  |    | 0,44 lb 1,27 |               |             |
| QC FF G 3/4M<br>MALE     | 12,5 | MPa 42 | mm   | -    | 79   | 24,5  | 34 | G3/4         | 16,7 kg 0,491 | NC05E040000 |
| Psi 6090                 |      | inch   | -    | 3,11 | 0,96 | 1,34  |    | 0,66 lb 1,08 |               |             |
| QC FF G 3/4M<br>FEMALE   | 12,5 | MPa 42 | mm   | 38   | 85   | -     | 34 | G3/4         | 16,7 kg 0,611 | NC06E040000 |
| Psi 6090                 |      | inch   | 1,50 | 3,35 | -    | 1,34  |    | 0,66 lb 1,35 |               |             |
| QC FF G 5/8M<br>MALE     | 16   | MPa 35 | mm   | -    | 86   | 27    | 41 | G5/8         | 14,3 kg 0,55  | NC05EA30000 |
| Psi 5075                 |      | inch   | -    | 3,39 | 1,06 | 1,61  |    | 0,56 lb 1,21 |               |             |
| QC FF G 5/8M<br>FEMALE   | 16   | MPa 35 | mm   | 42   | 94   | -     | 41 | G5/8         | 14,3 kg 0,69  | NC06EA30000 |
| Psi 5075                 |      | inch   | 1,65 | 3,70 | -    | 1,61  |    | 0,56 lb 1,52 |               |             |
| QC FF G 3/4M<br>MALE     | 16   | MPa 35 | mm   | -    | 86   | 27    | 41 | G3/4         | 16,7 kg 0,5   | NC05E040004 |
| Psi 5075                 |      | inch   | -    | 3,39 | 1,06 | 1,61  |    | 0,66 lb 1,10 |               |             |
| QC FF G 3/4M<br>FEMALE   | 16   | MPa 35 | mm   | 42   | 94   | -     | 41 | G3/4         | 16,7 kg 0,67  | NC06E040004 |
| Psi 5075                 |      | inch   | 1,65 | 3,70 | -    | 1,61  |    | 0,66 lb 1,48 |               |             |
| QC FF G 3/4M<br>MALE     | 19   | MPa 35 | mm   | -    | 91   | 29,95 | 41 | G3/4         | 16,7 kg 0,68  | NC05E040005 |
| Psi 5075                 |      | inch   | -    | 3,58 | 1,18 | 1,61  |    | 0,66 lb 1,50 |               |             |
| QC FF G 3/4M<br>FEMALE   | 19   | MPa 35 | mm   | 44   | 102  | -     | 41 | G3/4         | 16,7 kg 0,98  | NC06E040005 |
| Psi 5075                 |      | inch   | 1,73 | 4,02 | -    | 1,61  |    | 0,66 lb 2,16 |               |             |
| QC FF G 1M<br>MALE       | 19   | MPa 35 | mm   | -    | 94   | 29,95 | 41 | G1           | 22,2 kg 0,636 | NC05E050000 |
| Psi 5075                 |      | inch   | -    | 3,70 | 1,18 | 1,61  |    | 0,87 lb 1,40 |               |             |
| QC FF G 1M<br>FEMALE     | 19   | MPa 35 | mm   | 44   | 105  | -     | 41 | G1           | 22,2 kg 0,933 | NC06E050000 |
| Psi 5075                 |      | inch   | 1,73 | 4,13 | -    | 1,61  |    | 0,87 lb 2,06 |               |             |
| QC FF G 1M<br>MALE       | 25   | MPa 35 | mm   | -    | 106  | 36    | 50 | G1           | 22,2 kg 0,78  | NC05E050002 |
| Psi 5075                 |      | inch   | -    | 4,17 | 1,42 | 1,97  |    | 0,87 lb 1,72 |               |             |
| QC FF G 1M<br>FEMALE     | 25   | MPa 35 | mm   | 54,5 | 106  | -     | 50 | G1           | 22,2 kg 1,45  | NC06E050002 |
| Psi 5075                 |      | inch   | 2,15 | 4,17 | -    | 1,97  |    | 0,87 lb 3,20 |               |             |
| QC FF G 1 1/4M<br>MALE   | 25   | MPa 35 | mm   | -    | 107  | 36    | 50 | G1 1/4       | 28,6 kg 0,896 | NC05E060000 |
| Psi 5075                 |      | inch   | -    | 4,21 | 1,42 | 1,97  |    | 1,13 lb 1,98 |               |             |
| QC FF G 1 1/4M<br>FEMALE | 25   | MPa 35 | mm   | 54,5 | 107  | -     | 50 | G1 1/4       | 28,6 kg 1,523 | NC06E060000 |
| Psi 5075                 |      | inch   | 2,15 | 4,21 | -    | 1,97  |    | 1,13 lb 3,36 |               |             |
| QC FF G 1 1/2M<br>MALE   | 25   | MPa 35 | mm   | -    | 109  | 36    | 55 | G1 1/2       | 33,3 kg 0,95  | NC05E070000 |
| Psi 5075                 |      | inch   | -    | 4,29 | 1,42 | 2,17  |    | 1,31 lb 2,09 |               |             |
| QC FF G 1 1/2M<br>FEMALE | 25   | MPa 35 | mm   | 54,5 | 109  | -     | 55 | G1 1/2       | 33,3 kg 1,73  | NC06E070000 |
| Psi 5075                 |      | inch   | 2,15 | 4,29 | -    | 2,17  |    | 1,31 lb 3,81 |               |             |


ABOVE ISO 25 G 1 1/2": ON REQUEST



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female) MALE THREAD ISO 8434-6 BSPP


| TYPE                     | DN   | PN       | ØA        | C    | Ød    | ch   | ØM     | ØLW  | WEIGHT   | ITEM CODE   | CS<br>Carbon Steel |
|--------------------------|------|----------|-----------|------|-------|------|--------|------|----------|-------------|--------------------|
| QC FF G 1/4M<br>MALE     | 6,3  | MPa 42   | mm -      | 53,5 | 16,15 | 24   | G1/4   | 4,7  | kg 0,29  | NC05E010001 |                    |
| QC FF G 1/4M<br>FEMALE   |      | Psi 6090 | inch -    | 2,11 | 0,64  | 0,94 |        | 0,19 | lb 0,64  |             |                    |
| QC FF G 3/8M<br>MALE     | 10   | MPa 42   | mm 27     | 67   | -     | 24   | G1/4   | 4,7  | kg 0,351 | NC06E010001 |                    |
| QC FF G 3/8M<br>FEMALE   |      | Psi 6090 | inch 1,06 | 2,64 | -     | 0,94 |        | 0,19 | lb 0,77  |             |                    |
| QC FF G 1/2M<br>MALE     | 10   | MPa 42   | mm -      | 72   | 19,75 | 30   | G3/8   | 7,9  | kg 0,31  | NC05E020001 |                    |
| QC FF G 1/2M<br>FEMALE   |      | Psi 6090 | inch -    | 2,83 | 0,78  | 1,18 |        | 0,31 | lb 0,68  |             |                    |
| QC FF G 1/2M<br>MALE     | 10   | MPa 42   | mm 31     | 81,7 | -     | 30   | G3/8   | 7,9  | kg 0,49  | NC06E020001 |                    |
| QC FF G 1/2M<br>FEMALE   |      | Psi 6090 | inch 1,22 | 3,22 | -     | 1,18 |        | 0,31 | lb 1,08  |             |                    |
| QC FF G 1/2M<br>MALE     | 12,5 | MPa 42   | mm -      | 74   | 19,75 | 30   | G1/2   | 11,1 | kg 0,33  | NC05E02S000 |                    |
| QC FF G 1/2M<br>FEMALE   |      | Psi 6090 | inch -    | 2,91 | 0,78  | 1,18 |        | 0,44 | lb 0,73  |             |                    |
| QC FF G 1/2M<br>MALE     | 12,5 | MPa 42   | mm 31     | 83,7 | -     | 30   | G1/2   | 11,1 | kg 0,45  | NC06E02S000 |                    |
| QC FF G 1/2M<br>FEMALE   |      | Psi 6090 | inch 1,22 | 3,30 | -     | 1,18 |        | 0,44 | lb 0,99  |             |                    |
| QC FF G 1/2M<br>MALE     | 12,5 | MPa 42   | mm -      | 77   | 24,5  | 34   | G1/2   | 11,1 | kg 0,517 | NC05E030002 |                    |
| QC FF G 1/2M<br>FEMALE   |      | Psi 6090 | inch -    | 3,03 | 0,96  | 1,34 |        | 0,44 | lb 1,14  |             |                    |
| QC FF G 1/2M<br>MALE     | 12,5 | MPa 42   | mm 38     | 83   | -     | 34   | G1/2   | 11,1 | kg 0,577 | NC06E030002 |                    |
| QC FF G 1/2M<br>FEMALE   |      | Psi 6090 | inch 1,50 | 3,27 | -     | 1,34 |        | 0,44 | lb 1,27  |             |                    |
| QC FF G 3/4M<br>MALE     | 12,5 | MPa 42   | mm -      | 79   | 24,5  | 34   | G3/4   | 16,7 | kg 0,491 | NC05E03S000 |                    |
| QC FF G 3/4M<br>FEMALE   |      | Psi 6090 | inch -    | 3,11 | 0,96  | 1,34 |        | 0,66 | lb 1,08  |             |                    |
| QC FF G 3/4M<br>MALE     | 12,5 | MPa 42   | mm 38     | 85   | -     | 34   | G3/4   | 16,7 | kg 0,611 | NC06E03S000 |                    |
| QC FF G 3/4M<br>FEMALE   |      | Psi 6090 | inch 1,50 | 3,35 | -     | 1,34 |        | 0,66 | lb 1,35  |             |                    |
| QC FF G 5/8M<br>MALE     | 16   | MPa 35   | mm -      | 86   | 27    | 41   | G5/8   | 14,3 | kg 0,55  | NC05EA3S000 |                    |
| QC FF G 5/8M<br>FEMALE   |      | Psi 5075 | inch -    | 3,39 | 1,06  | 1,61 |        | 0,56 | lb 1,21  |             |                    |
| QC FF G 5/8M<br>MALE     | 16   | MPa 35   | mm 42     | 94   | -     | 41   | G5/8   | 14,3 | kg 0,69  | NC06EA3S000 |                    |
| QC FF G 5/8M<br>FEMALE   |      | Psi 5075 | inch 1,65 | -    | -     | 1,61 |        | 0,56 | lb 1,52  |             |                    |
| QC FF G 3/4M<br>MALE     | 16   | MPa 35   | mm -      | 86   | 27    | 41   | G3/4   | 16,7 | kg 0,5   | NC05E040002 |                    |
| QC FF G 3/4M<br>FEMALE   |      | Psi 5075 | inch -    | 3,39 | 1,06  | 1,61 |        | 0,66 | lb 1,10  |             |                    |
| QC FF G 3/4M<br>MALE     | 16   | MPa 35   | mm 42     | 94   | -     | 41   | G3/4   | 16,7 | kg 0,67  | NC06E040002 |                    |
| QC FF G 3/4M<br>FEMALE   |      | Psi 5075 | inch 1,65 | 3,70 | -     | 1,61 |        | 0,66 | lb 1,48  |             |                    |
| QC FF G 3/4M<br>MALE     | 19   | MPa 35   | mm -      | 91   | 29,95 | 41   | G3/4   | 16,7 | kg 0,68  | NC05E04S000 |                    |
| QC FF G 3/4M<br>FEMALE   |      | Psi 5075 | inch -    | 3,58 | 1,18  | 1,61 |        | 0,66 | lb 1,50  |             |                    |
| QC FF G 3/4M<br>MALE     | 19   | MPa 35   | mm 44     | 102  | -     | 41   | G3/4   | 16,7 | kg 0,98  | NC06E04S000 |                    |
| QC FF G 3/4M<br>FEMALE   |      | Psi 5075 | inch 1,73 | 4,02 | -     | 1,61 |        | 0,66 | lb 2,16  |             |                    |
| QC FF G 1M<br>MALE       | 19   | MPa 35   | mm -      | 94   | 29,95 | 41   | G1     | 22,2 | kg 0,636 | NC05E050001 |                    |
| QC FF G 1M<br>FEMALE     |      | Psi 5075 | inch -    | 3,70 | 1,18  | 1,61 |        | 0,87 | lb 1,40  |             |                    |
| QC FF G 1M<br>MALE       | 19   | MPa 35   | mm 44     | 105  | -     | 41   | G1     | 22,2 | kg 0,933 | NC06E050001 |                    |
| QC FF G 1M<br>FEMALE     |      | Psi 5075 | inch 1,73 | 4,13 | -     | 1,61 |        | 0,87 | lb 2,06  |             |                    |
| QC FF G 1M<br>MALE       | 25   | MPa 35   | mm -      | 106  | 36    | 50   | G1     | 22,2 | kg 0,78  | NC05E05S000 |                    |
| QC FF G 1M<br>FEMALE     |      | Psi 5075 | inch -    | 4,17 | 1,42  | 1,97 |        | 0,87 | lb 1,72  |             |                    |
| QC FF G 1 1/4M<br>MALE   | 25   | MPa 35   | mm 54,5   | 106  | -     | 50   | G1 1/4 | 22,2 | kg 1,45  | NC06E05S000 |                    |
| QC FF G 1 1/4M<br>FEMALE |      | Psi 5075 | inch 2,15 | 4,17 | -     | 1,97 |        | 0,87 | lb 3,20  |             |                    |
| QC FF G 1 1/2M<br>MALE   | 25   | MPa 35   | mm -      | 107  | 36    | 50   | G1 1/2 | 28,6 | kg 0,896 | NC05E060001 |                    |
| QC FF G 1 1/2M<br>FEMALE |      | Psi 5075 | inch -    | 4,21 | 1,42  | 1,97 |        | 1,13 | lb 1,98  |             |                    |
| QC FF G 1 1/2M<br>MALE   | 25   | MPa 35   | mm 54,5   | 107  | -     | 50   | G1 1/2 | 28,6 | kg 1,523 | NC06E060001 |                    |
| QC FF G 1 1/2M<br>FEMALE |      | Psi 5075 | inch 2,15 | 4,21 | -     | 1,97 |        | 1,13 | lb 3,36  |             |                    |
| QC FF G 1 1/2M<br>MALE   | 25   | MPa 35   | mm -      | 109  | 36    | 55   | G1 1/2 | 33,3 | kg 0,95  | NC05E05S001 |                    |
| QC FF G 1 1/2M<br>FEMALE |      | Psi 5075 | inch -    | 4,29 | 1,42  | 2,17 |        | 1,31 | lb 2,09  |             |                    |
| QC FF G 1 1/2M<br>MALE   | 25   | MPa 35   | mm 54,5   | 109  | -     | 55   | G1 1/2 | 33,3 | kg 1,73  | NC06E05S001 |                    |
| QC FF G 1 1/2M<br>FEMALE |      | Psi 5075 | inch 2,15 | 4,29 | -     | 2,17 |        | 1,31 | lb 3,81  |             |                    |

ABOVE ISO 25 G 1.1/2": ON REQUEST




## ■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female) FEMALE THREAD ASME B1.20.1 NPT

| TYPE                  | DN   | PN                    | ØA                 | C | Ød   | ch | ØM       | WEIGHT | ITEM CODE   | CS<br>Carbon Steel                 |      |                       |                    |    |        |         |          |    | CS<br>Carbon Steel |              |
|-----------------------|------|-----------------------|--------------------|---|------|----|----------|--------|-------------|------------------------------------|------|-----------------------|--------------------|----|--------|---------|----------|----|--------------------|--------------|
|                       |      |                       |                    |   |      |    |          |        |             |                                    | TYPE | DN                    | PN                 | ØA | C      | Ød      | ch       | ØM | WEIGHT             | ITEM CODE    |
| QC FF N 1/4<br>MALE   | 6,3  | MPa 42                | mm - 49,5 16,15 24 |   | N1/4 |    | kg 0,09  |        | NC05N010000 | QC FF N 3/4<br>MALE                | 19   | MPa 35                | mm - 88,5 29,95 41 |    | N3/4   |         | kg 0,48  |    | NC05N040005        | Carbon Steel |
| Psi 6090              |      | inch - 1,95 0,64 0,94 |                    |   |      |    | lb 0,20  |        |             | Psi 5075                           |      | inch - 3,48 1,18 1,61 |                    |    |        | lb 1,06 |          |    |                    |              |
| QC FF N 1/4<br>FEMALE | 10   | MPa 42                | mm 27 63 - 24      |   | N1/4 |    | kg 0,151 |        | NC06N010000 | QC FF N 3/4<br>FEMALE              |      | MPa 35                | mm 44 99 - 41      |    | N3/4   |         | kg 0,78  |    | NC06N040005        | Carbon Steel |
| Psi 6090              |      | inch 1,06 2,48 - 0,94 |                    |   |      |    | lb 0,33  |        |             | Psi 5075                           |      | inch 1,73 3,90 - 1,61 |                    |    |        | lb 1,72 |          |    |                    |              |
| QC FF N 3/8<br>MALE   | 10   | MPa 42                | mm - 67,5 19,75 30 |   | N3/8 |    | kg 0,11  |        | NC05N020000 | QC FF N 1<br>MALE                  | 25   | MPa 35                | mm - 92 29,95 41   |    | N1     |         | kg 0,436 |    | NC05N050000        | Carbon Steel |
| Psi 6090              |      | inch - 2,66 0,78 1,18 |                    |   |      |    | lb 0,24  |        |             | Psi 5075                           |      | inch - 3,62 1,18 1,61 |                    |    |        | lb 0,96 |          |    |                    |              |
| QC FF N 3/8<br>FEMALE | 10   | MPa 42                | mm 31 77 - 30      |   | N3/8 |    | kg 0,29  |        | NC06N020000 | QC FF N 1<br>FEMALE                |      | MPa 35                | mm 44 99 - 41      |    | N1     |         | kg 0,733 |    | NC06N050000        | Carbon Steel |
| Psi 6090              |      | inch 1,22 3,03 - 1,18 |                    |   |      |    | lb 0,64  |        |             | Psi 5075                           |      | inch 1,73 3,90 - 1,61 |                    |    |        | lb 1,62 |          |    |                    |              |
| QC FF N 1/2<br>MALE   | 12,5 | MPa 42                | mm - 72 19,75 30   |   | N1/2 |    | kg 0,13  |        | NC05N030000 | QC FF N 1<br>MALE                  | 25   | MPa 35                | mm - 100 36 50     |    | N1     |         | kg 0,58  |    | NC05N050002        | Carbon Steel |
| Psi 6090              |      | inch - 2,83 0,78 1,18 |                    |   |      |    | lb 0,29  |        |             | Psi 5075                           |      | inch - 3,94 1,42 1,97 |                    |    |        | lb 1,28 |          |    |                    |              |
| QC FF N 1/2<br>FEMALE | 12,5 | MPa 42                | mm 31 82 - 30      |   | N1/2 |    | kg 0,25  |        | NC06N030000 | QC FF N 1<br>FEMALE                |      | MPa 35                | mm 54,5 100 - 50   |    | N1     |         | kg 1,25  |    | NC06N050002        | Carbon Steel |
| Psi 6090              |      | inch 1,22 3,23 - 1,18 |                    |   |      |    | lb 0,55  |        |             | Psi 5075                           |      | inch 2,15 3,94 - 1,97 |                    |    |        | lb 2,76 |          |    |                    |              |
| QC FF N 1/2<br>MALE   | 12,5 | MPa 42                | mm - 75 24,5 34    |   | N1/2 |    | kg 0,317 |        | NC05N030003 | QC FF N 1 1/4<br>MALE              | 25   | MPa 35                | mm - 103 36 50     |    | N1 1/4 |         | kg 0,696 |    | NC05N060000        | Carbon Steel |
| Psi 6090              |      | inch - 2,95 0,96 1,34 |                    |   |      |    | lb 0,70  |        |             | Psi 5075                           |      | inch - 4,06 1,42 1,97 |                    |    |        | lb 1,53 |          |    |                    |              |
| QC FF N 1/2<br>FEMALE | 12,5 | MPa 42                | mm 38 81 - 34      |   | N1/2 |    | kg 0,377 |        | NC06N030003 | QC FF N 1 1/4<br>FEMALE            |      | MPa 35                | mm 54,5 103 - 50   |    | N1 1/4 |         | kg 1,323 |    | NC06N060000        | Carbon Steel |
| Psi 6090              |      | inch 1,50 3,19 - 1,34 |                    |   |      |    | lb 0,83  |        |             | Psi 5075                           |      | inch 2,15 4,06 - 1,97 |                    |    |        | lb 2,92 |          |    |                    |              |
| QC FF N 3/4<br>MALE   | 16   | MPa 42                | mm - 78 24,5 34    |   | N3/4 |    | kg 0,291 |        | NC05N040000 | QC FF N 1 1/2<br>MALE              | 25   | MPa 35                | mm - 103 36 55     |    | N1 1/2 |         | kg 0,75  |    | NC05N070000        | Carbon Steel |
| Psi 6090              |      | inch - 3,07 0,96 1,34 |                    |   |      |    | lb 0,64  |        |             | Psi 5075                           |      | inch 2,15 4,06 2,17   |                    |    |        | lb 1,65 |          |    |                    |              |
| QC FF N 3/4<br>FEMALE | 16   | MPa 42                | mm 38 84 - 34      |   | N3/4 |    | kg 0,411 |        | NC06N040000 | QC FF N 1 1/2<br>FEMALE            |      | MPa 35                | mm 54,5 103 - 55   |    | N1 1/2 |         | kg 1,53  |    | NC06N070000        | Carbon Steel |
| Psi 6090              |      | inch 1,50 3,31 - 1,34 |                    |   |      |    | lb 0,91  |        |             | Psi 5075                           |      | inch 2,15 4,06 - 2,17 |                    |    |        | lb 3,37 |          |    |                    |              |
| QC FF N 1/2<br>MALE   | 16   | MPa 35                | mm - 82 27 41      |   | N1/2 |    | kg 0,4   |        | NC05N030004 | ABOVE ISO 25 G 1 1/2" : ON REQUEST |      |                       |                    |    |        |         |          |    |                    |              |
| Psi 5075              |      | inch - 3,23 1,06 1,61 |                    |   |      |    | lb 0,88  |        |             |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| QC FF N 1/2<br>FEMALE | 16   | MPa 35                | mm 42 87 41 -      |   | N1/2 |    | kg 0,52  |        | NC06N030004 |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| Psi 5075              |      | inch 1,65 3,43 1,61 - |                    |   |      |    | lb 1,15  |        |             |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| QC FF N 3/4<br>MALE   | 16   | MPa 35                | mm - 83,5 27 41    |   | N3/4 |    | kg 0,3   |        | NC05N040004 |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| Psi 5075              |      | inch - 3,29 1,06 1,61 |                    |   |      |    | lb 0,66  |        |             |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| QC FF N 3/4<br>FEMALE | 16   | MPa 35                | mm 42 91 - 41      |   | N3/4 |    | kg 0,47  |        | NC06N040004 |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| Psi 5075              |      | inch 1,65 3,58 - 1,61 |                    |   |      |    | lb 1,04  |        |             |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| QC FF N 1<br>MALE     | 16   | MPa 35                | mm - 87 27 41      |   | N1   |    | kg 0,45  |        | NC05N050003 |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| Psi 5075              |      | inch - 3,43 1,06 1,61 |                    |   |      |    | lb 0,99  |        |             |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| QC FF N 1<br>FEMALE   | 16   | MPa 35                | mm 42 95 - 41      |   | N1   |    | kg 0,6   |        | NC06N050003 |                                    |      |                       |                    |    |        |         |          |    |                    |              |
| Psi 5075              |      | inch 1,65 3,74 - 1,61 |                    |   |      |    | lb 1,32  |        |             |                                    |      |                       |                    |    |        |         |          |    |                    |              |




## QUICK COUPLINGS ISO 16028 FLAT FACE (male / female) FEMALE THREAD ASME B1.20.1 NPT

| TYPE                  | DN   | PN        | ØA    | C    | Ød    | ch | ØM      | WEIGHT   | SS<br>Stainless Steel |                                   | ITEM CODE | TYPE      | DN      | PN   | ØA    | C  | Ød      | ch       | ØM          | WEIGHT | SS<br>Stainless Steel |    | ITEM CODE |    |    |  |  |  |  |  |  |  |  |  |  |
|-----------------------|------|-----------|-------|------|-------|----|---------|----------|-----------------------|-----------------------------------|-----------|-----------|---------|------|-------|----|---------|----------|-------------|--------|-----------------------|----|-----------|----|----|--|--|--|--|--|--|--|--|--|--|
|                       |      |           |       |      |       |    |         |          | MPa                   | inch                              | mm        | inch      | mm      | inch | mm    | kg | lb      | kg       | lb          | kg     | lb                    | kg | lb        | kg | lb |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1/4<br>MALE   | 6.3  | MPa 42    | mm -  | 49,5 | 16,15 | 24 | N1/4    | kg 0,09  | NC05N01S000           | QC FF N 3/4<br>MALE               | 19        | MPa 35    | mm -    | 88,5 | 29,95 | 41 | N3/4    | kg 0,48  | NC05N04S000 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch -    | 1,95  | 0,64 | 0,94  |    | lb 0,20 |          |                       | Psi 5075                          |           | inch -    | 3,48    | 1,18 | 1,61  |    | lb 1,06 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1/4<br>FEMALE | 6.3  | MPa 42    | mm 27 | 63   | -     | 24 | N1/4    | kg 0,151 | NC06N01S000           | QC FF N 3/4<br>FEMALE             |           | MPa 35    | mm 44   | 99   | -     | 41 | N3/4    | kg 0,78  | NC06N04S000 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch 1,06 | 2,48  | -    | 0,94  |    | lb 0,33 |          |                       | Psi 5075                          |           | inch 1,73 | 3,90    | -    | 1,61  |    | lb 1,72 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 3/8<br>MALE   | 10   | MPa 42    | mm -  | 67,5 | 19,75 | 30 | N3/8    | kg 0,11  | NC05N02S000           | QC FF N 1<br>MALE                 | 25        | MPa 35    | mm -    | 92   | 29,95 | 41 | N1      | kg 0,436 | NC05N04S001 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch -    | 2,66  | 0,78 | 1,18  |    | lb 0,24 |          |                       | Psi 5075                          |           | inch -    | 3,62    | 1,18 | 1,61  |    | lb 0,96 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 3/8<br>FEMALE | 10   | MPa 42    | mm 31 | 77   | -     | 30 | N3/8    | kg 0,29  | NC06N02S000           | QC FF N 1<br>FEMALE               |           | MPa 35    | mm 44   | 99   | -     | 41 | N1      | kg 0,733 | NC06N04S001 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch 1,22 | 3,03  | -    | 1,18  |    | lb 0,64 |          |                       | Psi 5075                          |           | inch 1,73 | 3,90    | -    | 1,61  |    | lb 1,62 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1/2<br>MALE   | 10   | MPa 42    | mm -  | 72   | 19,75 | 30 | N1/2    | kg 0,13  | NC05N02S001           | QC FF N 1<br>MALE                 |           | MPa 35    | mm -    | 100  | 36    | 50 | N 1     | kg 0,58  | NC05N05S000 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch -    | 2,83  | 0,78 | 1,18  |    | lb 0,29 |          |                       | Psi 5075                          |           | inch -    | 3,94    | 1,42 | 1,97  |    | lb 1,28 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1/2<br>FEMALE | 10   | MPa 42    | mm 31 | 82   | -     | 30 | N1/2    | kg 0,25  | NC06N02S001           | QC FF N 1<br>FEMALE               |           | MPa 35    | mm 54,5 | 100  | -     | 50 | N 1     | kg 1,25  | NC06N05S000 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch 1,22 | 3,23  | -    | 1,18  |    | lb 0,55 |          |                       | Psi 5075                          |           | inch 2,15 | 3,94    | -    | 1,97  |    | lb 2,76 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1/2<br>MALE   | 12,5 | MPa 42    | mm -  | 75   | 24,5  | 34 | N1/2    | kg 0,317 | NC05N03S000           | QC FF N 1 1/4<br>MALE             | 25        | MPa 35    | mm -    | 103  | 36    | 50 | N 1 1/4 | kg 0,696 | NC05N05S001 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch -    | 2,95  | 0,96 | 1,34  |    | lb 0,70 |          |                       | Psi 5075                          |           | inch -    | 4,06    | 1,42 | 1,97  |    | lb 1,53 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1/2<br>FEMALE | 12,5 | MPa 42    | mm 38 | 81   | -     | 34 | N1/2    | kg 0,377 | NC06N03S000           | QC FF N 1 1/4<br>FEMALE           |           | MPa 35    | mm 54,5 | 103  | -     | 50 | N 1 1/4 | kg 1,323 | NC06N05S001 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch 1,50 | 3,19  | -    | 1,34  |    | lb 0,83 |          |                       | Psi 5075                          |           | inch 2,15 | 4,06    | -    | 1,97  |    | lb 2,92 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 3/4<br>MALE   | 12,5 | MPa 42    | mm -  | 78   | 24,5  | 34 | N3/4    | kg 0,291 | NC05N03S001           | QC FF N 1 1/2<br>MALE             | 25        | MPa 35    | mm -    | 103  | 36    | 55 | N 1 1/2 | kg 0,75  | NC05N05S002 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch -    | 3,07  | 0,96 | 1,34  |    | lb 0,64 |          |                       | Psi 5075                          |           | inch -    | 4,06    | 1,42 | 2,17  |    | lb 1,65 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 3/4<br>FEMALE | 12,5 | MPa 42    | mm 38 | 84   | -     | 34 | N3/4    | kg 0,411 | NC06N03S001           | QC FF N 1 1/2<br>FEMALE           |           | MPa 35    | mm 54,5 | 103  | -     | 55 | N 1 1/2 | kg 1,53  | NC06N05S002 |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 6090              |      | inch 1,50 | 3,31  | -    | 1,34  |    | lb 0,91 |          |                       | Psi 5075                          |           | inch 2,15 | 4,06    | -    | 2,17  |    | lb 3,37 |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1/2<br>MALE   | 16   | MPa 35    | mm -  | 82   | 27    | 41 | N1/2    | kg 0,4   | NC05NA3S000           | ABOVE ISO 25 G 1.1/2": ON REQUEST |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 5075              |      | inch -    | 3,23  | 1,06 | 1,61  |    | lb 0,88 |          |                       |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1/2<br>FEMALE | 16   | MPa 35    | mm 42 | 87   | 41    | -  | N1/2    | kg 0,52  | NC06NA3S000           |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 5075              |      | inch 1,65 | 3,43  | 1,61 | -     |    | lb 1,15 |          |                       |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 3/4<br>MALE   | 16   | MPa 35    | mm -  | 83,5 | 27    | 41 | N3/4    | kg 0,3   | NC05NA3S001           |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 5075              |      | inch -    | 3,29  | 1,06 | 1,61  |    | lb 0,66 |          |                       |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 3/4<br>FEMALE | 16   | MPa 35    | mm 42 | 91   | -     | 41 | N3/4    | kg 0,47  | NC06NA3S001           |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 5075              |      | inch 1,65 | 3,58  | -    | 1,61  |    | lb 1,04 |          |                       |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1<br>MALE     | 16   | MPa 35    | mm -  | 87   | 27    | 41 | N1      | kg 0,45  | NC05NA3S002           |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 5075              |      | inch -    | 3,43  | 1,06 | 1,61  |    | lb 0,99 |          |                       |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| QC FF N 1<br>FEMALE   | 16   | MPa 35    | mm 42 | 95   | -     | 41 | N1      | kg 0,6   | NC06NA3S002           |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |
| Psi 5075              |      | inch 1,65 | 3,74  | -    | 1,61  |    | lb 1,32 |          |                       |                                   |           |           |         |      |       |    |         |          |             |        |                       |    |           |    |    |  |  |  |  |  |  |  |  |  |  |




**QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
FEMALE THREAD ISO 11926-1 (SAE J1926-1) ORB**

| TYPE                  | DN   | PN       | ØA          | C     | Ød   | ch      | ØM       | WEIGHT      | ITEM CODE             | CS                   | Carbon Steel | TYPE        | DN      | PN      | ØA       | C       | Ød                    | ch                    | ØM          | WEIGHT                | ITEM CODE | CS          | Carbon Steel |          |             |             |             |   |             |
|-----------------------|------|----------|-------------|-------|------|---------|----------|-------------|-----------------------|----------------------|--------------|-------------|---------|---------|----------|---------|-----------------------|-----------------------|-------------|-----------------------|-----------|-------------|--------------|----------|-------------|-------------|-------------|---|-------------|
|                       |      |          |             |       |      |         |          |             |                       | MPa                  | Psi          | mm          | inch    | -       | -        | -       | -                     | -                     | -           | kg                    | lb        | NC05S010000 | MPa          | Psi      | mm          | inch        | -           | - | -           |
| QC FF SAE4<br>MALE    | 6.3  | MPa 42   | mm - 48     | 16,15 | 24   | 7/16-   | kg 0,09  |             | NC05S010000           | QC FF SAE12<br>MALE" | 19           | MPa 35      | mm - 92 | 29,95   | 41       | 1-1/16- | kg 0,48               |                       | NC05S040005 | QC FF SAE12<br>FEMALE | MPa 35    | mm 44       | 103          | -        | 41          | 1-1/16-     | kg 0,78     |   | NC06S040005 |
| QC FF SAE4<br>FEMALE  |      | Psi 6090 | inch - 1,89 | 0,64  | 0,94 | 20 UNF  | lb 0,20  |             |                       | Psi 5075             |              | inch - 3,62 | 1,18    | 1,61    | 12 UN    | lb 1,06 |                       |                       | Psi 5075    | inch 1,73             | 4,06      | -           | 1,61         | 12 UN    | lb 1,72     |             | NC06S040005 |   |             |
| QC FF SAE6<br>MALE    |      | MPa 42   | mm - 27     | 61,5  | -    | 24      | 7/16-    | kg 0,151    | NC06S010000           | QC FF SAE16<br>MALE  |              | MPa 35      | mm - 92 | 29,95   | 41       | 1 5/16- | kg 0,7                |                       | NC05S050000 | QC FF SAE16<br>FEMALE | MPa 35    | mm 44       | 103          | -        | 41          | 1 5/16-     | kg 0,85     |   | NC06S050000 |
| QC FF SAE6<br>FEMALE  |      | Psi 6090 | inch 1,06   | 2,42  | -    | 0,94    | 20 UNF   | lb 0,33     |                       | Psi 5075             |              | inch - 3,62 | 1,18    | 1,61    | 12 UN    | lb 1,54 |                       |                       | Psi 5075    | inch 1,73             | 4,06      | -           | 1,61         | 12 UN    | lb 1,87     |             | NC06S050000 |   |             |
| QC FF SAE6<br>MALE    |      | MPa 42   | mm - 49     | 16,15 | 24   | 9/16-   | kg 0,22  | NC05S010001 | QC FF SAE16<br>FEMALE | MPa 35               | mm - 100     | 36          | 50      | 1-5/16- | kg 0,58  |         | NC05S050002           | QC FF SAE16<br>MALE   | MPa 35      | mm 54,5               | 100       | -           | 50           | 1-5/16-  | kg 1,25     |             | NC06S050002 |   |             |
| QC FF SAE6<br>FEMALE  |      | Psi 6090 | inch - 1,93 | 0,64  | 0,94 | 18 UNF  | lb 0,49  |             | Psi 5075              | inch 2,15            | 3,94         | -           | 1,97    | 12 UN   | lb 2,76  |         | QC FF SAE20<br>MALE   | MPa 35                | mm - 103    | 36                    | 50        | 1-5/8-      | kg 0,696     |          | NC05S060000 |             |             |   |             |
| QC FF SAE6<br>FEMALE  |      | MPa 42   | mm - 27     | 62,5  | -    | 24      | 9/16-    | kg 0,35     | NC06S010001           | Psi 5075             | inch - 4,06  | 1,42        | 1,97    | 12 UN   | lb 1,53  |         |                       | QC FF SAE20<br>FEMALE | MPa 35      | mm 54,5               | 103       | -           | 50           | 1-5/8-   | kg 1,323    |             | NC06S060000 |   |             |
| QC FF SAE6<br>MALE    |      | Psi 6090 | inch 1,06   | 2,46  | -    | 0,94    | 18 UNF   | lb 0,77     |                       | Psi 5075             | inch 2,15    | 4,06        | -       | 1,97    | 12 UN    | lb 2,92 |                       |                       |             |                       |           |             |              |          |             |             |             |   |             |
| QC FF SAE8<br>MALE    | 10   | MPa 42   | mm - 66,5   | 19,75 | 30   | 9/16-   | kg 0,11  | NC05S020000 | QC FF SAE16<br>MALE   | MPa 35               | mm - 100     | 36          | 50      | 1-5/16- | kg 0,58  |         | NC05S050002           | QC FF SAE16<br>FEMALE | MPa 35      | mm 54,5               | 100       | -           | 50           | 1-5/16-  | kg 1,25     |             | NC06S050002 |   |             |
| QC FF SAE8<br>FEMALE  |      | Psi 6090 | inch - 2,62 | 0,78  | 1,18 | 18 UNF  | lb 0,24  |             | Psi 5075              | inch - 3,94          | 1,42         | 1,97        | 12 UN   | lb 1,28 |          |         | QC FF SAE20<br>MALE   | MPa 35                | mm - 103    | 36                    | 50        | 1-5/8-      | kg 0,696     |          | NC05S060000 |             |             |   |             |
| QC FF SAE8<br>MALE    |      | MPa 42   | mm - 31     | 76    | -    | 30      | 9/16-    | kg 0,29     | NC06S020000           | Psi 5075             | inch 2,15    | 3,94        | -       | 1,97    | 12 UN    | lb 2,76 |                       | QC FF SAE20<br>FEMALE | MPa 35      | mm 54,5               | 103       | -           | 50           | 1-5/8-   | kg 1,323    |             | NC06S060000 |   |             |
| QC FF SAE8<br>FEMALE  |      | Psi 6090 | inch 1,22   | 2,99  | -    | 1,18    | 18 UNF   | lb 0,64     |                       | Psi 5075             | inch - 4,06  | 1,42        | 1,97    | 12 UN   | lb 1,53  |         |                       |                       |             |                       |           |             |              |          |             |             |             |   |             |
| QC FF SAE8<br>MALE    |      | MPa 42   | mm - 69,5   | 19,75 | 30   | 3/4-16  | kg 0,13  | NC05S030000 | QC FF SAE20<br>FEMALE | MPa 35               | mm - 103     | 36          | 50      | 1-5/8-  | kg 0,696 |         | NC05S060000           | QC FF SAE8<br>MALE    | MPa 42      | mm - 75               | 24,5      | 34          | 3/4-16       | kg 0,317 |             | NC05S030003 |             |   |             |
| QC FF SAE8<br>FEMALE  |      | Psi 6090 | inch - 2,74 | 0,78  | 1,18 | UNF     | lb 0,29  |             | Psi 5075              | inch - 2,95          | 0,96         | 1,34        | UNF     | lb 0,70 |          |         | QC FF SAE8<br>FEMALE  | MPa 42                | mm - 38     | 81                    | -         | 34          | 3/4-16       | kg 0,377 |             | NC06S030003 |             |   |             |
| QC FF SAE12<br>MALE   | 12,5 | MPa 42   | mm - 80,5   | 24,5  | 34   | 1-1/16- | kg 0,291 | NC05S040000 | QC FF SAE12<br>MALE   | MPa 35               | mm - 100     | 36          | 50      | 1-5/16- | kg 0,696 |         | NC05S060000           | QC FF SAE12<br>FEMALE | MPa 42      | mm - 38               | 86,5      | -           | 34           | 1-1/16-  | kg 0,411    |             | NC06S040000 |   |             |
| QC FF SAE12<br>FEMALE |      | Psi 6090 | inch - 3,17 | 0,96  | 1,34 | 12 UN   | lb 0,64  |             | Psi 5075              | inch 1,50            | 3,41         | -           | 1,34    | 12 UN   | lb 0,91  |         | QC FF SAE12<br>MALE   | MPa 35                | mm - 80     | 27                    | 41        | 3/4-16      | kg 0,4       |          | NC05S030004 |             |             |   |             |
| QC FF SAE12<br>MALE   |      | MPa 42   | mm - 85     | 27    | 41   | 1-1/16- | kg 0,3   | NC05S040004 | Psi 5075              | inch - 3,35          | 1,06         | 1,61        | 12 UN   | lb 0,66 |          |         | QC FF SAE12<br>FEMALE | MPa 35                | mm - 42     | 87                    | -         | 41          | 3/4-16       | kg 0,52  |             | NC06S030004 |             |   |             |
| QC FF SAE12<br>FEMALE |      | Psi 6090 | inch - 3,35 | 1,06  | 1,61 | 12 UN   | lb 1,04  |             | Psi 5075              | inch 1,65            | 3,43         | -           | 1,61    | 12 UN   | lb 1,15  |         | QC FF SAE12<br>MALE   | MPa 35                | mm - 85     | 27                    | 41        | 1-1/16-     | kg 0,3       |          | NC05S040004 |             |             |   |             |
| QC FF SAE12<br>FEMALE |      | MPa 42   | mm - 93     | -     | 41   | 1-1/16- | kg 0,47  | NC06S040004 | Psi 5075              | inch 1,65            | 3,66         | -           | 1,61    | 12 UN   | lb 1,04  |         | QC FF SAE12<br>FEMALE | MPa 35                | mm - 42     | 93                    | -         | 41          | 1-1/16-      | kg 0,47  |             | NC06S040004 |             |   |             |
| QC FF SAE12<br>MALE   |      | Psi 6090 | inch - 3,35 | 1,06  | 1,61 | 12 UN   | lb 1,04  |             | Psi 5075              | inch - 3,35          | 1,06         | 1,61        | 12 UN   | lb 1,04 |          |         |                       |                       |             |                       |           |             |              |          |             |             |             |   |             |
| QC FF SAE12<br>FEMALE |      | MPa 42   | mm - 93     | -     | 41   | 1-1/16- | kg 0,47  | NC06S040004 | Psi 5075              | inch 1,65            | 3,66         | -           | 1,61    | 12 UN   | lb 1,04  |         |                       |                       |             |                       |           |             |              |          |             |             |             |   |             |



**■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
FEMALE THREAD ISO 11926-1 (SAE J1926-1) ORB**


| TYPE                  | DN   | PN          | ØA      | C     | Ød     | ch      | ØM      | WEIGHT      | SS                   | ITEM CODE             | TYPE             | DN          | PN      | ØA      | C        | Ød          | ch                      | ØM                    | WEIGHT                  | SS                  | ITEM CODE     |               |             |             |             |             |             |
|-----------------------|------|-------------|---------|-------|--------|---------|---------|-------------|----------------------|-----------------------|------------------|-------------|---------|---------|----------|-------------|-------------------------|-----------------------|-------------------------|---------------------|---------------|---------------|-------------|-------------|-------------|-------------|-------------|
|                       |      |             |         |       |        |         |         |             | Stainless Steel      |                       |                  |             |         |         |          |             |                         |                       |                         |                     |               |               |             |             |             |             |             |
| QC FF SAE4<br>MALE    | 6.3  | MPa 42      | mm - 48 | 16,15 | 24     | 7/16-   | kg 0,09 | NC05S01S000 | QC FF SAE12<br>MALE  | 19                    | MPa 35           | mm - 92     | 29,95   | 41      | 1-1/16-  | kg 0,48     | NC05S04S000             | QC FF SAE12<br>FEMALE |                         | MPa 35              | mm 44 103 -   | 41            | 1-1/16-     | kg 0,78     | NC06S04S000 |             |             |
| Psi 6090              |      | inch - 1,89 | 0,64    | 0,94  | 20 UNF | lb 0,20 |         | Psi 5075    | Psi 5075             | inch - 3,62           | 1,18             | 1,61        | 12 UN   | lb 1,06 |          | Psi 5075    | inch 1,73 4,06 -        | 1,61                  | 12 UN                   | lb 1,72             |               |               |             |             |             |             |             |
| QC FF SAE4<br>FEMALE  |      | MPa 42      | mm 27   | 61,5  | -      | 24      | 7/16-   | kg 0,151    | NC06S01S000          | QC FF SAE16<br>MALE   | MPa 35           | mm - 92     | 29,95   | 41      | 1 5/16   | kg 0,7      | NC05S05S002             | QC FF SAE16<br>MALE   | MPa 35                  | mm - 92             | 29,95         | 41            | 1 5/16      | kg 0,7      | NC05S05S002 |             |             |
| Psi 6090              |      | inch 1,06   | 2,42    | -     | 0,94   | 20 UNF  | lb 0,33 |             | Psi 5075             | Psi 5075              | inch - 3,62      | 1,18        | 1,61    | -12 UN  | lb 1,54  |             | Psi 5075                | inch 1,73 4,06 -      | 1,61                    | -12 UN              | lb 1,87       |               |             |             |             |             |             |
| QC FF SAE6<br>MALE    |      | MPa 42      | mm -    | 49    | 16,15  | 24      | 9/16-   | kg 0,22     | NC05S01S001          | QC FF SAE16<br>FEMALE | MPa 35           | mm 44 103 - | 41      | 1 5/16  | kg 0,85  | NC06S05S002 | QC FF SAE16<br>FEMALE   | MPa 35                | mm 44 103 -             | 41                  | 1 5/16        | kg 0,85       | NC06S05S002 |             |             |             |             |
| Psi 6090              |      | inch -      | 1,93    | 0,64  | 0,94   | 18 UNF  | lb 0,49 |             | Psi 5075             | Psi 5075              | inch 1,73 4,06 - | 1,61        | -12 UN  | lb 1,87 |          | Psi 5075    | inch - 100 36 50 1-5/16 | kg 0,58               | NC05S05S000             | QC FF SAE16<br>MALE | MPa 35        | mm 54,5 100 - | 50          | 1-5/16      | kg 1,25     | NC06S05S000 |             |
| QC FF SAE6<br>FEMALE  |      | MPa 42      | mm 27   | 62,5  | -      | 24      | 9/16-   | kg 0,35     | NC06S01S001          | QC FF SAE16<br>FEMALE | Psi 5075         | inch - 3,94 | 1,42    | 1,97    | 12 UN    | lb 1,28     |                         | Psi 5075              | inch 2,15 3,94 -        | 1,97                | 12 UN         | lb 2,76       |             |             |             |             |             |
| Psi 6090              |      | inch 1,06   | 2,46    | -     | 0,94   | 18 UNF  | lb 0,77 |             | QC FF SAE20<br>MALE  | MPa 35                | mm - 103         | 36          | 50      | 1-5/8-  | kg 0,696 | NC05S05S001 | QC FF SAE20<br>MALE     | MPa 35                | mm - 103                | 36                  | 50            | 1-5/8-        | kg 1,323    | NC06S05S001 |             |             |             |
| QC FF SAE6<br>FEMALE  |      | MPa 42      | mm -    | 66,5  | 19,75  | 30      | 9/16-   | kg 0,11     | NC05S02S000          | QC FF SAE20<br>FEMALE | Psi 5075         | inch - 4,06 | 1,42    | 1,97    | 12 UN    | lb 1,53     |                         | Psi 5075              | inch 2,15 4,06 -        | 1,97                | 12 UN         | lb 2,92       |             |             |             |             |             |
| Psi 6090              |      | inch -      | 2,62    | 0,78  | 1,18   | 18 UNF  | lb 0,24 |             | QC FF SAE8<br>MALE   | 10                    | MPa 42           | mm 31       | 76      | -       | 30       | 9/16-       | kg 0,29                 | NC06S02S000           | QC FF SAE8<br>FEMALE    | MPa 35              | mm 54,5 100 - | 50            | 1-5/16      | kg 0,58     | NC05S05S000 |             |             |
| QC FF SAE6<br>FEMALE  |      | MPa 42      | mm 31   | 76    | -      | 30      | 9/16-   | kg 0,29     | NC06S02S000          | QC FF SAE8<br>MALE    | Psi 5075         | inch - 3,94 | 1,42    | 1,97    | 12 UN    | lb 1,28     |                         | Psi 5075              | inch 2,15 3,94 -        | 1,97                | 12 UN         | lb 2,76       |             |             |             |             |             |
| Psi 6090              |      | inch 1,22   | 2,99    | -     | 1,18   | 18 UNF  | lb 0,64 |             | QC FF SAE8<br>FEMALE | MPa 42                | mm - 69,5        | 19,75       | 30      | 3/4-16  | kg 0,13  | NC05S02S001 | QC FF SAE8<br>FEMALE    | MPa 35                | mm 54,5 100 -           | 50                  | 1-5/16        | kg 1,25       | NC06S05S000 |             |             |             |             |
| QC FF SAE8<br>MALE    |      | MPa 42      | mm -    | 69,5  | 19,75  | 30      | 3/4-16  | kg 0,13     | NC05S02S001          | QC FF SAE8<br>MALE    | Psi 5075         | inch - 4,06 | 1,42    | 1,97    | 12 UN    | lb 1,53     |                         | Psi 5075              | inch - 103 36 50 1-5/8- | kg 0,696            | NC05S05S001   |               |             |             |             |             |             |
| Psi 6090              |      | inch -      | 2,74    | 0,78  | 1,18   | UNF     | lb 0,29 |             | QC FF SAE8<br>FEMALE | MPa 42                | mm 31            | 79          | -       | 30      | 3/4-16   | kg 0,25     | NC06S02S001             | QC FF SAE8<br>FEMALE  | MPa 35                  | mm 54,5 103 -       | 50            | 1-5/8-        | kg 1,323    | NC06S05S001 |             |             |             |
| QC FF SAE8<br>FEMALE  |      | MPa 42      | mm 1,22 | 3,11  | -      | 1,18    | UNF     | kg 0,55     | NC06S02S001          | Psi 6090              | inch 1,22 3,11 - | 1,18        | UNF     | lb 0,55 |          | Psi 5075    | inch 2,15 4,06 -        | 1,97                  | 12 UN                   | lb 2,92             |               |               |             |             |             |             |             |
| QC FF SAE8<br>MALE    | 12,5 | MPa 42      | mm -    | 75    | 24,5   | 34      | 3/4-16  | kg 0,317    | NC05S03S000          | QC FF SAE12<br>MALE   | 16               | MPa 35      | mm - 80 | 27      | 41       | 3/4-16      | kg 0,4                  | NC05SA3S000           | QC FF SAE12<br>FEMALE   | 16                  | MPa 35        | mm - 80       | 27          | 41          | 3/4-16      | kg 0,4      | NC05SA3S000 |
| Psi 6090              |      | inch -      | 2,95    | 0,96  | 1,34   | UNF     | lb 0,70 |             | Psi 5075             | MPa 35                | mm 1,65          | 3,43        | -       | 1,61    | UNF      | lb 0,88     |                         | Psi 5075              | inch - 1,65 3,43 -      |                     | 1,61          | UNF           | lb 0,88     |             |             |             |             |
| QC FF SAE8<br>FEMALE  |      | MPa 42      | mm 38   | 81    | -      | 34      | 3/4-16  | kg 0,377    | NC06S03S000          | QC FF SAE12<br>FEMALE | MPa 35           | mm - 85     | 27      | 41      | 1-1/16-  | kg 0,52     | NC06SA3S000             | QC FF SAE12<br>MALE   | MPa 35                  |                     | mm - 85       | 27            | 41          | 1-1/16-     | kg 0,52     | NC06SA3S000 |             |
| Psi 6090              |      | inch 1,50   | 3,19    | -     | 1,34   | UNF     | lb 0,83 |             | Psi 5075             | MPa 35                | mm - 3,35        | 1,06        | 1,61    | 12 UN   | kg 0,66  | NC05SA3S001 | QC FF SAE12<br>FEMALE   | MPa 35                | mm - 3,35               | 1,06                | 1,61          | 12 UN         | kg 0,66     | NC05SA3S001 |             |             |             |
| QC FF SAE12<br>MALE   |      | MPa 42      | mm -    | 80,5  | 24,5   | 34      | 1-1/16- | kg 0,291    | NC05S03S001          | QC FF SAE12<br>FEMALE | MPa 35           | mm - 93     | -       | 41      | 1-1/16-  | kg 0,47     | NC06SA3S001             | QC FF SAE12<br>FEMALE | MPa 35                  | mm - 93             | -             | 41            | 1-1/16-     | kg 0,47     | NC06SA3S001 |             |             |
| QC FF SAE12<br>FEMALE |      | MPa 42      | mm 1,50 | 3,41  | -      | 1,34    | 12 UN   | kg 0,91     | NC06S03S001          | Psi 6090              | MPa 35           | mm - 1,35   | 1,06    | 1,61    | 12 UN    | kg 1,04     | NC06SA3S001             | Psi 6090              | MPa 35                  | mm - 1,35           | 1,06          | 1,61          | 12 UN       | kg 1,04     | NC06SA3S001 |             |             |



**■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
MALE THREAD METRIC ISO 8434-1-S (DIN 2353)**


**CS**  
Carbon Steel

| TYPE                | DN  | PN       | ØA   | C    | Ød   | ch    | ØM   | ØLW     | ØRA  | WEIGHT | ITEM CODE |
|---------------------|-----|----------|------|------|------|-------|------|---------|------|--------|-----------|
| QC FF 8S<br>MALE    | 6,3 | MPa 42   | mm   | -    | 54,5 | 16,15 | 24   | M16X1,5 | 5    | 8      | kg 0,232  |
|                     |     | Psi 6090 | inch | -    | 2,15 | 0,64  | 0,94 |         | 0,20 | 0,31   | lb 0,51   |
| QC FF 8S<br>FEMALE  |     | MPa 42   | mm   | 27   | 68   | -     | 24   | M16X1,5 | 5    | 8      | kg 0,338  |
|                     |     | Psi 6090 | inch | 1,06 | 2,68 | -     | 0,94 |         | 0,20 | 0,31   | lb 0,75   |
| QC FF 12S<br>MALE   | 10  | MPa 42   | mm   | -    | 72   | 19,75 | 30   | M20X1,5 | 8    | 12     | kg 0,208  |
|                     |     | Psi 6090 | inch | -    | 2,83 | 0,78  | 1,18 |         | 0,31 | 0,47   | lb 0,46   |
| QC FF 12S<br>FEMALE |     | MPa 42   | mm   | 31   | 81,5 | -     | 30   | M20X1,5 | 8    | 12     | kg 0,695  |
|                     |     | Psi 6090 | inch | 1,22 | 3,21 | -     | 1,18 |         | 0,31 | 0,47   | lb 1,53   |
| QC FF 16S<br>MALE   | 16  | MPa 35   | mm   | -    | 84   | 27    | 41   | M24X1,5 | 12   | 16     | kg 0,397  |
|                     |     | Psi 5075 | inch | -    | 3,31 | 1,06  | 1,61 |         | 0,47 | 0,63   | lb 0,88   |
| QC FF 16S<br>FEMALE |     | MPa 35   | mm   | 42   | 92   | -     | 41   | M24X1,5 | 12   | 16     | kg 0,72   |
|                     |     | Psi 5075 | inch | 1,65 | 3,62 | -     | 1,61 |         | 0,47 | 0,63   | lb 1,59   |
| QC FF 25S<br>MALE   | 25  | MPa 35   | mm   | -    | 105  | 36    | 50   | M36X2   | 20   | 25     | kg 0,81   |
|                     |     | Psi 5075 | inch | -    | 4,13 | 1,42  | 1,97 |         | 0,79 | 0,98   | lb 1,79   |
| QC FF 25S<br>FEMALE |     | MPa 35   | mm   | 54,5 | 105  | -     | 50   | M36X2   | 20   | 25     | kg 1,16   |
|                     |     | Psi 5075 | inch | 2,15 | 4,13 | -     | 1,97 |         | 0,79 | 0,98   | lb 2,56   |



**■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
MALE THREAD METRIC ISO 8434-1-S (DIN 2353)**


| TYPE                | DN  | PN        | ØA      | C     | Ød   | ch      | ØM   | ØLW  | ØRA      | WEIGHT      | ITEM CODE             |
|---------------------|-----|-----------|---------|-------|------|---------|------|------|----------|-------------|-----------------------|
|                     |     |           |         |       |      |         |      |      |          |             | SS<br>Stainless Steel |
| QC FF 8S<br>MALE    | 6,3 | MPa 42    | mm 54,5 | 16,15 | 24   | M16X1,5 | 5    | 8    | kg 0,232 | NC05H01S000 |                       |
| Psi 6090            |     | inch 0,00 | 2,15    | 0,64  | 0,94 |         | 0,20 | 0,31 | lb 0,51  |             |                       |
| QC FF 8S<br>FEMALE  | 10  | MPa 42    | mm 27   | 68    | 24   | M16X1,5 | 5    | 8    | kg 0,338 | NC06H01S000 |                       |
| Psi 6090            |     | inch 1,06 | 2,68    | 0,00  | 0,94 |         | 0,20 | 0,31 | lb 0,75  |             |                       |
| QC FF 12S<br>MALE   | 16  | MPa 42    | mm 72   | 19,75 | 30   | M20X1,5 | 8    | 12   | kg 0,208 | NC05H02S000 |                       |
| Psi 6090            |     | inch 0,00 | 2,83    | 0,78  | 1,18 |         | 0,31 | 0,47 | lb 0,46  |             |                       |
| QC FF 12S<br>FEMALE | 25  | MPa 42    | mm 31   | 81,5  | 30   | M20X1,5 | 8    | 12   | kg 0,695 | NC06H02S000 |                       |
| Psi 6090            |     | inch 1,22 | 3,21    | 0,00  | 1,18 |         | 0,31 | 0,47 | lb 1,53  |             |                       |
| QC FF 16S<br>MALE   | 16  | MPa 35    | mm 84   | 27    | 41   | M24X1,5 | 12   | 16   | kg 0,397 | NC05HA3S000 |                       |
| Psi 5075            |     | inch 0,00 | 3,31    | 1,06  | 1,61 |         | 0,47 | 0,63 | lb 0,88  |             |                       |
| QC FF 16S<br>FEMALE | 25  | MPa 35    | mm 42   | 92    | 41   | M24X1,5 | 12   | 16   | kg 0,72  | NC06HA3S000 |                       |
| Psi 5075            |     | inch 1,65 | 3,62    | 0,00  | 1,61 |         | 0,47 | 0,63 | lb 1,59  |             |                       |
| QC FF 25S<br>MALE   | 25  | MPa 35    | mm 105  | 36    | 50   | M36X2   | 20   | 25   | kg 0,81  | NC05H05S000 |                       |
| Psi 5075            |     | inch 0,00 | 4,13    | 1,42  | 1,97 |         | 0,79 | 0,98 | lb 1,79  |             |                       |
| QC FF 25S<br>FEMALE |     | MPa 35    | mm 54,5 | 105   | 50   | M36X2   | 20   | 25   | kg 1,16  | NC06H05S000 |                       |
| Psi 5075            |     | inch 2,15 | 4,13    | 0,00  | 1,97 |         | 0,79 | 0,98 | lb 2,56  |             |                       |



**QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
MALE THREAD METRIC ISO 8434-1-L (DIN 2353)**


**CS**  
Carbon Steel

| TYPE                | DN   | PN       | ØA   | C    | Ød   | ch    | ØM   | ØLW     | ØRA  | WEIGHT | ITEM CODE |
|---------------------|------|----------|------|------|------|-------|------|---------|------|--------|-----------|
| QC FF 8L<br>MALE    | 6.3  | MPa 42   | mm   | -    | 52,5 | 16,15 | 24   | M14x1,5 | 6    | 8      | kg 0,153  |
|                     |      | Psi 6090 | inch | -    | 2,07 | 0,64  | 0,94 |         | 0,24 | 0,31   | lb 0,34   |
|                     |      | MPa 42   | mm   | 27   | 66   | -     | 24   | M14x1,5 | 6    | 8      | kg 0,246  |
|                     |      | Psi 6090 | inch | 1,06 | 2,60 | -     | 0,94 |         | 0,24 | 0,31   | lb 0,54   |
|                     |      | MPa 42   | mm   | -    | 53,5 | 16,15 | 24   | M16x1,5 | 8    | 10     | kg 0,154  |
|                     |      | Psi 6090 | inch | -    | 2,11 | 0,64  | 0,94 | M16x1,5 | 0,31 | 0,39   | lb 0,34   |
| QC FF 10L<br>MALE   | 10   | MPa 42   | mm   | 27   | 67   | -     | 24   | M16x1,5 | 8    | 10     | kg 0,227  |
|                     |      | Psi 6090 | inch | 1,06 | 2,64 | -     | 0,94 |         | 0,31 | 0,39   | lb 0,50   |
|                     |      | MPa 42   | mm   | -    | 71   | 19,75 | 30   | M16x1,5 | 8    | 10     | kg 0,18   |
|                     |      | Psi 6090 | inch | -    | 2,80 | 0,78  | 1,18 | M16x1,5 | 0,31 | 0,39   | lb 0,40   |
|                     |      | MPa 42   | mm   | 31   | 80,5 | -     | 30   | M16x1,5 | 8    | 10     | kg 0,473  |
|                     |      | Psi 6090 | inch | 1,22 | 3,17 | -     | 1,18 |         | 0,31 | 0,39   | lb 1,04   |
| QC FF 12L<br>MALE   | 10   | MPa 42   | mm   | -    | 71   | 19,75 | 30   | M18X1,5 | 10   | 12     | kg 0,18   |
|                     |      | Psi 6090 | inch | -    | 2,80 | 0,78  | 1,18 | M18X1,5 | 0,39 | 0,47   | lb 0,40   |
|                     |      | MPa 42   | mm   | 31   | 80,5 | -     | 30   | M18X1,5 | 10   | 12     | kg 0,469  |
|                     |      | Psi 6090 | inch | 1,22 | 3,17 | -     | 1,18 |         | 0,39 | 0,47   | lb 1,03   |
|                     |      | MPa 42   | mm   | -    | 72   | 19,75 | 30   | M22X1,5 | 12   | 15     | kg 0,184  |
|                     |      | Psi 6090 | inch | -    | 2,84 | 0,78  | 1,18 |         | 0,47 | 0,59   | lb 0,41   |
| QC FF 15L<br>MALE   | 12,5 | MPa 42   | mm   | 31   | 81,5 | -     | 30   | M22X1,5 | 12   | 15     | kg 0,477  |
|                     |      | Psi 6090 | inch | 1,22 | 3,21 | -     | 1,18 |         | 0,47 | 0,59   | lb 1,05   |
|                     |      | MPa 42   | mm   | -    | 72   | 19,75 | 30   | M22X1,5 | 12   | 15     | kg 0,184  |
|                     |      | Psi 6090 | inch | -    | 2,84 | 0,78  | 1,18 |         | 0,47 | 0,59   | lb 0,41   |
|                     |      | MPa 42   | mm   | 31   | 81,5 | -     | 30   | M22X1,5 | 12   | 15     | kg 0,477  |
|                     |      | Psi 6090 | inch | 1,22 | 3,21 | -     | 1,18 |         | 0,47 | 0,59   | lb 1,05   |
| QC FF 12L<br>MALE   | 12,5 | MPa 42   | mm   | -    | 74   | 24,5  | 34   | M18X1,5 | 10   | 12     | kg 0,376  |
|                     |      | Psi 6090 | inch | -    | 2,91 | 0,96  | 1,34 | M18X1,5 | 0,39 | 0,47   | lb 0,83   |
|                     |      | MPa 42   | mm   | 38   | 80   | -     | 34   | M18X1,5 | 10   | 12     | kg 0,658  |
|                     |      | Psi 6090 | inch | 1,50 | 3,15 | -     | 1,34 |         | 0,39 | 0,47   | lb 1,45   |
|                     |      | MPa 42   | mm   | -    | 75   | 24,5  | 34   | M22X1,5 | 12   | 15     | kg 0,384  |
|                     |      | Psi 6090 | inch | -    | 2,95 | 0,96  | 1,34 | M22X1,5 | 0,47 | 0,59   | lb 0,85   |
| QC FF 15L<br>FEMALE | 12,5 | MPa 42   | mm   | 38   | 81   | -     | 34   | M22X1,5 | 12   | 15     | kg 0,665  |
|                     |      | Psi 6090 | inch | 1,50 | 3,19 | -     | 1,34 |         | 0,47 | 0,59   | lb 1,47   |
|                     |      | MPa 42   | mm   | -    | 75   | 24,5  | 34   | M22X1,5 | 12   | 15     | kg 0,384  |
|                     |      | Psi 6090 | inch | -    | 2,95 | 0,96  | 1,34 |         | 0,47 | 0,59   | lb 0,85   |
|                     |      | MPa 42   | mm   | 38   | 81   | -     | 34   | M26X1,5 | 15   | 18     | kg 0,396  |
|                     |      | Psi 6090 | inch | 1,50 | 3,19 | -     | 1,34 |         | 0,59 | 0,71   | lb 0,87   |
| QC FF 18L<br>MALE   | 16   | MPa 42   | mm   | -    | 75   | 24,5  | 34   | M26X1,5 | 15   | 18     | kg 0,673  |
|                     |      | Psi 6090 | inch | -    | 2,95 | 0,96  | 1,34 |         | 0,59 | 0,71   | lb 1,48   |
|                     |      | MPa 42   | mm   | 38   | 81   | -     | 34   | M26X1,5 | 15   | 18     | kg 0,673  |
|                     |      | Psi 6090 | inch | 1,50 | 3,19 | -     | 1,34 |         | 0,59 | 0,71   | lb 1,48   |
|                     |      | MPa 35   | mm   | -    | 82   | 27    | 41   | M26X1,5 | 15   | 18     | kg 0,342  |
|                     |      | Psi 5075 | inch | -    | 3,23 | 1,06  | 1,61 |         | 0,59 | 0,71   | lb 0,75   |
| QC FF 18L<br>FEMALE | 16   | MPa 35   | mm   | 42   | 90   | -     | 41   | M26X1,5 | 15   | 18     | kg 0,649  |
|                     |      | Psi 5075 | inch | 1,65 | 3,54 | -     | 1,61 |         | 0,59 | 0,71   | lb 1,43   |
|                     |      | MPa 35   | mm   | -    | 84   | 27    | 41   | M30X2   | 19   | 22     | kg 0,339  |
|                     |      | Psi 5075 | inch | -    | 3,31 | 1,06  | 1,61 |         | 0,75 | 0,87   | lb 0,75   |
|                     |      | MPa 35   | mm   | 42   | 92   | -     | 41   | M30X2   | 19   | 22     | kg 0,636  |
|                     |      | Psi 5075 | inch | 1,65 | 3,62 | -     | 1,61 |         | 0,75 | 0,87   | lb 1,40   |
| QC FF 18L<br>MALE   | 19   | MPa 35   | mm   | -    | 87   | 29,95 | 41   | M26X1,5 | 15   | 18     | kg 0,474  |
|                     |      | Psi 5075 | inch | -    | 3,43 | 1,18  | 1,61 |         | 0,59 | 0,71   | lb 1,04   |
|                     |      | MPa 35   | mm   | 44   | 98   | -     | 41   | M26X1,5 | 15   | 18     | kg 0,89   |
|                     |      | Psi 5075 | inch | 1,73 | 3,86 | -     | 1,61 |         | 0,59 | 0,71   | lb 1,96   |
|                     |      | MPa 35   | mm   | -    | 89   | 29,95 | 41   | M30X2   | 19   | 22     | kg 0,461  |
|                     |      | Psi 5075 | inch | -    | 3,50 | 1,18  | 1,61 |         | 0,75 | 0,87   | lb 1,02   |
| QC FF 22L<br>FEMALE | 19   | MPa 35   | mm   | 44   | 100  | -     | 41   | M30X2   | 19   | 22     | kg 0,882  |
|                     |      | Psi 5075 | inch | 1,73 | 3,94 | -     | 1,61 |         | 0,75 | 0,87   | lb 1,94   |



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)


| TYPE              | DN   | PN       | ØA        | C    | Ød    | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE             |
|-------------------|------|----------|-----------|------|-------|------|---------|------|------|----------|-----------------------|
|                   |      |          |           |      |       |      |         |      |      |          | SS<br>Stainless Steel |
| QC FF 8L<br>MALE  | 6.3  | MPa 42   | mm -      | 52,5 | 16,15 | 24   | M14x1,5 | 6    | 8    | kg 0,153 | NC05L01S000           |
|                   |      | Psi 6090 | inch -    | 2,07 | 0,64  | 0,94 |         | 0,24 | 0,31 | lb 0,34  |                       |
|                   |      | MPa 42   | mm 27     | 66   | -     | 24   | M14x1,5 | 6    | 8    | kg 0,246 | NC06L01S000           |
|                   |      | Psi 6090 | inch 1,06 | 2,60 | -     | 0,94 |         | 0,24 | 0,31 | lb 0,54  |                       |
|                   |      | MPa 42   | mm -      | 53,5 | 16,15 | 24   | M16x1,5 | 8    | 10   | kg 0,154 | NC05L01S001           |
|                   |      | Psi 6090 | inch -    | 2,11 | 0,64  | 0,94 |         | 0,31 | 0,39 | lb 0,34  |                       |
|                   |      | MPa 42   | mm 27     | 67   | -     | 24   | M16x1,5 | 8    | 10   | kg 0,227 | NC06L01S001           |
|                   |      | Psi 6090 | inch 1,06 | 2,64 | -     | 0,94 |         | 0,31 | 0,39 | lb 0,50  |                       |
| QC FF 10L<br>MALE | 10   | MPa 42   | mm -      | 71   | 19,75 | 30   | M16x1,5 | 8    | 10   | kg 0,18  | NC05L02S001           |
|                   |      | Psi 6090 | inch -    | 2,80 | 0,78  | 1,18 |         | 0,31 | 0,39 | lb 0,40  |                       |
|                   |      | MPa 42   | mm 31     | 80,5 | -     | 30   | M16x1,5 | 8    | 10   | kg 0,473 | NC06L02S001           |
|                   |      | Psi 6090 | inch 1,22 | 3,17 | -     | 1,18 |         | 0,31 | 0,39 | lb 1,04  |                       |
|                   |      | MPa 42   | mm -      | 71   | 19,75 | 30   | M18X1,5 | 10   | 12   | kg 0,18  | NC05L02S002           |
|                   |      | Psi 6090 | inch -    | 2,80 | 0,78  | 1,18 |         | 0,39 | 0,47 | lb 0,40  |                       |
|                   |      | MPa 42   | mm 31     | 80,5 | -     | 30   | M18X1,5 | 10   | 12   | kg 0,469 | NC06L02S002           |
|                   |      | Psi 6090 | inch 1,22 | 3,17 | -     | 1,18 |         | 0,39 | 0,47 | lb 1,03  |                       |
| QC FF 12L<br>MALE | 12,5 | MPa 42   | mm -      | 72   | 19,75 | 30   | M22X1,5 | 12   | 15   | kg 0,184 | NC05L02S003           |
|                   |      | Psi 6090 | inch -    | 2,84 | 0,78  | 1,18 |         | 0,47 | 0,59 | lb 0,41  |                       |
|                   |      | MPa 42   | mm 31     | 81,5 | -     | 30   | M22X1,5 | 12   | 15   | kg 0,477 | NC06L02S003           |
|                   |      | Psi 6090 | inch 1,22 | 3,21 | -     | 1,18 |         | 0,47 | 0,59 | lb 1,05  |                       |
|                   |      | MPa 42   | mm -      | 74   | 24,5  | 34   | M18X1,5 | 10   | 12   | kg 0,376 | NC05L03S000           |
|                   |      | Psi 6090 | inch -    | 2,91 | 0,96  | 1,34 |         | 0,39 | 0,47 | lb 0,83  |                       |
|                   |      | MPa 42   | mm 38     | 80   | -     | 34   | M18X1,5 | 10   | 12   | kg 0,658 | NC06L03S000           |
|                   |      | Psi 6090 | inch 1,50 | 3,15 | -     | 1,34 |         | 0,39 | 0,47 | lb 1,45  |                       |
| QC FF 15L<br>MALE | 12,5 | MPa 42   | mm -      | 75   | 24,5  | 34   | M22X1,5 | 12   | 15   | kg 0,384 | NC05L03S001           |
|                   |      | Psi 6090 | inch -    | 2,95 | 0,96  | 1,34 |         | 0,47 | 0,59 | lb 0,85  |                       |
|                   |      | MPa 42   | mm 38     | 81   | -     | 34   | M22X1,5 | 12   | 15   | kg 0,665 | NC06L03S001           |
|                   |      | Psi 6090 | inch 1,50 | 3,19 | -     | 1,34 |         | 0,47 | 0,59 | lb 1,47  |                       |
|                   |      | MPa 42   | mm -      | 75   | 24,5  | 34   | M26X1,5 | 15   | 18   | kg 0,396 | NC05L03S002           |
|                   |      | Psi 6090 | inch -    | 2,95 | 0,96  | 1,34 |         | 0,59 | 0,71 | lb 0,87  |                       |
|                   |      | MPa 42   | mm 38     | 81   | -     | 34   | M26X1,5 | 15   | 18   | kg 0,673 | NC06L03S002           |
|                   |      | Psi 6090 | inch 1,50 | 3,19 | -     | 1,34 |         | 0,59 | 0,71 | lb 1,48  |                       |
| QC FF 18L<br>MALE | 16   | MPa 35   | mm -      | 82   | 27    | 41   | M26X1,5 | 15   | 18   | kg 0,342 | NC05LA3S000           |
|                   |      | Psi 5075 | inch -    | 3,23 | 1,06  | 1,61 |         | 0,59 | 0,71 | lb 0,75  |                       |
|                   |      | MPa 35   | mm 42     | 90   | -     | 41   | M26X1,5 | 15   | 18   | kg 0,649 | NC06LA3S000           |
|                   |      | Psi 5075 | inch 1,65 | 3,54 | -     | 1,61 |         | 0,59 | 0,71 | lb 1,43  |                       |
| QC FF 22L<br>MALE | 16   | MPa 35   | mm -      | 84   | 27    | 41   | M30X2   | 19   | 22   | kg 0,339 | NC05LA3S001           |
|                   |      | Psi 5075 | inch -    | 3,31 | 1,06  | 1,61 |         | 0,75 | 0,87 | lb 0,75  |                       |
|                   |      | MPa 35   | mm 42     | 92   | -     | 41   | M30X2   | 19   | 22   | kg 0,636 | NC06LA3S001           |
|                   |      | Psi 5075 | inch 1,65 | 3,62 | -     | 1,61 |         | 0,75 | 0,87 | lb 1,40  |                       |
| QC FF 18L<br>MALE | 19   | MPa 35   | mm -      | 87   | 29,95 | 41   | M26X1,5 | 15   | 18   | kg 0,474 | NC05L04S000           |
|                   |      | Psi 5075 | inch -    | 3,43 | 1,18  | 1,61 |         | 0,59 | 0,71 | lb 1,04  |                       |
|                   |      | MPa 35   | mm 44     | 98   | -     | 41   | M26X1,5 | 15   | 18   | kg 0,89  | NC06L04S000           |
|                   |      | Psi 5075 | inch 1,73 | 3,86 | -     | 1,61 |         | 0,59 | 0,71 | lb 1,96  |                       |
| QC FF 22L<br>MALE | 19   | MPa 35   | mm -      | 89   | 29,95 | 41   | M30X2   | 19   | 22   | kg 0,461 | NC05L04S001           |
|                   |      | Psi 5075 | inch -    | 3,50 | 1,18  | 1,61 |         | 0,75 | 0,87 | lb 1,02  |                       |
|                   |      | MPa 35   | mm 44     | 100  | -     | 41   | M30X2   | 19   | 22   | kg 0,882 | NC06L04S001           |
|                   |      | Psi 5075 | inch 1,73 | 3,94 | -     | 1,61 |         | 0,75 | 0,87 | lb 1,94  |                       |



**■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
MALE THREAD METRIC ISO 8434-1-S (DIN 2353) BULKHEAD**


**CS**  
Carbon Steel

| TYPE                   | DN   | PN       | ØA        | C    | Ød    | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |
|------------------------|------|----------|-----------|------|-------|------|---------|------|------|----------|-------------|
| QC FF 8S BK<br>MALE    | 6,3  | MPa 42   | mm -      | 69,5 | 16,15 | 24   | M16X1,5 | 5    | 8    | kg 0,254 | NC05I010000 |
|                        |      | Psi 6090 | inch -    | 2,74 | 0,64  | 0,94 |         | 0,20 | 0,31 | lb 0,56  |             |
| QC FF 8S BK<br>FEMALE  | 10   | MPa 42   | mm 27     | 83   | -     | 24   | M16X1,5 | 5    | 8    | kg 0,359 | NC06I010000 |
|                        |      | Psi 6090 | inch 1,06 | 3,27 | -     | 0,94 |         | 0,20 | 0,31 | lb 0,79  |             |
| QC FF 12S BK<br>MALE   | 10   | MPa 42   | mm -      | 87   | 19,75 | 30   | M20X1,5 | 8    | 12   | kg 0,24  | NC05I020000 |
|                        |      | Psi 6090 | inch -    | 3,43 | 0,78  | 1,18 |         | 0,31 | 0,47 | lb 0,53  |             |
| QC FF 12S BK<br>FEMALE | 12,5 | MPa 42   | mm 31     | 96,5 | -     | 30   | M20X1,5 | 8    | 12   | kg 0,726 | NC06I020000 |
|                        |      | Psi 6090 | inch 1,22 | 3,80 | -     | 1,18 |         | 0,31 | 0,47 | lb 1,60  |             |
| QC FF 16S BK<br>MALE   | 12,5 | MPa 42   | mm -      | 92   | 24,5  | 34   | M24X1,5 | 12   | 16   | kg 0,546 | NC05I030000 |
|                        |      | Psi 6090 | inch -    | 3,62 | 0,96  | 1,34 |         | 0,47 | 0,63 | lb 1,20  |             |
| QC FF 16S BK<br>FEMALE | 16   | MPa 42   | mm 38     | 98   | -     | 34   | M24X1,5 | 12   | 16   | kg 0,95  | NC06I030000 |
|                        |      | Psi 6090 | inch 1,50 | 3,86 | -     | 1,34 |         | 0,47 | 0,63 | lb 2,09  |             |
| QC FF 16S BK<br>MALE   | 16   | MPa 35   | mm -      | 99   | 27    | 41   | M24X1,5 | 12   | 16   | kg 0,437 | NC05IA30000 |
|                        |      | Psi 5075 | inch -    | 3,90 | 1,06  | 1,61 |         | 0,47 | 0,63 | lb 0,96  |             |
| QC FF 16S BK<br>FEMALE | 19   | MPa 35   | mm 42     | 107  | -     | 41   | M24X1,5 | 12   | 16   | kg 0,76  | NC06IA30000 |
|                        |      | Psi 5075 | inch 1,65 | 4,21 | -     | 1,61 |         | 0,47 | 0,63 | lb 1,68  |             |
| QC FF 20S BK<br>MALE   | 19   | MPa 35   | mm -      | 113  | 29,95 | 41   | M30X2   | 16   | 20   | kg 0,546 | NC05I040000 |
|                        |      | Psi 5075 | inch -    | 4,45 | 1,18  | 1,61 |         | 0,63 | 0,79 | lb 1,20  |             |
| QC FF 20S BK<br>FEMALE | 25   | MPa 35   | mm 44     | 124  | -     | 41   | M30X2   | 16   | 20   | kg 0,957 | NC06I040000 |
|                        |      | Psi 5075 | inch 1,73 | 4,88 | -     | 1,61 |         | 0,63 | 0,79 | lb 2,11  |             |
| QC FF 25S BK<br>MALE   | 25   | MPa 35   | mm -      | 117  | 29,95 | 41   | M36X2   | 20   | 25   | kg 0,615 | NC05I040001 |
|                        |      | Psi 5075 | inch -    | 4,61 | 1,18  | 1,61 |         | 0,79 | 0,98 | lb 1,36  |             |
| QC FF 25S BK<br>FEMALE | 25   | MPa 35   | mm 44     | 128  | -     | 41   | M36X2   | 20   | 25   | kg 1,027 | NC06I040001 |
|                        |      | Psi 5075 | inch 1,73 | 5,04 | -     | 1,61 |         | 0,79 | 0,98 | lb 2,26  |             |
| QC FFE 25S BK<br>MALE  | 25   | MPa 35   | mm -      | 128  | 36    | 50   | M36X2   | 20   | 25   | kg 0,937 | NC05I050000 |
|                        |      | Psi 5075 | inch -    | 5,04 | 1,42  | 1,97 |         | 0,79 | 0,98 | lb 2,07  |             |
| QC FF 25S BK<br>FEMALE | 25   | MPa 35   | mm 54,5   | 128  | -     | 50   | M36X2   | 20   | 25   | kg 1,28  | NC06I050000 |
|                        |      | Psi 5075 | inch 2,15 | 5,04 | -     | 1,97 |         | 0,79 | 0,98 | lb 2,82  |             |



**■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
MALE THREAD METRIC ISO 8434-1-S (DIN 2353) BULKHEAD**


| TYPE                    | DN   | PN       | ØA     | C    | Ød    | ch   | ØM      | ØLW   | ØRA  | WEIGHT   | ITEM CODE   | SS<br>Stainless Steel |             |
|-------------------------|------|----------|--------|------|-------|------|---------|-------|------|----------|-------------|-----------------------|-------------|
| QC FF 8S BK<br>MALE     | 6,3  | MPa 42   | mm -   | 69,5 | 16,15 | 24   | M16X1,5 | 5     | 8    | kg 0,254 | NC05I01S000 |                       |             |
| QC FF 8S BK<br>FEMALE   |      | Psi 6090 | inch - | 2,74 | 0,64  | 0,94 |         | 0,20  | 0,31 | lb 0,56  |             | NC06I01S000           |             |
| QC FF 12S BK<br>MALE    | 10   | MPa 42   | mm -   | 87   | 19,75 | 30   | M20X1,5 | 8     | 12   | kg 0,24  | NC05I02S000 |                       |             |
| QC FF 12S BK<br>FEMALE  |      | Psi 6090 | inch - | 3,43 | 0,78  | 1,18 |         | 0,31  | 0,47 | lb 0,53  |             | NC06I02S000           |             |
| QC FF 16S BK<br>MALE    | 12,5 | MPa 42   | mm -   | 92   | 24,5  | 34   | M24X1,5 | 12    | 16   | kg 0,546 | NC05I03S000 |                       |             |
| QC FF 16S BK<br>FEMALE  |      | Psi 6090 | inch - | 3,62 | 0,96  | 1,34 |         | 0,47  | 0,63 | lb 1,20  |             | NC06I03S000           |             |
| QC FF 16S BK<br>MALE    | 16   | MPa 35   | mm -   | 99   | 27    | 41   | M24X1,5 | 12    | 16   | kg 0,437 | NC05I04S000 |                       |             |
| QC FF 16S BK<br>FEMALE  |      | Psi 5075 | inch - | 3,90 | 1,06  | 1,61 |         | 0,47  | 0,63 | lb 0,96  |             | NC06I04S000           |             |
| QC FF 20S BK<br>MALE    | 19   | MPa 35   | mm -   | 113  | 29,95 | 41   | M30X2   | 16    | 20   | kg 0,546 | NC05I04S000 |                       |             |
| QC FF 20S BK<br>FEMALE  |      | Psi 5075 | inch - | 4,45 | 1,18  | 1,61 |         | 0,63  | 0,79 | lb 1,20  |             | NC06I04S000           |             |
| QC FF 25S BK<br>MALE    | 25   | MPa 35   | mm -   | 44   | 124   | -    | 41      | M30X2 | 16   | 20       | kg 0,957    | NC05I04S001           |             |
| QC FF 25S BK<br>FEMALE  |      | Psi 5075 | inch - | 1,73 | 4,88  | -    | 1,61    |       | 0,63 | 0,79     | lb 2,11     |                       | NC06I04S001 |
| QC FFE 25S BK<br>MALE   | 25   | MPa 35   | mm -   | 117  | 29,95 | 41   | M36X2   | 20    | 25   | kg 0,615 | NC05I05S000 |                       |             |
| QC FFE 25S BK<br>FEMALE |      | Psi 5075 | inch - | 4,61 | 1,18  | 1,61 |         | 0,79  | 0,98 | lb 1,36  |             | NC06I05S000           |             |
| QC FF 25S BK<br>MALE    | 25   | MPa 35   | mm -   | 128  | 36    | 50   | M36X2   | 20    | 25   | kg 1,027 | NC05I05S000 |                       |             |
| QC FF 25S BK<br>FEMALE  |      | Psi 5075 | inch - | 5,04 | 1,42  | 1,97 |         | 0,79  | 0,98 | lb 2,26  |             | NC06I05S000           |             |



**■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD**


**CS**  
Carbon Steel

| TYPE                   | DN   | PN       | ØA   | C    | Ød   | ch    | ØM   | ØLW     | ØRA  | WEIGHT | ITEM CODE |
|------------------------|------|----------|------|------|------|-------|------|---------|------|--------|-----------|
| QC FF 8L BK<br>MALE    | 6,3  | MPa 42   | mm   | -    | 67,5 | 16,15 | 24   | M14x1,5 | 6    | 8      | kg 0,17   |
|                        |      | Psi 6090 | inch | -    | 2,66 | 0,64  | 0,94 |         | 0,24 | 0,31   | lb 0,37   |
|                        |      | MPa 42   | mm   | 27   | 81   | -     | 24   | M14x1,5 | 6    | 8      | kg 0,258  |
|                        |      | Psi 6090 | inch | 1,06 | 3,19 | -     | 0,94 |         | 0,24 | 0,31   | lb 0,57   |
|                        |      | MPa 42   | mm   | -    | 68,5 | 16,15 | 24   | M16x1,5 | 8    | 10     | kg 0,173  |
|                        |      | Psi 6090 | inch | -    | 2,70 | 0,64  | 0,94 | M16x1,5 | 0,31 | 0,39   | lb 0,38   |
| QC FF 10L BK<br>FEMALE | 10   | MPa 42   | mm   | 27   | 82   | -     | 24   | M16x1,5 | 8    | 10     | kg 0,261  |
|                        |      | Psi 6090 | inch | 1,06 | 3,23 | -     | 0,94 |         | 0,31 | 0,39   | lb 0,58   |
|                        |      | MPa 42   | mm   | -    | 86   | 19,75 | 30   | M16x1,5 | 8    | 10     | kg 0,194  |
|                        |      | Psi 6090 | inch | -    | 3,39 | 0,78  | 1,18 |         | 0,31 | 0,39   | lb 0,43   |
|                        |      | MPa 42   | mm   | 31   | 95,5 | -     | 30   | M16x1,5 | 8    | 10     | kg 0,492  |
|                        |      | Psi 6090 | inch | 1,22 | 3,76 | -     | 1,18 |         | 0,31 | 0,39   | lb 1,08   |
| QC FF 12L BK<br>MALE   | 10   | MPa 42   | mm   | -    | 87   | 19,75 | 30   | M18X1,5 | 10   | 12     | kg 0,196  |
|                        |      | Psi 6090 | inch | -    | 3,43 | 0,78  | 1,18 |         | 0,39 | 0,47   | lb 0,43   |
|                        |      | MPa 42   | mm   | 31   | 96,5 | -     | 30   | M18X1,5 | 10   | 12     | kg 0,49   |
|                        |      | Psi 6090 | inch | 1,22 | 3,80 | -     | 1,18 |         | 0,39 | 0,47   | lb 1,08   |
|                        |      | MPa 42   | mm   | -    | 87   | 19,75 | 30   | M22X1,5 | 12   | 15     | kg 0,214  |
|                        |      | Psi 6090 | inch | -    | 3,43 | 0,78  | 1,18 |         | 0,47 | 0,59   | lb 0,47   |
| QC FF 15L BK<br>FEMALE | 12,5 | MPa 42   | mm   | 31   | 96,5 | -     | 30   | M22X1,5 | 12   | 15     | kg 0,503  |
|                        |      | Psi 6090 | inch | 1,22 | 3,80 | -     | 1,18 |         | 0,47 | 0,59   | lb 1,11   |
|                        |      | MPa 42   | mm   | -    | 90   | 24,5  | 34   | M18X1,5 | 10   | 12     | kg 0,397  |
|                        |      | Psi 6090 | inch | -    | 3,54 | 0,96  | 1,34 |         | 0,39 | 0,47   | lb 0,88   |
|                        |      | MPa 42   | mm   | 38   | 96   | -     | 34   | M18X1,5 | 10   | 12     | kg 0,679  |
|                        |      | Psi 6090 | inch | 1,50 | 3,78 | -     | 1,34 |         | 0,39 | 0,47   | lb 1,50   |
| QC FF 15L BK<br>MALE   | 12,5 | MPa 42   | mm   | -    | 90   | 24,5  | 34   | M22X1,5 | 12   | 15     | kg 0,409  |
|                        |      | Psi 6090 | inch | -    | 3,54 | 0,96  | 1,34 |         | 0,47 | 0,59   | lb 0,90   |
|                        |      | MPa 42   | mm   | 38   | 96   | -     | 34   | M22X1,5 | 12   | 15     | kg 0,691  |
|                        |      | Psi 6090 | inch | 1,50 | 3,78 | -     | 1,34 |         | 0,47 | 0,59   | lb 1,52   |
|                        |      | MPa 35   | mm   | -    | 97   | 27    | 41   | M26X1,5 | 15   | 18     | kg 0,383  |
|                        |      | Psi 5075 | inch | -    | 3,82 | 1,06  | 1,61 |         | 0,59 | 0,71   | lb 0,84   |
| QC FF 18L BK<br>FEMALE | 16   | MPa 35   | mm   | 42   | 105  | -     | 41   | M26X1,5 | 15   | 18     | kg 0,69   |
|                        |      | Psi 5075 | inch | 1,65 | 4,13 | -     | 1,61 |         | 0,59 | 0,71   | lb 1,52   |
|                        |      | MPa 35   | mm   | -    | 102  | 29,95 | 41   | M26X1,5 | 15   | 18     | kg 0,509  |
|                        |      | Psi 5075 | inch | -    | 4,02 | 1,18  | 1,61 |         | 0,59 | 0,71   | lb 1,12   |
|                        |      | MPa 35   | mm   | 44   | 113  | -     | 41   | M26X1,5 | 15   | 18     | kg 0,935  |
|                        |      | Psi 5075 | inch | 1,73 | 4,45 | -     | 1,61 |         | 0,59 | 0,71   | lb 2,06   |
| QC FF 22L BK<br>MALE   | 19   | MPa 35   | mm   | -    | 109  | 29,95 | 41   | M30X2   | 19   | 22     | kg 0,529  |
|                        |      | Psi 5075 | inch | -    | 4,29 | 1,18  | 1,61 |         | 0,75 | 0,87   | lb 1,17   |
|                        |      | MPa 35   | mm   | 44   | 120  | -     | 41   | M30X2   | 19   | 22     | kg 0,945  |
|                        |      | Psi 5075 | inch | 1,73 | 4,72 | -     | 1,61 |         | 0,75 | 0,87   | lb 2,08   |



**■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD**


| TYPE                 | DN   | PN       | ØA        | C    | Ød    | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE             |
|----------------------|------|----------|-----------|------|-------|------|---------|------|------|----------|-----------------------|
|                      |      |          |           |      |       |      |         |      |      |          | SS<br>Stainless Steel |
| QC FF 8L BK<br>MALE  | 6,3  | MPa 42   | mm -      | 67,5 | 16,15 | 24   | M14x1,5 | 6    | 8    | kg 0,17  | NC05M01S000           |
|                      |      | Psi 6090 | inch -    | 2,66 | 0,64  | 0,94 |         | 0,24 | 0,31 | lb 0,37  |                       |
|                      |      | MPa 42   | mm 27     | 81   | -     | 24   | M14x1,5 | 6    | 8    | kg 0,258 | NC06M01S000           |
|                      |      | Psi 6090 | inch 1,06 | 3,19 | -     | 0,94 |         | 0,24 | 0,31 | lb 0,57  |                       |
|                      |      | MPa 42   | mm -      | 68,5 | 16,15 | 24   | M16x1,5 | 8    | 10   | kg 0,173 | NC05M01S001           |
|                      |      | Psi 6090 | inch -    | 2,70 | 0,64  | 0,94 |         | 0,31 | 0,39 | lb 0,38  |                       |
|                      |      | MPa 42   | mm 27     | 82   | -     | 24   | M16x1,5 | 8    | 10   | kg 0,261 | NC06M01S001           |
|                      |      | Psi 6090 | inch 1,06 | 3,23 | -     | 0,94 |         | 0,31 | 0,39 | lb 0,58  |                       |
| QC FF 10L BK<br>MALE | 10   | MPa 42   | mm -      | 86   | 19,75 | 30   | M16x1,5 | 8    | 10   | kg 0,194 | NC05M02S000           |
|                      |      | Psi 6090 | inch -    | 3,39 | 0,78  | 1,18 |         | 0,31 | 0,39 | lb 0,43  |                       |
|                      |      | MPa 42   | mm 31     | 95,5 | -     | 30   | M16x1,5 | 8    | 10   | kg 0,492 | NC06M02S000           |
|                      |      | Psi 6090 | inch 1,22 | 3,76 | -     | 1,18 |         | 0,31 | 0,39 | lb 1,08  |                       |
|                      |      | MPa 42   | mm -      | 87   | 19,75 | 30   | M18X1,5 | 10   | 12   | kg 0,196 | NC05M02S001           |
|                      |      | Psi 6090 | inch -    | 3,43 | 0,78  | 1,18 |         | 0,39 | 0,47 | lb 0,43  |                       |
|                      |      | MPa 42   | mm 31     | 96,5 | -     | 30   | M18X1,5 | 10   | 12   | kg 0,49  | NC06M02S001           |
|                      |      | Psi 6090 | inch 1,22 | 3,80 | -     | 1,18 |         | 0,39 | 0,47 | lb 1,08  |                       |
| QC FF 12L BK<br>MALE | 12,5 | MPa 42   | mm -      | 87   | 19,75 | 30   | M22X1,5 | 12   | 15   | kg 0,214 | NC05M02S002           |
|                      |      | Psi 6090 | inch -    | 3,43 | 0,78  | 1,18 |         | 0,47 | 0,59 | lb 0,47  |                       |
|                      |      | MPa 42   | mm 31     | 96,5 | -     | 30   | M22X1,5 | 12   | 15   | kg 0,503 | NC06M02S002           |
|                      |      | Psi 6090 | inch 1,22 | 3,80 | -     | 1,18 |         | 0,47 | 0,59 | lb 1,11  |                       |
|                      |      | MPa 42   | mm -      | 90   | 24,5  | 34   | M18X1,5 | 10   | 12   | kg 0,397 | NC05M03S000           |
|                      |      | Psi 6090 | inch -    | 3,54 | 0,96  | 1,34 |         | 0,39 | 0,47 | lb 0,88  |                       |
|                      |      | MPa 42   | mm 38     | 96   | -     | 34   | M18X1,5 | 10   | 12   | kg 0,679 | NC06M03S000           |
|                      |      | Psi 6090 | inch 1,50 | 3,78 | -     | 1,34 |         | 0,39 | 0,47 | lb 1,50  |                       |
| QC FF 15L BK<br>MALE | 16   | MPa 42   | mm -      | 90   | 24,5  | 34   | M22X1,5 | 12   | 15   | kg 0,409 | NC05M03S001           |
|                      |      | Psi 6090 | inch -    | 3,54 | 0,96  | 1,34 |         | 0,47 | 0,59 | lb 0,90  |                       |
|                      |      | MPa 42   | mm 38     | 96   | -     | 34   | M22X1,5 | 12   | 15   | kg 0,691 | NC06M03S001           |
|                      |      | Psi 6090 | inch 1,50 | 3,78 | -     | 1,34 |         | 0,47 | 0,59 | lb 1,52  |                       |
|                      |      | MPa 35   | mm -      | 97   | 27    | 41   | M26X1,5 | 15   | 18   | kg 0,383 | NC05MA3S000           |
|                      |      | Psi 5075 | inch -    | 3,82 | 1,06  | 1,61 |         | 0,59 | 0,71 | lb 0,84  |                       |
|                      |      | MPa 35   | mm 42     | 105  | -     | 41   | M26X1,5 | 15   | 18   | kg 0,69  | NC06MA3S000           |
|                      |      | Psi 5075 | inch 1,65 | 4,13 | -     | 1,61 |         | 0,59 | 0,71 | lb 1,52  |                       |
| QC FF 18L BK<br>MALE | 19   | MPa 35   | mm -      | 102  | 29,95 | 41   | M26X1,5 | 15   | 18   | kg 0,509 | NC05M04S000           |
|                      |      | Psi 5075 | inch -    | 4,02 | 1,18  | 1,61 |         | 0,59 | 0,71 | lb 1,12  |                       |
|                      |      | MPa 35   | mm 44     | 113  | -     | 41   | M26X1,5 | 15   | 18   | kg 0,935 | NC06M04S000           |
|                      |      | Psi 5075 | inch 1,73 | 4,45 | -     | 1,61 |         | 0,59 | 0,71 | lb 2,06  |                       |
|                      |      | MPa 35   | mm -      | 109  | 29,95 | 41   | M30X2   | 19   | 22   | kg 0,529 | NC05M04S001           |
|                      |      | Psi 5075 | inch -    | 4,29 | 1,18  | 1,61 |         | 0,75 | 0,87 | lb 1,17  |                       |
|                      |      | MPa 35   | mm 44     | 120  | -     | 41   | M30X2   | 19   | 22   | kg 0,945 | NC06M04S001           |
|                      |      | Psi 5075 | inch 1,73 | 4,72 | -     | 1,61 |         | 0,75 | 0,87 | lb 2,08  |                       |



**■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female)  
MALE THREAD ISO 8434-2 (SAE J514) JIC**

**CS**  
Carbon Steel

| TYPE                    | DN   | PN       | ØA        | C    | Ød    | ch   | ØM           | ØLW  | WEIGHT   | ITEM CODE   |
|-------------------------|------|----------|-----------|------|-------|------|--------------|------|----------|-------------|
| QC FF 3/8 JIC<br>MALE   | 6,3  | MPa 42   | mm -      | 50   | 16,15 | 24   | 9/16-18 UNF  | 7,5  | kg 0,153 | NC05J010000 |
|                         |      | Psi 6090 | inch -    | 1,97 | 0,64  | 0,94 |              | 0,30 | lb 0,34  |             |
| QC FF 3/8 JIC<br>FEMALE | 6,3  | MPa 42   | mm 27     | 63,6 | -     | 24   | 9/16-18 UNF  | 7,5  | kg 0,246 | NC0JG010000 |
|                         |      | Psi 6090 | inch 1,06 | 2,50 | -     | 0,94 |              | 0,30 | lb 0,54  |             |
| QC FF 3/8 JIC<br>MALE   | 10   | MPa 42   | mm -      | 68,2 | 19,75 | 30   | 9/16-18 UNF  | 7,5  | kg 0,18  | NC05J020000 |
|                         |      | Psi 6090 | inch -    | 2,69 | 0,78  | 1,18 |              | 0,30 | lb 0,40  |             |
| QC FF 3/8 JIC<br>FEMALE | 10   | MPa 42   | mm 31     | 77,8 | -     | 30   | 9/16-18 UNF  | 7,5  | kg 0,473 | NC06J020000 |
|                         |      | Psi 6090 | inch 1,22 | 3,06 | -     | 1,18 |              | 0,30 | lb 1,04  |             |
| QC FF 5/8 JIC<br>MALE   | 10   | MPa 42   | mm -      | 73,4 | 19,75 | 30   | 7/8-14 UNF   | 12,3 | kg 0,18  | NC05J020001 |
|                         |      | Psi 6090 | inch -    | 2,89 | 0,78  | 1,18 |              | 0,48 | lb 0,40  |             |
| QC FF 5/8 JIC<br>FEMALE | 10   | MPa 42   | mm 31     | 83   | -     | 30   | 7/8-14 UNF   | 12,3 | kg 0,469 | NC06J020001 |
|                         |      | Psi 6090 | inch 1,22 | 3,27 | -     | 1,18 |              | 0,48 | lb 1,03  |             |
| QC FF 1/2 JIC<br>MALE   | 12,5 | MPa 42   | mm -      | 70   | 19,75 | 30   | 3/4-16 UNF   | 9,9  | kg 0,184 | NC05J020002 |
|                         |      | Psi 6090 | inch -    | 2,76 | 0,78  | 1,18 |              | 0,39 | lb 0,41  |             |
| QC FF 1/2 JIC<br>FEMALE | 12,5 | MPa 42   | mm 31     | 80   | -     | 30   | 3/4-16 UNF   | 9,9  | kg 0,477 | NC06J020002 |
|                         |      | Psi 6090 | inch 1,22 | 3,15 | -     | 1,18 |              | 0,39 | lb 1,05  |             |
| QC FF 1/2 JIC<br>MALE   | 12,5 | MPa 42   | mm -      | 76,2 | 24,5  | 34   | 3/4-16 UNF   | 9,9  | kg 0,376 | NC05J030000 |
|                         |      | Psi 6090 | inch -    | 3,00 | 0,96  | 1,34 |              | 0,39 | lb 0,83  |             |
| QC FF 1/2 JIC<br>FEMALE | 12,5 | MPa 42   | mm 38     | 82,2 | -     | 34   | 3/4-16 UNF   | 9,9  | kg 0,658 | NC06J030000 |
|                         |      | Psi 6090 | inch 1,50 | 3,24 | -     | 1,34 |              | 0,39 | lb 1,45  |             |
| QC FF 5/8 JIC<br>MALE   | 12,5 | MPa 42   | mm -      | 79,3 | 24,5  | 34   | 7/8-14 UNF   | 12,3 | kg 0,384 | NC05J030001 |
|                         |      | Psi 6090 | inch -    | 3,12 | 0,96  | 1,34 |              | 0,48 | lb 0,85  |             |
| QC FF 5/8 JIC<br>FEMALE | 12,5 | MPa 42   | mm 38     | 85,3 | -     | 34   | 7/8-14 UNF   | 12,3 | kg 0,665 | NC06J030001 |
|                         |      | Psi 6090 | inch 1,50 | 3,36 | -     | 1,34 |              | 0,48 | lb 1,47  |             |
| QC FF 3/4 JIC<br>MALE   | 12,5 | MPa 42   | mm -      | 81,9 | 24,5  | 34   | 1-1/16-12 UN | 15,5 | kg 0,396 | NC05J030002 |
|                         |      | Psi 6090 | inch -    | 3,22 | 0,96  | 1,34 |              | 0,61 | lb 0,87  |             |
| QC FF 3/4 JIC<br>FEMALE | 12,5 | MPa 42   | mm 38     | 87,9 | -     | 34   | 1-1/16-12 UN | 15,5 | kg 0,673 | NC06J030002 |
|                         |      | Psi 6090 | inch 1,50 | 3,46 | -     | 1,34 |              | 0,61 | lb 1,48  |             |
| QC FF 1 JIC<br>MALE     | 12,5 | MPa 42   | mm -      | 83,1 | 24,5  | 34   | 1-5/16-12 UN | 21,5 | kg 0,34  | NC05J030003 |
|                         |      | Psi 6090 | inch -    | 3,27 | 0,96  | 1,34 |              | 0,85 | lb 0,75  |             |
| QC FF 1 JIC<br>FEMALE   | 12,5 | MPa 42   | mm 38     | 89   | -     | 34   | 1-5/16-12 UN | 21,5 | kg 0,66  | NC06J030003 |
|                         |      | Psi 6090 | inch 1,50 | 3,50 | -     | 1,34 |              | 0,85 | lb 1,46  |             |
| "C FF 1 JIC<br>MALE     | 16   | MPa 35   | mm -      | 84,3 | 27    | 41   | 1-5/16-12 UN | 21,5 | kg 0,342 | NC05JA30000 |
|                         |      | Psi 5075 | inch -    | 3,32 | 1,06  | 1,61 |              | 0,85 | lb 0,75  |             |
| "C FF 1 JIC<br>FEMALE   | 16   | MPa 35   | mm 42     | 92   | -     | 41   | 1-5/16-12 UN | 21,5 | kg 0,649 | NC06JA30000 |
|                         |      | Psi 5075 | inch 1,65 | 3,62 | -     | 1,61 |              | 0,85 | lb 1,43  |             |



## ■ QUICK COUPLINGS ISO 16028 FLAT FACE (male / female) MALE THREAD ISO 8434-2 (SAE J514) JIC

| TYPE                    | DN   | PN       | ØA        | C    | Ød    | ch   | ØM           | ØLW  | WEIGHT   | ITEM CODE   | SS<br>Stainless Steel |
|-------------------------|------|----------|-----------|------|-------|------|--------------|------|----------|-------------|-----------------------|
| QC FF 3/8 JIC<br>MALE   | 6,3  | MPa 42   | mm -      | 50   | 16,15 | 24   | 9/16-18 UNF  | 7,5  | kg 0,153 | NC05J01S000 |                       |
| QC FF 3/8 JIC<br>FEMALE |      | Psi 6090 | inch -    | 1,97 | 0,64  | 0,94 |              | 0,30 | lb 0,34  |             |                       |
| QC FF 3/8 JIC<br>MALE   | 10   | MPa 42   | mm 27     | 63,6 | -     | 24   | 9/16-18 UNF  | 7,5  | kg 0,246 | NC05J02S000 |                       |
| QC FF 3/8 JIC<br>FEMALE |      | Psi 6090 | inch 1,06 | 2,50 | -     | 0,94 |              | 0,30 | lb 0,54  |             |                       |
| QC FF 3/8 JIC<br>MALE   | 12,5 | MPa 42   | mm -      | 73,4 | 19,75 | 30   | 9/16-18 UNF  | 7,5  | kg 0,18  | NC05J03S000 |                       |
| QC FF 3/8 JIC<br>FEMALE |      | Psi 6090 | inch -    | 2,89 | 0,78  | 1,18 |              | 0,30 | lb 0,40  |             |                       |
| QC FF 3/8 JIC<br>MALE   | 16   | MPa 42   | mm 31     | 83   | -     | 30   | 9/16-18 UNF  | 7,5  | kg 0,473 | NC06J02S000 |                       |
| QC FF 3/8 JIC<br>FEMALE |      | Psi 6090 | inch 1,22 | 3,27 | -     | 1,18 |              | 0,30 | lb 1,04  |             |                       |
| QC FF 5/8 JIC<br>MALE   | 10   | MPa 42   | mm -      | 68,2 | 19,75 | 30   | 7/8-14 UNF   | 12,3 | kg 0,18  | NC05J02S001 |                       |
| QC FF 5/8 JIC<br>FEMALE |      | Psi 6090 | inch -    | 2,69 | 0,78  | 1,18 |              | 0,48 | lb 0,40  |             |                       |
| QC FF 5/8 JIC<br>MALE   | 12,5 | MPa 42   | mm 31     | 77,8 | -     | 30   | 7/8-14 UNF   | 12,3 | kg 0,469 | NC06J02S001 |                       |
| QC FF 5/8 JIC<br>FEMALE |      | Psi 6090 | inch 1,22 | 3,06 | -     | 1,18 |              | 0,48 | lb 1,03  |             |                       |
| QC FF 1/2 JIC<br>MALE   | 10   | MPa 42   | mm -      | 70   | 19,75 | 30   | 3/4-16 UNF   | 9,9  | kg 0,184 | NC05J02S002 |                       |
| QC FF 1/2 JIC<br>FEMALE |      | Psi 6090 | inch -    | 2,76 | 0,78  | 1,18 |              | 0,39 | lb 0,41  |             |                       |
| QC FF 1/2 JIC<br>MALE   | 12,5 | MPa 42   | mm 31     | 80   | -     | 30   | 3/4-16 UNF   | 9,9  | kg 0,477 | NC06J02S002 |                       |
| QC FF 1/2 JIC<br>FEMALE |      | Psi 6090 | inch 1,22 | 3,15 | -     | 1,18 |              | 0,39 | lb 1,05  |             |                       |
| QC FF 1/2 JIC<br>MALE   | 16   | MPa 42   | mm -      | 76,2 | 24,5  | 34   | 3/4-16 UNF   | 9,9  | kg 0,376 | NC05J03S000 |                       |
| QC FF 1/2 JIC<br>FEMALE |      | Psi 6090 | inch -    | 3,00 | 0,96  | 1,34 |              | 0,39 | lb 0,83  |             |                       |
| QC FF 1/2 JIC<br>MALE   | 12,5 | MPa 42   | mm 38     | 82,2 | -     | 34   | 3/4-16 UNF   | 9,9  | kg 0,658 | NC06J03S000 |                       |
| QC FF 1/2 JIC<br>FEMALE |      | Psi 6090 | inch 1,50 | 3,24 | -     | 1,34 |              | 0,39 | lb 1,45  |             |                       |
| QC FF 5/8 JIC<br>MALE   | 10   | MPa 42   | mm -      | 79,3 | 24,5  | 34   | 7/8-14 UNF   | 12,3 | kg 0,384 | NC05J03S001 |                       |
| QC FF 5/8 JIC<br>FEMALE |      | Psi 6090 | inch -    | 3,12 | 0,96  | 1,34 |              | 0,48 | lb 0,85  |             |                       |
| QC FF 5/8 JIC<br>MALE   | 12,5 | MPa 42   | mm 38     | 85,3 | -     | 34   | 7/8-14 UNF   | 12,3 | kg 0,665 | NC06J03S001 |                       |
| QC FF 5/8 JIC<br>FEMALE |      | Psi 6090 | inch 1,50 | 3,36 | -     | 1,34 |              | 0,48 | lb 1,47  |             |                       |
| QC FF 3/4 JIC<br>MALE   | 16   | MPa 42   | mm -      | 81,9 | 24,5  | 34   | 1-1/16-12 UN | 15,5 | kg 0,396 | NC05J03S002 |                       |
| QC FF 3/4 JIC<br>FEMALE |      | Psi 6090 | inch -    | 3,22 | 0,96  | 1,34 |              | 0,61 | lb 0,87  |             |                       |
| QC FF 3/4 JIC<br>MALE   | 12,5 | MPa 42   | mm 38     | 87,9 | -     | 34   | 1-1/16-12 UN | 15,5 | kg 0,673 | NC06J03S002 |                       |
| QC FF 3/4 JIC<br>FEMALE |      | Psi 6090 | inch 1,50 | 3,46 | -     | 1,34 |              | 0,61 | lb 1,48  |             |                       |
| QC FF 1 JIC<br>MALE     | 10   | MPa 42   | mm -      | 83,1 | 24,5  | 34   | 1-5/16-12 UN | 21,5 | kg 0,34  | NC05J03S003 |                       |
| QC FF 1 JIC<br>FEMALE   |      | Psi 6090 | inch -    | 3,27 | 0,96  | 1,34 |              | 0,85 | lb 0,75  |             |                       |
| QC FF 1 JIC<br>FEMALE   | 16   | MPa 42   | mm 38     | 89   | -     | 34   | 1-5/16-12 UN | 21,5 | kg 0,66  | NC06J03S003 |                       |
| QC FF 1 JIC<br>MALE     |      | Psi 6090 | inch 1,50 | 3,50 | -     | 1,34 |              | 0,85 | lb 1,46  |             |                       |
| QC FF 1 JIC<br>MALE     | 16   | 35       | mm -      | 84,3 | 27    | 41   | 1-5/16-12 UN | 21,5 | kg 0,342 | NC05JA3S000 |                       |
| QC FF 1 JIC<br>FEMALE   | 16   | 5075     | inch -    | 3,32 | 1,06  | 1,61 | 1-5/16-12 UN | 0,85 | lb 0,75  | NC06JA3S000 |                       |
| QC FF 1 JIC<br>FEMALE   | 16   | 35       | mm 42     | 92   | -     | 41   | 1-5/16-12 UN | 21,5 | kg 0,649 | NC06JA3S000 |                       |
| QC FF 1 JIC<br>FEMALE   | 16   | 5075     | inch 1,65 | 3,62 | -     | 1,61 | 1-5/16-12 UN | 0,85 | lb 1,43  | NC06JA3S000 |                       |



# FFAP

## QUICK COUPLINGS


**Flat Face high pressure**

Edition. 21.2

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 16028
- Sizes: from DN6 up to DN25
- Pressure: up to PN420

Male

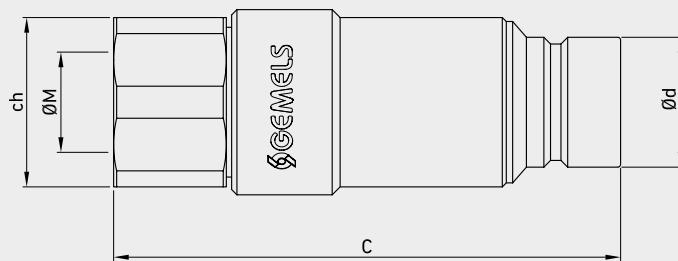

!

**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.




## CODE DESCRIPTION STRUCTURE

|                    | QC | 1/2 | M/F | DN12,5 | 1 | B |
|--------------------|----|-----|-----|--------|---|---|
| Type of coupling   | QC |     |     |        |   |   |
| FFAP FLAT FACE     |    |     |     |        |   |   |
| Ends               |    |     |     |        |   |   |
| ISO 1179-1         |    |     |     |        |   |   |
| BSPP               |    |     |     |        |   |   |
| G 1/4              |    |     |     |        |   |   |
| G 3/8              |    |     |     |        |   |   |
| G 1/2              |    |     |     |        |   |   |
| G 1                |    |     |     |        |   |   |
| G 1-1/4            |    |     |     |        |   |   |
| MALE               |    |     |     |        |   |   |
| DN/ISO             |    |     |     |        |   |   |
| 6,3                |    |     |     |        |   |   |
| 10                 |    |     |     |        |   |   |
| 12,5               |    |     |     |        |   |   |
| 19                 |    |     |     |        |   |   |
| 25                 |    |     |     |        |   |   |
| Body Material      |    |     |     |        |   |   |
| ● 1 = 1,0737       |    |     |     |        |   |   |
| Seal material      |    |     |     |        |   |   |
| ● B = NBR E = FKM* |    |     |     |        |   |   |



\*On request

- Cups
- Plugs



## QUICK COUPLINGS FLAT FACE CONNECTION UNDER PRESSURE (FFAP) (male / female) FEMALE THREAD ISO 1179-1 BSPP WITH BALL VALVE

| TYPE                    | DN   | PN                 | ØA             | C             | Ød            | ch | ØM      | WEIGHT              | ITEM CODE   |
|-------------------------|------|--------------------|----------------|---------------|---------------|----|---------|---------------------|-------------|
| QC FFAP G 1/4<br>MALE   | 6,3  | MPa 42<br>Psi 6090 | mm -<br>inch - | 76,7<br>3,02  | 16,17<br>0,64 | 20 | G 1/4   | kg 0,035<br>lb 0,08 | NC13G010000 |
| QC FFAP G 3/8<br>MALE   | 10   | MPa 42<br>Psi 6090 | mm -<br>inch - | 78,1<br>3,07  | 19,75<br>0,78 | 24 | G 3/8   | kg 0,048<br>lb 0,11 | NC13G020000 |
| QC FFAP G 1/2<br>MALE   | 12,5 | MPa 42<br>Psi 6090 | mm -<br>inch - | 95,8<br>3,77  | 24,54<br>0,97 | 32 | G 1/2   | kg 0,083<br>lb 0,18 | NC13G030000 |
| QC FFAP G 1<br>MALE     | 19   | MPa 35<br>Psi 5075 | mm -<br>inch - | 113,9<br>4,48 | 29,95<br>1,18 | 46 | G 1     | kg 0,256<br>lb 0,56 | NC13G050000 |
| QC FFAP G 1 1/4<br>MALE | 25   | MPa 35<br>Psi 5075 | mm -<br>inch - | 123,7<br>4,87 | 36,05<br>1,42 | 41 | G 1 1/4 | kg 0,535<br>lb 1,18 | NC13G060000 |

CS  
Carbon Steel



# ISO A

## QUICK COUPLINGS

**Available PL version, free flow (without valve) on both sides**

Edition. 21.2

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 7241/A
- Sizes: from DN6 to DN50
- Pressure: up to PN420


### SS Stainless Steel

- Type: Quick Couplings
- Models: ISO 7241/A
- Sizes: from DN6 to DN50
- Pressure: up to PN300


!

**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.

Male

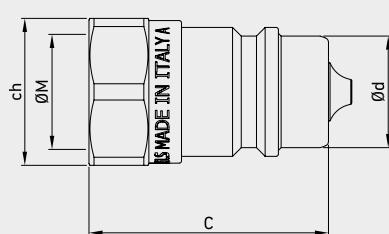


Female

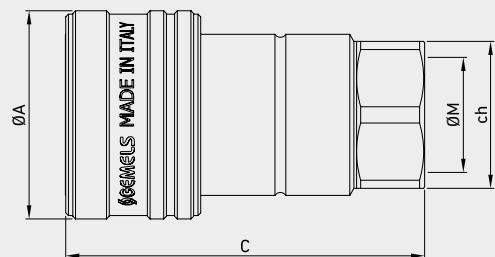


#### Performance

(1/4", 3/8", 1/2", 3/4", 1")  
Series (1/4", 3/8", 1/2", 3/4", 1")  
200SUS (Test Fluid: Oil-200SUS)

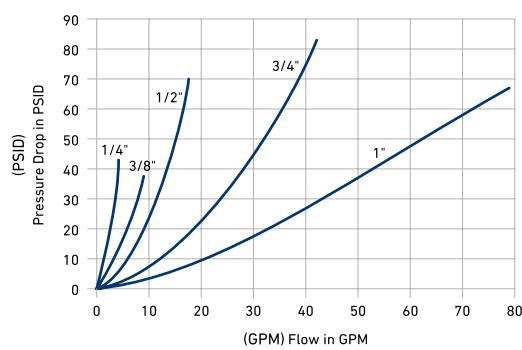

(1 1/4", 1 1/2", 2")  
(1 1/4", 1 1/2", 2")

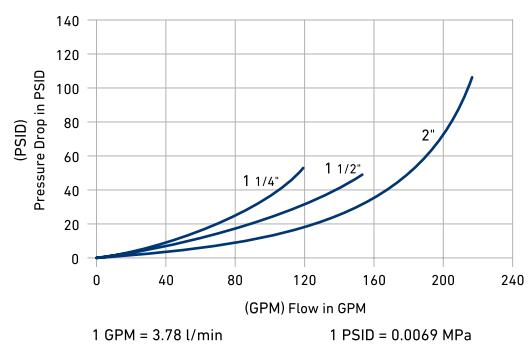




## CODE DESCRIPTION STRUCTURE


|                    | QC                  | G1/2                                | M/F | DN12,5 | 1 | B |
|--------------------|---------------------|-------------------------------------|-----|--------|---|---|
| Type of coupling   |                     |                                     |     |        |   |   |
| ISO 7241/A         |                     |                                     |     |        |   |   |
| Ends               |                     |                                     |     |        |   |   |
| ISO 1179-1<br>BSPP | ASME B1.20.1<br>NPT | ISO 11926-1<br>(SAE J1926-1)<br>ORB |     |        |   |   |
| G 1/4              | N 1/4               | SAE4                                |     |        |   |   |
| G 3/8              | N 3/8               | SAE6                                |     |        |   |   |
| G 1/2              | N 1/2               | SAE8                                |     |        |   |   |
| G 3/4              | N 3/4               | SAE12                               |     |        |   |   |
| G 1                | N 1                 | SAE16                               |     |        |   |   |
| G 1 1/4            | N 1 1/4             | SAE20                               |     |        |   |   |
| G 1 1/2            | N 1 1/2             | SAE24                               |     |        |   |   |
| G 2                | N 2                 | SAE32                               |     |        |   |   |
| MALE               |                     |                                     |     |        |   |   |
| FEMALE             |                     |                                     |     |        |   |   |
| DN/ISO             |                     |                                     |     |        |   |   |
| 6,3                |                     |                                     |     |        |   |   |
| 10                 |                     |                                     |     |        |   |   |
| 12,5               |                     |                                     |     |        |   |   |
| 20                 |                     |                                     |     |        |   |   |
| 25                 |                     |                                     |     |        |   |   |
| 31,5               |                     |                                     |     |        |   |   |
| 40                 |                     |                                     |     |        |   |   |
| 50                 |                     |                                     |     |        |   |   |
| Body Material      |                     |                                     |     |        |   |   |
| ● 1 = 1,0737       |                     |                                     |     |        |   |   |
| ● 4 = 1,4404       |                     |                                     |     |        |   |   |
| Seal material      |                     |                                     |     |        |   |   |
| ● B = NBR E = FKM* |                     |                                     |     |        |   |   |
| ● E = FKM          |                     |                                     |     |        |   |   |

\*On request  
 • Cups  
 • Plugs




## QUICK COUPLINGS ISO 7241/A (male / female) FEMALE THREAD ISO 1179-1 BSPP WITH POPPET

| TYPE                       | DN   | PN       | ØA          | C     | Ød   | ch   | ØM      | WEIGHT    | ITEM CODE   | CS     | SS      | Stainless Steel |         |
|----------------------------|------|----------|-------------|-------|------|------|---------|-----------|-------------|--------|---------|-----------------|---------|
|                            |      |          |             |       |      |      |         |           |             |        |         |                 |         |
| QC ISO A G<br>1/4 MALE     | 6,3  | MPa 42   | mm - 35,5   | 11,86 | 19   |      | G1/4    | kg 0,037  | NC01G010000 | MPa 30 | mm - 34 | 11,8            | 19      |
|                            |      | Psi 6090 | inch - 1,40 | 0,47  | 0,75 |      |         | lb 0,08   |             |        |         |                 | G1/4    |
| QC ISO A G<br>1/4 FEMALE   |      | MPa 42   | mm 25       | 49,6  | -    | 19   |         | kg 0,11   | NC02G010000 | MPa 30 | mm 26   | 58,5            | - 19    |
|                            |      | Psi 6090 | inch 0,98   | 1,95  | -    | 0,75 |         | lb 0,24   |             |        |         |                 | G1/4    |
| QC ISO A G<br>3/8 MALE     | 10   | MPa 42   | mm - 39,5   | 17,3  | 22   |      | G3/8    | kg 0,05   | NC01G020000 | MPa 25 | mm - 40 | 17,3            | 22      |
|                            |      | Psi 6090 | inch - 1,56 | 0,68  | 0,87 |      |         | lb 0,11   |             |        |         |                 | G3/8    |
| QC ISO A G<br>3/8 FEMALE   |      | MPa 42   | mm 32       | 57    | -    | 22   |         | kg 0,15   | NC02G020000 | MPa 25 | mm 30   | 64              | - 22    |
|                            |      | Psi 6090 | inch 1,26   | 2,24  | -    | 0,87 |         | lb 0,33   |             |        |         |                 | G3/8    |
| QC ISO A G<br>1/2 MALE     | 12,5 | MPa 35   | mm - 44     | 20,5  | 27   |      | G1/2    | kg 0,0924 | NC01G030000 | MPa 25 | mm - 46 | 20,5            | 27      |
|                            |      | Psi 5075 | inch - 1,73 | 0,81  | 1,06 |      |         | lb 0,20   |             |        |         |                 | G1/2    |
| QC ISO A G<br>1/2 FEMALE   |      | MPa 35   | mm 38,25    | 66    | -    | 27   |         | kg 0,227  | NC02G030000 | MPa 25 | mm 38   | 73              | - 27    |
|                            |      | Psi 5075 | inch 1,51   | 2,60  | -    | 1,06 |         | lb 0,50   |             |        |         |                 | G1/2    |
| QC ISO A G<br>3/4 MALE     | 20   | MPa 25   | mm - 55,5   | 29,1  | 34   |      | G3/4    | kg 0,2    | NC01G040000 | MPa 25 | mm - 54 | 29,1            | 36      |
|                            |      | Psi 3625 | inch - 2,19 | 1,15  | 1,34 |      |         | lb 0,44   |             |        |         |                 | G3/4    |
| QC ISO A G<br>3/4 FEMALE   |      | MPa 25   | mm 48       | 83    | -    | 34   |         | kg 0,49   | NC02G040000 | MPa 25 | mm 48   | 87,5            | - 36    |
|                            |      | Psi 3625 | inch 1,89   | 3,27  | -    | 1,34 |         | lb 1,08   |             |        |         |                 | G3/4    |
| QC ISO A G 1<br>MALE       | 25   | MPa 25   | mm - 66     | 34,34 | 41   |      | G 1     | kg 0,311  | NC01G050000 | MPa 20 | mm - 63 | 34,3            | 41      |
|                            |      | Psi 3625 | inch - 2,60 | 1,35  | 1,61 |      |         | lb 0,69   |             |        |         |                 | G 1     |
| QC ISO A G 1<br>FEMALE     |      | MPa 25   | mm 56       | 100   | -    | 41   |         | kg 0,7825 | NC02G050000 | MPa 20 | mm 54   | 103             | - 38    |
|                            |      | Psi 3625 | inch 2,20   | 3,94  | -    | 1,61 |         | lb 1,73   |             |        |         |                 | G 1     |
| QC ISO A G 1<br>1/4 MALE   | 31,5 | MPa 25   | mm - 74,8   | 45    | 50   |      | G 1 1/4 | kg 0,537  | NC01G060000 | MPa 10 | mm - 69 | 45              | 50      |
|                            |      | Psi 3625 | inch - 2,94 | 1,77  | 1,97 |      |         | lb 1,18   |             |        |         |                 | G 1 1/4 |
| QC ISO A G 1<br>1/4 FEMALE |      | MPa 25   | mm 71       | 117,5 | -    | 50   |         | kg 1,243  | NC02G060000 | MPa 10 | mm 70   | 115             | - 50    |
|                            |      | Psi 3625 | inch 2,80   | 4,63  | -    | 1,97 |         | lb 2,74   |             |        |         |                 | G 1 1/4 |
| QC ISO A G 1<br>1/2 MALE   | 40   | MPa 20   | mm - 84     | 55    | 60   |      | G 1 1/2 | kg 0,881  | NC01G070000 | MPa 8  | mm - 73 | 55              | 60      |
|                            |      | Psi 2900 | inch - 3,31 | 2,17  | 2,36 |      |         | lb 1,94   |             |        |         |                 | G 1 1/2 |
| QC ISO A G 1<br>1/2 FEMALE |      | MPa 20   | mm 86       | 135   | -    | 60   |         | kg 2,126  | NC02G070000 | MPa 8  | mm 81   | 123             | - 60    |
|                            |      | Psi 2900 | inch 3,39   | 5,31  | -    | 2,36 |         | lb 4,69   |             |        |         |                 | G 1 1/2 |
| QC ISO A G 2<br>MALE       | 50   | MPa 15   | mm - 102,5  | 65,1  | 75   |      | G 2     | kg 1,613  | NC01G080000 | MPa 6  | mm - 90 | 65,1            | 70      |
|                            |      | Psi 2175 | inch - 4,04 | 2,56  | 2,95 |      |         | lb 3,56   |             |        |         |                 | G 2     |
| QC ISO A G 2<br>FEMALE     |      | MPa 15   | mm 103      | 162,5 | -    | 75   |         | kg 3,961  | NC02G080000 | MPa 6  | mm 103  | 147             | - 70    |
|                            |      | Psi 2175 | inch 4,06   | 6,40  | -    | 2,95 |         | lb 8,73   |             |        |         |                 | G 2     |



## ■ QUICK COUPLINGS ISO 7241/A (male / female) FEMALE THREAD ASME B1.20.1 NPT WITH POPPET

| TYPE                    | DN   | PN          | ØA         | C     | Ød   | ch | ØM     | WEIGHT    | CS           | ITEM CODE   | SS       | Stainless Steel |      |      |        |           |             |             |
|-------------------------|------|-------------|------------|-------|------|----|--------|-----------|--------------|-------------|----------|-----------------|------|------|--------|-----------|-------------|-------------|
|                         |      |             |            |       |      |    |        |           | Carbon Steel |             |          |                 |      |      |        |           |             |             |
| QC ISO A N 1/4 MALE     | 6,3  | MPa 42      | mm - 35,5  | 11,86 | 19   |    | N1/4   | kg 0,037  |              | NC01N010000 | MPa 30   | mm - 34         | 11,8 | 19   | N1/4   | kg 0,037  | NC01N010001 |             |
| Psi 6090                |      | inch - 1,40 | 0,47       | 0,75  |      |    |        | lb 0,08   |              |             | Psi 4350 | inch - 1,34     | 0,46 | 0,75 |        | lb 0,08   |             |             |
| QC ISO A N 1/4 FEMALE   | 6,3  | MPa 42      | mm 25      | 49,6  | -    | 19 |        | kg 0,11   |              | NC02N010000 | MPa 30   | mm 26           | 58,5 | -    | 19     | N1/4      | kg 0,11     | NC02N010001 |
| Psi 6090                |      | inch 0,98   | 1,95       | -     | 0,75 |    | N1/4   | lb 0,24   |              |             | Psi 4350 | inch 1,02       | 2,30 | -    | 0,75   |           | lb 0,24     |             |
| QC ISO A N 3/8 MALE     | 10   | MPa 42      | mm - 39,5  | 17,3  | 22   |    | N3/8   | kg 0,05   |              | NC01N020000 | MPa 25   | mm - 40         | 17,3 | 22   | N3/8   | kg 0,05   | NC01N020001 |             |
| Psi 6090                |      | inch - 1,56 | 0,68       | 0,87  |      |    |        | lb 0,11   |              |             | Psi 3625 | inch - 1,57     | 0,68 | 0,87 |        | lb 0,11   |             |             |
| QC ISO A N 3/8 FEMALE   | 10   | MPa 42      | mm 32      | 57    | -    | 22 | N3/8   | kg 0,15   |              | NC02N020000 | MPa 25   | mm 30           | 64   | -    | 22     | N3/8      | kg 0,15     | NC02N020001 |
| Psi 6090                |      | inch 1,26   | 2,24       | -     | 0,87 |    | N3/8   | lb 0,33   |              |             | Psi 3625 | inch 1,18       | 2,52 | -    | 0,87   |           | lb 0,33     |             |
| QC ISO A N 1/2 MALE     | 12,5 | MPa 35      | mm - 44    | 20,5  | 27   |    | N1/2   | kg 0,0924 |              | NC01N030000 | MPa 25   | mm - 46         | 20,5 | 27   | N1/2   | kg 0,0924 | NC01N030001 |             |
| Psi 5075                |      | inch - 1,73 | 0,81       | 1,06  |      |    |        | lb 0,20   |              |             | Psi 3625 | inch - 1,81     | 0,81 | 1,06 |        | lb 0,20   |             |             |
| QC ISO A N 1/2 FEMALE   | 12,5 | MPa 35      | mm 38,25   | 66    | -    | 27 | N1/2   | kg 0,227  |              | NC02N030000 | MPa 25   | mm 38           | 73   | -    | 27     | N1/2      | kg 0,227    | NC02N030001 |
| Psi 5075                |      | inch 1,51   | 2,60       | -     | 1,06 |    | N1/2   | lb 0,50   |              |             | Psi 3625 | inch 1,50       | 2,87 | -    | 1,06   |           | lb 0,50     |             |
| QC ISO A N 3/4 MALE     | 20   | MPa 25      | mm - 55,5  | 29,1  | 34   |    | N3/4   | kg 0,2    |              | NC01N040000 | MPa 25   | mm - 54         | 29,1 | 36   | N3/4   | kg 0,2    | NC01N040001 |             |
| Psi 3625                |      | inch - 2,19 | 1,15       | 1,34  |      |    |        | lb 0,44   |              |             | Psi 3625 | inch - 2,13     | 1,15 | 1,42 |        | lb 0,44   |             |             |
| QC ISO A N 3/4 FEMALE   | 20   | MPa 25      | mm 48      | 83    | -    | 34 | N3/4   | kg 0,49   |              | NC02N040000 | MPa 25   | mm 48           | 87,5 | -    | 36     | N3/4      | kg 0,49     | NC02N040001 |
| Psi 3625                |      | inch 1,89   | 3,27       | -     | 1,34 |    | N3/4   | lb 1,08   |              |             | Psi 3625 | inch 1,89       | 3,44 | -    | 1,42   |           | lb 1,08     |             |
| QC ISO A N 1 MALE       | 25   | MPa 25      | mm - 66    | 34,34 | 41   |    | N 1    | kg 0,311  |              | NC01N050000 | MPa 20   | mm - 63         | 34,3 | 41   | N 1    | kg 0,311  | NC01N050001 |             |
| Psi 3625                |      | inch - 2,60 | 1,35       | 1,61  |      |    |        | lb 0,69   |              |             | Psi 2900 | inch - 2,48     | 1,35 | 1,61 |        | lb 0,69   |             |             |
| QC ISO A N 1 FEMALE     | 25   | MPa 25      | mm 56      | 100   | -    | 41 | G 1    | kg 0,7825 |              | NC02N050000 | MPa 20   | mm 54           | 103  | -    | 38     | G 1       | kg 0,7825   | NC02N050001 |
| Psi 3625                |      | inch 2,20   | 3,94       | -     | 1,61 |    | G 1    | lb 1,73   |              |             | Psi 2900 | inch 2,13       | 4,06 | -    | 1,50   |           | lb 1,73     |             |
| QC ISO A N 1 1/4 MALE   | 31,5 | MPa 25      | mm - 74,8  | 45    | 50   |    | N1 1/4 | kg 0,537  |              | NC01N060000 | MPa 10   | mm - 69         | 45   | 50   | N1 1/4 | kg 0,537  | NC01N060001 |             |
| Psi 3625                |      | inch - 2,94 | 1,77       | 1,97  |      |    |        | lb 1,18   |              |             | Psi 1450 | inch - 2,72     | 1,77 | 1,97 |        | lb 1,18   |             |             |
| QC ISO A N 1 1/4 FEMALE | 31,5 | MPa 25      | mm 71      | 117,5 | -    | 50 | N1 1/4 | kg 1,243  |              | NC02N060000 | MPa 10   | mm 70           | 115  | -    | 50     | N1 1/4    | kg 1,243    | NC02N060001 |
| Psi 3625                |      | inch 2,80   | 4,63       | -     | 1,97 |    | N1 1/4 | lb 2,74   |              |             | Psi 1450 | inch 2,76       | 4,53 | -    | 1,97   |           | lb 2,74     |             |
| QC ISO A N 1 1/2 MALE   | 40   | MPa 20      | mm - 84    | 55    | 60   |    | N1 1/2 | kg 0,881  |              | NC01N070000 | MPa 8    | mm - 73         | 55   | 60   | N1 1/2 | kg 0,881  | NC01N070001 |             |
| Psi 2900                |      | inch - 3,31 | 2,17       | 2,36  |      |    |        | lb 1,94   |              |             | Psi 1160 | inch - 2,87     | 2,17 | 2,36 |        | lb 1,94   |             |             |
| QC ISO A N 1 1/2 FEMALE | 40   | MPa 20      | mm 86      | 135   | -    | 60 | N1 1/2 | kg 2,126  |              | NC02N070000 | MPa 8    | mm 81           | 126  | -    | 60     | N1 1/2    | kg 2,126    | NC02N070001 |
| Psi 2900                |      | inch 3,39   | 5,31       | -     | 2,36 |    | N1 1/2 | lb 4,69   |              |             | Psi 1160 | inch 3,19       | 4,96 | -    | 2,36   |           | lb 4,69     |             |
| QC ISO A N 2 MALE       | 50   | MPa 15      | mm - 102,5 | 65,1  | 75   |    | N 2    | kg 1,613  |              | NC01N080000 | MPa 6    | mm - 90         | 65,1 | 70   | N 2    | kg 1,613  | NC01N080001 |             |
| Psi 2175                |      | inch - 4,04 | 2,56       | 2,95  |      |    |        | lb 3,56   |              |             | Psi 870  | inch - 3,54     | 2,56 | 2,76 |        | lb 3,56   |             |             |
| QC ISO A N 2 FEMALE     | 50   | MPa 15      | mm 103     | 162,5 | -    | 75 | N 2    | kg 3,961  |              | NC02N080000 | MPa 6    | mm 103          | 147  | -    | 70     | N 2       | kg 3,961    | NC02N080001 |
| Psi 2175                |      | inch 4,06   | 6,40       | -     | 2,95 |    | N 2    | lb 8,73   |              |             | Psi 870  | inch 4,06       | 5,79 | -    | 2,76   |           | lb 8,73     |             |



## ■ QUICK COUPLINGS ISO 7241/A (male / female) FEMALE THREAD ISO 11926-1 (SAE J1926-1) ORB WITH POPPET

| TYPE                     | DN   | PN                    | ØA                 | C         | Ød          | ch   | ØM                    | WEIGHT          | ITEM CODE | CS          | Stainless Steel |
|--------------------------|------|-----------------------|--------------------|-----------|-------------|------|-----------------------|-----------------|-----------|-------------|-----------------|
|                          |      |                       |                    |           |             |      |                       |                 |           |             |                 |
| QC ISO A SAE4<br>MALE    | 6,3  | MPa 42                | mm - 35,5 11,8 19  | kg 0,037  | NC01S010000 | 6,3  | MPa 30                | mm - 34 11,8 19 | kg 0,037  | NC01S01S001 | SS              |
| Psi 6090                 |      | inch - 1,40 0,47 0,75 | lb 0,08            | Psi 4350  |             |      | inch - 1,34 0,46 0,75 | lb 0,08         |           |             |                 |
| QC ISO A SAE4<br>FEMALE  | 6,3  | MPa 42                | mm 25 49,6 - 19    | kg 0,11   | NC02S010000 | 6,3  | MPa 30                | mm 26 58,5 - 19 | kg 0,11   | NC02S01S001 | SS              |
| Psi 6090                 |      | inch 0,98 1,95 - 0,75 | lb 0,24            | Psi 4350  |             |      | inch 1,02 2,30 - 0,75 | lb 0,24         |           |             |                 |
| QC ISO A SAE6<br>MALE    | 10   | MPa 42                | mm - 39,5 17,3 22  | kg 0,05   | NC01S020000 | 10   | MPa 25                | mm - 40 17,3 22 | kg 0,05   | NC01S02S001 | SS              |
| Psi 6090                 |      | inch - 1,56 0,68 0,87 | lb 0,11            | Psi 3625  |             |      | inch - 1,57 0,68 0,87 | lb 0,11         |           |             |                 |
| QC ISO A SAE6<br>FEMALE  | 10   | MPa 42                | mm 32 57 - 22      | kg 0,15   | NC02S020000 | 10   | MPa 25                | mm 30 64 - 22   | kg 0,15   | NC02S02S001 | SS              |
| Psi 6090                 |      | inch 1,26 2,24 - 0,87 | lb 0,33            | Psi 3625  |             |      | inch 1,18 2,52 - 0,87 | lb 0,33         |           |             |                 |
| QC ISO A SAE8<br>MALE    | 12,5 | MPa 35                | mm - 44 20,5 27    | kg 0,0924 | NC01S030000 | 12,5 | MPa 25                | mm - 46 20,5 27 | kg 0,0924 | NC01S03S001 | SS              |
| Psi 5075                 |      | inch - 1,73 0,81 1,06 | lb 0,20            | Psi 3625  |             |      | inch - 1,81 0,81 1,06 | lb 0,20         |           |             |                 |
| QC ISO A SAE8<br>FEMALE  | 12,5 | MPa 35                | mm 38,25 66 - 27   | kg 0,227  | NC02S030000 | 12,5 | MPa 25                | mm 38 73 - 27   | kg 0,227  | NC02S03S001 | SS              |
| Psi 5075                 |      | inch 1,51 2,60 - 1,06 | lb 0,50            | Psi 3625  |             |      | inch 1,50 2,87 - 1,06 | lb 0,50         |           |             |                 |
| QC ISO A SAE12<br>MALE   | 20   | MPa 25                | mm - 55,5 29,1 34  | kg 0,2    | NC01S040000 | 20   | MPa 25                | mm - 54 29,1 36 | kg 0,2    | NC01S04S001 | SS              |
| Psi 3625                 |      | inch - 2,19 1,15 1,34 | lb 0,44            | Psi 3625  |             |      | inch - 2,13 1,15 1,42 | lb 0,44         |           |             |                 |
| QC ISO A SAE12<br>FEMALE | 20   | MPa 25                | mm 48 83 - 34      | kg 0,49   | NC02S040000 | 20   | MPa 25                | mm 48 87,5 - 36 | kg 0,49   | NC02S04S001 | SS              |
| Psi 3625                 |      | inch 1,89 3,27 - 1,34 | lb 1,08            | Psi 3625  |             |      | inch 1,89 3,44 - 1,42 | lb 1,08         |           |             |                 |
| QC ISO A SAE16<br>MALE   | 25   | MPa 25                | mm - 66 34,34 41   | kg 0,311  | NC01S050000 | 25   | MPa 20                | mm - 63 34,3 41 | kg 0,311  | NC01S05S001 | SS              |
| Psi 3625                 |      | inch - 2,60 1,35 1,61 | lb 0,69            | Psi 2900  |             |      | inch - 2,48 1,35 1,61 | lb 0,69         |           |             |                 |
| QC ISO A SAE16<br>FEMALE | 25   | MPa 25                | mm 56 100 - 41     | kg 0,7825 | NC02S050000 | 25   | MPa 20                | mm 54 103 - 38  | kg 0,7825 | NC02S05S001 | SS              |
| Psi 3625                 |      | inch 2,20 3,94 - 1,61 | lb 1,73            | Psi 2900  |             |      | inch 2,13 4,06 - 1,50 | lb 1,73         |           |             |                 |
| QC ISO A SAE20<br>MALE   | 31,5 | MPa 25                | mm - 74,8 45 50    | kg 0,537  | NC01S060000 | 31,5 | MPa 10                | mm - 69 45 50   | kg 0,537  | NC01S06S001 | SS              |
| Psi 3625                 |      | inch - 2,94 1,77 1,97 | lb 1,18            | Psi 1450  |             |      | inch - 2,72 1,77 1,97 | lb 1,18         |           |             |                 |
| QC ISO A SAE20<br>FEMALE | 31,5 | MPa 25                | mm 71 117,5 - 50   | kg 1,243  | NC02S060000 | 31,5 | MPa 10                | mm 70 115 - 50  | kg 1,243  | NC02S06S001 | SS              |
| Psi 3625                 |      | inch 2,80 4,63 - 1,97 | lb 2,74            | Psi 1450  |             |      | inch 2,76 4,53 - 1,97 | lb 2,74         |           |             |                 |
| QC ISO A SAE24<br>MALE   | 40   | MPa 20                | mm - 84 55 60      | kg 0,881  | NC01S070000 | 40   | MPa 8                 | mm - 73 55 60   | kg 0,881  | NC01S07S001 | SS              |
| Psi 2900                 |      | inch - 3,31 2,17 2,36 | lb 1,94            | Psi 1160  |             |      | inch - 2,87 2,17 2,36 | lb 1,94         |           |             |                 |
| QC ISO A SAE24<br>FEMALE | 40   | MPa 20                | mm 86 135 - 60     | kg 2,126  | NC02S070000 | 40   | MPa 8                 | mm 81 126 - 60  | kg 2,126  | NC02S07S001 | SS              |
| Psi 2900                 |      | inch 3,39 5,31 - 2,36 | lb 4,69            | Psi 1160  |             |      | inch 3,19 4,96 - 2,36 | lb 4,69         |           |             |                 |
| QC ISO A SAE32<br>MALE   | 50   | MPa 15                | mm - 102,5 65,1 75 | kg 1,613  | NC01S080000 | 50   | MPa 6                 | mm - 90 65,1 70 | kg 1,613  | NC01S08S001 | SS              |
| Psi 2175                 |      | inch - 4,04 2,56 2,95 | lb 3,56            | Psi 870   |             |      | inch - 3,54 2,56 2,76 | lb 3,56         |           |             |                 |
| QC ISO A SAE32<br>FEMALE | 50   | MPa 15                | mm 103 162,5 - 75  | kg 3,961  | NC02S080000 | 50   | MPa 6                 | mm 103 147 - 70 | kg 3,961  |             |                 |
| Psi 2175                 |      | inch 4,06 6,40 - 2,95 | lb 8,73            | Psi 870   |             |      | inch 4,06 5,79 - 2,76 | lb 8,73         |           |             |                 |





# PUSH-PULL


## QUICK COUPLINGS

Available other different threads on request

Edition. 21.2

### cs Carbon Steel

- Type: Quick Couplings
- Models: ISO 7241/A  
PUSH-PULL
- Sizes: from DN10 up to DN25
- Pressure: up to PN420

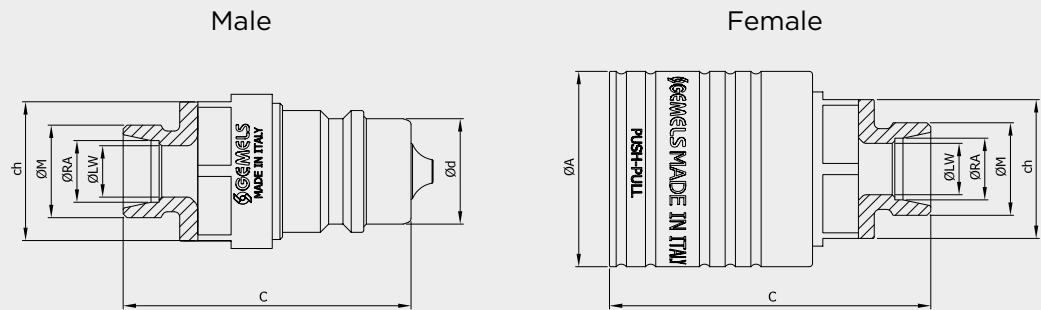

!

Available also  
in patented version:  
ball valve with integrated  
quick coupling.




## CODE DESCRIPTION STRUCTURE

|                                    | QC                         | 1/2                        | F/M                                    | DN12,5                                 | 1 | B |
|------------------------------------|----------------------------|----------------------------|--|--|---|---|
| <b>Type of coupling</b>            |                            |                            |  |  |   |   |
| ISO 7241A PP                       |                            |                            |  |  |   |   |
| <b>Ends</b>                        |                            |                            |  |  |   |   |
| ISO 1179-1 BSPPASME B1.20.1<br>NPT | ISO 8434-1-S<br>(DIN 2353) | ISO 8434-1-L<br>(DIN 2353) | ISO 8434-1-S<br>(DIN 2353)<br>BULKHEAD | ISO 8434-1-L<br>(DIN 2353)<br>BULKHEAD |   |   |
| G3/8                               | 6L                         | 12S                        | 8L                                     | 10S                                    |   |   |
| G1/2                               | N 1/2                      | 8L                         | 10L                                    | 12S                                    |   |   |
| G3/4                               |                            | 10L                        | 12L                                    | 16S                                    |   |   |
| G1                                 |                            | 12L                        | 15L                                    | 20S                                    |   |   |
|                                    |                            | 15L                        | 18L                                    |  |   |   |
|                                    |                            | 18L                        | 22L                                    |  |   |   |
|                                    |                            | 22L                        | 28L                                    |  |   |   |
|                                    |                            | 28L                        |  |  |   |   |
| <b>MALE</b>                        |                            |                            |  |  |   |   |
| FEMALE                             |                            |                            |  |  |   |   |
| <b>DN/ISO</b>                      |                            |                            |  |  |   |   |
| 10                                 |                            |                            |  |  |   |   |
| 12,5                               |                            |                            |  |  |   |   |
| 20                                 |                            |                            |  |  |   |   |
| 25                                 |                            |                            |  |  |   |   |
| <b>Body Material</b>               |                            |                            |  |  |   |   |
| ● 1 = 1,0737                       |                            |                            |  |  |   |   |
| <b>Seal material</b>               |                            |                            |  |  |   |   |
| B = NBR E = FKM*                   |                            |                            |  |  |   |   |

\*On request

- Cups
- Plugs



Male type see ISO 7241/A


## ■ QUICK COUPLINGS PUSH-PULL (male / female)

FEMALE THREAD ISO 1179-1 BSPP

Interchangeable according to ISO 7241-A

CS  
Carbon Steel

| TYPE                  | DN   | PN       |      | ØA   | C    | Ød | ch   | ØM   | WEIGHT  | ITEM CODE   |
|-----------------------|------|----------|------|------|------|----|------|------|---------|-------------|
| QC PP G 3/8<br>FEMALE | 10   | MPa 42   | mm   | 32   | 60,5 | -  | 24   | G3/8 | kg 0,26 | NC12G020000 |
|                       |      | Psi 6090 | inch | 1,26 | 2,38 | -  | 0,94 |      | lb 0,57 |             |
| QC PP G 1/2<br>FEMALE | 12,5 | MPa 42   | mm   | 32   | 63   | -  | 24   | G1/2 | kg 0,28 | NC12G020001 |
|                       |      | Psi 6090 | inch | 1,26 | 2,48 | -  | 0,94 |      | lb 0,62 |             |
| QC PP G 3/8<br>FEMALE | 12,5 | MPa 35   | mm   | 38   | 66   | -  | 27   | G3/8 | kg 0,29 | NC12G030000 |
|                       |      | Psi 5075 | inch | 1,50 | 2,60 | -  | 1,06 |      | lb 0,64 |             |
| QC PP G 1/2<br>FEMALE | 19   | MPa 35   | mm   | 38   | 68,5 | -  | 27   | G1/2 | kg 0,31 | NC12G030001 |
|                       |      | Psi 5075 | inch | 1,50 | 2,70 | -  | 1,06 |      | lb 0,68 |             |
| QC PP G 3/4<br>FEMALE | 19   | MPa 25   | mm   | 47   | 85,6 | -  | 37   | G3/4 | kg 0,59 | NC12G040000 |
|                       |      | Psi 3625 | inch | 1,85 | 3,37 | -  | 1,46 |      | lb 1,30 |             |
| QC PP G 3/4<br>FEMALE | 25   | MPa 25   | mm   | 55   | 102  | -  | 41   | G3/4 | kg 0,94 | NC12G050000 |
|                       |      | Psi 3625 | inch | 2,17 | 4,02 | -  | 1,61 |      | lb 2,07 |             |
| QC PP G 1<br>FEMALE   | 25   | MPa 25   | mm   | 55   | 104  | -  | 41   | G1   | kg 0,92 | NC12G050001 |
|                       |      | Psi 3625 | inch | 2,17 | 4,09 | -  | 1,61 |      | lb 2,03 |             |




Male type see ISO 7241/A

## ■ QUICK COUPLINGS ISO 7241/A (male / female)

FEMALE THREAD ASME B1.20.1 NPT WITH POPPET

CS  
Carbon Steel


| TYPE                  | DN   | PN       |      | ØA   | C    | Ød | ch   | ØM   | WEIGHT  | ITEM CODE   |
|-----------------------|------|----------|------|------|------|----|------|------|---------|-------------|
| QC PP N 1/2<br>FEMALE | 12,5 | MPa 35   | mm   | 38   | 72   | -  | 27   | N1/2 | kg 0,19 | NC12N030001 |
|                       |      | Psi 5075 | inch | 1,50 | 2,83 | -  | 1,06 |      | lb 0,42 |             |



**QUICK COUPLINGS PUSH-PULL (male / female)  
MALE THREAD METRIC ISO 8434-1-S (DIN 2353)**  
**Interchangeable according to ISO 7241-A**

CS  
Carbon  
Steel


| TYPE              | DN   | PN       | ØA   | C    | Ød   | ch    | ØM   | ØLW     | ØRA  | WEIGHT | ITEM CODE |
|-------------------|------|----------|------|------|------|-------|------|---------|------|--------|-----------|
| QC PP 8S<br>MALE  | 10   | MPa 42   | mm   | -    | 52   | 17,3  | 24   | M16X1,5 | 5    | 8      | kg 0,12   |
|                   |      | Psi 6090 | inch | -    | 2,05 | 0,68  | 0,94 |         | 0,20 | 0,31   | lb 0,26   |
|                   |      | MPa 42   | mm   | 32   | 63   | -     | 24   | M16X1,5 | 5    | 8      | kg 0,321  |
|                   |      | Psi 6090 | inch | 1,26 | 2,48 | -     | 0,94 |         | 0,20 | 0,31   | lb 0,71   |
|                   | 12,5 | MPa 42   | mm   | -    | 52   | 17,3  | 24   | M18X1,5 | 10   | 7      | kg 0,13   |
|                   |      | Psi 6090 | inch | -    | 2,05 | 0,68  | 0,94 |         | 0,39 | 0,28   | lb 0,29   |
|                   |      | MPa 42   | mm   | 32   | 63   | -     | 24   | M18X1,5 | 10   | 7      | kg 0,324  |
|                   |      | Psi 6090 | inch | 1,26 | 2,48 | -     | 0,94 |         | 0,39 | 0,28   | lb 0,71   |
| QC PP 12S<br>MALE | 12,5 | MPa 35   | mm   | -    | 57   | 20,5  | 27   | M20X1,5 | 8    | 12     | kg 0,135  |
|                   |      | Psi 5075 | inch | -    | 2,24 | 0,81  | 1,06 |         | 0,31 | 0,47   | lb 0,30   |
|                   |      | MPa 35   | mm   | 38   | 64,5 | -     | 27   | M20X1,5 | 8    | 12     | kg 0,28   |
|                   |      | Psi 5075 | inch | 1,50 | 2,54 | -     | 1,06 |         | 0,31 | 0,47   | lb 0,62   |
|                   | 20   | MPa 35   | mm   | -    | 59   | 20,5  | 27   | M22X1,5 | 8    | 14     | kg 0,45   |
|                   |      | Psi 5075 | inch | -    | 2,32 | 0,81  | 1,06 |         | 0,31 | 0,55   | lb 0,99   |
|                   |      | MPa 35   | mm   | 38   | 66,5 | -     | 27   | M22X1,5 | 8    | 14     | kg 0,281  |
|                   |      | Psi 5075 | inch | 1,50 | 2,62 | -     | 1,06 |         | 0,31 | 0,55   | lb 0,62   |
| QC PP 16S<br>MALE | 20   | MPa 35   | mm   | -    | 59   | 20,5  | 27   | M24X1,5 | 12   | 16     | kg 0,157  |
|                   |      | Psi 5075 | inch | -    | 2,32 | 0,81  | 1,06 |         | 0,47 | 0,63   | lb 0,35   |
|                   |      | MPa 35   | mm   | 38   | 66,5 | -     | 27   | M24X1,5 | 12   | 16     | kg 0,284  |
|                   |      | Psi 5075 | inch | 1,50 | 2,62 | -     | 1,06 |         | 0,47 | 0,63   | lb 0,63   |
|                   | 25   | MPa 25   | mm   | -    | 64   | 29    | 34   | M24X1,5 | 12   | 16     | kg 0,251  |
|                   |      | Psi 3625 | inch | -    | 2,52 | 1,14  | 1,34 |         | 0,47 | 0,63   | lb 0,55   |
|                   |      | MPa 25   | mm   | 47   | 79,5 | -     | 34   | M24X1,5 | 12   | 16     | kg 0,51   |
|                   |      | Psi 3625 | inch | 1,85 | 3,13 | -     | 1,34 |         | 0,47 | 0,63   | lb 1,12   |
| QC PP 20S<br>MALE | 25   | MPa 25   | mm   | -    | 66   | 29    | 34   | M30X2   | 16   | 20     | kg 0,26   |
|                   |      | Psi 3625 | inch | -    | 2,60 | 1,14  | 1,34 |         | 0,63 | 0,79   | lb 0,57   |
|                   |      | MPa 25   | mm   | 47   | 81,5 | -     | 34   | M30X2   | 16   | 20     | kg 0,53   |
|                   |      | Psi 3625 | inch | 1,85 | 3,21 | -     | 1,34 |         | 0,63 | 0,79   | lb 1,17   |
|                   | 30   | MPa 25   | mm   | -    | 88,5 | 34,34 | 41   | M30X2   | 12   | 16     | kg 0,4    |
|                   |      | Psi 3625 | inch | -    | 3,48 | 1,35  | 1,61 |         | 0,47 | 0,63   | lb 0,88   |
|                   |      | MPa 25   | mm   | 55   | 104  | -     | 41   | M30X2   | 12   | 16     | kg 0,11   |
|                   |      | Psi 3625 | inch | 2,17 | 4,09 | -     | 1,61 |         | 0,47 | 0,63   | lb 0,24   |
| QC PP 25S<br>MALE | 30   | MPa 25   | mm   | -    | 90,5 | 34,34 | 41   | M36X2   | 16   | 20     | kg 0,56   |
|                   |      | Psi 3625 | inch | -    | 3,56 | 1,35  | 1,61 |         | 0,63 | 0,79   | lb 1,23   |
|                   |      | MPa 25   | mm   | 55   | 106  | -     | 41   | M36X2   | 16   | 20     | kg 0,123  |
|                   |      | Psi 3625 | inch | 2,17 | 4,17 | -     | 1,61 |         | 0,63 | 0,79   | lb 0,27   |
|                   | 35   | MPa 25   | mm   | -    | 92,5 | 34,34 | 46   | M42X2   | 12   | 16     | kg 0,6    |
|                   |      | Psi 3625 | inch | -    | 3,64 | 1,35  | 1,81 |         | 0,47 | 0,63   | lb 1,32   |
|                   |      | MPa 25   | mm   | 55   | 108  | -     | 46   | M42X2   | 12   | 16     | kg 0,25   |
|                   |      | Psi 3625 | inch | 2,17 | 4,25 | -     | 1,81 |         | 0,47 | 0,63   | lb 0,55   |



**■ QUICK COUPLINGS PUSH-PULL (male / female)**  
**MALE THREAD METRIC ISO 8434-1-L (DIN 2353)**  
**Interchangeable according to ISO 7241-A**

CS  
Carbon Steel


| TYPE                | DN   | PN       | ØA   | C    | Ød   | ch    | ØM   | ØLW     | ØRA  | WEIGHT | ITEM CODE |
|---------------------|------|----------|------|------|------|-------|------|---------|------|--------|-----------|
| QC PP 6L<br>MALE    | 10   | MPa 42   | mm   | -    | 50   | 17,3  | 24   | M12X1,5 | 4    | 6      | kg 0,07   |
|                     |      | Psi 6090 | inch | -    | 1,97 | 0,68  | 0,94 |         | 0,16 | 0,24   | lb 0,15   |
|                     |      | MPa 42   | mm   | 32   | 61   | -     | 24   | M12X1,5 | 4    | 6      | kg 0,25   |
|                     |      | Psi 6090 | inch | 1,26 | 2,40 | -     | 0,94 | M12X1,5 | 0,16 | 0,24   | lb 0,55   |
|                     |      | MPa 42   | mm   | -    | 50   | 17,3  | 24   | M14X1,5 | 6    | 8      | kg 0,13   |
|                     |      | Psi 6090 | inch | -    | 1,97 | 0,68  | 0,94 | M14X1,5 | 0,24 | 0,31   | lb 0,29   |
|                     |      | MPa 42   | mm   | 32   | 61   | -     | 24   | M14X1,5 | 6    | 8      | kg 0,253  |
|                     |      | Psi 6090 | inch | 1,26 | 2,40 | -     | 0,94 | M14X1,5 | 0,24 | 0,31   | lb 0,56   |
|                     |      | MPa 42   | mm   | -    | 51   | 17,3  | 24   | M16X1,5 | 8    | 10     | kg 0,15   |
|                     |      | Psi 6090 | inch | -    | 2,01 | 0,68  | 0,94 | M16X1,5 | 0,31 | 0,39   | lb 0,33   |
| QC PP 10L<br>MALE   | 12,5 | MPa 42   | mm   | 32   | 62   | -     | 24   | M16X1,5 | 8    | 10     | kg 0,255  |
|                     |      | Psi 6090 | inch | 1,26 | 2,44 | -     | 0,94 | M16X1,5 | 0,31 | 0,39   | lb 0,56   |
|                     |      | MPa 35   | mm   | -    | 56   | 20,5  | 27   | M16X1,5 | 8    | 10     | kg 0,16   |
|                     |      | Psi 5075 | inch | -    | 2,20 | 0,81  | 1,06 | M16X1,5 | 0,31 | 0,39   | lb 0,35   |
|                     |      | MPa 35   | mm   | 38   | 63,5 | -     | 27   | M16X1,5 | 8    | 10     | kg 0,24   |
|                     |      | Psi 5075 | inch | 1,50 | 2,50 | -     | 1,06 | M16X1,5 | 0,31 | 0,39   | lb 0,53   |
|                     |      | MPa 35   | mm   | -    | 56   | 20,5  | 27   | M18X1,5 | 10   | 12     | kg 0,169  |
|                     |      | Psi 5075 | inch | -    | 2,20 | 0,81  | 1,06 | M18X1,5 | 0,39 | 0,47   | lb 0,37   |
|                     |      | MPa 35   | mm   | 38   | 63,5 | -     | 27   | M18X1,5 | 10   | 12     | kg 0,254  |
|                     |      | Psi 5075 | inch | 1,50 | 2,50 | -     | 1,06 | M18X1,5 | 0,39 | 0,47   | lb 0,56   |
| QC PP 12L<br>MALE   | 20   | MPa 35   | mm   | -    | 57   | 20,5  | 27   | M22X1,5 | 12   | 15     | kg 0,17   |
|                     |      | Psi 5075 | inch | -    | 2,24 | 0,81  | 1,06 | M22X1,5 | 0,47 | 0,59   | lb 0,37   |
|                     |      | MPa 35   | mm   | 38   | 64,5 | -     | 27   | M22X1,5 | 12   | 15     | kg 0,26   |
|                     |      | Psi 5075 | inch | 1,50 | 2,54 | -     | 1,06 | M22X1,5 | 0,47 | 0,59   | lb 0,57   |
|                     |      | MPa 35   | mm   | -    | 57   | 20,5  | 27   | M26X1,5 | 15   | 18     | kg 0,179  |
|                     |      | Psi 5075 | inch | -    | 2,24 | 0,81  | 1,06 | M26X1,5 | 0,59 | 0,71   | lb 0,39   |
|                     |      | MPa 35   | mm   | 38   | 64,5 | -     | 27   | M26X1,5 | 15   | 18     | kg 0,263  |
|                     |      | Psi 5075 | inch | 1,50 | 2,54 | -     | 1,06 | M26X1,5 | 0,59 | 0,71   | lb 0,58   |
|                     |      | MPa 25   | mm   | -    | 62   | 29,1  | 34   | M26X1,5 | 15   | 18     | kg 0,25   |
|                     |      | Psi 3625 | inch | -    | 2,44 | 1,15  | 1,34 | M26X1,5 | 0,59 | 0,71   | lb 0,55   |
| QC PP 18L<br>MALE   | 25   | MPa 25   | mm   | 47   | 77,5 | -     | 34   | M26X1,5 | 15   | 18     | kg 0,52   |
|                     |      | Psi 3625 | inch | 1,85 | 3,05 | -     | 1,34 | M26X1,5 | 0,59 | 0,71   | lb 1,15   |
|                     |      | MPa 25   | mm   | -    | 64   | 29,1  | 34   | M30X2   | 19   | 22     | kg 0,27   |
|                     |      | Psi 3625 | inch | -    | 2,52 | 1,15  | 1,34 | M30X2   | 0,75 | 0,87   | lb 0,60   |
|                     |      | MPa 25   | mm   | 47   | 79,5 | -     | 34   | M30X2   | 19   | 22     | kg 0,55   |
|                     |      | Psi 3625 | inch | 1,85 | 3,13 | -     | 1,34 | M30X2   | 0,75 | 0,87   | lb 1,21   |
|                     |      | MPa 25   | mm   | -    | 86,5 | 34,34 | 41   | M30X2   | 19   | 22     | kg 0,4    |
|                     |      | Psi 3625 | inch | -    | 3,41 | 1,35  | 1,61 | M30X2   | 0,75 | 0,87   | lb 0,88   |
|                     |      | MPa 25   | mm   | 55   | 102  | -     | 41   | M30X2   | 19   | 22     | kg 0,89   |
|                     |      | Psi 3625 | inch | 2,17 | 4,02 | -     | 1,61 | M30X2   | 0,75 | 0,87   | lb 1,96   |
| QC PP 22L<br>MALE   | 25   | MPa 25   | mm   | -    | 86,5 | 34,34 | 41   | M36X2   | 24   | 28     | kg 0,45   |
|                     |      | Psi 3625 | inch | -    | 3,41 | 1,35  | 1,61 | M36X2   | 0,94 | 1,10   | lb 0,99   |
|                     |      | MPa 25   | mm   | 55   | 102  | -     | 41   | M36X2   | 24   | 28     | kg 0,895  |
|                     |      | Psi 3625 | inch | 2,17 | 4,02 | -     | 1,61 | M36X2   | 0,94 | 1,10   | lb 1,97   |
|                     |      | MPa 25   | mm   | -    | 88,5 | 34,34 | 46   | M45X2   | 30   | 35     | kg 0,5    |
|                     |      | Psi 3625 | inch | -    | 3,48 | 1,35  | 1,81 | M45X2   | 1,18 | 1,38   | lb 1,10   |
| QC PP 35L<br>MALE   | 25   | MPa 25   | mm   | 55   | 104  | -     | 46   | M45X2   | 30   | 35     | kg 0,9    |
|                     |      | Psi 3625 | inch | 2,17 | 4,09 | -     | 1,81 | M45X2   | 1,18 | 1,38   | lb 1,98   |
| QC PP 35L<br>FEMALE | 25   | MPa 25   | mm   | -    | 86,5 | 34,34 | 46   | M45X2   | 30   | 35     | kg 0,9    |
|                     |      | Psi 3625 | inch | -    | 3,41 | 1,35  | 1,81 | M45X2   | 1,18 | 1,38   | lb 1,98   |



**QUICK COUPLINGS PUSH-PULL (male / female)**  
**MALE THREAD METRIC ISO 8434-1-S (DIN 2353) BULKHEAD**  
**Interchangeable according to ISO 7241-A**

CS  
Carbon Steel

| TYPE                 | DN   | PN       | ØA   | C    | Ød    | ch    | ØM   | ØLW     | ØRA  | WEIGHT | ITEM CODE |
|----------------------|------|----------|------|------|-------|-------|------|---------|------|--------|-----------|
| QC PP 10S BK<br>MALE | 12,5 | MPa 35   | mm   | -    | 72    | 20,5  | 27   | M18X1,5 | 7    | 10     | kg 0,169  |
|                      |      | Psi 5075 | inch | -    | 2,83  | 0,81  | 1,06 |         | 0,28 | 0,39   | lb 0,37   |
|                      |      | MPa 35   | mm   | 38   | 79,5  | -     | 27   | M18X1,5 | 7    | 10     | kg 0,3    |
|                      |      | Psi 5075 | inch | 1,50 | 3,13  | -     | 1,06 |         | 0,28 | 0,39   | lb 0,66   |
|                      |      | MPa 35   | mm   | -    | 72    | 20,5  | 27   | M20X1,5 | 8    | 12     | kg 0,16   |
|                      |      | Psi 5075 | inch | -    | 2,83  | 0,81  | 1,06 |         | 0,31 | 0,47   | lb 0,35   |
|                      |      | MPa 35   | mm   | 38   | 79,5  | -     | 27   | M20X1,5 | 8    | 12     | kg 0,32   |
|                      |      | Psi 5075 | inch | 1,50 | 3,13  | -     | 1,06 |         | 0,31 | 0,47   | lb 0,71   |
| QC PP 12S BK<br>MALE | 20   | MPa 35   | mm   | -    | 74    | 20,5  | 27   | M24X1,5 | 12   | 16     | kg 0,172  |
|                      |      | Psi 5075 | inch | -    | 2,91  | 0,81  | 1,06 |         | 0,47 | 0,63   | lb 0,38   |
|                      |      | MPa 35   | mm   | 38   | 81,5  | -     | 27   | M24X1,5 | 12   | 16     | kg 0,33   |
|                      |      | Psi 5075 | inch | 1,50 | 3,21  | -     | 1,06 |         | 0,47 | 0,63   | lb 0,73   |
|                      |      | MPa 25   | mm   | -    | 79    | 29,1  | 34   | M24X1,5 | 12   | 16     | kg 0,27   |
|                      |      | Psi 3625 | inch | -    | 3,11  | 1,15  | 1,34 |         | 0,47 | 0,63   | lb 0,60   |
|                      |      | MPa 25   | mm   | 47   | 94,5  | -     | 34   | M24X1,5 | 12   | 16     | kg 0,57   |
|                      |      | Psi 3625 | inch | 1,85 | 3,72  | -     | 1,34 |         | 0,47 | 0,63   | lb 1,26   |
| QC PP 20S BK<br>MALE | 25   | MPa 25   | mm   | -    | 77    | 29,1  | 34   | M30X2   | 16   | 20     | kg 0,29   |
|                      |      | Psi 3625 | inch | -    | 3,03  | 1,15  | 1,34 |         | 0,63 | 0,79   | lb 0,64   |
|                      |      | MPa 25   | mm   | 47   | 92,5  | -     | 34   | M30X2   | 16   | 20     | kg 0,6    |
|                      |      | Psi 3625 | inch | 1,85 | 3,64  | -     | 1,34 |         | 0,63 | 0,79   | lb 1,32   |
|                      |      | MPa 25   | mm   | -    | 110,5 | 34,34 | 41   | M30X2   | 16   | 20     | kg 0,52   |
|                      |      | Psi 3625 | inch | -    | 4,35  | 1,35  | 1,61 |         | 0,63 | 0,79   | lb 1,15   |
|                      |      | MPa 25   | mm   | 55   | 126   | -     | 41   | M30X2   | 16   | 20     | kg 1,023  |
|                      |      | Psi 3625 | inch | 2,17 | 4,96  | -     | 1,61 |         | 0,63 | 0,79   | lb 2,26   |
| QC PP 25S BK<br>MALE | 25   | MPa 25   | mm   | -    | 110,5 | 34,34 | 41   | M36X2   | 20   | 25     | kg 0,55   |
|                      |      | Psi 3625 | inch | -    | 4,35  | 1,35  | 1,61 |         | 0,79 | 0,98   | lb 1,21   |
|                      |      | MPa 25   | mm   | 55   | 126   | -     | 41   | M36X2   | 20   | 25     | kg 1,12   |
|                      |      | Psi 3625 | inch | 2,17 | 4,96  | -     | 1,61 |         | 0,79 | 0,98   | lb 2,47   |
|                      |      | MPa 25   | mm   | -    | 112,5 | 34,34 | 41   | M42X2   | 25   | 30     | kg 0,62   |
|                      |      | Psi 3625 | inch | -    | 4,43  | 1,35  | 1,61 |         | 0,98 | 1,18   | lb 1,37   |
|                      |      | MPa 25   | mm   | 55   | 128   | -     | 41   | M42X2   | 25   | 30     | kg 1,22   |
|                      |      | Psi 3625 | inch | 2,17 | 5,04  | -     | 1,61 |         | 0,98 | 1,18   | lb 2,69   |



**QUICK COUPLINGS PUSH-PULL (male / female)  
MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD  
Interchangeable according to ISO 7241-A**

CS  
Carbon Steel

| TYPE                   | DN   | PN       | ØA   | C    | Ød    | ch    | ØM   | ØLW     | ØRA  | WEIGHT | ITEM CODE |
|------------------------|------|----------|------|------|-------|-------|------|---------|------|--------|-----------|
| QC PP 8L BK<br>MALE    | 10   | MPa 42   | mm   | -    | 65    | 17,3  | 24   | M14X1,5 | 6    | 8      | kg 0,12   |
|                        |      | Psi 6090 | inch | -    | 2,56  | 0,68  | 0,94 |         | 0,24 | 0,31   | lb 0,26   |
|                        |      | MPa 42   | mm   | 32   | 76    | -     | 24   | M14X1,5 | 6    | 8      | kg 0,321  |
|                        |      | Psi 6090 | inch | 1,26 | 2,99  | -     | 0,94 |         | 0,24 | 0,31   | lb 0,71   |
|                        |      | MPa 42   | mm   | -    | 66    | 17,3  | 24   | M16X1,5 | 8    | 10     | kg 0,145  |
|                        |      | Psi 6090 | inch | -    | 2,60  | 0,68  | 0,94 |         | 0,31 | 0,39   | lb 0,32   |
| QC PP 10L BK<br>MALE   | 12,5 | MPa 42   | mm   | 32   | 77    | -     | 24   | M16X1,5 | 8    | 10     | kg 0,33   |
|                        |      | Psi 6090 | inch | 1,26 | 3,03  | -     | 0,94 |         | 0,31 | 0,39   | lb 0,73   |
|                        |      | MPa 35   | mm   | -    | 71    | 20,5  | 27   | M16X1,5 | 8    | 10     | kg 0,149  |
|                        |      | Psi 5075 | inch | -    | 2,80  | 0,81  | 1,06 |         | 0,31 | 0,39   | lb 0,33   |
|                        |      | MPa 35   | mm   | 38   | 78,5  | -     | 27   | M16X1,5 | 8    | 10     | kg 0,3    |
|                        |      | Psi 5075 | inch | 1,50 | 3,09  | -     | 1,06 |         | 0,31 | 0,39   | lb 0,66   |
| QC PP 12L BK<br>MALE   | 12,5 | MPa 35   | mm   | -    | 72    | 20,5  | 27   | M18X1,5 | 10   | 12     | kg 0,15   |
|                        |      | Psi 5075 | inch | -    | 2,83  | 0,81  | 1,06 |         | 0,39 | 0,47   | lb 0,33   |
|                        |      | MPa 35   | mm   | 38   | 79,5  | -     | 27   | M18X1,5 | 10   | 12     | kg 0,3    |
|                        |      | Psi 5075 | inch | 1,50 | 3,13  | -     | 1,06 |         | 0,39 | 0,47   | lb 0,66   |
|                        |      | MPa 35   | mm   | -    | 72    | 20,5  | 27   | M22X1,5 | 12   | 15     | kg 0,16   |
|                        |      | Psi 5075 | inch | -    | 2,83  | 0,81  | 1,06 |         | 0,47 | 0,59   | lb 0,35   |
| QC PP 15L BK<br>MALE   | 20   | MPa 35   | mm   | 38   | 79,5  | -     | 27   | M22X1,5 | 12   | 15     | kg 0,31   |
|                        |      | Psi 5075 | inch | 1,50 | 3,13  | -     | 1,06 |         | 0,47 | 0,59   | lb 0,68   |
|                        |      | MPa 35   | mm   | -    | 72    | 20,5  | 27   | M26X1,5 | 15   | 18     | kg 0,175  |
|                        |      | Psi 5075 | inch | -    | 2,83  | 0,81  | 1,06 |         | 0,59 | 0,71   | lb 0,39   |
|                        |      | MPa 35   | mm   | 38   | 79,5  | -     | 27   | M26X1,5 | 15   | 18     | kg 0,33   |
|                        |      | Psi 5075 | inch | 1,50 | 3,13  | -     | 1,06 |         | 0,59 | 0,71   | lb 0,73   |
| QC PP 15L BK<br>MALE   | 25   | MPa 25   | mm   | -    | 77    | 29,1  | 34   | M22X1,5 | 12   | 15     | kg 0,252  |
|                        |      | Psi 3625 | inch | -    | 3,03  | 1,15  | 1,34 |         | 0,47 | 0,59   | lb 0,56   |
|                        |      | MPa 25   | mm   | 47   | 92,5  | -     | 34   | M22X1,5 | 12   | 15     | kg 0,55   |
|                        |      | Psi 3625 | inch | 1,85 | 3,64  | -     | 1,34 |         | 0,47 | 0,59   | lb 1,21   |
|                        |      | MPa 25   | mm   | -    | 77    | 29,1  | 34   | M26X1,5 | 15   | 18     | kg 0,246  |
|                        |      | Psi 3625 | inch | -    | 3,03  | 1,15  | 1,34 |         | 0,59 | 0,71   | lb 0,54   |
| QC PP 18L BK<br>MALE   | 20   | MPa 25   | mm   | 47   | 92,5  | -     | 34   | M26X1,5 | 15   | 18     | kg 0,56   |
|                        |      | Psi 3625 | inch | 1,85 | 3,64  | -     | 1,34 |         | 0,59 | 0,71   | lb 1,23   |
|                        |      | MPa 25   | mm   | -    | 84    | 29,1  | 34   | M30X2   | 19   | 22     | kg 0,298  |
|                        |      | Psi 3625 | inch | -    | 3,31  | 1,15  | 1,34 |         | 0,75 | 0,87   | lb 0,66   |
|                        |      | MPa 25   | mm   | 47   | 99,5  | -     | 34   | M30X2   | 19   | 22     | kg 0,6    |
|                        |      | Psi 3625 | inch | 1,85 | 3,92  | -     | 1,34 |         | 0,75 | 0,87   | lb 1,32   |
| QC PP 22L BK<br>MALE   | 25   | MPa 25   | mm   | -    | 106,5 | 34,34 | 41   | M30X2   | 19   | 22     | kg 0,55   |
|                        |      | Psi 3625 | inch | -    | 4,19  | 1,35  | 1,61 |         | 0,75 | 0,87   | lb 1,21   |
|                        |      | MPa 25   | mm   | 55   | 122   | -     | 41   | M30X2   | 19   | 22     | kg 0,98   |
|                        |      | Psi 3625 | inch | 2,17 | 4,80  | -     | 1,61 |         | 0,75 | 0,87   | lb 2,16   |
|                        |      | MPa 25   | mm   | -    | 106,5 | 34,34 | 41   | M36X2   | 24   | 28     | kg 0,569  |
|                        |      | Psi 3625 | inch | -    | 4,19  | 1,35  | 1,61 |         | 0,94 | 1,10   | lb 1,25   |
| QC PP 28L BK<br>FEMALE | 25   | MPa 25   | mm   | 55   | 122   | -     | 41   | M36X2   | 24   | 28     | kg 1      |
|                        |      | Psi 3625 | inch | 2,17 | 4,80  | -     | 1,61 |         | 0,94 | 1,10   | lb 2,20   |





## DV


## QUICK COUPLINGS

Edition. 21.0




## cs Carbon Steel

- Type: Quick Couplings
- Models: ISO 7241/A  
PUSH-PULL
- Sizes: from DN13 up to DN20
- Pressure: up to PN350

Male

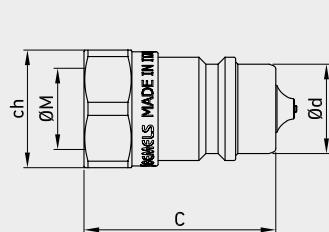

Female

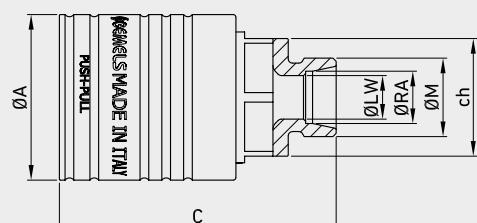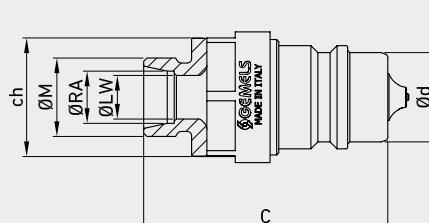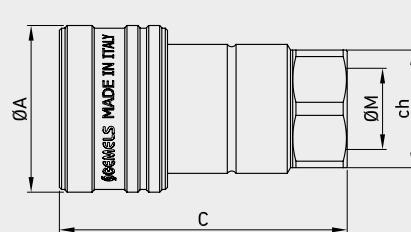



## CODE DESCRIPTION STRUCTURE

|    |     |      |        |   |   |
|----|-----|------|--------|---|---|
| QC | 1/2 | 1M/F | DN12,5 | 1 | B |
|----|-----|------|--------|---|---|

Type of coupling \_\_\_\_\_

DV

Ends \_\_\_\_\_

|                    | ISO A               |                                     |                            |                            | PUSH-PULL                              |  |  |
|--------------------|---------------------|-------------------------------------|----------------------------|----------------------------|--|--|--|
| ISO 1179-1<br>BSPP | ASME B1.20.1<br>NPT | ISO 11926-1<br>(SAE J1926-1)<br>ORB | ISO 8434-1-S<br>(DIN 2353) | ISO 8434-1-L<br>(DIN 2353) | ISO 8434-1-S<br>(DIN 2353)<br>BULKHEAD | ISO 8434-1-L<br>(DIN 2353)<br>BULKHEAD |  |
| G 1/2              | N 1/2               | SAE 8                               | 12S                        | 10L                        | 10S                                    | 10L                                    |  |
| G 3/4              | N 3/4               | SAE12                               | 16S<br>20S                 | 12L<br>15L<br>18L<br>22L   | 12S<br>16S                             | 12L<br>15L<br>18L<br>22L               |  |

MALE \_\_\_\_\_  
FEMALE \_\_\_\_\_

DN/ISO \_\_\_\_\_


12,5  
20

Body Material \_\_\_\_\_

● 1 = 1,0737

Seal material \_\_\_\_\_

B = NBR E = FKM\*




\*Push-Pull design on request

**■ QUICK COUPLINGS ISO 7241/A  
WITH POPPET WITH DECOMPRESSION VALVE (male / female)  
FEMALE THREAD ISO 1179-1 BSPP  
Interchangeable according to ISO 7241-A**

CS  
Carbon Steel

| TYPE                  | DN   | PN       | ØA        | C    | Ød   | ch   | ØM   | WEIGHT    | ITEM CODE   |
|-----------------------|------|----------|-----------|------|------|------|------|-----------|-------------|
| QC DV G 1/2<br>MALE   | 12,5 | MPa 35   | mm -      | 44   | 20,5 | 27   | G1/2 | kg 0,0924 | NC23G030000 |
| QC DV G 1/2<br>FEMALE |      | Psi 5075 | inch -    | 1,73 | 0,81 | 1,06 |      | lb 0,20   |             |
| QC DV G 3/4<br>MALE   | 20   | MPa 35   | mm 38,25  | 66   | -    | 27   | G1/2 | kg 0,227  | NC24G030000 |
| QC DV G 3/4<br>FEMALE |      | Psi 3625 | inch 1,51 | 2,60 | -    | 1,06 |      | lb 0,50   |             |
| QC DV G 3/4<br>MALE   | 20   | MPa 25   | mm -      | 55,5 | 29,1 | 34   | G3/4 | kg 0,2    | NC23G040000 |
| QC DV G 3/4<br>FEMALE |      | Psi 3625 | inch -    | 2,19 | 1,15 | 1,34 |      | lb 0,44   |             |
| QC DV G 3/4<br>MALE   | 20   | MPa 25   | mm 48     | 83   | -    | 34   | G3/4 | kg 0,49   | NC24G040000 |
| QC DV G 3/4<br>FEMALE |      | Psi 3625 | inch 1,89 | 3,27 | -    | 1,34 |      | lb 1,08   |             |




\*Push-Pull design on request

**■ QUICK COUPLINGS ISO 7241/A WITH POPPET  
WITH DECOMPRESSION VALVE (male / female)  
FEMALE THREAD ASME B1.20.1 NPT  
Interchangeable according to ISO 7241-A**

CS  
Carbon Steel

| TYPE                  | DN   | PN       | ØA        | C    | Ød   | ch   | ØM   | WEIGHT    | ITEM CODE   |
|-----------------------|------|----------|-----------|------|------|------|------|-----------|-------------|
| QC DV N 1/2<br>MALE   | 12,5 | MPa 35   | mm -      | 44   | 20,5 | 27   | N1/2 | kg 0,0924 | NC23N030000 |
| QC DV N 1/2<br>FEMALE |      | Psi 5075 | inch -    | 1,73 | 0,81 | 1,06 |      | lb 0,20   |             |
| QC DV N 3/4<br>MALE   | 20   | MPa 35   | mm 38,25  | 66   | -    | 27   | N1/2 | kg 0,227  | NC24N030000 |
| QC DV N 3/4<br>FEMALE |      | Psi 3625 | inch 1,51 | 2,60 | -    | 1,06 |      | lb 0,50   |             |
| QC DV N 3/4<br>MALE   | 20   | MPa 25   | mm -      | 55,5 | 29,1 | 34   | N3/4 | kg 0,2    | NC23N040000 |
| QC DV N 3/4<br>FEMALE |      | Psi 3625 | inch -    | 2,19 | 1,15 | 1,34 |      | lb 0,44   |             |
| QC DV N 3/4<br>MALE   | 20   | MPa 25   | mm 48     | 83   | -    | 34   | N3/4 | kg 0,49   | NC24N040000 |
| QC DV N 3/4<br>FEMALE |      | Psi 3625 | inch 1,89 | 3,27 | -    | 1,34 |      | lb 1,08   |             |




\*Push-Pull design on request

**QUICK COUPLINGS ISO 7241/A  
WITH POPPET WITH DECOMPRESSION VALVE (male / female)  
FEMALE THREAD ISO 11926-1 (SAE J1926-1) ORB  
Interchangeable according to ISO 7241-A**

CS  
Carbon Steel


| TYPE                  | DN   | PN  |      | ØA   | C     | Ød   | ch   | ØM   | WEIGHT |        | ITEM CODE   |
|-----------------------|------|-----|------|------|-------|------|------|------|--------|--------|-------------|
| QC DV SAE8<br>MALE    | 12,5 | MPa | 35   | mm   | -     | 44   | 20,5 | 27   | kg     | 0,0924 | NC23S030000 |
|                       |      | Psi | 5075 | inch | -     | 1,73 | 0,81 | 1,06 | lb     | 0,20   |             |
| QC DV SAE8<br>FEMALE  | 20   | MPa | 35   | mm   | 38,25 | 66   | -    | 27   | kg     | 0,227  | NC24S030000 |
|                       |      | Psi | 5075 | inch | 1,51  | 2,60 | -    | 1,06 | lb     | 0,50   |             |
| QC DV SAE12<br>MALE   | 20   | MPa | 25   | mm   | -     | 55,5 | 29,1 | 34   | kg     | 0,2    | NC23S040000 |
|                       |      | Psi | 3625 | inch | -     | 2,19 | 1,15 | 1,34 | lb     | 0,44   |             |
| QC DV SAE12<br>FEMALE | 20   | MPa | 25   | mm   | 48    | 83   | -    | 34   | kg     | 0,49   | NC24S040000 |
|                       |      | Psi | 3625 | inch | 1,89  | 3,27 | -    | 1,34 | lb     | 1,08   |             |



**■ QUICK COUPLINGS PUSH-PULL  
WITH DECOMPRESSION VALVE (male / female)  
MALE THREAD METRIC ISO 8434-1-S (DIN 2353)  
Interchangeable according to ISO 7241-A**

CS  
Carbon  
Steel


| TYPE                | DN   | PN       | ØA        | C    | Ød   | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |  |
|---------------------|------|----------|-----------|------|------|------|---------|------|------|----------|-------------|--|
| QC DV 12S<br>MALE   | 12,5 | MPa 35   | mm -      | 57   | 20,5 | 27   | M20X1,5 | 8    | 12   | kg 0,135 | NC23H030000 |  |
|                     |      | Psi 5075 | inch 0-00 | 2,24 | 0,81 | 1,06 |         | 0,31 | 0,47 | lb 0,30  |             |  |
| QC DV 12S<br>FEMALE |      | MPa 35   | mm 38     | 64,5 | -    | 27   | M20X1,5 | 8    | 12   | kg 0,28  | NC24H030000 |  |
|                     |      | Psi 5075 | inch 1,50 | 2,54 | -    | 1,06 |         | 0,31 | 0,47 | lb 0,62  |             |  |
| QC DV 16S<br>MALE   |      | MPa 35   | mm -      | 59   | 20,5 | 27   | M24X1,5 | 12   | 16   | kg 0,157 | NC23H030001 |  |
|                     |      | Psi 5075 | inch -    | 2,32 | 0,81 | 1,06 |         | 0,47 | 0,63 | lb 0,35  |             |  |
| QC DV 16S<br>FEMALE |      | MPa 35   | mm 38     | 66,5 | -    | 27   | M24X1,5 | 12   | 16   | kg 0,284 | NC24H030001 |  |
|                     |      | Psi 5075 | inch 1,50 | 2,62 | -    | 1,06 |         | 0,47 | 0,63 | lb 0,63  |             |  |
| QC DV 16S<br>MALE   |      | MPa 25   | mm -      | 64   | 29   | 34   | M24X1,5 | 12   | 16   | kg 0,251 | NC23H040000 |  |
|                     |      | Psi 3625 | inch -    | 2,52 | 1,14 | 1,34 |         | 0,47 | 0,63 | lb 0,55  |             |  |
| QC DV 16S<br>FEMALE |      | MPa 25   | mm 47     | 79,5 | -    | 34   | M24X1,5 | 12   | 16   | kg 0,51  | NC24H040000 |  |
|                     |      | Psi 3625 | inch 1,85 | 3,13 | -    | 1,34 |         | 0,47 | 0,63 | lb 1,12  |             |  |
| QC DV 20S<br>MALE   |      | MPa 25   | mm -      | 66   | 29   | 34   | M30X2   | 16   | 20   | kg 0,26  | NC23H040001 |  |
|                     |      | Psi 3625 | inch -    | 2,60 | 1,14 | 1,34 |         | 0,63 | 0,79 | lb 0,57  |             |  |
| QC DV 20S<br>FEMALE |      | MPa 25   | mm 47     | 81,5 | -    | 34   | M30X2   | 16   | 20   | kg 0,53  | NC24H040001 |  |
|                     |      | Psi 3625 | inch 1,85 | 3,21 | -    | 1,34 |         | 0,63 | 0,79 | lb 1,17  |             |  |



**QUICK COUPLINGS PUSH-PULL  
WITH DECOMPRESSION VALVE (male / female)  
MALE THREAD METRIC ISO 8434-1-L (DIN 2353)  
Interchangeable according to ISO 7241-A**

CS  
Carbon Steel


| TYPE                | DN   | PN       | ØA   | C    | Ød   | ch   | ØM   | ØLW     | ØRA  | WEIGHT | ITEM CODE |
|---------------------|------|----------|------|------|------|------|------|---------|------|--------|-----------|
| QC DV 10L<br>MALE   | 12,5 | MPa 35   | mm   | -    | 56   | 20,5 | 27   | M16X1,5 | 8    | 10     | kg 0,16   |
| QC DV 10L<br>FEMALE |      | Psi 5075 | inch | -    | 2,20 | 0,81 | 1,06 |         | 0,31 | 0,39   | lb 0,35   |
| QC DV 12L<br>MALE   |      | MPa 35   | mm   | 38   | 63,5 | -    | 27   | M16X1,5 | 8    | 10     | kg 0,24   |
| QC DV 12L<br>FEMALE |      | Psi 5075 | inch | 1,50 | 2,50 | -    | 1,06 |         | 0,31 | 0,39   | lb 0,53   |
| QC DV 12L<br>MALE   |      | MPa 35   | mm   | -    | 56   | 20,5 | 27   | M18X1,5 | 10   | 12     | kg 0,169  |
| QC DV 12L<br>FEMALE |      | Psi 5075 | inch | -    | 2,20 | 0,81 | 1,06 |         | 0,39 | 0,47   | lb 0,37   |
| QC DV 15L<br>MALE   |      | MPa 35   | mm   | 38   | 63,5 | -    | 27   | M18X1,5 | 10   | 12     | kg 0,254  |
| QC DV 15L<br>FEMALE |      | Psi 5075 | inch | 1,50 | 2,50 | -    | 1,06 |         | 0,39 | 0,47   | lb 0,56   |
| QC DV 15L<br>MALE   | 20   | MPa 35   | mm   | -    | 57   | 20,5 | 27   | M22X1,5 | 12   | 15     | kg 0,17   |
| QC DV 15L<br>FEMALE |      | Psi 5075 | inch | -    | 2,24 | 0,81 | 1,06 |         | 0,47 | 0,59   | lb 0,37   |
| QC DV 18L<br>MALE   |      | MPa 35   | mm   | 38   | 64,5 | -    | 27   | M22X1,5 | 12   | 15     | kg 0,26   |
| QC DV 18L<br>FEMALE |      | Psi 5075 | inch | 1,50 | 2,54 | -    | 1,06 |         | 0,47 | 0,59   | lb 0,57   |
| QC DV 18L<br>MALE   | 20   | MPa 35   | mm   | -    | 57   | 20,5 | 27   | M26X1,5 | 15   | 18     | kg 0,179  |
| QC DV 18L<br>FEMALE |      | Psi 5075 | inch | -    | 2,24 | 0,81 | 1,06 |         | 0,59 | 0,71   | lb 0,39   |
| QC DV 18L<br>MALE   |      | MPa 35   | mm   | 38   | 64,5 | -    | 27   | M26X1,5 | 15   | 18     | kg 0,263  |
| QC DV 18L<br>FEMALE |      | Psi 5075 | inch | 1,50 | 2,54 | -    | 1,06 |         | 0,59 | 0,71   | lb 0,58   |
| QC DV 18L<br>MALE   | 20   | MPa 25   | mm   | -    | 62   | 29,1 | 34   | M26X1,5 | 15   | 18     | kg 0,25   |
| QC DV 18L<br>FEMALE |      | Psi 3625 | inch | -    | 2,44 | 1,15 | 1,34 |         | 0,59 | 0,71   | lb 0,55   |
| QC DV 22L<br>MALE   |      | MPa 25   | mm   | 47   | 77,5 | -    | 34   | M26X1,5 | 15   | 18     | kg 0,52   |
| QC DV 22L<br>FEMALE |      | Psi 3625 | inch | 1,85 | 3,05 | -    | 1,34 |         | 0,59 | 0,71   | lb 1,15   |
| QC DV 22L<br>MALE   | 20   | MPa 25   | mm   | -    | 64   | 29,1 | 34   | M30X2   | 19   | 22     | kg 0,27   |
| QC DV 22L<br>FEMALE |      | Psi 3625 | inch | -    | 2,52 | 1,15 | 1,34 |         | 0,75 | 0,87   | lb 0,60   |
| QC DV 22L<br>MALE   | 20   | MPa 25   | mm   | 47   | 79,5 | -    | 34   | M30X2   | 19   | 22     | kg 0,55   |
| QC DV 22L<br>FEMALE |      | Psi 3625 | inch | 1,85 | 3,13 | -    | 1,34 |         | 0,75 | 0,87   | lb 1,21   |



**■ QUICK COUPLINGS PUSH-PULL  
WITH DECOMPRESSION VALVE (male / female)  
MALE THREAD METRIC ISO 8434-1-S (DIN 2353) BULKHEAD  
Interchangeable according to ISO 7241-A**

CS  
Carbon  
Steel

| TYPE                   | DN   | PN       | ØA        | C    | Ød   | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |
|------------------------|------|----------|-----------|------|------|------|---------|------|------|----------|-------------|
| QC DV 10S BK<br>MALE   |      | MPa 35   | mm -      | 72   | 20,5 | 27   | M18X1,5 | 7    | 10   | kg 0,169 | NC23I030000 |
|                        |      | Psi 5075 | inch -    | 2,83 | 0,81 | 1,06 |         | 0,28 | 0,39 | lb 0,37  |             |
| QC DV 10S BK<br>FEMALE | 12,5 | MPa 35   | mm 38     | 79,5 | -    | 27   | M18X1,5 | 7    | 10   | kg 0,3   | NC24I030000 |
|                        |      | Psi 5075 | inch 1,50 | 3,13 | -    | 1,06 |         | 0,28 | 0,39 | lb 0,66  |             |
| QC DV 12S BK<br>MALE   |      | MPa 35   | mm -      | 72   | 20,5 | 27   | M20X1,5 | 8    | 12   | kg 0,16  | NC23I030001 |
|                        |      | Psi 5075 | inch -    | 2,83 | 0,81 | 1,06 |         | 0,31 | 0,47 | lb 0,35  |             |
| QC DV 12S BK<br>FEMALE | 12,5 | MPa 35   | mm 38     | 79,5 | -    | 27   | M20X1,5 | 8    | 12   | kg 0,32  | NC24I030001 |
|                        |      | Psi 5075 | inch 1,50 | 3,13 | -    | 1,06 |         | 0,31 | 0,47 | lb 0,71  |             |
| QC DV 16S BK<br>MALE   | 20   | MPa 25   | mm -      | 79   | 29,1 | 34   | M24X1,5 | 12   | 16   | kg 0,27  | NC23I040000 |
|                        |      | Psi 3625 | inch -    | 3,11 | 1,15 | 1,34 |         | 0,47 | 0,63 | lb 0,60  |             |
| QC DV 16S BK<br>FEMALE | 20   | MPa 25   | mm 47     | 94,5 | -    | 34   | M24X1,5 | 12   | 16   | kg 0,57  | NC24I040000 |
|                        |      | Psi 3625 | inch 1,85 | 3,72 | -    | 1,34 |         | 0,47 | 0,63 | lb 1,26  |             |



**QUICK COUPLINGS PUSH-PULL  
WITH DECOMPRESSION VALVE (male / female)  
MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD  
Interchangeable according to ISO 7241-A**

CS  
Carbon Steel

| TYPE                   | DN   | PN       | ØA   | C    | Ød   | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |
|------------------------|------|----------|------|------|------|------|---------|------|------|----------|-------------|
| QC DV 10L BK<br>MALE   | 12,5 | MPa 35   | mm   | 71   | 20,5 | 27   | M16X1,5 | 8    | 10   | kg 0,149 | NC23M030000 |
| QC DV 10L BK<br>FEMALE |      | Psi 5075 | inch | 0,00 | 2,80 | 0,81 | 1,06    | 0,31 | 0,39 | lb 0,33  |             |
| QC DV 12L BK<br>MALE   |      | MPa 35   | mm   | 38   | 78,5 | 27   | M16X1,5 | 8    | 10   | kg 0,3   | NC24M030000 |
| QC DV 12L BK<br>FEMALE |      | Psi 5075 | inch | 1,50 | 3,09 | 0,00 | 1,06    | 0,31 | 0,39 | lb 0,66  |             |
| QC DV 12L BK<br>MALE   |      | MPa 35   | mm   | 72   | 20,5 | 27   | M18X1,5 | 10   | 12   | kg 0,15  | NC23M030001 |
| QC DV 12L BK<br>FEMALE |      | Psi 5075 | inch | 0,00 | 2,83 | 0,81 | 1,06    | 0,39 | 0,47 | lb 0,33  |             |
| QC DV 15L BK<br>MALE   |      | MPa 35   | mm   | 38   | 79,5 | 27   | M18X1,5 | 10   | 12   | kg 0,3   | NC24M030001 |
| QC DV 15L BK<br>FEMALE |      | Psi 5075 | inch | 1,50 | 3,13 | 0,00 | 1,06    | 0,39 | 0,47 | lb 0,66  |             |
| QC DV 15L BK<br>MALE   |      | MPa 35   | mm   | 72   | 20,5 | 27   | M22X1,5 | 12   | 15   | kg 0,16  | NC23M030002 |
| QC DV 15L BK<br>FEMALE |      | Psi 5075 | inch | 0,00 | 2,83 | 0,81 | 1,06    | 0,47 | 0,59 | lb 0,35  |             |
| QC DV 18L BK<br>MALE   | 20   | MPa 35   | mm   | 38   | 79,5 | 27   | M22X1,5 | 12   | 15   | kg 0,31  | NC24M030002 |
| QC DV 18L BK<br>FEMALE |      | Psi 5075 | inch | 1,50 | 3,13 | 0,00 | 1,06    | 0,47 | 0,59 | lb 0,68  |             |
| QC DV 18L BK<br>MALE   |      | MPa 35   | mm   | 72   | 20,5 | 27   | M26X1,5 | 15   | 18   | kg 0,175 | NC23M030003 |
| QC DV 18L BK<br>FEMALE |      | Psi 5075 | inch | 0,00 | 2,83 | 0,81 | 1,06    | 0,59 | 0,71 | lb 0,39  |             |
| QC DV 15L BK<br>MALE   |      | MPa 25   | mm   | 77   | 29,1 | 34   | M22X1,5 | 12   | 15   | kg 0,252 | NC23M040000 |
| QC DV 15L BK<br>FEMALE |      | Psi 3625 | inch | 0,00 | 3,03 | 1,15 | 1,34    | 0,47 | 0,59 | lb 0,56  |             |
| QC DV 22L BK<br>MALE   |      | MPa 25   | mm   | 47   | 92,5 | 34   | M22X1,5 | 12   | 15   | kg 0,55  | NC24M040000 |
| QC DV 22L BK<br>FEMALE |      | Psi 3625 | inch | 1,85 | 3,64 | 0,00 | 1,34    | 0,47 | 0,59 | lb 1,21  |             |
| QC DV 22L BK<br>MALE   |      | MPa 25   | mm   | 84   | 29,1 | 34   | M30X2   | 19   | 22   | kg 0,298 | NC23M040001 |
| QC DV 22L BK<br>FEMALE |      | Psi 3625 | inch | 0,00 | 3,31 | 1,15 | 1,34    | 0,75 | 0,87 | lb 0,66  |             |
| QC DV 22L BK<br>MALE   |      | MPa 25   | mm   | 47   | 99,5 | 34   | M30X2   | 19   | 22   | kg 0,6   | NC24M040001 |
| QC DV 22L BK<br>FEMALE |      | Psi 3625 | inch | 1,85 | 3,92 | 0,00 | 1,34    | 0,75 | 0,87 | lb 1,32  |             |



# ISO B

## QUICK COUPLINGS


Edition. 21.2

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 7241/B
- Sizes: from DN6 to DN50
- Pressure: up to PN420

### SS Stainless Steel


- Type: Quick Couplings
- Models: ISO 7241/B
- Sizes: from DN6 to DN50
- Pressure: up to PN300

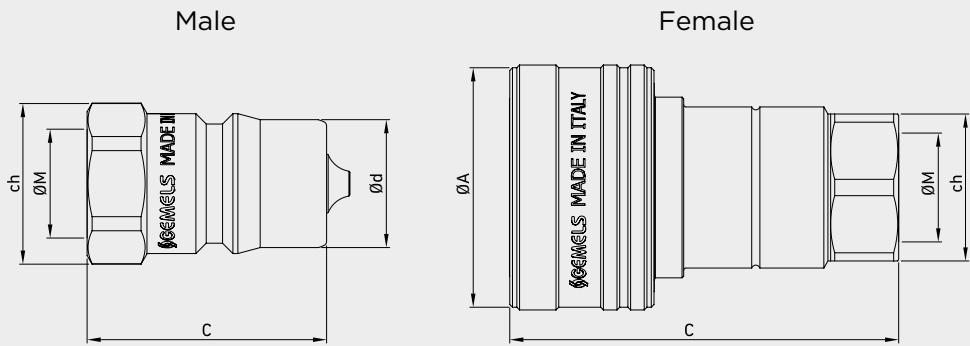

!

**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.

**Performance**  
(1/4", 3/8", 1/2", 3/4", 1")  
Series (1/4", 3/8", 1/2", 3/4", 1")  
200SUS (Test Fluid: Oil-200SUS)

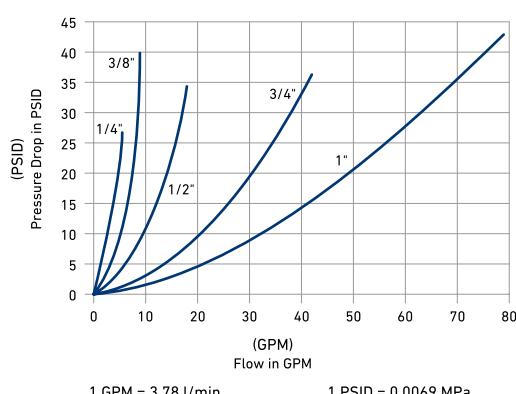



## CODE DESCRIPTION STRUCTURE

**QC    G1/2    M/F    DN12,5    1    B**

**Type of coupling** \_\_\_\_\_

ISO 7241/B

**Ends** \_\_\_\_\_

ISO 1179-1   ASME B1.20.1   ISO 11926-1

BSPP      NPT      (SAE J1926-1)  
              ORB

|         |         |       |
|---------|---------|-------|
| G 1/8   | N 1/8   | SAE4  |
| G 1/4   | N 1/4   | SAE6  |
| G 3/8   | N 3/8   | SAE8  |
| G 1/2   | N 1/2   | SAE12 |
| G 3/4   | N 3/4   | SAE16 |
| G 1     | N 1     | SAE20 |
| G 1 1/2 | N 1 1/2 | SAE24 |
| G 2     | N 2     | SAE32 |

MALE \_\_\_\_\_

FEMALE \_\_\_\_\_

**DN/ISO** \_\_\_\_\_

5

6,3

10

12,5

20

25

40

50

Carbon  
steel

Stainless  
steel

**Body Material** \_\_\_\_\_

● **1** = 1,0737

● **4** = 1,4404

**Seal material** \_\_\_\_\_


● **B** = NBR   E = FKM\*

● **E** = FKM

\*On request


- Cups

- Plugs



## ■ QUICK COUPLINGS ISO 7241/B (male / female) MALE THREAD METRIC ISO 1179-1 BSPP WITH POPPET


| TYPE                     | DN   | PN       | ØA                    | C | Ød     | ch | ØM        | WEIGHT | ITEM CODE   | CS<br>Carbon Steel         |          |                       | SS<br>Stainless Steel | ITEM CODE |             |
|--------------------------|------|----------|-----------------------|---|--------|----|-----------|--------|-------------|----------------------------|----------|-----------------------|-----------------------|-----------|-------------|
|                          |      |          |                       |   |        |    |           |        |             |                            |          |                       |                       |           |             |
| QC ISO B G 1/4<br>MALE   | 6,3  | MPa 42   | mm - 35,5 14,2 19     |   | G1/4   |    | kg 0,036  |        | NC03G010000 | QC ISO B G 1/8<br>MALE     | MPa 30   | mm - 31 10,8 14       | G1/8                  | kg 0,02   | NC03G000001 |
|                          |      | Psi 6090 | inch - 1,40 0,56 0,75 |   |        |    | lb 0,08   |        |             |                            | Psi 4350 | inch - 1,22 0,43 0,55 |                       | lb 0,04   |             |
| QC ISO B G 1/4<br>FEMALE | 6,3  | MPa 42   | mm 28,5 56 - 19       |   | G1/4   |    | kg 0,128  |        | NC04G010000 | QC ISO B G 1/8<br>FEMALE   | MPa 30   | mm 24 50 - 14         | G1/8                  | kg 0,07   | NC04G000001 |
|                          |      | Psi 6090 | inch 1,12 2,20 - 0,75 |   |        |    | lb 0,28   |        |             |                            | Psi 4350 | inch 0,94 1,97 - 0,55 |                       | lb 0,15   |             |
| QC ISO B G 3/8<br>MALE   | 10   | MPa 42   | mm - 39 19,05 22      |   | G3/8   |    | kg 0,07   |        | NC03G020000 | QC ISO B G 1/4<br>MALE     | MPa 30   | mm - 37 14,1 19       | G1/4                  | kg 0,036  | NC03G010001 |
|                          |      | Psi 6090 | inch - 1,54 0,75 0,87 |   |        |    | lb 0,15   |        |             |                            | Psi 4350 | inch - 1,46 0,56 0,75 |                       | lb 0,08   |             |
| QC ISO B G 3/8<br>FEMALE | 10   | MPa 42   | mm 35 63 - 22         |   | G3/8   |    | kg 0,217  |        | NC04G020000 | QC ISO B G 1/4<br>FEMALE   | MPa 30   | mm 28 58,5 - 19       | G1/4                  | kg 0,128  | NC04G010001 |
|                          |      | Psi 6090 | inch 1,38 2,48 - 0,87 |   |        |    | lb 0,48   |        |             |                            | Psi 4350 | inch 1,10 2,30 - 0,75 |                       | lb 0,28   |             |
| QC ISO B G 1/2<br>MALE   | 12,5 | MPa 42   | mm - 44 23,5 27       |   | G1/2   |    | kg 0,11   |        | NC03G030000 | QC ISO B G 3/8<br>MALE     | MPa 25   | mm - 39 19 22         | G3/8                  | kg 0,07   | NC03G020001 |
|                          |      | Psi 6090 | inch - 1,73 0,93 1,06 |   |        |    | lb 0,24   |        |             |                            | Psi 3625 | inch - 1,54 0,75 0,87 |                       | lb 0,15   |             |
| QC ISO B G 1/2<br>FEMALE | 12,5 | MPa 42   | mm 45 71,5 - 27       |   | G1/2   |    | kg 0,36   |        | NC04G030000 | QC ISO B G 3/8<br>FEMALE   | MPa 25   | mm 35 64 - 22         | G3/8                  | kg 0,217  | NC04G020001 |
|                          |      | Psi 6090 | inch 1,77 2,81 - 1,06 |   |        |    | lb 0,79   |        |             |                            | Psi 3625 | inch 1,38 2,52 - 0,87 |                       | lb 0,48   |             |
| QC ISO B G 3/4<br>MALE   | 20   | MPa 25   | mm - 55,5 31,45 36    |   | G3/4   |    | kg 0,22   |        | NC03G040000 | QC ISO B G 1/2<br>MALE     | MPa 25   | mm - 45,5 23,5 27     | G1/2                  | kg 0,11   | NC03G030001 |
|                          |      | Psi 3625 | inch - 2,19 1,24 1,42 |   |        |    | lb 0,49   |        |             |                            | Psi 3625 | inch - 1,79 0,93 1,06 |                       | lb 0,24   |             |
| QC ISO B G 3/4<br>FEMALE | 20   | MPa 25   | mm 55 90 - 36         |   | G3/4   |    | kg 0,668  |        | NC04G040000 | QC ISO B G 1/2<br>FEMALE   | MPa 25   | mm 42 73 - 27         | G1/2                  | kg 0,36   | NC04G030001 |
|                          |      | Psi 3625 | inch 2,17 3,54 - 1,42 |   |        |    | lb 1,47   |        |             |                            | Psi 3625 | inch 1,65 2,87 - 1,06 |                       | lb 0,79   |             |
| QC ISO B G 1<br>MALE     | 25   | MPa 25   | mm - 66 37,8 41       |   | G1     |    | kg 0,3466 |        | NC03G050000 | QC ISO B G 3/4<br>MALE     | MPa 25   | mm - 54 31,4 36       | G3/4                  | kg 0,22   | NC03G040001 |
|                          |      | Psi 3625 | inch - 2,60 1,49 1,61 |   |        |    | lb 0,76   |        |             |                            | Psi 3625 | inch - 2,13 1,24 1,42 |                       | lb 0,49   |             |
| QC ISO B G 1<br>FEMALE   | 25   | MPa 25   | mm 63 106 - 41        |   | G1     |    | kg 1,005  |        | NC04G050000 | QC ISO B G 3/4<br>FEMALE   | MPa 25   | mm 52 87,5 - 36       | G3/4                  | kg 0,668  | NC04G040001 |
|                          |      | Psi 3625 | inch 2,48 4,17 - 1,61 |   |        |    | lb 2,22   |        |             |                            | Psi 3625 | inch 2,05 3,44 - 1,42 |                       | lb 1,47   |             |
| ABOVE 1": *ON REQUEST    |      |          |                       |   |        |    |           |        |             |                            |          |                       |                       |           |             |
| QC ISO B G 1<br>MALE     | 25   | MPa 20   | mm - 63 37,8 41       |   | G1     |    | kg 0,3466 |        | NC03G050001 | QC ISO B G 1<br>FEMALE     | MPa 20   | mm 60 103 - 41        | G1                    | kg 1,005  | NC04G050001 |
|                          |      | Psi 2900 | inch - 2,48 1,49 1,61 |   |        |    | lb 0,76   |        |             |                            | Psi 2900 | inch 2,36 4,06 - 1,61 |                       | lb 2,22   |             |
| QC ISO B G 1<br>1/4 MALE | 31,5 | MPa 14   | mm - 126 44,5 65      |   | G1 1/4 |    | kg -      |        | NC03G06S000 | QC ISO B G 1<br>1/4 FEMALE | MPa 14   | mm 74,8 126 - 65      | G1 1/4                | kg -      | NC04G06S000 |
|                          |      | Psi 2030 | inch - 4,96 1,75 2,56 |   |        |    | lb -      |        |             |                            | Psi 2030 | inch 2,94 4,96 - 2,56 |                       | lb -      |             |
| QC ISO B G 1<br>1/2 MALE | 40   | MPa 14   | mm - 126 44,5 65      |   | G1 1/2 |    | kg -      |        | NC03G07S000 | QC ISO B G 1<br>1/2 FEMALE | MPa 14   | mm 74,8 126 - 65      | G1 1/2                | kg -      | NC04G07S000 |
|                          |      | Psi 2030 | inch - 4,96 1,75 2,56 |   |        |    | lb -      |        |             |                            | Psi 2030 | inch 2,94 4,96 - 2,56 |                       | lb -      |             |
| QC ISO B G 2<br>MALE     | 50   | MPa 9    | mm - 142 63,2 90      |   | G 2    |    | kg -      |        | NC03G08S000 | QC ISO B G 2<br>FEMALE     | MPa 9    | mm 105 142 - 90       | G 2                   | kg -      | NC04G08S000 |
|                          |      | Psi 1305 | inch - 5,59 2,49 3,54 |   |        |    | lb -      |        |             |                            | Psi 1305 | inch 4,13 5,59 - 3,54 |                       | lb -      |             |



## QUICK COUPLINGS ISO 7241/B (male / female) FEMALE THREAD ASME B1.20.1 NPT WITH POPPET

| TYPE                     | DN   | PN                    | ØA                 | C       | Ød        | ch | ØM          | WEIGHT                     | ITEM CODE | CS                    | Carbon Steel      |         | SS       | Stainless Steel | ITEM CODE |
|--------------------------|------|-----------------------|--------------------|---------|-----------|----|-------------|----------------------------|-----------|-----------------------|-------------------|---------|----------|-----------------|-----------|
|                          |      |                       |                    |         |           |    |             |                            |           |                       |                   |         |          |                 |           |
| QC ISO B N 1/4<br>MALE   | 6,3  | MPa 42                | mm - 35,5 14,2 19  | N1/4    | kg 0,036  |    | NC03N010000 | QC ISO B N 1/8<br>MALE     | 5         | MPa 30                | mm - 31 10,8 14   | N1/8    | kg 0,02  | NC03N00S000     |           |
| Psi 6090                 |      | inch - 1,40 0,56 0,75 |                    | lb 0,08 |           |    |             | Psi 4350                   |           | inch - 1,22 0,43 0,55 |                   | lb 0,04 |          |                 |           |
| QC ISO B N 1/4<br>FEMALE | 6,3  | MPa 42                | mm 28,5 56 - 19    | N1/4    | kg 0,128  |    | NC04N010000 | QC ISO B N 1/8<br>FEMALE   |           | MPa 30                | mm 24 50 - 14     | N1/8    | kg 0,07  | NC04N00S000     |           |
| Psi 6090                 |      | inch 1,12 2,20 - 0,75 |                    | lb 0,28 |           |    |             | Psi 4350                   |           | inch 0,94 1,97 - 0,55 |                   | lb 0,15 |          |                 |           |
| QC ISO B N 3/8<br>MALE   | 10   | MPa 42                | mm - 39 19,05 22   | N3/8    | kg 0,07   |    | NC03N020000 | QC ISO B N 1/4<br>MALE     | 6,3       | MPa 30                | mm - 37 14,1 19   | N1/4    | kg 0,036 | NC03N01S000     |           |
| Psi 6090                 |      | inch - 1,54 0,75 0,87 |                    | lb 0,15 |           |    |             | Psi 4350                   |           | inch - 1,46 0,56 0,75 |                   | lb 0,08 |          |                 |           |
| QC ISO B N 3/8<br>FEMALE | 10   | MPa 42                | mm 35 63 - 22      | N3/8    | kg 0,217  |    | NC04N020000 | QC ISO B N 1/4<br>FEMALE   |           | MPa 30                | mm 28 58,5 - 19   | N1/4    | kg 0,128 | NC04N01S000     |           |
| Psi 6090                 |      | inch 1,38 2,48 - 0,87 |                    | lb 0,48 |           |    |             | Psi 4350                   |           | inch 1,10 2,30 - 0,75 |                   | lb 0,28 |          |                 |           |
| QC ISO B N 1/2<br>MALE   | 12,5 | MPa 42                | mm - 44 23,5 27    | N1/2    | kg 0,11   |    | NC03N030000 | QC ISO B N 3/8<br>MALE     | 10        | MPa 25                | mm - 39 19 22     | N3/8    | kg 0,07  | NC03N02S000     |           |
| Psi 6090                 |      | inch - 1,73 0,93 1,06 |                    | lb 0,24 |           |    |             | Psi 3625                   |           | inch - 1,54 0,75 0,87 |                   | lb 0,15 |          |                 |           |
| QC ISO B N 1/2<br>FEMALE | 12,5 | MPa 42                | mm 45 71,5 - 27    | N1/2    | kg 0,36   |    | NC04N030000 | QC ISO B N 3/8<br>FEMALE   |           | MPa 25                | mm 35 64 - 22     | N3/8    | kg 0,217 | NC04N02S000     |           |
| Psi 6090                 |      | inch 1,77 2,81 - 1,06 |                    | lb 0,79 |           |    |             | Psi 3625                   |           | inch 1,38 2,52 - 0,87 |                   | lb 0,48 |          |                 |           |
| QC ISO B N 3/4<br>MALE   | 20   | MPa 25                | mm - 55,5 31,45 36 | N3/4    | kg 0,22   |    | NC03N040000 | QC ISO B N 1/2<br>MALE     | 12,5      | MPa 25                | mm - 45,5 23,5 27 | N1/2    | kg 0,11  | NC03N03S000     |           |
| Psi 3625                 |      | inch - 2,19 1,24 1,42 |                    | lb 0,49 |           |    |             | Psi 3625                   |           | inch - 1,79 0,93 1,06 |                   | lb 0,24 |          |                 |           |
| QC ISO B N 3/4<br>FEMALE | 20   | MPa 25                | mm 55 90 - 36      | N3/4    | kg 0,668  |    | NC04N040000 | QC ISO B N 1/2<br>FEMALE   |           | MPa 25                | mm 42 72 - 27     | N1/2    | kg 0,36  | NC04N03S000     |           |
| Psi 3625                 |      | inch 2,17 3,54 - 1,42 |                    | lb 1,47 |           |    |             | Psi 3625                   |           | inch 1,65 2,83 - 1,06 |                   | lb 0,79 |          |                 |           |
| QC ISO B N 1<br>MALE     | 25   | MPa 25                | mm - 66 37,8 41    | N1      | kg 0,3466 |    | NC03N050000 | QC ISO B N 3/4<br>MALE     | 20        | MPa 25                | mm - 54 31,4 36   | N3/4    | kg 0,22  | NC03N04S000     |           |
| Psi 3625                 |      | inch - 2,60 1,49 1,61 |                    | lb 0,76 |           |    |             | Psi 3625                   |           | inch - 2,13 1,24 1,42 |                   | lb 0,49 |          |                 |           |
| QC ISO B N 1<br>FEMALE   | 25   | MPa 25                | mm 63 106 - 41     | N1      | kg 1,005  |    | NC04N050000 | QC ISO B N 3/4<br>FEMALE   |           | MPa 25                | mm 52 87,5 - 36   | N3/4    | kg 0,668 | NC04N04S000     |           |
| Psi 3625                 |      | inch 2,48 4,17 - 1,61 |                    | lb 2,22 |           |    |             | Psi 3625                   |           | inch 2,05 3,44 - 1,42 |                   | lb 1,47 |          |                 |           |
| QC ISO B N 1<br>MALE     | 31,5 | MPa 20                | mm - 63 37,8 41    | N1      | kg 0,3466 |    | NC03N05S000 | QC ISO B N 1<br>FEMALE     | 25        | MPa 20                | mm 60 103 - 41    | N1      | kg 1,005 | NC04N05S000     |           |
| Psi 2900                 |      | inch - 2,48 1,49 1,61 |                    | lb 0,76 |           |    |             | Psi 2900                   |           | inch 2,36 4,06 - 1,61 |                   | lb 2,22 |          |                 |           |
| QC ISO B N 1<br>1/4 MALE | 31,5 | MPa 14                | mm - 126 44,5 65   | N1 1/4  | kg -      |    | NC03N06S000 | QC ISO B N 1<br>1/4 FEMALE | 31,5      | MPa 14                | mm 74,8 126 - 65  | N1 1/4  | kg -     | NC04N06S000     |           |
| Psi 2030                 |      | inch - 4,96 1,75 2,56 |                    | lb -    |           |    |             | Psi 2030                   |           | inch 2,94 4,96 - 2,56 |                   | lb -    |          |                 |           |
| QC ISO B N 1<br>1/2 MALE | 40   | MPa 14                | mm - 126 44,5 65   | N1 1/2  | kg -      |    | NC03N07S000 | QC ISO B N 1<br>1/2 FEMALE |           | MPa 14                | mm 74,8 126 - 65  | N1 1/2  | kg -     | NC04N07S000     |           |
| Psi 2030                 |      | inch - 4,96 1,75 2,56 |                    | lb -    |           |    |             | Psi 2030                   |           | inch 2,94 4,96 - 2,56 |                   | lb -    |          |                 |           |
| QC ISO B N 2<br>MALE     | 50   | MPa 9                 | mm - 142 63,2 90   | N 2     | kg -      |    | NC03N08S000 | QC ISO B N 2<br>FEMALE     |           | MPa 9                 | mm 105 142 - 90   | N 2     | kg -     | NC04N08S000     |           |
| Psi 1305                 |      | inch - 5,59 2,49 3,54 |                    | lb -    |           |    |             | Psi 1305                   |           | inch 4,13 5,59 - 3,54 |                   | lb -    |          |                 |           |

ABOVE 1": \*ON REQUEST



## ■ QUICK COUPLINGS ISO 7241/B (male / female) FEMALE THREAD ISO 11926-1 (SAE J1926-1) ORB WITH POPPET

| TYPE                     | DN   | PN       | ØA                    | C | Ød | ch | ØM        | WEIGHT | ITEM CODE   | CS           | SS<br>Stainless Steel |           |
|--------------------------|------|----------|-----------------------|---|----|----|-----------|--------|-------------|--------------|-----------------------|-----------|
|                          |      |          |                       |   |    |    |           |        |             | Carbon Steel |                       |           |
| QC ISO B SAE4<br>MALE    | 6,3  | MPa 42   | mm - 35,5 14,2 19     |   |    |    | kg 0,036  |        | NC03S010000 | MPa 30       | mm - 37 14,1 19       | SAE4      |
|                          |      | Psi 6090 | inch - 1,40 0,56 0,75 |   |    |    | lb 0,08   |        |             | Psi 4350     | inch - 1,46 0,56 0,75 | kg 0,036  |
| QC ISO B SAE4<br>FEMALE  |      | MPa 42   | mm 28,5 56 - 19       |   |    |    | kg 0,128  |        | NC04S010000 | MPa 30       | mm 28 58,5 - 19       | SAE4      |
|                          |      | Psi 6090 | inch 1,12 2,20 - 0,75 |   |    |    | lb 0,28   |        |             | Psi 4350     | inch 1,10 2,30 - 0,75 | kg 0,128  |
| QC ISO B SAE6<br>MALE    | 10   | MPa 42   | mm - 39 19,05 22      |   |    |    | kg 0,07   |        | NC03S020000 | MPa 25       | mm - 39 19 22         | SAE6      |
|                          |      | Psi 6090 | inch - 1,54 0,75 0,87 |   |    |    | lb 0,15   |        |             | Psi 3625     | inch - 1,54 0,75 0,87 | kg 0,07   |
| QC ISO B SAE6<br>FEMALE  |      | MPa 42   | mm 35 63 - 22         |   |    |    | kg 0,217  |        | NC04S020000 | MPa 25       | mm 35 64 - 22         | SAE6      |
|                          |      | Psi 6090 | inch 1,38 2,48 - 0,87 |   |    |    | lb 0,48   |        |             | Psi 3625     | inch 1,38 2,52 - 0,87 | kg 0,217  |
| QC ISO B SAE8<br>MALE    | 12,5 | MPa 42   | mm - 44 23,5 27       |   |    |    | kg 0,11   |        | NC03S030000 | MPa 25       | mm - 45,5 23,5 27     | SAE8      |
|                          |      | Psi 6090 | inch - 1,73 0,93 1,06 |   |    |    | lb 0,24   |        |             | Psi 3625     | inch - 1,79 0,93 1,06 | kg 0,11   |
| QC ISO B SAE8<br>FEMALE  |      | MPa 42   | mm 45 71,5 - 27       |   |    |    | kg 0,36   |        | NC04S030000 | MPa 25       | mm 42 72 - 27         | SAE8      |
|                          |      | Psi 6090 | inch 1,77 2,81 - 1,06 |   |    |    | lb 0,79   |        |             | Psi 3625     | inch 1,65 2,83 - 1,06 | kg 0,36   |
| QC ISO B SAE12<br>MALE   | 20   | MPa 25   | mm - 55,5 31,45 36    |   |    |    | kg 0,22   |        | NC03S040000 | MPa 25       | mm - 54 31,4 36       | SAE12     |
|                          |      | Psi 3625 | inch - 2,19 1,24 1,42 |   |    |    | lb 0,49   |        |             | Psi 3625     | inch - 2,13 1,24 1,42 | kg 0,22   |
| QC ISO B SAE12<br>FEMALE |      | MPa 25   | mm 55 90 - 36         |   |    |    | kg 0,668  |        | NC04S040000 | MPa 25       | mm 52 87,5 - 36       | SAE12     |
|                          |      | Psi 3625 | inch 2,17 3,54 - 1,42 |   |    |    | lb 1,47   |        |             | Psi 3625     | inch 2,05 3,44 - 1,42 | kg 0,668  |
| QC ISO B SAE16<br>MALE   | 25   | MPa 25   | mm - 66 37,8 41       |   |    |    | kg 0,3466 |        | NC03S050000 | MPa 20       | mm - 63 37,8 41       | SAE16     |
|                          |      | Psi 3625 | inch - 2,60 1,49 1,61 |   |    |    | lb 0,76   |        |             | Psi 2900     | inch - 2,48 1,49 1,61 | kg 0,3466 |
| QC ISO B SAE16<br>FEMALE |      | MPa 25   | mm 63 106 - 41        |   |    |    | kg 1,005  |        | NC04S050000 | MPa 20       | mm 60 103 - 41        | SAE16     |
|                          |      | Psi 3625 | inch 2,48 4,17 - 1,61 |   |    |    | lb 2,22   |        |             | Psi 2900     | inch 2,36 4,06 - 1,61 | kg 1,005  |
| ABOVE 1": *ON REQUEST    |      |          |                       |   |    |    |           |        |             |              |                       |           |
| QC ISO B SAE20<br>MALE   | 31,5 | MPa 35   | mm - 126 44,5 65      |   |    |    | kg -      |        | NC03S06S000 | MPa 35       | mm - 126 44,5 65      | SAE20     |
|                          |      | Psi 5075 | inch - 4,96 1,75 2,56 |   |    |    | lb -      |        |             | Psi 5075     | inch - 4,96 1,75 2,56 | kg -      |
| QC ISO B SAE20<br>FEMALE |      | MPa 35   | mm 74,8 126 - 65      |   |    |    | kg -      |        | NC04S06S000 | MPa 35       | mm 74,8 126 - 65      | SAE20     |
|                          |      | Psi 5075 | inch 2,94 4,96 - 2,56 |   |    |    | lb -      |        |             | Psi 5075     | inch 2,94 4,96 - 2,56 | kg -      |
| QC ISO B SAE24<br>MALE   | 40   | MPa 35   | mm - 126 44,5 65      |   |    |    | kg -      |        | NC03S07S000 | MPa 35       | mm - 126 44,5 65      | SAE24     |
|                          |      | Psi 5075 | inch - 4,96 1,75 2,56 |   |    |    | lb -      |        |             | Psi 5075     | inch - 4,96 1,75 2,56 | kg -      |
| QC ISO B SAE24<br>FEMALE |      | MPa 35   | mm 74,8 126 - 65      |   |    |    | kg -      |        | NC04S07S000 | MPa 35       | mm 74,8 126 - 65      | SAE24     |
|                          |      | Psi 5075 | inch 2,94 4,96 - 2,56 |   |    |    | lb -      |        |             | Psi 5075     | inch 2,94 4,96 - 2,56 | kg -      |
| QC ISO B SAE32<br>MALE   | 50   | MPa 35   | mm - 142 63,2 90      |   |    |    | kg -      |        | NC03S08S000 | MPa 35       | mm - 142 63,2 90      | SAE32     |
|                          |      | Psi 5075 | inch - 5,59 2,49 3,54 |   |    |    | lb -      |        |             | Psi 5075     | inch - 5,59 2,49 3,54 | kg -      |
| QC ISO B SAE32<br>FEMALE |      | MPa 35   | mm 105 142 - 90       |   |    |    | kg -      |        | NC04S08S000 | MPa 35       | mm 105 142 - 90       | SAE32     |
|                          |      | Psi 5075 | inch 4,13 5,59 - 3,54 |   |    |    | lb -      |        |             | Psi 5075     | inch 4,13 5,59 - 3,54 | kg -      |
| QC ISO B G 2<br>MALE     | 50   | MPa 9    | mm - 142 63,2 90      |   |    |    | G 2       |        | NC03G08S000 | MPa 9        | mm - 142 63,2 90      | G 2       |
|                          |      | Psi 1305 | inch - 5,59 2,49 3,54 |   |    |    | lb -      |        |             | Psi 1305     | inch - 5,59 2,49 3,54 | kg -      |
| QC ISO B G 2<br>FEMALE   |      | MPa 9    | mm 105 142 - 90       |   |    |    | G 2       |        | NC04G08S000 | MPa 9        | mm 105 142 - 90       | G 2       |
|                          |      | Psi 1305 | inch 4,13 5,59 - 3,54 |   |    |    | lb -      |        |             | Psi 1305     | inch 4,13 5,59 - 3,54 | kg -      |





# N


## QUICK COUPLINGS

Edition. 21.1


### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 5675
- Sizes: from DN6 to DN25
- Pressure: up to PN350

Male

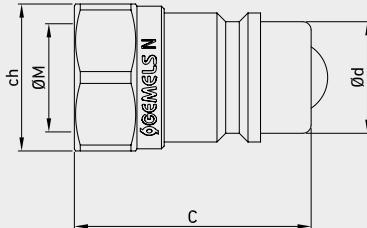

Female

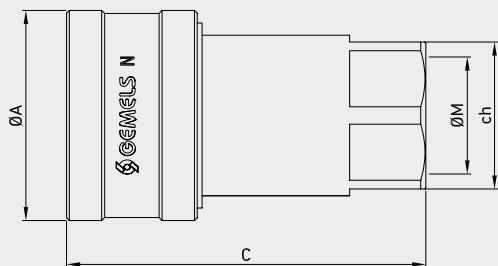


**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.

### Performance

(1/4", 3/8", 1/2", 3/4", 1")

Series (1/4", 3/8", 1/2", 3/4", 1")

200SUS (Test Fluid: Oil-200SUS)

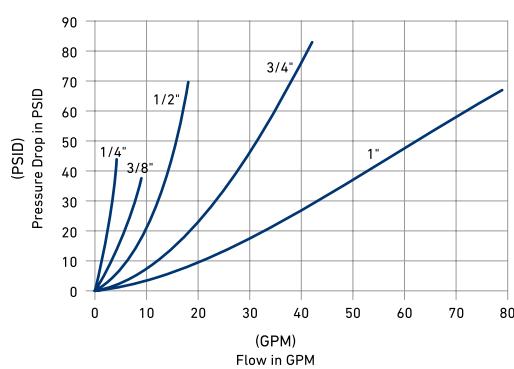

1 GPM = 3.78 l/min

1 PSID = 0.0069 MPa



## CODE DESCRIPTION STRUCTURE



Type of coupling \_\_\_\_\_

ISO 5675 N

Ends \_\_\_\_\_

ISO 1179-1 ASME B1.20.1

BSPP NPT

G 1/4 N 1/4

G 3/8 N 3/8

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1

MALE \_\_\_\_\_

FEMALE

DN/ISO \_\_\_\_\_

6,3

10

12,5

20

25

Body Material \_\_\_\_\_



● 1 = 1,0737

Seal material \_\_\_\_\_

B = NBR E = FKM\*

\*On request

- Cups
- Plugs



**QUICK COUPLINGS ISO 5675  
(male / female)  
FEMALE THREAD ISO 1179-1 BSPP  
WITH BALL**

**CS**  
Carbon Steel

| TYPE                 | DN   | PN       | ØA          | C    | Ød   | ch   | ØM      | WEIGHT   | ITEM CODE   |
|----------------------|------|----------|-------------|------|------|------|---------|----------|-------------|
| QC N G 1/4<br>MALE   | 6,3  | MPa 35   | mm - 36     | 14,2 | 19   |      | G 1/4   | kg 0,04  | NC07G010000 |
|                      |      | Psi 5075 | inch - 1,42 | 0,56 | 0,75 |      | lb 0,09 |          |             |
| QC N G 1/4<br>FEMALE |      | MPa 35   | mm 27,6     | 53,5 | -    | 19   |         | kg 0,11  | NC08G010000 |
|                      |      | Psi 5075 | inch 1,09   | 2,11 | -    | 0,75 | lb 0,24 |          |             |
| QC N G 3/8<br>MALE   | 10   | MPa 28   | mm - 40     | 19   | 24   |      | G 3/8   | kg 0,08  | NC07G020000 |
|                      |      | Psi 4060 | inch - 1,57 | 0,75 | 0,94 |      | lb 0,18 |          |             |
| QC N G 3/8<br>FEMALE |      | MPa 28   | mm 34       | 63   | -    | 24   |         | kg 0,2   | NC08G020000 |
|                      |      | Psi 4060 | inch 1,34   | 2,48 | -    | 0,94 | lb 0,44 |          |             |
| QC N G 1/2<br>MALE   | 12,5 | MPa 28   | mm - 43,5   | 20,5 | 27   |      | G 1/2   | kg 0,09  | NC07G030000 |
|                      |      | Psi 4060 | inch - 1,71 | 0,81 | 1,06 |      | lb 0,20 |          |             |
| QC N G 1/2<br>FEMALE |      | MPa 28   | mm 38,6     | 66,3 | -    | 27   |         | kg 0,27  | NC08G030000 |
|                      |      | Psi 4060 | inch 1,52   | 2,61 | -    | 1,06 | lb 0,60 |          |             |
| QC N G 3/4<br>MALE   | 20   | MPa 20   | mm - 53,5   | 28   | 34   |      | G 3/4   | kg 0,182 | NC07G040000 |
|                      |      | Psi 2900 | inch - 2,11 | 1,10 | 1,34 |      | lb 0,40 |          |             |
| QC N G 3/4<br>FEMALE |      | MPa 20   | mm 48,2     | 82,5 | -    | 34   |         | kg 0,515 | NC08G040000 |
|                      |      | Psi 2900 | inch 1,90   | 3,25 | -    | 1,34 | lb 1,14 |          |             |
| QC N G 1<br>MALE     | 25   | MPa 20   | mm - 63     | 31,3 | 41   |      | G 1     | kg 0,246 | NC07G050000 |
|                      |      | Psi 2900 | inch - 2,48 | 1,23 | 1,61 |      | lb 0,54 |          |             |
| QC N G 1<br>FEMALE   |      | MPa 20   | mm 56       | 96,5 | -    | 41   |         | kg 0,817 | NC08G050000 |
|                      |      | Psi 2900 | inch 2,20   | 3,80 | -    | 1,61 | lb 1,80 |          |             |

**QUICK COUPLINGS ISO 5675  
(male / female)  
FEMALE THREAD ASME B1.20.1  
NPT WITH BALL**

**CS**  
Carbon Steel

| TYPE                 | DN   | PN       | ØA          | C    | Ød   | ch   | ØM      | WEIGHT  | ITEM CODE   |
|----------------------|------|----------|-------------|------|------|------|---------|---------|-------------|
| QC N N 1/4<br>MALE   | 6,3  | MPa 35   | mm - 36     | 14,2 | 19   |      | NPT     | kg 0,04 | NC07N010000 |
|                      |      | Psi 5075 | inch - 1,42 | 0,56 | 0,75 | 1/4  | lb 0,09 |         |             |
| QC N N 1/4<br>FEMALE |      | MPa 35   | mm 27,6     | 53,5 | -    | 19   | NPT     | kg 0,11 | NC08N010000 |
|                      |      | Psi 5075 | inch 1,09   | 2,11 | -    | 0,75 | 1/4     | lb 0,24 |             |
| QC N N 3/8<br>MALE   | 10   | MPa 28   | mm - 40     | 19   | 24   |      | NPT     | kg 0,08 | NC07N020000 |
|                      |      | Psi 4060 | inch - 1,57 | 0,75 | 0,94 | 3/8  | lb 0,18 |         |             |
| QC N N 3/8<br>FEMALE |      | MPa 28   | mm 34       | 63   | -    | 24   | NPT     | kg 0,2  | NC08N020000 |
|                      |      | Psi 4060 | inch 1,34   | 2,48 | -    | 0,94 | 3/8     | lb 0,44 |             |
| QC N N 1/2<br>MALE   | 12,5 | MPa 28   | mm - 43,5   | 20,5 | 27   |      | NPT     | kg 0,09 | NC07N030000 |
|                      |      | Psi 4060 | inch - 1,71 | 0,81 | 1,06 | 1/2  | lb 0,20 |         |             |
| QC N N 1/2<br>FEMALE |      | MPa 28   | mm 38,6     | 66,3 | -    | 27   | NPT     | kg 0,27 | NC08N030000 |
|                      |      | Psi 4060 | inch 1,52   | 2,61 | -    | 1,06 | 1/2     | lb 0,60 |             |
| QC N N 3/4<br>MALE   | 20   | MPa 20   | mm - 53,5   | 28   | 34   |      | NPT     | kg 0,09 | NC07N040000 |
|                      |      | Psi 2900 | inch - 2,11 | 1,10 | 1,34 | 3/4  | lb 0,20 |         |             |
| QC N N 3/4<br>FEMALE |      | MPa 20   | mm 48,2     | 82,5 | -    | 34   | NPT     | kg 0,27 | NC08N040000 |
|                      |      | Psi 2900 | inch 1,90   | 3,25 | -    | 1,34 | 3/4     | lb 0,60 |             |
| QC N N 1<br>MALE     | 25   | MPa 20   | mm - 63     | 31,3 | 41   |      | NPT     | kg 0,09 | NC07N050000 |
|                      |      | Psi 2900 | inch - 2,48 | 1,23 | 1,61 | 1/2  | lb 0,20 |         |             |
| QC N N 1<br>FEMALE   |      | MPa 20   | mm 56       | 96,5 | -    | 41   | NPT     | kg 0,27 | NC08N050000 |
|                      |      | Psi 2900 | inch 2,20   | 3,80 | -    | 1,61 | 1/2     | lb 0,60 |             |





NV

## QUICK COUPLINGS


Interchangeable size 1/2" with ISO 7241/A

Edition. 21.2


## cs Carbon Steel

- Type: Quick Couplings
- Models: ISO 5675
- Sizes: from DN6 to DN25
- Pressure: up to PN350

Male

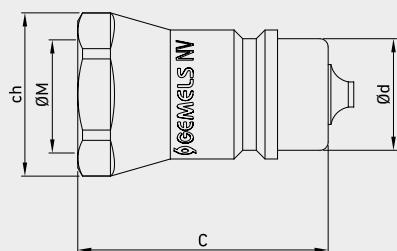

Female

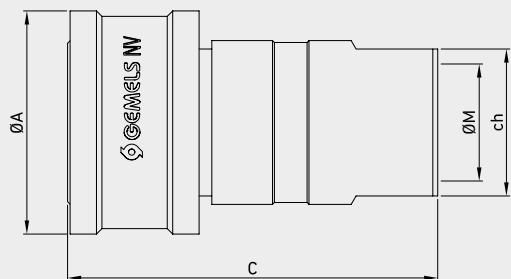

!


**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.

**Performance**

(1/4", 3/8", 1/2", 3/4", 1")

Series (1/4", 3/8", 1/2", 3/4", 1")

200SUS (Test Fluid: Oil-200SUS)

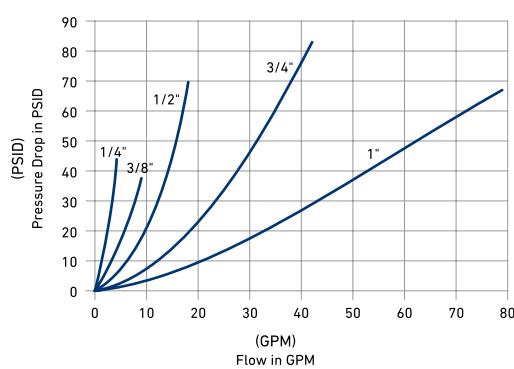

1 GPM = 3.78 l/min

1 PSID = 0.0069 MPa



## CODE DESCRIPTION STRUCTURE



Type of coupling \_\_\_\_\_

ISO 5675 NV

Ends \_\_\_\_\_

ISO 1179-1 ASME B1.20.1

BSPP NPT

G 1/4 N 1/4

G 3/8 N 3/8

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1

MALE \_\_\_\_\_

FEMALE

DN/ISO \_\_\_\_\_

6,3

10

12,5

20

25

Body Material \_\_\_\_\_



● 1 = 1,0737

Seal material \_\_\_\_\_

B = NBR E = FKM\*

\*On request

- Cups
- Plugs



**■ QUICK COUPLINGS ISO 5675  
(male / female)  
FEMALE THREAD ISO 1179-1  
BSPP WITH POPPET**

**CS**  
Carbon Steel

| TYPE                  | DN   | PN       | ØA          | C    | Ød   | ch   | ØM    | WEIGHT   | ITEM CODE   |
|-----------------------|------|----------|-------------|------|------|------|-------|----------|-------------|
| QC NV G 1/4<br>MALE   | 6,3  | MPa 35   | mm - 36     | 14,2 | 19   |      | G 1/4 | kg 0,043 | NC09G010000 |
|                       |      | Psi 5075 | inch - 1,42 | 0,56 | 0,75 |      |       | lb 0,09  |             |
| QC NV G 1/4<br>FEMALE |      | MPa 35   | mm 27,6     | 55,5 | -    | 22   |       | kg 0,128 | NC10G010000 |
|                       |      | Psi 5075 | inch 1,09   | 2,19 | -    | 0,87 |       | lb 0,28  |             |
| QC NV G 3/8<br>MALE   | 10   | MPa 35   | mm - 40     | 19   | 24   |      | G 3/8 | kg 0,075 | NC09G020000 |
|                       |      | Psi 5075 | inch - 1,57 | 0,75 | 0,94 |      |       | lb 0,17  |             |
| QC NV G 3/8<br>FEMALE |      | MPa 35   | mm 34       | 60,5 | -    | 24   |       | kg 0,2   | NC10G020000 |
|                       |      | Psi 5075 | inch 1,34   | 2,38 | -    | 0,94 |       | lb 0,44  |             |
| QC NV G 1/2<br>MALE   | 12,5 | MPa 35   | mm - 46     | 20,5 | 27   |      | G 1/2 | kg 0,085 | NC09G030000 |
|                       |      | Psi 5075 | inch - 1,81 | 0,81 | 1,06 |      |       | lb 0,19  |             |
| QC NV G 1/2<br>FEMALE |      | MPa 35   | mm 38       | 68   | -    | 27   |       | kg 0,27  | NC10G030000 |
|                       |      | Psi 5075 | inch 1,50   | 2,68 | -    | 1,06 |       | lb 0,60  |             |
| QC NV G 3/4<br>MALE   | 20   | MPa 25   | mm - 53,5   | 28   | 34   |      | G 3/4 | kg 0,174 | NC09G040000 |
|                       |      | Psi 3625 | inch - 2,11 | 1,10 | 1,34 |      |       | lb 0,38  |             |
| QC NV G 3/4<br>FEMALE |      | MPa 25   | mm 48,2     | 82,5 | -    | 34   |       | kg 0,515 | NC10G040000 |
|                       |      | Psi 3625 | inch 1,90   | 3,25 | -    | 1,34 |       | lb 1,14  |             |
| QC NV G 1<br>MALE     | 25   | MPa 25   | mm - 64     | 31,3 | 41   |      | G 1   | kg 0,258 | NC09G050000 |
|                       |      | Psi 3625 | inch - 2,52 | 1,23 | 1,61 |      |       | lb 0,57  |             |
| QC NV G 1<br>FEMALE   |      | MPa 25   | mm 56,2     | 97,5 | -    | 41   |       | kg 0,936 | NC10G050000 |
|                       |      | Psi 3625 | inch 2,21   | 3,84 | -    | 1,61 |       | lb 2,06  |             |

**■ QUICK COUPLINGS ISO 5675  
(male / female)  
FEMALE THREAD ASME B1.20.1  
NPT WITH POPPET**

**CS**  
Carbon Steel

| TYPE                  | DN   | PN       | ØA          | C    | Ød   | ch   | ØM  | WEIGHT   | ITEM CODE   |
|-----------------------|------|----------|-------------|------|------|------|-----|----------|-------------|
| QC NV N 1/4<br>MALE   | 6,3  | MPa 35   | mm - 36     | 14,2 | 19   |      | NPT | kg 0,044 | NC09N010000 |
|                       |      | Psi 5075 | inch - 1,42 | 0,56 | 0,75 |      | 1/4 | lb 0,10  |             |
| QC NV N 1/4<br>FEMALE |      | MPa 35   | mm 27,6     | 55,5 | -    | 22   | NPT | kg 0,13  | NC10N010000 |
|                       |      | Psi 5075 | inch 1,09   | 2,19 | -    | 0,87 | 1/4 | lb 0,29  |             |
| QC NV N 3/8<br>MALE   | 10   | MPa 35   | mm - 40     | 19   | 24   |      | NPT | kg 0,08  | NC09N020000 |
|                       |      | Psi 5075 | inch - 1,57 | 0,75 | 0,94 |      | 3/8 | lb 0,18  |             |
| QC NV N 3/8<br>FEMALE |      | MPa 35   | mm 34       | 60,5 | -    | 24   | NPT | kg 0,2   | NC10N020000 |
|                       |      | Psi 5075 | inch 1,34   | 2,38 | -    | 0,94 | 3/8 | lb 0,44  |             |
| QC NV N 1/2<br>MALE   | 12,5 | MPa 35   | mm - 46     | 20,5 | 27   |      | NPT | kg 0,09  | NC09N030000 |
|                       |      | Psi 5075 | inch - 1,81 | 0,81 | 1,06 |      | 1/2 | lb 0,20  |             |
| QC NV N 1/2<br>FEMALE |      | MPa 35   | mm 38       | 68   | -    | 27   | NPT | kg 0,27  | NC10N030000 |
|                       |      | Psi 5075 | inch 1,50   | 2,68 | -    | 1,06 | 1/2 | lb 0,60  |             |
| QC NV N 3/4<br>MALE   | 20   | MPa 25   | mm - 53,5   | 28   | 34   |      | NPT | kg 0,09  | NC09N040000 |
|                       |      | Psi 3625 | inch - 2,11 | 1,10 | 1,34 |      | 3/4 | lb 0,20  |             |
| QC NV N 3/4<br>FEMALE |      | MPa 25   | mm 48,2     | 82,5 | -    | 34   | NPT | kg 0,29  | NC10N040000 |
|                       |      | Psi 3625 | inch 1,90   | 3,25 | -    | 1,34 | 3/4 | lb 0,64  |             |
| QC NV N 1<br>MALE     | 25   | MPa 25   | mm - 64     | 31,3 | 41   |      | NPT | kg 0,1   | NC09N050000 |
|                       |      | Psi 3625 | inch - 2,52 | 1,23 | 1,61 |      | 1   | lb 0,22  |             |
| QC NV N 1<br>FEMALE   |      | MPa 25   | mm 56,2     | 97,5 | -    | 41   | NPT | kg 0,3   | NC10N050000 |
|                       |      | Psi 3625 | inch 2,21   | 3,84 | -    | 1,61 | 1   | lb 0,66  |             |






# BGF

## QUICK COUPLINGS

Edition. 21.0

### cs Carbon Steel

- Type: Quick Couplings
- Models: ISO 5676
- Sizes: from DN10 to DN13
- Pressure: up to PN210

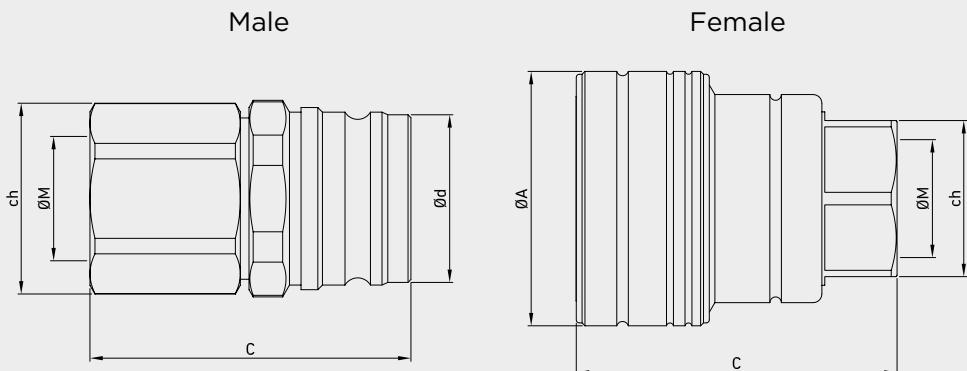

!

**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.




## CODE DESCRIPTION STRUCTURE

|                    | QC                        | DN12,5                                       | 1M/F | DN12,5 | 1 | B |
|--------------------|---------------------------|--|------|--------|---|---|
| Type of coupling   |                           |  |      |        |   |   |
| FLAT FACE - BGF    |                           |  |      |        |   |   |
| Ends               |                           |  |      |        |   |   |
| ISO 1179-1<br>BSPP | ISO 8434-1-L<br>(DIN2353) | ISO 8434-1-L<br>(DIN2353)<br><b>BULKHEAD</b> |      |        |   |   |
| G 3/8<br>G 1/2     | 12L<br>15L                | 12L<br>15L                                   |      |        |   |   |
| MALE               |                           |  |      |        |   |   |
| FEMALE             |                           |  |      |        |   |   |
| DN/ISO             |                           |  |      |        |   |   |
| 10<br>13           |                           |  |      |        |   |   |
| Body Material      |                           |  |      |        |   |   |
| ● 1 = 1,0737       |                           |  |      |        |   |   |
| Seal material      |                           |  |      |        |   |   |
| B = NBR E = FKM*   |                           |  |      |        |   |   |

\*On request


- Cups
- Plugs



## ■ QUICK COUPLINGS BGF ISO 5676 (male / female) FEMALE THREAD ISO 1179-1 BSPP

CS  
Carbon Steel


| TYPE                   | DN   | PN       | ØA        | C    | Ød   | ch   | ØM   | WEIGHT   | ITEM CODE   |
|------------------------|------|----------|-----------|------|------|------|------|----------|-------------|
| QC BGF G 3/8<br>MALE   | 12,5 | MPa 21   | mm -      | 55,5 | 29   | 30   | G3/8 | kg 0,226 | NC21G030001 |
| QC BGF G3/8<br>FEMALE  |      | Psi 3045 | inch -    | 2,19 | 1,14 | 1,18 |      | lb 0,50  |             |
| QC BGF G 1/2<br>MALE   | 12,5 | MPa 21   | mm 44     | 55,5 | -    | 27   | G3/8 | kg 0,333 | NC22G030001 |
| QC BGF G 1/2<br>FEMALE |      | Psi 3045 | inch 1,73 | 2,19 | -    | 1,06 |      | lb 0,73  |             |
| QC BGF G 1/2<br>MALE   | 12,5 | MPa 21   | mm -      | 55,5 | 29   | 30   | G1/2 | kg 0,226 | NC21G030000 |
| QC BGF G 1/2<br>FEMALE |      | Psi 3045 | inch -    | 2,19 | 1,14 | 1,18 |      | lb 0,50  |             |
| QC BGF G 1/2<br>MALE   | 12,5 | MPa 21   | mm 44     | 55,5 | -    | 27   | G1/2 | kg 0,319 | NC22G030000 |
| QC BGF G 1/2<br>FEMALE |      | Psi 3045 | inch 1,73 | 2,19 | -    | 1,06 |      | lb 0,70  |             |



## ■ QUICK COUPLINGS BGF ISO 5676 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN2353)

CS  
Carbon Steel

| TYPE                 | DN   | PN       | ØA        | C    | Ød   | ch   | ØM      | WEIGHT   | ITEM CODE   |
|----------------------|------|----------|-----------|------|------|------|---------|----------|-------------|
| QC BGF 12L<br>MALE   | 12,5 | MPa 21   | mm -      | 51   | 29   | 32   | M18X1,5 | kg 0,157 | NC21L030001 |
| QC BGF 12L<br>FEMALE |      | Psi 3045 | inch -    | 2,01 | 1,14 | 1,26 |         | lb 0,35  |             |
| QC BGF 12L<br>MALE   | 12,5 | MPa 21   | mm 44     | 51   | -    | 27   | M18X1,5 | kg 0,321 | NC22L030001 |
| QC BGF 12L<br>FEMALE |      | Psi 3045 | inch 1,73 | 2,01 | -    | 1,06 |         | lb 0,71  |             |
| QC BGF 15L<br>MALE   | 12,5 | MPa 21   | mm -      | 60,5 | 29   | 32   | M22X1,5 | kg 0,157 | NC21L030000 |
| QC BGF 15L<br>FEMALE |      | Psi 3045 | inch -    | 2,38 | 1,14 | 1,26 |         | lb 0,35  |             |
| QC BGF 15L<br>MALE   | 12,5 | MPa 21   | mm 44     | 60,5 | -    | 27   | M22X1,5 | kg 0,332 | NC22L030000 |
| QC BGF 15L<br>FEMALE |      | Psi 3045 | inch 1,73 | 2,38 | -    | 1,06 |         | lb 0,73  |             |



## ■ QUICK COUPLINGS BGF ISO 5676 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN2353) BULKHEAD

CS  
Carbon Steel

| TYPE                   | DN   | PN       | ØA   | C    | Ød   | ch   | ØM      | WEIGHT  | ITEM CODE   |
|------------------------|------|----------|------|------|------|------|---------|---------|-------------|
| QC BGF 12LBK<br>MALE   | 12,5 | MPa 21   | mm   | 58,5 | 29   | 32   | M18X1,5 | kg 0,55 | NC21M030001 |
| QC BGF 12LBK<br>FEMALE |      | Psi 3045 | inch | 0,00 | 2,30 | 1,14 | 1,26    | lb 1,21 |             |
| QC BGF 15LBK<br>MALE   | 12,5 | MPa 21   | mm   | 44   | 58,5 | 27   | M18X1,5 | kg 0,63 | NC22M030001 |
| QC BGF 15LBK<br>FEMALE |      | Psi 3045 | inch | 1,73 | 2,30 | 0,00 | 1,06    | lb 1,39 |             |
| QC BGF 15LBK<br>MALE   | 12,5 | MPa 21   | mm   | 60,5 | 29   | 32   | M22X1,5 | kg 0,18 | NC21M030000 |
| QC BGF 15LBK<br>FEMALE |      | Psi 3045 | inch | 0,00 | 2,38 | 1,14 | 1,26    | lb 0,40 |             |
| QC BGF 15LBK<br>MALE   | 12,5 | MPa 21   | mm   | 44   | 60,5 | 27   | M22X1,5 | kg 0,25 | NC22M030000 |
| QC BGF 15LBK<br>FEMALE |      | Psi 3045 | inch | 1,73 | 2,38 | 0,00 | 1,06    | lb 0,55 |             |



# VGA

## QUICK COUPLINGS

Available other different threads on request


Edition. 21.3

### CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 14541
- Sizes: from DN6 up to DN25
- Pressure: up to PN420

### SS Stainless Steel

- Type: Quick Couplings
- Models: ISO 14541
- Sizes: from DN6 up to DN25
- Pressure: up to PN420

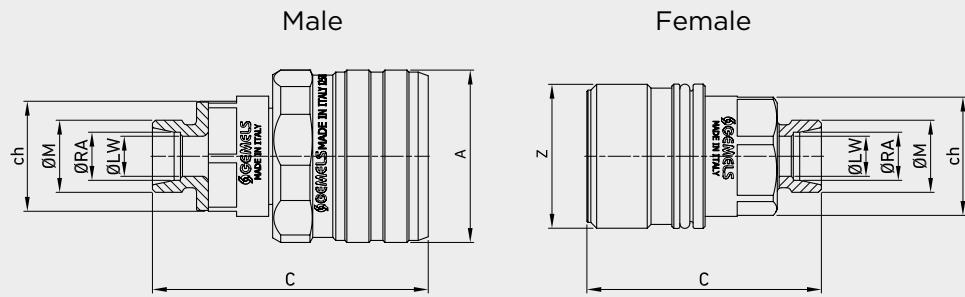

!

Available also  
in patented version:  
ball valve with integrated  
quick coupling.



## CODE DESCRIPTION STRUCTURE



Type of coupling  SCREW-TO-CONNECT-COUPLED ISO 14541

**Ends**

| ISO 1179-1<br>BSPP | ISO 8434-1-S<br>(DIN 2353) | ISO 8434-1-L<br>(DIN 2353) | ISO 8434-1-S<br>(DIN 2353)<br>BULKHEAD | ISO 8434-1-L<br>(DIN 2353)<br>BULKHEAD |
|--------------------|----------------------------|----------------------------|--|--|
| G1/4               | 6L                         | 8S                         | 8L                                     | 10S                                    |
| G3/8               | 8L                         | 10S                        | 10L                                    | 12S                                    |
| G1/2               | 10L                        | 12S                        | 12L                                    | 16S                                    |
| G3/4               | 12L                        | 14S                        | 15L                                    | 20S                                    |
| G1                 | 15L                        | 16S                        | 18L                                    | 25S                                    |
|                    | 18L                        | 20S                        | 22L                                    | 30S                                    |
|                    | 22L                        | 25S                        | 28L                                    |  |
|                    | 28L                        | 30S                        |  |  |
|                    | 35L                        |                            |  |  |

MALE   
FEMALE

DN/ISO   
6,3  
10  
12,5  
20  
25

Body Material


- 1 = 1,0737
- 4 = 1,4404

Seal material

- B = NBR E = FKM\*
- E = FKM

\*On request


- Cups
- Plugs



## SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female) FEMALE THREAD ISO 1179-1 BSPP

| TYPE                   | DN   | PN        | ØA    | C     | Øz    | ch   | ØM   | WEIGHT   | ITEM CODE   | CS           | Stainless Steel |       |       |      |      |          |             |
|------------------------|------|-----------|-------|-------|-------|------|------|----------|-------------|--------------|-----------------|-------|-------|------|------|----------|-------------|
|                        |      |           |       |       |       |      |      |          |             | Carbon Steel |                 |       |       |      |      |          |             |
| QC VGA G 1/4<br>MALE   | 6,3  | MPa 42    | mm 30 | 64    | -     | 19   | G1/4 | kg 0,141 | NC15G010000 | MPa 42       | mm 30           | 64    | -     | 19   | G1/4 | kg 0,141 | NC15G01S000 |
| Psi 6090               |      | inch 1,18 | 2,52  |       |       | 0,75 |      | lb 0,31  |             | Psi 6090     | inch 1,18       | 2,52  | -     | 0,75 |      | lb 0,31  |             |
| QC VGA G 1/4<br>FEMALE | 6,3  | MPa 42    | mm -  | 60,5  | M24X2 | 19   | G1/4 | kg 0,122 | NC16G010000 | MPa 42       | mm -            | 53    | M24X2 | 19   | G1/4 | kg 0,122 | NC16G01S000 |
| Psi 6090               |      | inch -    | 2,38  |       |       | 0,75 |      | lb 0,27  |             | Psi 6090     | inch -          | 2,09  |       | 0,75 |      | lb 0,27  |             |
| QC VGA G 3/8<br>MALE   | 10   | MPa 42    | mm 34 | 66,5  | -     | 24   | G3/8 | kg 0,193 | NC15G020000 | MPa 42       | mm 34           | 66,5  | -     | 24   | G3/8 | kg 0,193 | NC15G02S000 |
| Psi 6090               |      | inch 1,34 | 2,62  |       |       | 0,94 |      | lb 0,43  |             | Psi 6090     | inch 1,34       | 2,62  | -     | 0,94 |      | lb 0,43  |             |
| QC VGA G 3/8<br>FEMALE | 10   | MPa 42    | mm -  | 60    | M28X2 | 24   | G3/8 | kg 0,185 | NC16G020000 | MPa 42       | mm -            | 60    | M28X2 | 24   | G3/8 | kg 0,185 | NC16G02S000 |
| Psi 6090               |      | inch -    | 2,36  |       |       | 0,94 |      | lb 0,41  |             | Psi 6090     | inch -          | 2,36  |       | 0,94 |      | lb 0,41  |             |
| QC VGA G 1/2<br>MALE   | 10   | MPa 42    | mm 34 | 69    | -     | 24   | G1/2 | kg 0,187 | NC15G020001 | MPa 42       | mm 34           | 69    | -     | 24   | G1/2 | kg 0,187 | NC15G02S001 |
| Psi 6090               |      | inch 1,34 | 2,72  |       |       | 0,94 |      | lb 0,41  |             | Psi 6090     | inch 1,34       | 2,72  | -     | 0,94 |      | lb 0,41  |             |
| QC VGA G 1/2<br>FEMALE | 10   | MPa 42    | mm -  | 62,5  | M28X2 | 24   | G1/2 | kg 0,171 | NC16G020001 | MPa 42       | mm -            | 62,5  | M28X2 | 24   | G1/2 | kg 0,171 | NC16G02S001 |
| Psi 6090               |      | inch -    | 2,46  |       |       | 0,94 |      | lb 0,38  |             | Psi 6090     | inch -          | 2,46  |       | 0,94 |      | lb 0,38  |             |
| QC VGA G 3/8<br>MALE   | 12,5 | MPa 42    | mm 43 | 71    | -     | 27   | G3/8 | kg 0,309 | NC15G030000 | MPa 42       | mm 43           | 71    | -     | 27   | G3/8 | kg 0,309 | NC15G03S000 |
| Psi 6090               |      | inch 1,69 | 2,80  |       |       | 1,06 |      | lb 0,68  |             | Psi 6090     | inch 1,69       | 2,80  | -     | 1,06 |      | lb 0,68  |             |
| QC VGA G 3/8<br>FEMALE | 12,5 | MPa 42    | mm -  | 60,5  | M36X2 | 27   | G3/8 | kg 0,311 | NC16G030000 | MPa 42       | mm -            | 60,5  | M36X2 | 27   | G3/8 | kg 0,311 | NC16G03S000 |
| Psi 6090               |      | inch -    | 2,38  |       |       | 1,06 |      | lb 0,69  |             | Psi 6090     | inch -          | 2,38  |       | 1,06 |      | lb 0,69  |             |
| QC VGA G 1/2<br>MALE   | 12,5 | MPa 42    | mm 43 | 74    | -     | 27   | G1/2 | kg 0,303 | NC15G030001 | MPa 42       | mm 43           | 74    | -     | 27   | G1/2 | kg 0,303 | NC15G03S001 |
| Psi 6090               |      | inch 1,69 | 2,91  |       |       | 1,06 |      | lb 0,67  |             | Psi 6090     | inch 1,69       | 2,91  | -     | 1,06 |      | lb 0,67  |             |
| QC VGA G 1/2<br>FEMALE | 12,5 | MPa 42    | mm -  | 63,5  | M36X2 | 27   | G1/2 | kg 0,306 | NC16G030001 | MPa 42       | mm -            | 63,5  | M36X2 | 27   | G1/2 | kg 0,306 | NC16G03S001 |
| Psi 6090               |      | inch -    | 2,50  |       |       | 1,06 |      | lb 0,67  |             | Psi 6090     | inch -          | 2,50  |       | 1,06 |      | lb 0,67  |             |
| QC VGA G 3/4<br>MALE   | 20   | MPa 42    | mm 48 | 85    | -     | 34   | G3/4 | kg 0,44  | NC15G040000 | MPa 42       | mm 48           | 85    | -     | 34   | G3/4 | kg 0,44  | NC15G04S000 |
| Psi 6090               |      | inch 1,89 | 3,35  |       |       | 1,34 |      | lb 0,97  |             | Psi 6090     | inch 1,89       | 3,35  | -     | 1,34 |      | lb 0,97  |             |
| QC VGA G 3/4<br>FEMALE | 20   | MPa 42    | mm -  | 84    | M42X2 | 34   | G3/4 | kg 0,517 | NC16G040000 | MPa 42       | mm -            | 84    | M42X2 | 34   | G3/4 | kg 0,517 | NC16G04S000 |
| Psi 6090               |      | inch -    | 3,31  |       |       | 1,34 |      | lb 1,14  |             | Psi 6090     | inch -          | 3,31  |       | 1,34 |      | lb 1,14  |             |
| QC VGA G 3/4<br>MALE   | 25   | MPa 35    | mm 57 | 98,5  | -     | 41   | G3/4 | kg 0,758 | NC15G050000 | MPa 35       | mm 57           | 98,5  | -     | 41   | G3/4 | kg 0,758 | NC15G05S000 |
| Psi 5075               |      | inch 2,24 | 3,88  |       |       | 1,61 |      | lb 1,67  |             | Psi 5075     | inch 2,24       | 3,88  | -     | 1,61 |      | lb 1,67  |             |
| QC VGA G 3/4<br>FEMALE | 25   | MPa 35    | mm -  | 95    | M48X2 | 41   | G3/4 | kg 0,75  | NC16G050000 | MPa 35       | mm -            | 95    | M48X2 | 41   | G3/4 | kg 0,75  | NC16G05S000 |
| Psi 5075               |      | inch -    | 3,74  |       |       | 1,61 |      | lb 1,65  |             | Psi 5075     | inch -          | 3,74  |       | 1,61 |      | lb 1,65  |             |
| QC VGA G 1<br>MALE     | 25   | MPa 35    | mm 57 | 100,5 | -     | 41   | G1   | kg 0,737 | NC15G050001 | MPa 35       | mm 57           | 100,5 | -     | 41   | G1   | kg 0,737 | NC15G05S001 |
| Psi 5075               |      | inch 2,24 | 3,96  |       |       | 1,61 |      | lb 1,62  |             | Psi 5075     | inch 2,24       | 3,96  | -     | 1,61 |      | lb 1,62  |             |
| QC VGA G 1<br>FEMALE   |      | MPa 35    | mm -  | 97    | M48X2 | 41   | G1   | kg 0,728 | NC16G050001 | MPa 35       | mm -            | 97    | M48X2 | 41   | G1   | kg 0,728 | NC16G05S001 |
| Psi 5075               |      | inch -    | 3,82  |       |       | 1,61 |      | lb 1,60  |             | Psi 5075     | inch -          | 3,82  |       | 1,61 |      | lb 1,60  |             |






## SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-S (DIN 2353)


**CS**  
Carbon Steel

| TYPE                 | DN   | PN       | ØA        | C     | Øz    | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |
|----------------------|------|----------|-----------|-------|-------|------|---------|------|------|----------|-------------|
| QC VGA 8S<br>MALE    | 10   | MPa 42   | mm 34     | 69    | -     | 24   | M16X1,5 | 5    | 8    | kg 0,169 | NC15H020000 |
|                      |      | Psi 6090 | inch 1,34 | 2,72  | -     | 0,94 |         | 0,20 | 0,31 | lb 0,31  | 0,37        |
|                      |      | MPa 42   | mm -      | 62,5  | M28X2 | 24   | M16X1,5 | 5    | 8    | kg 0,172 | NC16H020000 |
|                      |      | Psi 6090 | inch -    | 2,46  |       | 0,94 |         | 0,20 | 0,31 | lb 0,38  |             |
|                      |      | MPa 42   | mm 34     | 69    | -     | 24   | M18X1,5 | 7    | 10   | kg 0,169 | NC15H020001 |
|                      |      | Psi 6090 | inch 1,34 | 2,72  | -     | 0,94 | M18X1,5 | 0,28 | 0,39 | kg 0,39  | 0,37        |
| QC VGA 10S<br>MALE   | 12,5 | MPa 42   | mm -      | 62,5  | M28X2 | 24   | M18X1,5 | 7    | 10   | kg 0,158 | NC16H020001 |
|                      |      | Psi 6090 | inch -    | 2,46  |       | 0,94 |         | 0,28 | 0,39 | lb 0,35  |             |
|                      |      | MPa 42   | mm 43     | 70    | -     | 27   | M20X1,5 | 8    | 12   | kg 0,251 | NC15H030000 |
|                      |      | Psi 6090 | inch 1,69 | 2,76  | -     | 1,06 |         | 0,31 | 0,47 | kg 0,47  | 0,55        |
|                      |      | MPa 42   | mm -      | 59,5  | M36X2 | 27   | M20X1,5 | 8    | 12   | kg 0,254 | NC16H030000 |
|                      |      | Psi 6090 | inch -    | 2,34  |       | 1,06 |         | 0,31 | 0,47 | lb 0,56  |             |
| QC VGA 14S<br>MALE   | 20   | MPa 42   | mm 43     | 72    | -     | 27   | M22X1,5 | 8    | 14   | kg 0,26  | NC15H030001 |
|                      |      | Psi 6090 | inch 1,69 | 2,83  | -     | 1,06 | M22X1,5 | 0,31 | 0,55 | kg 0,55  | 0,57        |
|                      |      | MPa 42   | mm -      | 61,5  | M36X2 | 27   | M22X1,5 | 8    | 14   | kg 0,258 | NC16H030001 |
|                      |      | Psi 6090 | inch -    | 2,42  |       | 1,06 |         | 0,31 | 0,55 | lb 0,57  |             |
|                      |      | MPa 42   | mm 43     | 72    | -     | 27   | M24X1,5 | 12   | 16   | kg 0,281 | NC15H030002 |
|                      |      | Psi 6090 | inch 1,69 | 2,83  | -     | 1,06 |         | 0,47 | 0,63 | kg 0,63  | 0,62        |
| QC VGA 16S<br>FEMALE | 25   | MPa 42   | mm -      | 61,5  | M36X2 | 27   | M24X1,5 | 12   | 16   | kg 0,278 | NC16H030002 |
|                      |      | Psi 6090 | inch -    | 2,42  |       | 1,06 | M24X1,5 | 0,47 | 0,63 | lb 0,61  |             |
|                      |      | MPa 42   | mm 48     | 79    | -     | 34   | M24X1,5 | 12   | 16   | kg 0,374 | NC15H040000 |
|                      |      | Psi 6090 | inch 1,89 | 3,11  | -     | 1,34 |         | 0,47 | 0,63 | kg 0,63  | 0,82        |
|                      |      | MPa 42   | mm -      | 78    | M42X2 | 34   | M24X1,5 | 12   | 16   | kg 0,266 | NC16H040000 |
|                      |      | Psi 6090 | inch -    | 3,07  |       | 1,34 |         | 0,47 | 0,63 | lb 0,59  |             |
| QC VGA 20S<br>MALE   | 25   | MPa 42   | mm 48     | 81    | -     | 34   | M30X2   | 16   | 20   | kg 0,383 | NC15H040001 |
|                      |      | Psi 6090 | inch 1,89 | 3,19  | -     | 1,34 |         | 0,63 | 0,79 | kg 0,79  | 0,84        |
|                      |      | MPa 42   | mm -      | 80    | M42X2 | 34   | M30X2   | 16   | 20   | kg 0,436 | NC16H040001 |
|                      |      | Psi 6090 | inch -    | 3,15  |       | 1,34 |         | 0,63 | 0,79 | lb 0,96  |             |
|                      |      | MPa 35   | mm 57     | 100,5 | -     | 41   | M30X2   | 16   | 20   | kg 0,723 | NC15H050000 |
|                      |      | Psi 5075 | inch 2,24 | 3,96  | -     | 1,61 |         | 0,63 | 0,79 | kg 0,79  | 1,59        |
| QC VGA 20S<br>FEMALE | 25   | MPa 35   | mm -      | 97    | M48x2 | 41   | M30X2   | 16   | 20   | kg 0,721 | NC16H050000 |
|                      |      | Psi 5075 | inch -    | 3,82  |       | 1,61 |         | 0,63 | 0,79 | lb 1,59  |             |
|                      |      | MPa 35   | mm 57     | 102,5 | -     | 41   | M36X2   | 20   | 25   | kg 0,742 | NC15H050001 |
|                      |      | Psi 5075 | inch 2,24 | 4,04  | -     | 1,61 |         | 0,79 | 0,98 | kg 0,98  | 1,64        |
|                      |      | MPa 35   | mm -      | 99    | M48x2 | 41   | M36X2   | 20   | 25   | kg 0,74  | NC16H050001 |
|                      |      | Psi 5075 | inch -    | 3,90  |       | 1,61 |         | 0,79 | 0,98 | lb 1,63  |             |
| QC VGA 25S<br>MALE   | 25   | MPa 35   | mm 57     | 104,5 | -     | 46   | M42X2   | 25   | 30   | kg 0,821 | NC15H050002 |
|                      |      | Psi 5075 | inch 2,24 | 4,11  | -     | 1,81 |         | 0,98 | 1,18 | kg 1,18  | 1,81        |
|                      |      | MPa 35   | mm -      | 101   | M48x2 | 46   | M42X2   | 25   | 30   | kg 0,813 | NC16H050002 |
|                      |      | Psi 5075 | inch -    | 3,98  |       | 1,81 |         | 0,98 | 1,18 | lb 1,79  |             |



## SCREW-TO-CONNECT-COUPINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-S (DIN 2353)


| TYPE                    | DN   | PN       | ØA        | C     | Øz    | ch   | ØM      | ØLW  | ØRA  | WEIGHT    | ITEM CODE   | SS<br>Stainless Steel |  |
|-------------------------|------|----------|-----------|-------|-------|------|---------|------|------|-----------|-------------|-----------------------|--|
| "QC VGA 8S<br>MALE"     | 10   | MPa 42   | mm 34     | 69    | -     | 24   | M16X1,5 | 5    | 8    | kg 0,169  | NC15H02S000 | Stainless Steel       |  |
| "QC VGA 8S<br>FEMALE"   |      | Psi 6090 | inch 1,34 | 2,72  | -     | 0,94 |         | 0,20 | 0,31 | 0,31 0,37 |             |                       |  |
| "QC VGA 10S<br>MALE "   |      | MPa 42   | mm -      | 62,5  | M28X2 | 24   | M16X1,5 | 5    | 8    | kg 0,172  | NC16H02S000 |                       |  |
| "QC VGA 10S<br>FEMALE " |      | Psi 6090 | inch -    | 2,46  | -     | 0,94 |         | 0,20 | 0,31 | lb 0,38   |             |                       |  |
| "QC VGA 12S<br>MALE"    |      | MPa 42   | mm 34     | 69    | -     | 24   | M18X1,5 | 7    | 10   | kg 0,169  | NC15H02S001 |                       |  |
| "QC VGA 12S<br>FEMALE"  |      | Psi 6090 | inch 1,34 | 2,72  | -     | 0,94 |         | 0,28 | 0,39 | 0,39 0,37 |             |                       |  |
| "QC VGA 14S<br>MALE"    |      | MPa 42   | mm -      | 62,5  | M28X2 | 24   | M18X1,5 | 7    | 10   | kg 0,158  | NC16H02S001 |                       |  |
| "QC VGA 14S<br>FEMALE " |      | Psi 6090 | inch -    | 2,46  | -     | 0,94 |         | 0,28 | 0,39 | lb 0,35   |             |                       |  |
| "QC VGA 12S<br>MALE"    | 12,5 | MPa 42   | mm 43     | 70    | -     | 27   | M20X1,5 | 8    | 12   | kg 0,251  | NC15H03S000 | Stainless Steel       |  |
| "QC VGA 12S<br>FEMALE"  |      | Psi 6090 | inch 1,69 | 2,76  | -     | 1,06 |         | 0,31 | 0,47 | 0,47 0,55 |             |                       |  |
| "QC VGA 14S<br>MALE"    |      | MPa 42   | mm -      | 59,5  | M36X2 | 27   | M20X1,5 | 8    | 12   | kg 0,254  | NC16H03S000 |                       |  |
| "QC VGA 14S<br>FEMALE"  |      | Psi 6090 | inch -    | 2,34  | -     | 1,06 |         | 0,31 | 0,47 | lb 0,56   |             |                       |  |
| "QC VGA 14S<br>MALE"    |      | MPa 42   | mm 43     | 72    | -     | 27   | M22X1,5 | 8    | 14   | kg 0,26   | NC15H03S001 |                       |  |
| "QC VGA 14S<br>FEMALE"  |      | Psi 6090 | inch 1,69 | 2,83  | -     | 1,06 |         | 0,31 | 0,55 | 0,55 0,57 |             |                       |  |
| "QC VGA 16S<br>MALE"    |      | MPa 42   | mm -      | 61,5  | M36X2 | 27   | M22X1,5 | 8    | 14   | kg 0,258  | NC16H03S001 |                       |  |
| "QC VGA 16S<br>FEMALE"  |      | Psi 6090 | inch -    | 2,42  | -     | 1,06 |         | 0,31 | 0,55 | lb 0,57   |             |                       |  |
| "QC VGA 16S<br>MALE"    | 20   | MPa 42   | mm 43     | 72    | -     | 27   | M24X1,5 | 12   | 16   | kg 0,281  | NC15H03S002 | Stainless Steel       |  |
| "QC VGA 16S<br>FEMALE"  |      | Psi 6090 | inch 1,69 | 2,83  | -     | 1,06 |         | 0,47 | 0,63 | 0,63 0,62 |             |                       |  |
| "QC VGA 16S<br>MALE"    |      | MPa 42   | mm -      | 61,5  | M36X2 | 27   | M24X1,5 | 12   | 16   | kg 0,278  | NC16H03S002 |                       |  |
| "QC VGA 16S<br>FEMALE"  |      | Psi 6090 | inch -    | 2,42  | -     | 1,06 |         | 0,47 | 0,63 | lb 0,61   |             |                       |  |
| "QC VGA 16S<br>MALE"    |      | MPa 42   | mm 48     | 79    | -     | 34   | M24X1,5 | 12   | 16   | kg 0,374  | NC15H04S000 |                       |  |
| "QC VGA 16S<br>FEMALE"  |      | Psi 6090 | inch 1,89 | 3,11  | -     | 1,34 |         | 0,47 | 0,63 | 0,63 0,82 |             |                       |  |
| "QC VGA 20S<br>MALE"    |      | MPa 42   | mm -      | 78    | M42X2 | 34   | M24X1,5 | 12   | 16   | kg 0,266  | NC16H04S000 |                       |  |
| "QC VGA 20S<br>FEMALE"  |      | Psi 6090 | inch -    | 3,07  | -     | 1,34 |         | 0,47 | 0,63 | lb 0,59   |             |                       |  |
| "QC VGA 20S<br>MALE"    | 25   | MPa 42   | mm 48     | 81    | -     | 34   | M30X2   | 16   | 20   | kg 0,383  | NC15H04S001 | Stainless Steel       |  |
| "QC VGA 20S<br>FEMALE"  |      | Psi 6090 | inch 1,89 | 3,19  | -     | 1,34 |         | 0,63 | 0,79 | 0,79 0,84 |             |                       |  |
| "QC VGA 20S<br>MALE"    |      | MPa 42   | mm -      | 80    | M42X2 | 34   | M30X2   | 16   | 20   | kg 0,436  | NC16H04S001 |                       |  |
| "QC VGA 20S<br>FEMALE"  |      | Psi 6090 | inch -    | 3,15  | -     | 1,34 |         | 0,63 | 0,79 | lb 0,96   |             |                       |  |
| "QC VGA 20S<br>MALE"    |      | MPa 35   | mm 57     | 100,5 | -     | 41   | M30X2   | 16   | 20   | kg 0,723  | NC15H05S000 |                       |  |
| "QC VGA 20S<br>FEMALE"  |      | Psi 5075 | inch 2,24 | 3,96  | -     | 1,61 |         | 0,63 | 0,79 | 0,79 1,59 |             |                       |  |
| "QC VGA 20S<br>MALE"    |      | MPa 35   | mm -      | 97    | M48x2 | 41   | M30X2   | 16   | 20   | kg 0,721  | NC16H05S000 |                       |  |
| "QC VGA 20S<br>FEMALE"  |      | Psi 5075 | inch -    | 3,82  | -     | 1,61 |         | 0,63 | 0,79 | lb 1,59   |             |                       |  |
| "QC VGA 25S<br>MALE"    | 25   | MPa 35   | mm 57     | 102,5 | -     | 41   | M36X2   | 20   | 25   | kg 0,742  | NC15H05S001 | Stainless Steel       |  |
| "QC VGA 25S<br>FEMALE"  |      | Psi 5075 | inch 2,24 | 4,04  | -     | 1,61 |         | 0,79 | 0,98 | 0,98 1,64 |             |                       |  |
| "QC VGA 25S<br>MALE"    |      | MPa 35   | mm -      | 99    | M48x2 | 41   | M36X2   | 20   | 25   | kg 0,74   | NC16H05S001 |                       |  |
| "QC VGA 25S<br>FEMALE"  |      | Psi 5075 | inch -    | 3,90  | -     | 1,61 |         | 0,79 | 0,98 | lb 1,63   |             |                       |  |
| "QC VGA 30S<br>MALE"    |      | MPa 35   | mm 57     | 104,5 | -     | 46   | M42X2   | 25   | 30   | kg 0,821  | NC15H05S002 |                       |  |
| "QC VGA 30S<br>FEMALE"  |      | Psi 5075 | inch 2,24 | 4,11  | -     | 1,81 |         | 0,98 | 1,18 | 1,18 1,81 |             |                       |  |
| "QC VGA 30S<br>MALE"    |      | MPa 35   | mm -      | 101   | M48x2 | 46   | M42X2   | 25   | 30   | kg 0,813  | NC16H05S002 |                       |  |
| "QC VGA 30S<br>FEMALE"  |      | Psi 5075 | inch -    | 3,98  | -     | 1,81 |         | 0,98 | 1,18 | lb 1,79   |             |                       |  |



## SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)


**CS**  
Carbon Steel

| TYPE                 | DN   | PN       | ØA        | C    | Øz    | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |  |
|----------------------|------|----------|-----------|------|-------|------|---------|------|------|----------|-------------|--|
| QC VGA 8L<br>MALE    | 6,3  | MPa 42   | mm 30     | 61   | -     | 19   | M14X1,5 | 6    | 8    | kg 0,114 | NC15L010000 |  |
|                      |      | Psi 6090 | inch 1,18 | 2,40 | -     | 0,75 |         | 0,24 | 0,31 | kg 0,31  |             |  |
| QC VGA 8L<br>FEMALE  |      | MPa 42   | mm -      | 57,5 | M24X2 | 19   | M14X1,5 | 6    | 8    | kg 0,1   | NC16L010000 |  |
|                      |      | Psi 6090 | inch -    | 2,26 | -     | 0,75 | M14X1,5 | 0,24 | 0,31 | lb 0,22  |             |  |
| QC VGA 6L<br>MALE    | 10   | MPa 42   | mm 34     | 67   | -     | 24   | M12X1,5 | 4    | 6    | kg 0,19  | NC15L020000 |  |
|                      |      | Psi 6090 | inch 1,34 | 2,64 | -     | 0,94 | M12X1,5 | 0,16 | 0,24 | kg 0,24  |             |  |
| QC VGA 6L<br>FEMALE  |      | MPa 42   | mm -      | 60,5 | M28X2 | 24   | M12X1,5 | 4    | 6    | kg 0,166 | NC16L020000 |  |
|                      |      | Psi 6090 | inch -    | 2,38 | -     | 0,94 | M12X1,5 | 0,16 | 0,24 | lb 0,37  |             |  |
| QC VGA 8L<br>MALE    |      | MPa 42   | mm 34     | 67   | -     | 24   | M14X1,5 | 6    | 8    | kg 0,165 | NC15L020001 |  |
|                      |      | Psi 6090 | inch 1,34 | 2,64 | -     | 0,94 | M14X1,5 | 0,24 | 0,31 | kg 0,31  |             |  |
| QC VGA 8L<br>FEMALE  |      | MPa 42   | mm -      | 60,5 | M28X2 | 24   | M14X1,5 | 6    | 8    | kg 0,167 | NC16L020001 |  |
|                      |      | Psi 6090 | inch -    | 2,38 | -     | 0,94 | M14X1,5 | 0,24 | 0,31 | kg 0,37  |             |  |
| QC VGA 10L<br>MALE   | 12,5 | MPa 42   | mm 34     | 68   | -     | 24   | M16X1,5 | 8    | 10   | kg 0,166 | NC15L020002 |  |
|                      |      | Psi 6090 | inch 1,34 | 2,68 | -     | 0,94 | M16X1,5 | 0,31 | 0,39 | kg 0,39  |             |  |
| QC VGA 10L<br>FEMALE |      | MPa 42   | mm -      | 61,5 | M28X2 | 24   | M16X1,5 | 8    | 10   | kg 0,173 | NC16L020002 |  |
|                      |      | Psi 6090 | inch -    | 2,42 | -     | 0,94 | M16X1,5 | 0,31 | 0,39 | kg 0,38  |             |  |
| QC VGA 10L<br>MALE   |      | MPa 42   | mm 43     | 69   | -     | 27   | M16X1,5 | 8    | 10   | kg 0,247 | NC15L030000 |  |
|                      |      | Psi 6090 | inch 1,69 | 2,72 | -     | 1,06 | M16X1,5 | 0,31 | 0,39 | kg 0,39  |             |  |
| QC VGA 10L<br>FEMALE |      | MPa 42   | mm -      | 58,5 | M36X2 | 27   | M16X1,5 | 8    | 10   | kg 0,27  | NC16L030000 |  |
|                      |      | Psi 6090 | inch -    | 2,30 | -     | 1,06 | M16X1,5 | 0,31 | 0,39 | kg 0,60  |             |  |
| QC VGA 12L<br>MALE   |      | MPa 42   | mm 43     | 69   | -     | 27   | M18X1,5 | 10   | 12   | kg 0,247 | NC15L030001 |  |
|                      |      | Psi 6090 | inch 1,69 | 2,72 | -     | 1,06 | M18X1,5 | 0,39 | 0,47 | kg 0,47  |             |  |
| QC VGA 12L<br>FEMALE |      | MPa 42   | mm -      | 58,5 | M36X2 | 27   | M18X1,5 | 10   | 12   | kg 0,25  | NC16L030001 |  |
|                      |      | Psi 6090 | inch -    | 2,30 | -     | 1,06 | M18X1,5 | 0,39 | 0,47 | kg 0,55  |             |  |
| QC VGA 15L<br>MALE   |      | MPa 42   | mm 43     | 70   | -     | 27   | M22X1,5 | 12   | 15   | kg 0,253 | NC15L030002 |  |
|                      |      | Psi 6090 | inch 1,69 | 2,76 | -     | 1,06 | M22X1,5 | 0,47 | 0,59 | kg 0,59  |             |  |
| QC VGA 15L<br>FEMALE |      | MPa 42   | mm -      | 59,5 | M36X2 | 27   | M22X1,5 | 12   | 15   | kg 0,251 | NC16L030002 |  |
|                      |      | Psi 6090 | inch -    | 2,34 | -     | 1,06 | M22X1,5 | 0,47 | 0,59 | kg 0,55  |             |  |
| QC VGA 18L<br>MALE   |      | MPa 42   | mm 43     | 70   | -     | 27   | M26X1,5 | 15   | 18   | kg 0,258 | NC15L030003 |  |
|                      |      | Psi 6090 | inch 1,69 | 2,76 | -     | 1,06 | M26X1,5 | 0,59 | 0,71 | kg 0,71  |             |  |
| QC VGA 18L<br>FEMALE |      | MPa 42   | mm -      | 59,5 | M36X2 | 27   | M26X1,5 | 15   | 18   | kg 0,261 | NC16L030003 |  |
|                      |      | Psi 6090 | inch -    | 2,34 | -     | 1,06 | M26X1,5 | 0,59 | 0,71 | kg 0,58  |             |  |



## SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)


| TYPE                 | DN | PN       | ØA        | C    | Øz    | ch   | ØM      | ØLW  | ØRA  | WEIGHT    | ITEM CODE          |
|----------------------|----|----------|-----------|------|-------|------|---------|------|------|-----------|--------------------|
|                      |    |          |           |      |       |      |         |      |      |           | CS<br>Carbon Steel |
| QC VGA 18L<br>MALE   | 20 | MPa 42   | mm 48     | 77   | -     | 34   | M26X1,5 | 15   | 18   | kg 0,372  | NC15L040000        |
|                      |    | Psi 6090 | inch 1,89 | 3,03 | -     | 1,34 |         | 0,59 | 0,71 | 0,71 0,82 |                    |
|                      |    | MPa 42   | mm -      | 76   | M42X2 | 34   | M26X1,5 | 15   | 18   | kg 0,424  | NC16L040000        |
|                      |    | Psi 6090 | inch -    | 2,99 |       | 1,34 |         | 0,59 | 0,71 | lb 0,93   |                    |
|                      |    | MPa 42   | mm 48     | 79   | -     | 34   | M30X2   | 19   | 22   | kg 0,375  | NC15L040001        |
|                      |    | Psi 6090 | inch 1,89 | 3,11 | -     | 1,34 |         | 0,75 | 0,87 | 0,87 0,83 |                    |
|                      |    | MPa 42   | mm -      | 78   | M42X2 | 34   | M30X2   | 19   | 22   | kg 0,854  | NC16L040001        |
|                      |    | Psi 6090 | inch -    | 3,07 |       | 1,34 |         | 0,75 | 0,87 | lb 1,88   |                    |
| QC VGA 22L<br>MALE   | 25 | MPa 35   | mm 57     | 98,5 | -     | 41   | M30X2   | 19   | 22   | kg 0,708  | NC15L050000        |
|                      |    | Psi 5075 | inch 2,24 | 3,88 | -     | 1,61 |         | 0,75 | 0,87 | 0,87 1,56 |                    |
|                      |    | MPa 35   | mm -      | 95   | M48X2 | 41   | M30X2   | 19   | 22   | kg 0,701  | NC16L050000        |
|                      |    | Psi 5075 | inch -    | 3,74 |       | 1,61 |         | 0,75 | 0,87 | lb 1,55   |                    |
|                      |    | MPa 35   | mm 57     | 98,5 | -     | 41   | M36X2   | 24   | 28   | kg 0,707  | NC15L050001        |
|                      |    | Psi 5075 | inch 2,24 | 3,88 | -     | 1,61 |         | 0,94 | 1,10 | 1,10 1,56 |                    |
|                      |    | MPa 35   | mm -      | 95   | M48X2 | 41   | M36X2   | 24   | 28   | kg 0,7    | NC16L050001        |
|                      |    | Psi 5075 | inch -    | 3,74 |       | 1,61 |         | 0,94 | 1,10 | lb 1,54   |                    |
| QC VGA 28L<br>MALE   |    | MPa 35   | mm 57     | 100  | -     | 46   | M45X2   | 30   | 35   | kg 0,784  | NC15L050002        |
|                      |    | Psi 5075 | inch 2,24 | 3,94 | -     | 1,81 |         | 1,18 | 1,38 | 1,38 1,73 |                    |
| QC VGA 35L<br>FEMALE |    | MPa 35   | mm -      | 97   | M48X2 | 46   | M45X2   | 30   | 35   | kg 0,777  | NC16L050002        |
|                      |    | Psi 5075 | inch -    | 3,82 |       | 1,81 |         | 1,18 | 1,38 | lb 1,71   |                    |



## SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)


**SS**  
Stainless Steel

| TYPE                 | DN   | PN       | ØA        | C    | Øz    | ch   | ØM      | ØLW  | ØRA  | WEIGHT             | ITEM CODE   |
|----------------------|------|----------|-----------|------|-------|------|---------|------|------|--------------------|-------------|
| QC VGA 8L<br>MALE    | 6,3  | MPa 42   | mm 30     | 61   | -     | 19   | M14X1,5 | 6    | 8    | kg 0,114           | NC15L01S000 |
|                      |      | Psi 6090 | inch 1,18 | 2,40 | -     | 0,75 |         | 0,24 | 0,31 | kg 0,31<br>lb 0,25 |             |
| QC VGA 8L<br>FEMALE  |      | MPa 42   | mm -      | 50,5 | M24X2 | 19   | M14X1,5 | 6    | 8    | kg 0,1             | NC16L01S000 |
|                      |      | Psi 6090 | inch -    | 1,99 | -     | 0,75 |         | 0,24 | 0,31 | lb 0,22            |             |
| QC VGA 6L<br>MALE    | 10   | MPa 42   | mm 34     | 67   | -     | 24   | M12X1,5 | 4    | 6    | kg 0,19            | NC15L02S000 |
|                      |      | Psi 6090 | inch 1,34 | 2,64 | -     | 0,94 | M12X1,5 | 0,16 | 0,24 | kg 0,24<br>lb 0,42 |             |
| QC VGA 6L<br>FEMALE  |      | MPa 42   | mm -      | 60,5 | M28X2 | 24   | M12X1,5 | 4    | 6    | kg 0,166           | NC16L02S000 |
|                      |      | Psi 6090 | inch -    | 2,38 | -     | 0,94 | M12X1,5 | 0,16 | 0,24 | lb 0,37            |             |
| QC VGA 8L<br>MALE    |      | MPa 42   | mm 34     | 67   | -     | 24   | M14X1,5 | 6    | 8    | kg 0,165           | NC15L02S001 |
|                      |      | Psi 6090 | inch 1,34 | 2,64 | -     | 0,94 | M14X1,5 | 0,24 | 0,31 | kg 0,31<br>lb 0,36 |             |
| QC VGA 8L<br>FEMALE  |      | MPa 42   | mm -      | 60,5 | M28X2 | 24   | M14X1,5 | 6    | 8    | kg 0,167           | NC16L02S001 |
|                      |      | Psi 6090 | inch -    | 2,38 | -     | 0,94 | M14X1,5 | 0,24 | 0,31 | kg 0,37            |             |
| QC VGA 10L<br>MALE   |      | MPa 42   | mm 34     | 68   | -     | 24   | M16X1,5 | 8    | 10   | kg 0,166           | NC15L02S002 |
|                      |      | Psi 6090 | inch 1,34 | 2,68 | -     | 0,94 | M16X1,5 | 0,31 | 0,39 | kg 0,39<br>lb 0,37 |             |
| QC VGA 10L<br>FEMALE |      | MPa 42   | mm -      | 61,5 | M28X2 | 24   | M16X1,5 | 8    | 10   | kg 0,173           | NC16L02S002 |
|                      |      | Psi 6090 | inch -    | 2,42 | -     | 0,94 | M16X1,5 | 0,31 | 0,39 | kg 0,38<br>lb 0,38 |             |
| QC VGA 10L<br>MALE   | 12,5 | MPa 42   | mm 43     | 69   | -     | 27   | M16X1,5 | 8    | 10   | kg 0,247           | NC15L03S000 |
|                      |      | Psi 6090 | inch 1,69 | 2,72 | -     | 1,06 | M16X1,5 | 0,31 | 0,39 | kg 0,39<br>lb 0,54 |             |
| QC VGA 10L<br>FEMALE |      | MPa 42   | mm -      | 58,5 | M36X2 | 27   | M16X1,5 | 8    | 10   | kg 0,27            | NC16L03S000 |
|                      |      | Psi 6090 | inch -    | 2,30 | -     | 1,06 | M16X1,5 | 0,31 | 0,39 | kg 0,60            |             |
| QC VGA 12L<br>MALE   |      | MPa 42   | mm 43     | 69   | -     | 27   | M18X1,5 | 10   | 12   | kg 0,247           | NC15L03S001 |
|                      |      | Psi 6090 | inch 1,69 | 2,72 | -     | 1,06 | M18X1,5 | 0,39 | 0,47 | kg 0,47<br>lb 0,54 |             |
| QC VGA 12L<br>FEMALE |      | MPa 42   | mm -      | 58,5 | M36X2 | 27   | M18X1,5 | 10   | 12   | kg 0,25            | NC16L03S001 |
|                      |      | Psi 6090 | inch -    | 2,30 | -     | 1,06 | M18X1,5 | 0,39 | 0,47 | kg 0,55<br>lb 0,55 |             |
| QC VGA 15L<br>MALE   |      | MPa 42   | mm 43     | 70   | -     | 27   | M22X1,5 | 12   | 15   | kg 0,253           | NC15L03S002 |
|                      |      | Psi 6090 | inch 1,69 | 2,76 | -     | 1,06 | M22X1,5 | 0,47 | 0,59 | kg 0,59<br>lb 0,56 |             |
| QC VGA 15L<br>FEMALE |      | MPa 42   | mm -      | 59,5 | M36X2 | 27   | M22X1,5 | 12   | 15   | kg 0,251           | NC16L03S002 |
|                      |      | Psi 6090 | inch -    | 2,34 | -     | 1,06 | M22X1,5 | 0,47 | 0,59 | kg 0,55            |             |
| QC VGA 18L<br>MALE   |      | MPa 42   | mm 43     | 70   | -     | 27   | M26X1,5 | 15   | 18   | kg 0,258           | NC15L03S003 |
|                      |      | Psi 6090 | inch 1,69 | 2,76 | -     | 1,06 | M26X1,5 | 0,59 | 0,71 | kg 0,71<br>lb 0,57 |             |
| QC VGA 18L<br>FEMALE |      | MPa 42   | mm -      | 59,5 | M36X2 | 27   | M26X1,5 | 15   | 18   | kg 0,261           | NC16L03S003 |
|                      |      | Psi 6090 | inch -    | 2,34 | -     | 1,06 | M26X1,5 | 0,59 | 0,71 | kg 0,58            |             |



## SCREW-TO-CONNECT-COUPINGS ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)


| TYPE               | DN | PN       | ØA        | C    | Øz    | ch   | ØM      | ØLW  | ØRA  | WEIGHT    | ITEM CODE   | SS<br>Stainless Steel |
|--------------------|----|----------|-----------|------|-------|------|---------|------|------|-----------|-------------|-----------------------|
| QC VGA 18L<br>MALE | 20 | MPa 42   | mm 48     | 77   | -     | 34   | M26X1,5 | 15   | 18   | kg 0,372  | NC15L04S000 |                       |
|                    |    | Psi 6090 | inch 1,89 | 3,03 | -     | 1,34 |         | 0,59 | 0,71 | 0,71 0,82 |             |                       |
|                    |    | MPa 42   | mm -      | 76   | M42X2 | 34   | M26X1,5 | 15   | 18   | kg 0,424  | NC16L04S000 |                       |
|                    |    | Psi 6090 | inch -    | 2,99 |       | 1,34 |         | 0,59 | 0,71 | lb 0,93   |             |                       |
|                    |    | MPa 42   | mm 48     | 79   | -     | 34   | M30X2   | 19   | 22   | kg 0,375  | NC15L04S001 |                       |
|                    |    | Psi 6090 | inch 1,89 | 3,11 | -     | 1,34 | M30X2   | 0,75 | 0,87 | 0,87 0,83 |             |                       |
|                    |    | MPa 42   | mm -      | 78   | M42X2 | 34   | M30X2   | 19   | 22   | kg 0,854  | NC16L04S001 |                       |
|                    |    | Psi 6090 | inch -    | 3,07 |       | 1,34 |         | 0,75 | 0,87 | lb 1,88   |             |                       |
| QC VGA 22L<br>MALE | 25 | MPa 35   | mm 57     | 98,5 | -     | 41   | M30X2   | 19   | 22   | kg 0,708  | NC15L05S000 |                       |
|                    |    | Psi 5075 | inch 2,24 | 3,88 | -     | 1,61 |         | 0,75 | 0,87 | 0,87 1,56 |             |                       |
|                    |    | MPa 35   | mm -      | 95   | M48X2 | 41   | M30X2   | 19   | 22   | kg 0,701  | NC16L05S000 |                       |
|                    |    | Psi 5075 | inch -    | 3,74 |       | 1,61 |         | 0,75 | 0,87 | lb 1,55   |             |                       |
|                    |    | MPa 35   | mm 57     | 98,5 | -     | 41   | M36X2   | 24   | 28   | kg 0,707  | NC15L05S001 |                       |
|                    |    | Psi 5075 | inch 2,24 | 3,88 | -     | 1,61 | M36X2   | 0,94 | 1,10 | 1,10 1,56 |             |                       |
|                    |    | MPa 35   | mm -      | 95   | M48X2 | 41   | M36X2   | 24   | 28   | kg 0,7    | NC16L05S001 |                       |
|                    |    | Psi 5075 | inch -    | 3,74 |       | 1,61 |         | 0,94 | 1,10 | lb 1,54   |             |                       |
| QC VGA 28L<br>MALE |    | MPa 35   | mm 57     | 100  | -     | 46   | M45X2   | 30   | 35   | kg 0,784  | NC15L05S002 |                       |
|                    |    | Psi 5075 | inch 2,24 | 3,94 | -     | 1,81 | M45X2   | 1,18 | 1,38 | 1,38 1,73 |             |                       |
| QC VGA 35L<br>MALE |    | MPa 35   | mm -      | 97   | M48X2 | 46   | M45X2   | 30   | 35   | kg 0,777  | NC16L05S002 |                       |
|                    |    | Psi 5075 | inch -    | 3,82 |       | 1,81 |         | 1,18 | 1,38 | lb 1,71   |             |                       |



**SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female)  
MALE THREAD METRIC ISO 8434-1-S (DIN 2353) BULKHEAD**


**CS**  
Carbon Steel

| TYPE                  | DN   | PN       | ØA        | C     | Øz    | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |
|-----------------------|------|----------|-----------|-------|-------|------|---------|------|------|----------|-------------|
| QC VGA 10S BK<br>MALE | 12,5 | MPa 42   | mm 43     | 85    | -     | 27   | M18X1,5 | 7    | 10   | kg 0,453 | NC15I030000 |
|                       |      | Psi 6090 | inch 1,69 | 3,35  | -     | 1,06 |         | 0,28 | 0,39 | lb 1,00  |             |
|                       |      | MPa 42   | mm -      | 74,5  | M36X2 | 27   | M18X1,5 | 7    | 10   | kg 0,271 | NC16I030000 |
|                       |      | Psi 6090 | inch -    | 2,93  | -     | 1,06 |         | 0,28 | 0,39 | lb 0,60  |             |
|                       |      | MPa 42   | mm 43     | 85    | -     | 27   | M20X1,5 | 8    | 12   | kg 0,457 | NC15I030001 |
|                       |      | Psi 6090 | inch 1,69 | 3,35  | -     | 1,06 |         | 0,31 | 0,47 | lb 1,01  |             |
|                       |      | MPa 42   | mm -      | 74,5  | M36X2 | 27   | M20X1,5 | 8    | 12   | kg 0,275 | NC16I030001 |
|                       |      | Psi 6090 | inch -    | 2,93  | -     | 1,06 |         | 0,31 | 0,47 | lb 0,61  |             |
| QC VGA 12S BK<br>MALE | 20   | MPa 42   | mm 43     | 87    | -     | 27   | M24X1,5 | 12   | 16   | kg 0,471 | NC15I030002 |
|                       |      | Psi 6090 | inch 1,69 | 3,43  | -     | 1,06 |         | 0,47 | 0,63 | lb 1,04  |             |
|                       |      | MPa 42   | mm -      | 76,5  | M36X2 | 27   | M24X1,5 | 12   | 16   | kg 0,283 | NC16I030002 |
|                       |      | Psi 6090 | inch -    | 3,01  | -     | 1,06 |         | 0,47 | 0,63 | lb 0,62  |             |
|                       |      | MPa 42   | mm 48     | 94    | -     | 34   | M24X1,5 | 12   | 16   | kg 0,674 | NC15I040000 |
|                       |      | Psi 6090 | inch 1,89 | 3,70  | -     | 1,34 |         | 0,47 | 0,63 | lb 1,49  |             |
|                       |      | MPa 42   | mm -      | 93    | M42X2 | 34   | M24X1,5 | 12   | 16   | kg 0,447 | NC16I040000 |
|                       |      | Psi 6090 | inch -    | 3,66  | -     | 1,34 |         | 0,47 | 0,63 | lb 0,99  |             |
| QC VGA 20S BK<br>MALE | 25   | MPa 42   | mm 48     | 103   | -     | 34   | M30X2   | 16   | 20   | kg 0,716 | NC15I040001 |
|                       |      | Psi 6090 | inch 1,89 | 4,06  | -     | 1,34 |         | 0,63 | 0,79 | lb 1,58  |             |
|                       |      | MPa 42   | mm -      | 102   | M42X2 | 34   | M30X2   | 16   | 20   | kg 0,484 | NC16I040001 |
|                       |      | Psi 6090 | inch -    | 4,02  | -     | 1,34 |         | 0,63 | 0,79 | lb 1,07  |             |
|                       |      | MPa 35   | mm 57     | 122,5 | -     | 41   | M30X2   | 16   | 20   | kg 1,217 | NC15I050000 |
|                       |      | Psi 5075 | inch 2,24 | 4,82  | -     | 1,61 |         | 0,63 | 0,79 | lb 2,68  |             |
|                       |      | MPa 35   | mm -      | 119   | M48X2 | 41   | M30X2   | 16   | 20   | kg 0,749 | NC16I050000 |
|                       |      | Psi 5075 | inch -    | 4,69  | -     | 1,61 |         | 0,63 | 0,79 | lb 1,65  |             |
| QC VGA 25S BK<br>MALE | 35   | MPa 35   | mm 57     | 122,5 | -     | 41   | M36X2   | 20   | 25   | kg 1,398 | NC15I050001 |
|                       |      | Psi 5075 | inch 2,24 | 4,82  | -     | 1,61 |         | 0,79 | 0,98 | lb 3,08  |             |
|                       |      | MPa 35   | mm -      | 119   | M48X2 | 41   | M36X2   | 20   | 25   | kg 0,84  | NC16I050001 |
|                       |      | Psi 5075 | inch -    | 4,69  | -     | 1,61 |         | 0,79 | 0,98 | lb 1,85  |             |
|                       |      | MPa 35   | mm 57     | 124,5 | -     | 46   | M42X2   | 25   | 30   | kg 1,566 | NC15I050002 |
|                       |      | Psi 5075 | inch 2,24 | 4,90  | -     | 1,81 |         | 0,98 | 1,18 | lb 3,45  |             |
|                       |      | MPa 35   | mm --     | 121   | M48X2 | 46   | M42X2   | 25   | 30   | kg 0,948 | NC16I050002 |
|                       |      | Psi 5075 | inch -    | 4,76  | -     | 1,81 |         | 0,98 | 1,18 | lb 2,09  |             |



## SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-S (DIN 2353) BULKHEAD


| TYPE                  | DN   | PN       | ØA        | C     | Øz    | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE             |
|-----------------------|------|----------|-----------|-------|-------|------|---------|------|------|----------|-----------------------|
|                       |      |          |           |       |       |      |         |      |      |          | SS<br>Stainless Steel |
| QC VGA 10S BK<br>MALE | 12,5 | MPa 42   | mm 43     | 85    | -     | 27   | M18X1,5 | 7    | 10   | kg 0,453 | NC15I03S000           |
|                       |      | Psi 6090 | inch 1,69 | 3,35  | -     | 1,06 |         | 0,28 | 0,39 | lb 1,00  |                       |
|                       |      | MPa 42   | mm -      | 74,5  | M36X2 | 27   | M18X1,5 | 7    | 10   | kg 0,271 | NC16I03S000           |
|                       |      | Psi 6090 | inch -    | 2,93  |       | 1,06 |         | 0,28 | 0,39 | lb 0,60  |                       |
|                       |      | MPa 42   | mm 43     | 85    | -     | 27   | M20X1,5 | 8    | 12   | kg 0,457 | NC15I03S001           |
|                       |      | Psi 6090 | inch 1,69 | 3,35  | -     | 1,06 | M20X1,5 | 0,31 | 0,47 | lb 1,01  |                       |
|                       |      | MPa 42   | mm -      | 74,5  | M36X2 | 27   | M20X1,5 | 8    | 12   | kg 0,275 | NC16I03S001           |
|                       |      | Psi 6090 | inch -    | 2,93  |       | 1,06 |         | 0,31 | 0,47 | lb 0,61  |                       |
| QC VGA 16S BK<br>MALE | 20   | MPa 42   | mm 43     | 87    | -     | 27   | M24X1,5 | 12   | 16   | kg 0,471 | NC15I03S002           |
|                       |      | Psi 6090 | inch 1,69 | 3,43  | -     | 1,06 |         | 0,47 | 0,63 | lb 1,04  |                       |
|                       |      | MPa 42   | mm -      | 76,5  | M36X2 | 27   | M24X1,5 | 12   | 16   | kg 0,283 | NC16I03S002           |
|                       |      | Psi 6090 | inch -    | 3,01  |       | 1,06 |         | 0,47 | 0,63 | lb 0,62  |                       |
|                       |      | MPa 42   | mm 48     | 94    | -     | 34   | M24X1,5 | 12   | 16   | kg 0,674 | NC15I04S000           |
|                       |      | Psi 6090 | inch 1,89 | 3,70  |       | 1,34 |         | 0,47 | 0,63 | lb 1,49  |                       |
|                       |      | MPa 42   | mm -      | 93    | M42X2 | 34   | M24X1,5 | 12   | 16   | kg 0,447 | NC16I04S000           |
|                       |      | Psi 6090 | inch -    | 3,66  |       | 1,34 |         | 0,47 | 0,63 | lb 0,99  |                       |
| QC VGA 20S BK<br>MALE | 25   | MPa 42   | mm 48     | 103   | -     | 34   | M30X2   | 16   | 20   | kg 0,716 | NC15I04S001           |
|                       |      | Psi 6090 | inch 1,89 | 4,06  | -     | 1,34 |         | 0,63 | 0,79 | lb 1,58  |                       |
|                       |      | MPa 42   | mm -      | 102   | M42X2 | 34   | M30X2   | 16   | 20   | kg 0,484 | NC16I04S001           |
|                       |      | Psi 6090 | inch -    | 4,02  |       | 1,34 |         | 0,63 | 0,79 | lb 1,07  |                       |
|                       |      | MPa 35   | mm 57     | 122,5 | -     | 41   | M30X2   | 16   | 20   | kg 1,217 | NC15I05S000           |
|                       |      | Psi 5075 | inch 2,24 | 4,82  | -     | 1,61 |         | 0,63 | 0,79 | lb 2,68  |                       |
|                       |      | MPa 35   | mm -      | 119   | M48X2 | 41   | M30X2   | 16   | 20   | kg 0,749 | NC16I05S000           |
|                       |      | Psi 5075 | inch -    | 4,69  |       | 1,61 |         | 0,63 | 0,79 | lb 1,65  |                       |
| QC VGA 25S BK<br>MALE | 35   | MPa 35   | mm 57     | 122,5 | -     | 41   | M36X2   | 20   | 25   | kg 1,398 | NC15I05S001           |
|                       |      | Psi 5075 | inch 2,24 | 4,82  | -     | 1,61 |         | 0,79 | 0,98 | lb 3,08  |                       |
|                       |      | MPa 35   | mm -      | 119   | M48X2 | 41   | M36X2   | 20   | 25   | kg 0,84  | NC16I05S001           |
|                       |      | Psi 5075 | inch -    | 4,69  |       | 1,61 |         | 0,79 | 0,98 | lb 1,85  |                       |
|                       |      | MPa 35   | mm 57     | 124,5 | -     | 46   | M42X2   | 25   | 30   | kg 1,566 | NC15I05S002           |
|                       |      | Psi 5075 | inch 2,24 | 4,90  | -     | 1,81 |         | 0,98 | 1,18 | lb 3,45  |                       |
|                       |      | MPa 35   | mm --     | 121   | M48X2 | 46   | M42X2   | 25   | 30   | kg 0,948 | NC16I05S002           |
|                       |      | Psi 5075 | inch -    | 4,76  |       | 1,81 |         | 0,98 | 1,18 | lb 2,09  |                       |



**SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female)  
MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD**

**CS**  
Carbon Steel

| TYPE                    | DN   | PN       | ØA        | C     | Øz | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |
|-------------------------|------|----------|-----------|-------|----|------|---------|------|------|----------|-------------|
| QC VGA 8L BK<br>MALE    | 10   | MPa 42   | mm 34     | 82    |    | 24   | M14X1,5 | 6    | 8    | kg 0,173 | NC15M020000 |
|                         |      | Psi 6090 | inch 1,34 | 3,23  |    | 0,94 |         | 0,24 | 0,31 | kg 0,31  | 0,38        |
|                         |      | MPa 42   | mm -      | 75,5  |    | 24   | M14X1,5 | 6    | 8    | kg 0,161 |             |
|                         |      | Psi 6090 | inch -    | 2,97  |    | 0,94 |         | 0,24 | 0,31 | lb 0,35  | NC16M020000 |
|                         |      | MPa 42   | mm 34     | 83    |    | 24   | M16X1,5 | 8    | 10   | kg 0,175 |             |
|                         |      | Psi 6090 | inch 1,34 | 3,27  |    | 0,94 |         | 0,31 | 0,39 | kg 0,39  | NC15M020001 |
|                         |      | MPa 42   | mm -      | 76,5  |    | 24   | M16X1,5 | 8    | 10   | kg 0,178 |             |
|                         |      | Psi 6090 | inch -    | 3,01  |    | 0,94 |         | 0,31 | 0,39 | lb 0,39  | NC16M020001 |
|                         |      | MPa 42   | mm 43     | 84    |    | 27   | M16X1,5 | 8    | 10   | kg 0,261 |             |
|                         |      | Psi 6090 | inch 1,69 | 3,31  |    | 1,06 |         | 0,31 | 0,39 | kg 0,47  | 0,58        |
| QC VGA 10L BK<br>FEMALE | 12,5 | MPa 42   | mm -      | 73,5  |    | 27   | M16X1,5 | 8    | 10   | kg 0,289 |             |
|                         |      | Psi 6090 | inch -    | 2,89  |    | 1,06 |         | 0,31 | 0,39 | lb 0,64  | NC16M030000 |
|                         |      | MPa 42   | mm 43     | 85    |    | 27   | M18X1,5 | 10   | 12   | kg 0,263 |             |
|                         |      | Psi 6090 | inch 1,69 | 3,35  |    | 1,06 |         | 0,39 | 0,47 | kg 0,55  | 0,58        |
|                         |      | MPa 42   | mm -      | 74,5  |    | 27   | M18X1,5 | 10   | 12   | kg 0,266 |             |
|                         |      | Psi 6090 | inch -    | 2,93  |    | 1,06 |         | 0,39 | 0,47 | lb 0,59  | NC16M030001 |
|                         |      | MPa 42   | mm 43     | 85    |    | 27   | M22X1,5 | 12   | 15   | kg 0,271 |             |
|                         |      | Psi 6090 | inch 1,69 | 3,35  |    | 1,06 |         | 0,47 | 0,59 | kg 0,55  | 0,60        |
|                         |      | MPa 42   | mm -      | 74,5  |    | 27   | M22X1,5 | 12   | 15   | kg 0,274 |             |
|                         |      | Psi 6090 | inch -    | 2,93  |    | 1,06 |         | 0,47 | 0,59 | kg 0,55  | 0,60        |
| QC VGA 12L BK<br>FEMALE | 20   | MPa 42   | mm 43     | 85    |    | 27   | M26X1,5 | 15   | 18   | kg 0,279 |             |
|                         |      | Psi 6090 | inch 1,69 | 3,35  |    | 1,06 |         | 0,59 | 0,71 | kg 0,63  | 0,62        |
|                         |      | MPa 42   | mm -      | 74,5  |    | 27   | M26X1,5 | 15   | 18   | kg 0,282 |             |
|                         |      | Psi 6090 | inch -    | 2,93  |    | 1,06 |         | 0,59 | 0,71 | lb 0,62  | NC16M030003 |
|                         |      | MPa 42   | mm 48     | 92    |    | 34   | M22X1,5 | 12   | 15   | kg 0,385 |             |
|                         |      | Psi 6090 | inch 1,89 | 3,62  |    | 1,34 |         | 0,47 | 0,59 | kg 0,63  | 0,85        |
|                         |      | MPa 42   | mm -      | 91    |    | 34   | M22X1,5 | 12   | 15   | kg 0,438 |             |
|                         |      | Psi 6090 | inch -    | 3,58  |    | 1,34 |         | 0,47 | 0,59 | lb 0,97  | NC16M040000 |
|                         |      | MPa 42   | mm 48     | 92    |    | 34   | M26X1,5 | 15   | 18   | kg 0,398 |             |
|                         |      | Psi 6090 | inch 1,89 | 3,62  |    | 1,34 |         | 0,59 | 0,71 | kg 0,79  | 0,88        |
| QC VGA 15L BK<br>FEMALE | 25   | MPa 42   | mm -      | 91    |    | 34   | M26X1,5 | 15   | 18   | kg 0,446 |             |
|                         |      | Psi 6090 | inch -    | 3,58  |    | 1,34 |         | 0,59 | 0,71 | lb 0,98  | NC16M040001 |
|                         |      | MPa 42   | mm 48     | 99    |    | 34   | M30X2   | 19   | 22   | kg 0,413 |             |
|                         |      | Psi 6090 | inch 1,89 | 3,90  |    | 1,34 |         | 0,75 | 0,87 | kg 0,79  | 0,91        |
|                         |      | MPa 42   | mm -      | 98    |    | 34   | M30X2   | 19   | 22   | kg 0,466 |             |
|                         |      | Psi 6090 | inch -    | 3,86  |    | 1,34 |         | 0,75 | 0,87 | lb 1,03  | NC16M040002 |
|                         |      | MPa 35   | mm 57     | 118,5 |    | 41   | M30X2   | 19   | 22   | kg 0,767 |             |
|                         |      | Psi 5075 | inch 2,24 | 4,67  |    | 1,61 |         | 0,75 | 0,87 | kg 0,98  | 1,69        |
|                         |      | MPa 35   | mm -      | 115   |    | 41   | M30X2   | 19   | 22   | kg 0,764 |             |
|                         |      | Psi 5075 | inch -    | 4,53  |    | 1,61 |         | 0,75 | 0,87 | lb 1,68  | NC16M050000 |
| QC VGA 22L BK<br>FEMALE | 25   | MPa 35   | mm 57     | 118,5 |    | 41   | M36X2   | 24   | 28   | kg 0,786 |             |
|                         |      | Psi 5075 | inch 2,24 | 4,67  |    | 1,61 |         | 0,94 | 1,10 | kg 1,18  | 1,73        |
| QC VGA 22L BK<br>FEMALE | 25   | MPa 35   | mm -      | 115   |    | 41   | M36X2   | 24   | 28   | kg 0,784 |             |
|                         |      | Psi 5075 | inch -    | 4,53  |    | 1,61 |         | 0,94 | 1,10 | lb 1,73  | NC16M050001 |



## SCREW-TO-CONNECT-COUPLED ISO 14541 (male / female) MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD

**SS**  
Stainless Steel

| TYPE                    | DN   | PN       | ØA        | C     | Øz | ch   | ØM      | ØLW  | ØRA  | WEIGHT   | ITEM CODE   |
|-------------------------|------|----------|-----------|-------|----|------|---------|------|------|----------|-------------|
| QC VGA 8L BK<br>MALE    | 10   | MPa 42   | mm 34     | 82    |    | 24   | M14X1,5 | 6    | 8    | kg 0,173 | NC15M02S000 |
|                         |      | Psi 6090 | inch 1,34 | 3,23  |    | 0,00 |         | 0,94 | 0,24 | lb 0,31  | 0,38        |
|                         |      | MPa 42   | mm -      | 75,5  |    | 24   | M14X1,5 | 6    | 8    | kg 0,161 |             |
|                         |      | Psi 6090 | inch -    | 2,97  |    | 0,94 |         | 0,24 | 0,31 | lb 0,35  |             |
|                         |      | MPa 42   | mm 34     | 83    |    | 24   | M16X1,5 | 8    | 10   | kg 0,175 | NC15M02S001 |
|                         |      | Psi 6090 | inch 1,34 | 3,27  |    | 0,00 | M16X1,5 | 0,94 | 0,31 | kg 0,39  | 0,39        |
|                         |      | MPa 42   | mm -      | 76,5  |    | 24   | M16X1,5 | 8    | 10   | kg 0,178 |             |
|                         |      | Psi 6090 | inch -    | 3,01  |    | 0,94 | M16X1,5 | 0,31 | 0,39 | lb 0,39  |             |
| QC VGA 10L BK<br>MALE   | 12,5 | MPa 42   | mm 43     | 84    |    | 27   | M16X1,5 | 8    | 10   | kg 0,261 | NC15M03S000 |
|                         |      | Psi 6090 | inch 1,69 | 3,31  |    | 0,00 |         | 1,06 | 0,31 | kg 0,39  | 0,58        |
|                         |      | MPa 42   | mm -      | 73,5  |    | 27   | M16X1,5 | 8    | 10   | kg 0,289 |             |
|                         |      | Psi 6090 | inch -    | 2,89  |    | 1,06 |         | 0,31 | 0,39 | lb 0,64  |             |
|                         |      | MPa 42   | mm 43     | 85    |    | 27   | M18X1,5 | 10   | 12   | kg 0,263 | NC15M03S001 |
|                         |      | Psi 6090 | inch 1,69 | 3,35  |    | 0,00 | M18X1,5 | 1,06 | 0,39 | kg 0,47  | 0,58        |
|                         |      | MPa 42   | mm -      | 74,5  |    | 27   | M18X1,5 | 10   | 12   | kg 0,266 |             |
|                         |      | Psi 6090 | inch -    | 2,93  |    | 1,06 | M18X1,5 | 0,39 | 0,47 | lb 0,59  |             |
| QC VGA 15L BK<br>MALE   | 20   | MPa 42   | mm 43     | 85    |    | 27   | M22X1,5 | 12   | 15   | kg 0,271 | NC15M03S002 |
|                         |      | Psi 6090 | inch 1,69 | 3,35  |    | 0,00 |         | 1,06 | 0,47 | kg 0,59  | 0,60        |
|                         |      | MPa 42   | mm -      | 74,5  |    | 27   | M22X1,5 | 12   | 15   | kg 0,274 |             |
|                         |      | Psi 6090 | inch -    | 2,93  |    | 1,06 | M22X1,5 | 0,47 | 0,59 | kg 0,55  | 0,60        |
|                         |      | MPa 42   | mm 43     | 85    |    | 27   | M26X1,5 | 15   | 18   | kg 0,279 | NC15M03S003 |
|                         |      | Psi 6090 | inch 1,69 | 3,35  |    | 0,00 | M26X1,5 | 1,06 | 0,59 | kg 0,71  | 0,62        |
|                         |      | MPa 42   | mm -      | 74,5  |    | 27   | M26X1,5 | 15   | 18   | kg 0,282 |             |
|                         |      | Psi 6090 | inch -    | 2,93  |    | 1,06 | M26X1,5 | 0,59 | 0,71 | lb 0,62  |             |
| QC VGA 15L BK<br>FEMALE | 25   | MPa 42   | mm 48     | 92    |    | 34   | M22X1,5 | 12   | 15   | kg 0,385 | NC15M04S000 |
|                         |      | Psi 6090 | inch 1,89 | 3,62  |    | 0,00 |         | 1,34 | 0,47 | kg 0,59  | 0,85        |
|                         |      | MPa 42   | mm -      | 91    |    | 34   | M22X1,5 | 12   | 15   | kg 0,438 |             |
|                         |      | Psi 6090 | inch -    | 3,58  |    | 1,34 |         | 0,47 | 0,59 | lb 0,97  |             |
|                         |      | MPa 42   | mm 48     | 92    |    | 34   | M26X1,5 | 15   | 18   | kg 0,398 | NC15M04S001 |
|                         |      | Psi 6090 | inch 1,89 | 3,62  |    | 0,00 | M26X1,5 | 1,34 | 0,59 | kg 0,71  | 0,88        |
|                         |      | MPa 42   | mm -      | 91    |    | 34   | M26X1,5 | 15   | 18   | kg 0,446 |             |
|                         |      | Psi 6090 | inch -    | 3,58  |    | 1,34 | M26X1,5 | 0,59 | 0,71 | lb 0,98  |             |
| QC VGA 18L BK<br>MALE   | 25   | MPa 42   | mm 48     | 99    |    | 34   | M30X2   | 19   | 22   | kg 0,413 | NC15M04S002 |
|                         |      | Psi 6090 | inch 1,89 | 3,90  |    | 0,00 |         | 1,34 | 0,75 | kg 0,87  | 0,91        |
|                         |      | MPa 42   | mm -      | 98    |    | 34   | M30X2   | 19   | 22   | kg 0,466 |             |
|                         |      | Psi 6090 | inch -    | 3,86  |    | 1,34 | M30X2   | 0,75 | 0,87 | lb 1,03  |             |
|                         |      | MPa 35   | mm 57     | 118,5 |    | 41   | M30X2   | 19   | 22   | kg 0,767 | NC15M05S000 |
|                         |      | Psi 5075 | inch 2,24 | 4,67  |    | 0,00 |         | 1,61 | 0,75 | kg 0,87  | 1,69        |
|                         |      | MPa 35   | mm -      | 115   |    | 41   | M30X2   | 19   | 22   | kg 0,764 |             |
|                         |      | Psi 5075 | inch -    | 4,53  |    | 1,61 |         | 0,75 | 0,87 | lb 1,68  |             |
| QC VGA 22L BK<br>MALE   | 25   | MPa 35   | mm 57     | 118,5 |    | 41   | M36X2   | 24   | 28   | kg 0,786 | NC15M05S001 |
|                         |      | Psi 5075 | inch 2,24 | 4,67  |    | 0,00 |         | 1,61 | 0,94 | kg 1,10  | 1,73        |
|                         |      | MPa 35   | mm -      | 115   |    | 41   | M36X2   | 24   | 28   | kg 0,784 |             |
|                         |      | Psi 5075 | inch -    | 4,53  |    | 1,61 | M36X2   | 0,94 | 1,10 | lb 1,73  |             |




# VGB

## QUICK COUPLINGS

Edition. 21.3

### cs Carbon Steel

- Type: Quick Couplings
- Models: ISO 14540
- Sizes: from DN6 up to DN10
- Pressure: up to PN700

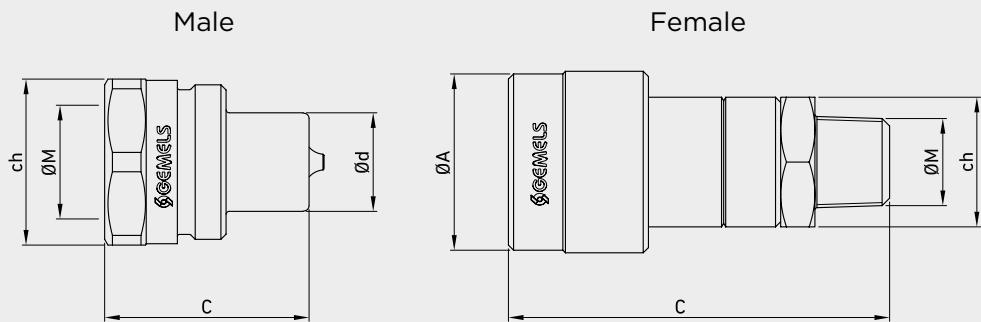

**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.




## CODE DESCRIPTION STRUCTURE

|                    | QC | 1/4 | M/F | 6,3 | 1 | B |
|--------------------|----|-----|-----|-----|---|---|
| Type of coupling   |    |     |     |     |   |   |
| VGB                |    |     |     |     |   |   |
| Ends               |    |     |     |     |   |   |
| ASME B1.20.1       |    |     |     |     |   |   |
| NPT                |    |     |     |     |   |   |
| N 1/4 M            |    |     |     |     |   |   |
| N 3/8 M            |    |     |     |     |   |   |
| MALE               |    |     |     |     |   |   |
| FEMALE             |    |     |     |     |   |   |
| DN/ISO             |    |     |     |     |   |   |
| 6,3                |    |     |     |     |   |   |
| Body Material      |    |     |     |     |   |   |
| ● 1 = 1,0737       |    |     |     |     |   |   |
| Seal material      |    |     |     |     |   |   |
| ● B = NBR E = FKM* |    |     |     |     |   |   |



\*On request  
Cups  
Plugs  
with ball instead of poppet



## QUICK COUPLINGS ISO 14540 VGB (MALE/FEMALE) MALE THREAD ASME B1.20.1 NPT WITH POPPET

| TYPE                    | DN  | PN        | ØA        | C    | Ød   | ch | ØM      | WEIGHT   | ITEM CODE   |
|-------------------------|-----|-----------|-----------|------|------|----|---------|----------|-------------|
| QC VGB N 1/4M<br>MALE   | 6,3 | MPa 70    | mm -      | 32,5 | 15,9 | 19 | NPT 1/4 | kg 0,113 | NC17N010000 |
|                         |     | Psi 10150 | inch -    | 1,28 | 0,63 |    |         | lb 0,25  |             |
| QC VGB N 1/4M<br>FEMALE | 6,3 | MPa 70    | mm 28,5   | 60,8 | -    | 22 | NPT 1/4 | kg 0,07  | NC18N010000 |
|                         |     | Psi 10150 | inch 1,12 | 2,39 | -    |    |         | lb 0,15  |             |
| QC VGB N 3/8M<br>MALE   | 10  | MPa 70    | mm -      | 35   | 19   | 32 | NPT 3/8 | kg 0,221 | NC17N020000 |
|                         |     | Psi 10150 | inch -    | 1,38 | 0,75 |    |         | lb 0,49  |             |
| QC VGB N 3/8M<br>FEMALE | 10  | MPa 70    | mm 35     | 75,3 | -    | 25 | NPT 3/8 | kg 0,111 | NC18N020000 |
|                         |     | Psi 10150 | inch 1,38 | 2,96 | -    |    |         | lb 0,24  |             |

## QUICK COUPLINGS ISO 14540 VGB (MALE/FEMALE) MALE THREAD ASME B1.20.1 NPT WITH BALL

| TYPE                         | DN  | PN        | ØA        | C    | Ød   | ch | ØM      | WEIGHT   | ITEM CODE   |
|------------------------------|-----|-----------|-----------|------|------|----|---------|----------|-------------|
| QC VGB N 1/4M BALL<br>MALE   | 6,3 | MPa 70    | mm -      | 32,5 | 15,9 | 19 | NPT 1/4 | kg 0,113 | NC17N010001 |
|                              |     | Psi 10150 | inch -    | 1,28 | 0,63 |    |         | lb 0,25  |             |
| QC VGB N 1/4M BALL<br>FEMALE | 6,3 | MPa 70    | mm 28,5   | 60,8 | -    | 22 | NPT 1/4 | kg 0,07  | NC18N010001 |
|                              |     | Psi 10150 | inch 1,12 | 2,39 | -    |    |         | lb 0,15  |             |
| QC VGB N 3/8M BALL<br>MALE   | 10  | MPa 70    | mm -      | 35   | 19   | 32 | NPT 3/8 | kg 0,221 | NC17N020001 |
|                              |     | Psi 10150 | inch -    | 1,38 | 0,75 |    |         | lb 0,49  |             |
| QC VGB N 3/8M BALL<br>FEMALE | 10  | MPa 70    | mm 35     | 75,3 | -    | 25 | NPT 3/8 | kg 0,111 | NC18N020001 |
|                              |     | Psi 10150 | inch 1,38 | 2,96 | -    |    |         | lb 0,24  |             |




## DG

## QUICK COUPLINGS

Edition. 21.2

## cs Carbon Steel

- Type: Quick Couplings
- Models: ISO 15171-1
- Sizes: from DN6
- Pressure: up to PN500

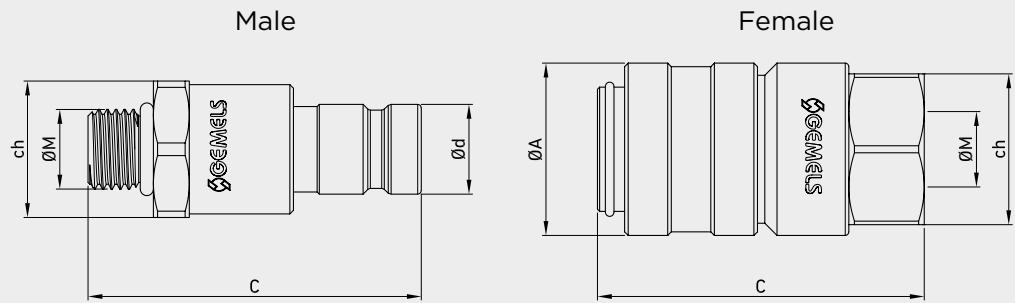

!

**Available also  
in patented version:**  
ball valve with integrated  
quick coupling.




## CODE DESCRIPTION STRUCTURE

|                    | QC                  | 1/4                                 | M/F | DN6,3 | 1 | B |
|--------------------|---------------------|-------------------------------------|-----|-------|---|---|
| Type of coupling   |                     |                                     |     |       |   |   |
| DG                 |                     |                                     |     |       |   |   |
| Ends               |                     |                                     |     |       |   |   |
| ISO 1179-1<br>BSPP | ASME B1.20.1<br>NPT | ISO 11926-1<br>(SAE J1926-1)<br>ORB |     |       |   |   |
| G1/8<br>G1/4       | N 1/8<br>N 1/4      | SAE 4                               |     |       |   |   |
| MALE               |                     |                                     |     |       |   |   |
| FEMALE             |                     |                                     |     |       |   |   |
| DN/ISO             |                     |                                     |     |       |   |   |
| 6,3                |                     |                                     |     |       |   |   |
| Body Material      |                     |                                     |     |       |   |   |
| ● 1 = 1,0737       |                     |                                     |     |       |   |   |
| Seal material      |                     |                                     |     |       |   |   |
| B = NBR E = FKM*   |                     |                                     |     |       |   |   |

\*On request


- Cups
- Plugs



## ■ QUICK COUPLINGS ISO 15171-1 DG (male-female) FEMALE THREAD ISO 1179-1 BSPP

**CS**  
Carbon  
Steel


| TYPE                  | DN  | PN       | ØA        | C    | Ød   | ch | ØM    | WEIGHT   | ITEM CODE   |
|-----------------------|-----|----------|-----------|------|------|----|-------|----------|-------------|
| QC DG G 1/8<br>MALE   | 6,3 | MPa 50   | mm -      | 42,8 | 12,6 | 19 | G 1/8 | kg 0,039 | NC19G010000 |
|                       |     | Psi 7250 | inch -    | 1,69 | 0,50 |    |       | lb 0,09  |             |
| QC DG G 1/8<br>FEMALE | 6,3 | MPa 50   | mm 24     | 50   | -    | 21 | G 1/8 | kg 0,048 | NC20G010000 |
|                       |     | Psi 7250 | inch 0,94 | 1,97 | -    |    |       | lb 0,11  |             |
| QC DG G 1/4<br>MALE   | 6,3 | MPa 50   | mm -      | 42,8 | 12,6 | 19 | G 1/4 | kg 0,049 | NC19G010001 |
|                       |     | Psi 7250 | inch -    | 1,69 | 0,50 |    |       | lb 0,11  |             |
| QC DG G 1/4<br>FEMALE | 6,3 | MPa 50   | mm 24     | 50   | -    | 21 | G 1/4 | kg 0,05  | NC20G010001 |
|                       |     | Psi 7250 | inch 0,94 | 1,97 | -    |    |       | lb 0,11  |             |



## ■ QUICK COUPLINGS ISO 15171-1 DG (male-female) FEMALE THREAD ASME B1.20.1 NPT

**CS**  
Carbon  
Steel

| TYPE                  | DN  | PN       | ØA        | C    | Ød   | ch | ØM    | WEIGHT   | ITEM CODE   |
|-----------------------|-----|----------|-----------|------|------|----|-------|----------|-------------|
| QC DG N 1/8<br>MALE   | 6,3 | MPa 50   | mm -      | 42,8 | 12,6 | 19 | N 1/8 | kg 0,039 | NC19N010000 |
|                       |     | Psi 7250 | inch -    | 1,69 | 0,50 |    |       | lb 0,09  |             |
| QC DG N 1/8<br>FEMALE | 6,3 | MPa 50   | mm 24     | 50   | -    | 21 | N 1/8 | kg 0,048 | NC20N010000 |
|                       |     | Psi 7250 | inch 0,94 | 1,97 | -    |    |       | lb 0,11  |             |
| QC DG N 1/4<br>MALE   | 6,3 | MPa 50   | mm -      | 42,8 | 12,6 | 19 | N 1/4 | kg 0,049 | NC19N010001 |
|                       |     | Psi 7250 | inch -    | 1,69 | 0,50 |    |       | lb 0,11  |             |
| QC DG N 1/4<br>FEMALE | 6,3 | MPa 50   | mm 24     | 50   | -    | 21 | N 1/4 | kg 0,05  | NC20N010001 |
|                       |     | Psi 7250 | inch 0,94 | 1,97 | -    |    |       | lb 0,11  |             |



**■ QUICK COUPLINGS ISO 15171-1 DG (male-female)  
FEMALE THREAD ISO 11926-1 (SAE J1926-1) ORB**

| TYPE                  | DN  | PN          | ØA   | C    | Ød   | ch   | ØM | WEIGHT  | ITEM CODE          |  |
|-----------------------|-----|-------------|------|------|------|------|----|---------|--------------------|--|
|                       |     |             |      |      |      |      |    |         | CS<br>Carbon Steel |  |
| QC DG SAE4<br>MALE    | 6,3 | MPa    50   | mm   | -    | 42,8 | 12,6 | 19 | SAE 4 M | kg    0,049        |  |
|                       |     | Psi    7250 | inch | -    | 1,69 | 0,50 |    |         | lb    0,11         |  |
| QC DG SAE 4<br>FEMALE |     | MPa    50   | mm   | 24   | 50   | -    | 21 | SAE 4   | kg    0,05         |  |
|                       |     | Psi    7250 | inch | 0,94 | 1,97 | -    |    |         | lb    0,11         |  |



# BALL VALVES WITH INTEGRATED QUICK COUPLINGS

GE2 FF / GE2 A / GE2 PP / GE2 VGA

PATENT

Edition. 21.2

## CS Carbon Steel

- Carbon Steel
- Model: Ball Valve GE2 with Integrated Quick Coupling **FLAT FACE**
- Sizes: from DN10 up to DN25
- Pressure: up to PN420
- Model: Ball Valve GE2 with Integrated Quick Coupling **ISO A**
- Sizes: from DN10 up to DN25
- Pressure: up to PN420
- Model: Ball Valve GE2 with Integrated Quick Coupling **PUSH-PULL**
- Sizes: from DN10 up to DN25
- Pressure: up to PN420
- Model: Ball Valve GE2 with Integrated Quick Coupling **VGA**
- Sizes: from DN10 up to DN25
- Pressure: up to PN420

AVAILABLE ALSO IN OTHER MODELS OF BALL VALVES AND QUICK COUPLINGS








## CODE DESCRIPTION STRUCTURE

| Type and way of valve      | GE2                          | G1/2           | DN13                        | FF                          | Nominal dimension | TYPE AND WAY OF QC                            | M/F    | NOMINAL DIMENSION |
|----------------------------|------------------------------|----------------|-----------------------------|-----------------------------|-------------------|---|--------|-------------------|
| GE2 2-way                  |                              |                |                             |                             |                   |   |        |                   |
| Ends                       |                              |                |                             |                             |                   |   |        |                   |
| GAS DIN/<br>ISO 228<br>BSP | NPT ANSI<br>/ASME<br>B1.20.1 | SAE<br>J1926-1 | DIN 2353<br>HEAVY<br>SERIES | DIN 2353<br>LIGHT<br>SERIES |                   |   |        |                   |
| G 3/8                      | N 3/8                        | SAE6           | 12S                         | 10L                         | DN10              | ISO 16028 FF                                  | MALE   | 10                |
| G 1/2                      | N 1/2                        | SAE8           | 14S                         | 12L                         | DN13              | ISO 7241/A                                    | FEMALE | 12,5              |
| G 3/4                      | N 3/4                        | SAE12          | 16S                         | 15L                         | DN20              | ISO 7241/A<br>PUSH-PULL                       |        | 20                |
| G 1                        | N 1                          | SAE16          | 20S                         | 18L                         | DN25              | Screw<br>to connect<br>couplings<br>ISO 14541 |        | 25                |
|                            |                              |                | 25S                         | 22L                         |                   |   |        |                   |
|                            |                              |                | 30S                         | 28L                         |                   |   |        |                   |
|                            |                              |                | 38S                         | 35L                         |                   |   |        |                   |

## GE2 FF



FIXING HOLES INCLUDED

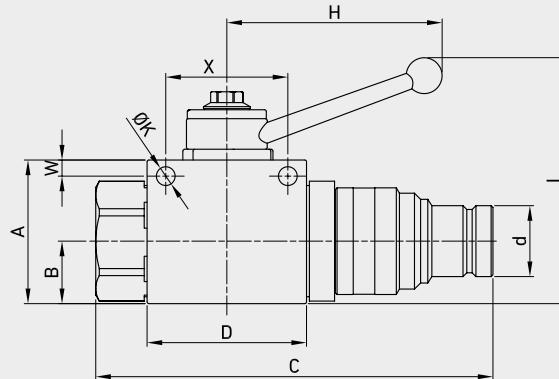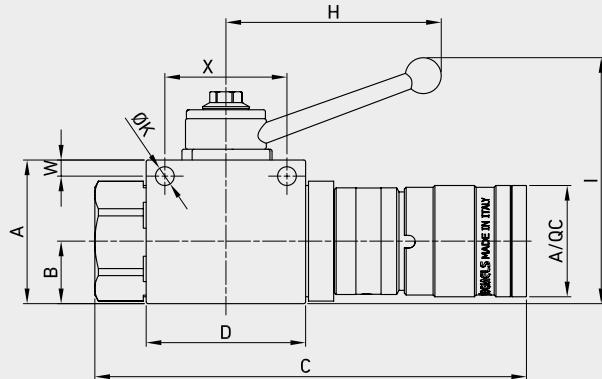


## GE2 DIN/ISO 228 BSP + ISO 16028 FLAT FACE

CS  
 Carbon Steel  
 ITEM CODE


| TYPE                            | DN | PN                 | A                  | B            | C             | D            | d             | E          | F             | G          | H           | I           | A/QC         | ØM    | ØK*          | W*          | X*         | SW         | ØLW        |                 |
|---------------------------------|----|--------------------|--------------------|--------------|---------------|--------------|---------------|------------|---------------|------------|-------------|-------------|--------------|-------|--------------|-------------|------------|------------|------------|-----------------|
| GE2 G3/8 + QC<br>FF 10 MALE     | 6  | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 110,6<br>4,35 | 44,4<br>1,75 | 19,75<br>0,78 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -            | G 3/8 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | NC05G0200GET230 |
| GE2 G3/8 + QC<br>FF 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 120,2<br>4,73 | 44,4<br>1,75 | -             | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 31<br>1,22   | G 3/8 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | NC06G0200GET230 |
| GE2 G1/2 + QC<br>FF 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 123,5<br>4,86 | 48,4<br>1,91 | 24,5<br>0,96  | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -            | G 1/2 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | NC05G0300GET330 |
| GE2 G1/2 + QC<br>FF 12,5 FEMALE | 20 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 129,5<br>5,10 | 48,4<br>1,91 | -             | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50   | G 1/2 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | NC06G0300GET330 |
| GE2 G3/4 + QC<br>FF 19 MALE     | 25 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 139<br>5,47   | 62,5<br>2,46 | 29,95<br>1,18 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | -            | G 3/4 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | NC05G0400GET430 |
| GE2 G3/4 + QC<br>FF 19 FEMALE   | 25 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 150<br>5,91   | 62,5<br>2,46 | -             | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | 45<br>1,77   | G 3/4 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | NC06G0400GET430 |
| GE2 G1 + QC<br>FF 25 MALE       | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 172,5<br>6,79 | 66,5<br>2,62 | 36<br>1,42    | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -            | G 1   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | NC05G0500GET530 |
| GE2 G1 + QC<br>FF 25 FEMALE     | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 172,5<br>6,79 | 66,5<br>2,62 | -             | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 54,5<br>2,15 | G 1   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | NC06G0500GET530 |

## GE2 FF



## GE2 ANSI/ASME B1.20.1 NPT + ISO 16028 FLAT FACE

| TYPE                            | DN | PN                 |                    |              |               |              |               |            |               |            |             |             |              |       |              | CS          | Carbon Steel | ITEM CODE  |            |                 |
|---------------------------------|----|--------------------|--------------------|--------------|---------------|--------------|---------------|------------|---------------|------------|-------------|-------------|--------------|-------|--------------|-------------|--------------|------------|------------|-----------------|
|                                 |    |                    | A                  | B            | C             | D            | d             | E          | F             | G          | H           | I           | A/QC         | ØM    | ØK*          | W*          | X*           | SW         | ØLW        |                 |
| GE2 N3/8 + QC<br>FF 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 110,6<br>4,35 | 44,4<br>1,75 | 19,75<br>0,78 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -            | N 3/8 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34   | 9<br>0,35  | 10<br>0,39 | NC05N0200GET230 |
| GE2 N3/8 + QC<br>FF 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 120,2<br>4,73 | 44,4<br>1,75 | -             | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 31<br>1,22   | N 3/8 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34   | 9<br>0,35  | 10<br>0,39 | NC06N0200GET230 |
| GE2 N1/2 + QC<br>FF 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 123,5<br>4,86 | 48,4<br>1,91 | 24,5<br>0,96  | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -            | N 1/2 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42   | 9<br>0,35  | 13<br>0,51 | NC05N0300GET330 |
| GE2 N1/2 + QC<br>FF 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 129,5<br>5,10 | 48,4<br>1,91 | -             | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50   | N 1/2 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42   | 9<br>0,35  | 13<br>0,51 | NC06N0300GET330 |
| GE2 N3/4 + QC<br>FF 19 MALE     | 19 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 139<br>5,47   | 62,5<br>2,46 | 29,95<br>1,18 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | -            | N 3/4 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97   | 14<br>0,55 | 20<br>0,79 | NC05N0400GET430 |
| GE2 N3/4 + QC<br>FF 19 FEMALE   | 19 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 150<br>5,91   | 62,5<br>2,46 | -             | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | 45<br>1,77   | N 3/4 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97   | 14<br>0,55 | 20<br>0,79 | NC06N0400GET430 |
| GE2 N1 + QC<br>FF 25 MALE       | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 172,5<br>6,79 | 66,5<br>2,62 | 36<br>1,42    | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -            | N 1   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97   | 14<br>0,55 | 25<br>0,98 | NC05N0500GET530 |
| GE2 N1 + QC<br>FF 25 FEMALE     | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 172,5<br>6,79 | 66,5<br>2,62 | -             | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 54,5<br>2,15 | N 1   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97   | 14<br>0,55 | 25<br>0,98 | NC06N0500GET530 |





## GE2 SAE J1926-1 + ISO 16028 FLAT FACE

| TYPE                            | DN | PN                 |                    |              |               |              |               |               |               |            |             |             |              |        |              | CS          | Carbon Steel | ITEM CODE  |            |                 |
|---------------------------------|----|--------------------|--------------------|--------------|---------------|--------------|---------------|---------------|---------------|------------|-------------|-------------|--------------|--------|--------------|-------------|--------------|------------|------------|-----------------|
|                                 |    |                    | A                  | B            | C             | D            | d             | E             | F             | G          | H           | I           | A/QC         | ØM     | ØK*          | W*          | X*           | SW         | ØLW        |                 |
| GE2 SAE6 + QC<br>FF 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,5<br>0,69 | 110,6<br>4,35 | 44,4<br>1,75 | 19,75<br>0,78 | 11,1<br>0,44  | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -            | 9/16   | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34   | 9<br>0,35  | 10<br>0,39 | NC05S0200GET230 |
| GE2 SAE6 + QC<br>FF 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,5<br>0,69 | 120,2<br>4,73 | 44,4<br>1,75 | -             | 11,1<br>0,44  | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 31<br>1,22   | 9/16   | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34   | 9<br>0,35  | 10<br>0,39 | NC06S0200GET230 |
| GE2 SAE8 + QC<br>FF 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 123,5<br>4,86 | 48,4<br>1,91 | 24,5<br>0,96  | 11,1<br>0,44  | 57,25<br>2,25 | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -            | 3/4    | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42   | 9<br>0,35  | 13<br>0,51 | NC05S0300GET330 |
| GE2 SAE8 + QC<br>FF 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 129,5<br>5,10 | 48,4<br>1,91 | -             | 11,1<br>0,44  | 57,25<br>2,25 | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50   | 3/4    | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42   | 9<br>0,35  | 13<br>0,51 | NC06S0300GET330 |
| GE2 SAE12 + QC<br>FF 19 MALE    | 19 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 139<br>5,47   | 62,5<br>2,46 | 29,95<br>1,18 | 14,35<br>0,56 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | -            | 1 1/16 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97   | 14<br>0,55 | 20<br>0,79 | NC05S0400GET430 |
| GE2 SAE12 + QC<br>FF 19 FEMALE  | 19 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 150<br>5,91   | 62,5<br>2,46 | -             | 14,35<br>0,56 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | 45<br>1,77   | 1 1/16 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97   | 14<br>0,55 | 20<br>0,79 | NC06S0400GET430 |
| GE2 SAE16 + QC<br>FF 25 MALE    | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 172,5<br>6,79 | 66,5<br>2,62 | 36<br>1,42    | 14,35<br>0,56 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -            | 1 5/16 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97   | 14<br>0,55 | 25<br>0,98 | NC05S0500GET530 |
| GE2 SAE16 + QC<br>FF 25 FEMALE  | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 172,5<br>6,79 | 66,5<br>2,62 | -             | 14,35<br>0,56 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 54,5<br>2,15 | 1 5/16 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97   | 14<br>0,55 | 25<br>0,98 | NC06S0500GET530 |

## GE2 FF

FIXING HOLES INCLUDED

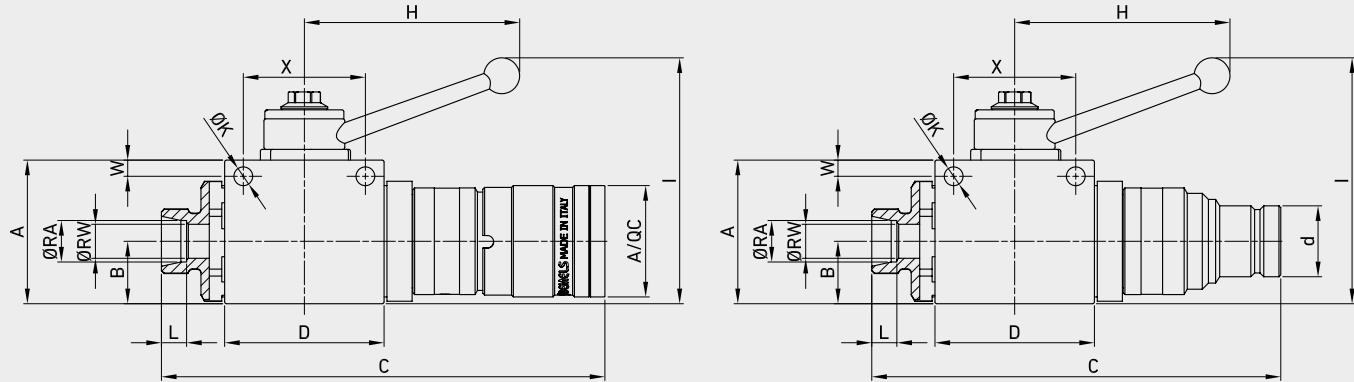


## GE2 DIN 2353 HEAVY SERIES + ISO 16028 FLAT FACE

CS

Carbon Steel

| TYPE                           | DN | PN                 | A                  | B            | C             | D            | d             | E          | F             | G          | H           | I           | A/QC         | ØM      | ØK*          | W*          | X*         | SW         | ØLW        | ØRA        | ITEM CODE       |
|--------------------------------|----|--------------------|--------------------|--------------|---------------|--------------|---------------|------------|---------------|------------|-------------|-------------|--------------|---------|--------------|-------------|------------|------------|------------|------------|-----------------|
| GE2 12S + QC<br>FF 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 112,1<br>4,41 | 44,4<br>1,75 | 19,75<br>0,78 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -            | M20x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 | NC05H0200GET230 |
| GE2 12S + QC<br>FF 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 121,7<br>4,79 | 44,4<br>1,75 | -             | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 31<br>1,22   | M20x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 | NC06H0200GET230 |
| GE2 14S + QC<br>FF 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 115,3<br>4,54 | 44,4<br>1,75 | 19,75<br>0,78 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -            | M22x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 14<br>0,55 | NC05H0201GET230 |
| GE2 14S + QC<br>FF 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 125<br>4,92   | 44,4<br>1,75 | -             | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 31<br>1,22   | M22x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 14<br>0,55 | NC06H0201GET230 |
| GE2 16S + QC<br>FF 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 126,5<br>4,98 | 48,4<br>1,91 | 24,5<br>0,96  | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -            | M24x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 16<br>0,63 | NC05H0300GET330 |
| GE2 16S + QC<br>FF 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 132,5<br>5,22 | 48,4<br>1,91 | -             | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50   | M24x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 16<br>0,63 | NC06H0300GET330 |
| GE2 20S + QC<br>FF 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 128,5<br>5,06 | 48,4<br>1,91 | 24,5<br>0,96  | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -            | M30x2   | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 20<br>0,79 | NC05H0301GET330 |
| GE2 20S + QC<br>FF 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 134,5<br>5,30 | 48,4<br>1,91 | -             | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50   | M30x2   | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 20<br>0,79 | NC06H0301GET330 |
| GE2 25S + QC<br>FF 19 MALE     | 19 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 147,2<br>5,80 | 62,5<br>2,46 | 29,95<br>1,18 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | -            | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 25<br>0,98 | NC05H0400GET430 |
| GE2 25S + QC<br>FF 19 FEMALE   | 19 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 158<br>6,22   | 62,5<br>2,46 | -             | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | 45<br>1,77   | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 25<br>0,98 | NC06H0400GET430 |
| GE2 30S + QC<br>FF 25 MALE     | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 176,5<br>6,95 | 66,5<br>2,62 | 36<br>1,42    | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -            | M42x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 30<br>1,18 | NC05H0500GET530 |
| GE2 30S + QC<br>FF 25 FEMALE   | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 176,5<br>6,95 | 66,5<br>2,62 | -             | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 54,5<br>2,15 | M42x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 30<br>1,18 | NC06H0500GET530 |
| GE2 38S + QC F<br>FF 25 MALE   | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 182<br>7,17   | 66,5<br>2,62 | 36<br>1,42    | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -            | M52x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 38<br>1,50 | NC05H0501GET530 |
| GE2 38S + QC F<br>FF 25 FEMALE | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 182<br>7,17   | 66,5<br>2,62 | -             | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 54,5<br>2,15 | M52x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 38<br>1,50 | NC06H0501GET530 |

## GE2 FF





## GE2 DIN 2353 LIGHT SERIES + ISO 16028 FLAT FACE

| TYPE                           | DN | PN                 |                    | A            | B             | C            | D             | d          | E             | F          | G           | H           | I            | A/QC    | ØM           | ØK*         | W*         | X*         | SW         | ØLW        | ØRA | CS<br>Carbon Steel | ITEM CODE |
|--------------------------------|----|--------------------|--------------------|--------------|---------------|--------------|---------------|------------|---------------|------------|-------------|-------------|--------------|---------|--------------|-------------|------------|------------|------------|------------|-----|--------------------|-----------|
|                                |    |                    |                    |              |               |              |               |            |               |            |             |             |              |         |              |             |            |            |            |            |     |                    |           |
| GE2 10L + QC<br>FF 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 112,3<br>4,42 | 44,4<br>1,75 | 19,75<br>0,78 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -<br>-       | M16x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 8<br>0,31  | 10<br>0,39 |     | NC05L0200GET230    |           |
| GE2 10L + QC<br>FF 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 122<br>4,80   | 44,4<br>1,75 | -<br>-        | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 31<br>1,22   | M16x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 8<br>0,31  | 10<br>0,39 |     | NC06L0200GET230    |           |
| GE2 12L + QC<br>FF 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 113,9<br>4,48 | 44,4<br>1,75 | 19,75<br>0,78 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -<br>-       | M18x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 |     | NC05L0201GET230    |           |
| GE2 12L + QC<br>FF 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 123,5<br>4,86 | 44,4<br>1,75 | -<br>-        | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 31<br>1,22   | M18x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 |     | NC06L0201GET230    |           |
| GE2 15L + QC<br>FF 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 125,5<br>4,94 | 48,4<br>1,91 | 24,5<br>0,96  | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -<br>-       | M22x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 15<br>0,59 |     | NC05L0300GET330    |           |
| GE2 15L + QC<br>FF 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 131,5<br>5,18 | 48,4<br>1,91 | -<br>-        | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50   | M22x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 15<br>0,59 |     | NC06L0300GET330    |           |
| GE2 18L + QC<br>FF 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 125,5<br>4,94 | 48,4<br>1,91 | 24,5<br>0,96  | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -<br>-       | M26x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 18<br>0,71 |     | NC05L0301GET330    |           |
| GE2 18L + QC<br>FF 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 131,5<br>5,18 | 48,4<br>1,91 | -<br>-        | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50   | M26x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 18<br>0,71 |     | NC06L0301GET330    |           |
| GE2 22L + QC<br>FF 19 MALE     | 19 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 146,7<br>5,78 | 62,5<br>2,46 | 29,95<br>1,18 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | -<br>-       | M30x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 22<br>0,87 |     | NC05L0400GET430    |           |
| GE2 22L + QC<br>FF 19 FEMALE   | 19 | MPa 35<br>Psi 5075 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 157,7<br>6,21 | 62,5<br>2,46 | -<br>-        | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | 45<br>1,77   | M30x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 22<br>0,87 |     | NC06L0400GET430    |           |
| GE2 28L + QC<br>FF 25 MALE     | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 175<br>6,89   | 66,5<br>2,62 | 36<br>1,42    | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -<br>-       | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 28<br>1,10 |     | NC05L0500GET530    |           |
| GE2 28L + QC<br>FF 25 FEMALE   | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 175<br>6,89   | 66,5<br>2,62 | -<br>-        | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 54,5<br>2,15 | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 28<br>1,10 |     | NC06L0500GET530    |           |
| GE2 35L + QC<br>FF 25 MALE     | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 176<br>6,93   | 66,5<br>2,62 | 36<br>1,42    | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -<br>-       | M45x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 35<br>1,38 |     | NC05L0501GET530    |           |
| GE2 35L + QC<br>FF 25 FEMALE   | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 176<br>6,93   | 66,5<br>2,62 | -<br>-        | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 54,5<br>2,15 | M45x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 35<br>1,38 |     | NC06L0501GET530    |           |

## GE2 A



FIXING HOLES INCLUDED

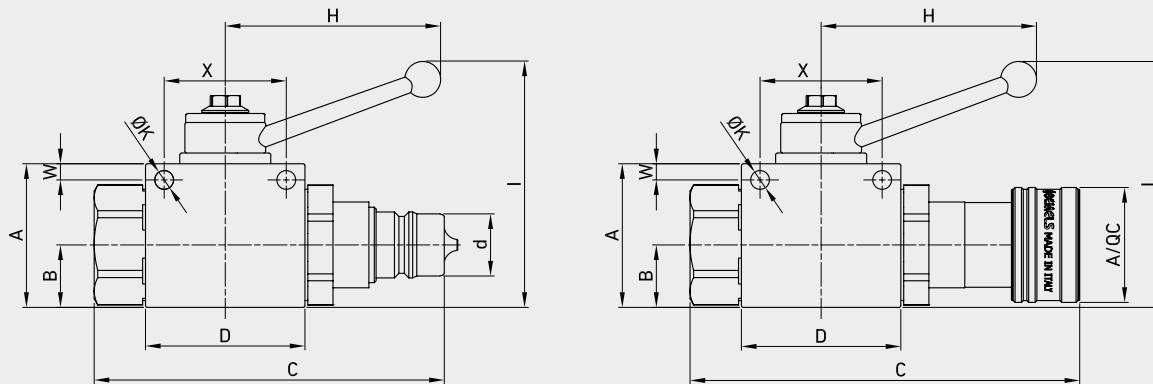


## GE2 DIN/ISO 228 BSP + ISO 7241/A

CS  
 Carbon Steel  
 ITEM CODE


| TYPE                           | DN | PN       | A         | B    | C     | D    | d     | E    | F     | G    | H    | I    | A/QC  | ØM    | ØK*  | W*   | X*   | SW   | ØLW  |                 |
|--------------------------------|----|----------|-----------|------|-------|------|-------|------|-------|------|------|------|-------|-------|------|------|------|------|------|-----------------|
| GE2 G3/8 + QC<br>A 10 MALE     | 10 | MPa 42   | mm 40     | 17,4 | 97,5  | 44,4 | 17,3  | 11   | 54,25 | 35   | 110  | 93   | -     | G 3/8 | 5,25 | 4,5  | 34   | 9    | 10   | NC01G0200GET230 |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 3,84  | 1,75 | 0,68  | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | -     |       | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 |                 |
| GE2 G3/8 + QC<br>A 10 FEMALE   | 10 | MPa 42   | mm 40     | 17,4 | 108,5 | 44,4 | -     | 11   | 54,25 | 35   | 110  | 93   | 32    | G 3/8 | 5,25 | 4,5  | 34   | 9    | 10   | NC02G0200GET230 |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 4,27  | 1,75 | -     | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | 1,26  |       | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 |                 |
| GE2 G1/2 + QC<br>A 12,5 MALE   | 13 | MPa 35   | mm 43     | 19,7 | 114,5 | 48,4 | 20,5  | 11   | 57    | 37   | 110  | 97   | -     | G 1/2 | 5,25 | 5    | 36   | 9    | 13   | NC01G0300GET330 |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,51  | 1,91 | 0,81  | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | -     |       | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 |                 |
| GE2 G1/2 + QC<br>A 12,5 FEMALE | 13 | MPa 35   | mm 43     | 19,7 | 121   | 48,4 | -     | 11   | 57    | 37   | 110  | 97   | 38,25 | G 1/2 | 5,25 | 5    | 36   | 9    | 13   | NC02G0300GET330 |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,76  | 1,91 | -     | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | 1,51  |       | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 |                 |
| GE2 G3/4 + QC<br>A 20 MALE     | 20 | MPa 25   | mm 57     | 25,4 | 131   | 62,5 | 29,1  | 14   | 75,5  | 49   | 180  | 105  | -     | G 3/4 | 6,25 | 6    | 50   | 14   | 20   | NC01G0400GET430 |
|                                |    | Psi 3625 | inch 2,24 | 1,00 | 5,16  | 2,46 | 1,15  | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | -     |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 |                 |
| GE2 G3/4 + QC<br>A 20 FEMALE   | 20 | MPa 25   | mm 57     | 25,4 | 146,5 | 62,5 | -     | 14   | 75,5  | 49   | 180  | 105  | 48    | G 3/4 | 6,25 | 6    | 50   | 14   | 20   | NC02G0400GET430 |
|                                |    | Psi 3625 | inch 2,24 | 1,00 | 5,77  | 2,46 | -     | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | 1,89  |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 |                 |
| GE2 G1 + QC<br>A 25 MALE       | 25 | MPa 25   | mm 65     | 29,5 | 166,5 | 66,5 | 34,34 | 14   | 83,5  | 55   | 180  | 113  | -     | G 1   | 6,25 | 6    | 50   | 14   | 25   | NC01G0500GET530 |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 6,56  | 2,62 | 1,35  | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | -     |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 |                 |
| GE2 G1 + QC<br>A 25 FEMALE     | 25 | MPa 25   | mm 65     | 29,5 | 182   | 66,5 | -     | 14   | 83,5  | 55   | 180  | 113  | 56    | G 1   | 6,25 | 6    | 50   | 14   | 25   | NC02G0500GET530 |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 7,17  | 2,62 | -     | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 2,20  |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 |                 |

## GE2 A







## GE2 ANSI/ASME B1.20.1 NPT + ISO 7241/A

| TYPE                           | DN | PN       |           |      |       |      |       |      |       |      |      |      |       |       |      | CS   | Carbon Steel | ITEM CODE |      |                 |
|--------------------------------|----|----------|-----------|------|-------|------|-------|------|-------|------|------|------|-------|-------|------|------|--------------|-----------|------|-----------------|
|                                |    |          | A         | B    | C     | D    | d     | E    | F     | G    | H    | I    | A/QC  | ØM    | ØK*  | W*   | X*           | SW        | ØLW  |                 |
| GE2 N3/8 + QC<br>A 10 MALE     | 10 | MPa 42   | mm 40     | 17,4 | 97,5  | 44,4 | 17,3  | 11   | 54,25 | 35   | 110  | 93   | -     | N 3/8 | 5,25 | 4,5  | 34           | 9         | 10   | NC01N0200GET230 |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 3,84  | 1,75 | 0,68  | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | -     |       | 0,21 | 0,18 | 1,34         | 0,35      | 0,39 |                 |
| GE2 N3/8 + QC<br>A 10 FEMALE   | 10 | MPa 42   | mm 40     | 17,4 | 108,5 | 44,4 | -     | 11   | 54,25 | 35   | 110  | 93   | 32    | N 3/8 | 5,25 | 4,5  | 34           | 9         | 10   | NC02N0200GET230 |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 4,27  | 1,75 | -     | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | 1,26  |       | 0,21 | 0,18 | 1,34         | 0,35      | 0,39 |                 |
| GE2 N1/2 + QC<br>A 12,5 MALE   | 13 | MPa 35   | mm 43     | 19,7 | 114,5 | 48,4 | 20,5  | 11   | 57    | 37   | 110  | 97   | -     | N 1/2 | 5,25 | 5    | 36           | 9         | 13   | NC01N0300GET330 |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,51  | 1,91 | 0,81  | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | -     |       | 0,21 | 0,20 | 1,42         | 0,35      | 0,51 |                 |
| GE2 N1/2 + QC<br>A 12,5 FEMALE | 13 | MPa 35   | mm 43     | 19,7 | 121   | 48,4 | -     | 11   | 57    | 37   | 110  | 97   | 38,25 | N 1/2 | 5,25 | 5    | 36           | 9         | 13   | NC02N0300GET330 |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,76  | 1,91 | -     | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | 1,51  |       | 0,21 | 0,20 | 1,42         | 0,35      | 0,51 |                 |
| GE2 N3/4 + QC<br>A 20 MALE     | 20 | MPa 25   | mm 57     | 25,4 | 131   | 62,5 | 29,1  | 14   | 75,5  | 49   | 180  | 105  | -     | N 3/4 | 6,25 | 6    | 50           | 14        | 20   | NC01N0400GET430 |
|                                |    | Psi 3625 | inch 2,24 | 1,00 | 5,16  | 2,46 | 1,15  | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | -     |       | 0,25 | 0,24 | 1,97         | 0,55      | 0,79 |                 |
| GE2 N3/4 + QC<br>A 20 FEMALE   | 20 | MPa 25   | mm 57     | 25,4 | 146,5 | 62,5 | -     | 14   | 75,5  | 49   | 180  | 105  | 48    | N 3/4 | 6,25 | 6    | 50           | 14        | 20   | NC02N0400GET430 |
|                                |    | Psi 3625 | inch 2,24 | 1,00 | 5,77  | 2,46 | -     | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | 1,89  |       | 0,25 | 0,24 | 1,97         | 0,55      | 0,79 |                 |
| GE2 N1 + QC<br>A 25 MALE       | 25 | MPa 25   | mm 65     | 29,5 | 166,5 | 66,5 | 34,34 | 14   | 83,5  | 55   | 180  | 113  | -     | N 1   | 6,25 | 6    | 50           | 14        | 25   | NC01N0500GET530 |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 6,56  | 2,62 | 1,35  | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | -     |       | 0,25 | 0,24 | 1,97         | 0,55      | 0,98 |                 |
| GE2 N1 + QC<br>A 25 FEMALE     | 25 | MPa 25   | mm 65     | 29,5 | 182   | 66,5 | -     | 14   | 83,5  | 55   | 180  | 113  | 56    | N 1   | 6,25 | 6    | 50           | 14        | 25   | NC02N0500GET530 |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 7,17  | 2,62 | -     | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 2,20  |       | 0,25 | 0,24 | 1,97         | 0,55      | 0,98 |                 |




## GE2 SAE J1926-1 + ISO 7241/A

| TYPE                           | DN | PN       |           |      |       |      |       |       |       |      |      |      |      |        |      | CS   | Carbon Steel | ITEM CODE |      |                 |
|--------------------------------|----|----------|-----------|------|-------|------|-------|-------|-------|------|------|------|------|--------|------|------|--------------|-----------|------|-----------------|
|                                |    |          | A         | B    | C     | D    | d     | E     | F     | G    | H    | I    | A/QC | ØM     | ØK*  | W*   | X*           | SW        | ØLW  |                 |
| GE2 SAE6 + QC<br>A 10 MALE     | 10 | MPa 42   | mm 40     | 17,5 | 110,6 | 44,4 | 19,75 | 11,1  | 54,25 | 35   | 110  | 93   | -    | 9/16   | 5,25 | 4,5  | 34           | 9         | 10   | NC01S0200GET230 |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 4,35  | 1,75 | 0,78  | 0,44  | 2,14  | 1,38 | 4,33 | 3,66 | -    |        | UNF  | 0,21 | 0,18         | 1,34      | 0,35 | 0,39            |
| GE2 SAE6 + QC<br>A 10 FEMALE   | 10 | MPa 42   | mm 40     | 17,5 | 120,2 | 44,4 | -     | 11,1  | 54,25 | 35   | 110  | 93   | 31   | 9/16   | 5,25 | 4,5  | 34           | 9         | 10   | NC02S0200GET230 |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 4,73  | 1,75 | -     | 0,44  | 2,14  | 1,38 | 4,33 | 3,66 | 1,22 |        | UNF  | 0,21 | 0,18         | 1,34      | 0,35 | 0,39            |
| GE2 SAE8 + QC<br>A 12,5 MALE   | 13 | MPa 35   | mm 43     | 19,7 | 123,5 | 48,4 | 24,5  | 11,1  | 57,25 | 37   | 110  | 97   | -    | 3/4    | 5,25 | 5    | 36           | 9         | 13   | NC01S0300GET330 |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,86  | 1,91 | 0,96  | 0,44  | 2,25  | 1,46 | 4,33 | 3,82 | -    |        | UNF  | 0,21 | 0,20         | 1,42      | 0,35 | 0,51            |
| GE2 SAE8 + QC<br>A 12,5 FEMALE | 13 | MPa 35   | mm 43     | 19,7 | 129,5 | 48,4 | -     | 11,1  | 57,25 | 37   | 110  | 97   | 38   | 3/4    | 5,25 | 5    | 36           | 9         | 13   | NC02S0300GET330 |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 5,10  | 1,91 | -     | 0,44  | 2,25  | 1,46 | 4,33 | 3,82 | 1,50 |        | UNF  | 0,21 | 0,20         | 1,42      | 0,35 | 0,51            |
| GE2 SAE12 + QC<br>A 20 MALE    | 19 | MPa 25   | mm 57     | 25,4 | 139   | 62,5 | 29,95 | 14,35 | 75,5  | 49   | 180  | 105  | -    | 1 1/16 | 6,25 | 6    | 50           | 14        | 20   | NC01S0400GET430 |
|                                |    | Psi 3625 | inch 2,24 | 1,00 | 5,47  | 2,46 | 1,18  | 0,56  | 2,97  | 1,93 | 7,09 | 4,13 | -    |        | UNF  | 0,25 | 0,24         | 1,97      | 0,55 | 0,79            |
| GE2 SAE12 + QC<br>A 20 FEMALE  | 19 | MPa 25   | mm 57     | 25,4 | 150   | 62,5 | -     | 14,35 | 75,5  | 49   | 180  | 105  | 45   | 1 1/16 | 6,25 | 6    | 50           | 14        | 20   | NC02S0400GET430 |
|                                |    | Psi 3625 | inch 2,24 | 1,00 | 5,91  | 2,46 | -     | 0,56  | 2,97  | 1,93 | 7,09 | 4,13 | 1,77 |        | UNF  | 0,25 | 0,24         | 1,97      | 0,55 | 0,79            |
| GE2 SAE16 + QC<br>A 25 MALE    | 25 | MPa 25   | mm 65     | 29,5 | 172,5 | 66,5 | 36    | 14,35 | 83,5  | 55   | 180  | 113  | -    | 1 5/16 | 6,25 | 6    | 50           | 14        | 25   | NC01S0500GET530 |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 6,79  | 2,62 | 1,42  | 0,56  | 3,29  | 2,17 | 7,09 | 4,45 | -    |        | UNF  | 0,25 | 0,24         | 1,97      | 0,55 | 0,98            |
| GE2 SAE16 + QC<br>A 25 FEMALE  | 25 | MPa 25   | mm 65     | 29,5 | 172,5 | 66,5 | -     | 14,35 | 83,5  | 55   | 180  | 113  | 54,5 | 1 5/16 | 6,25 | 6    | 50           | 14        | 25   | NC02S0500GET530 |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 6,79  | 2,62 | -     | 0,56  | 3,29  | 2,17 | 7,09 | 4,45 | 2,15 |        | UNF  | 0,25 | 0,24         | 1,97      | 0,55 | 0,98            |

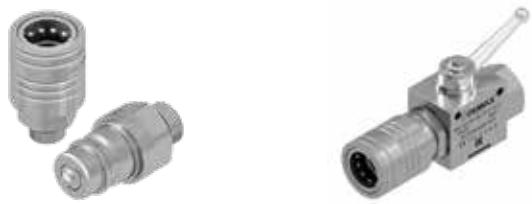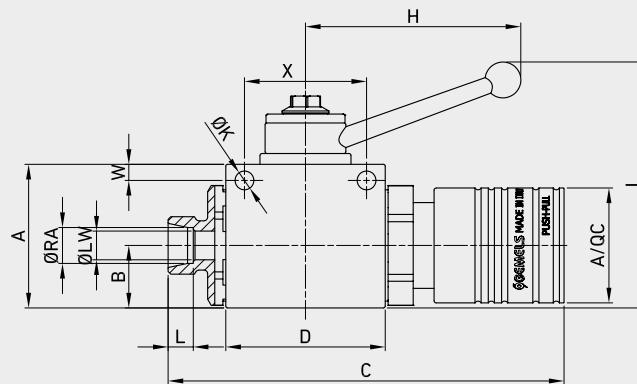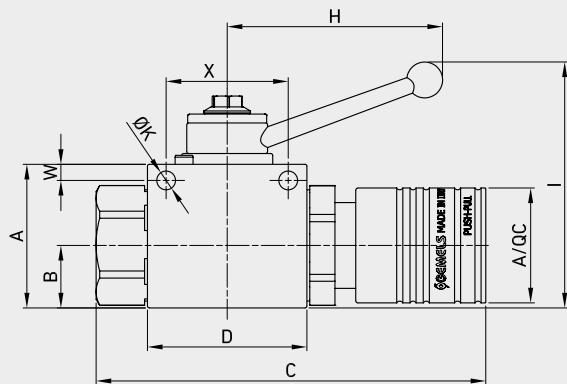**GE2 PP**

**FIXING HOLES INCLUDED**

**■ GE2 DIN/ISO 228 BSP + ISO 7241/A FOR MALE/FEMALE PUSH-PULL**
**CS**

Carbon Steel


| TYPE                            | DN | PN                 | A                  | B            | C             | D            | d | E          | F             | G          | H           | I           | A/QC       | ØM    | ØK*          | W*          | X*         | SW         | ØLW        | ITEM CODE       |
|---------------------------------|----|--------------------|--------------------|--------------|---------------|--------------|---|------------|---------------|------------|-------------|-------------|------------|-------|--------------|-------------|------------|------------|------------|-----------------|
| GE2 G3/8 + QC<br>PP 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 108,5<br>4,27 | 44,4<br>1,75 | - | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 32<br>1,26 | G 3/8 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | NC12G0200GET230 |
| GE2 G1/2 + QC<br>PP 12,5 FEMALE | 13 | MPa 35<br>Psi 5075 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 121<br>4,76   | 48,4<br>1,91 | - | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50 | G 1/2 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | NC12G0300GET330 |
| GE2 G3/4 + QC<br>PP 20 FEMALE   | 20 | MPa 25<br>Psi 3625 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 146,5<br>5,77 | 62,5<br>2,46 | - | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | 47<br>1,85 | G 3/4 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | NC12G0400GET430 |
| GE2 G1 + QC<br>PP 25 FEMALE     | 25 | MPa 25<br>Psi 3625 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 182<br>7,17   | 66,5<br>2,62 | - | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 55<br>2,17 | G 1   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | NC12G0500GET530 |



## GE2 PP

## GE2 ANSI/ASME B1.20.1 NPT + ISO 7241/A FOR MALE/FEMALE PUSH-PULL


| TYPE                            | DN | PN       |           |      |       |      |   |      |       |      |      |      |      |       | ITEM CODE | Carbon Steel |      |      |      |                 |              |
|---------------------------------|----|----------|-----------|------|-------|------|---|------|-------|------|------|------|------|-------|-----------|--------------|------|------|------|-----------------|--------------|
|                                 |    |          | A         | B    | C     | D    | d | E    | F     | G    | H    | I    | A/QC | ØM    | ØK*       | W*           | X*   | SW   | ØLW  |                 |              |
| GE2 N3/8 + QC<br>PP 10 FEMALE   | 10 | MPa 42   | mm 40     | 17,4 | 108,5 | 44,4 | - | 11   | 54,25 | 35   | 110  | 93   | 32   | N 3/8 | 5,25      | 4,5          | 34   | 9    | 10   | NC12N0200GET230 | Carbon Steel |
|                                 |    | Psi 6090 | inch 1,57 | 0,69 | 4,27  | 1,75 | - | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | 1,26 |       | 0,21      | 0,18         | 1,34 | 0,35 | 0,39 |                 |              |
| GE2 N1/2 + QC<br>PP 12,5 FEMALE | 13 | MPa 35   | mm 43     | 19,7 | 121   | 48,4 | - | 11   | 57    | 37   | 110  | 97   | 38   | N 1/2 | 5,25      | 5            | 36   | 9    | 13   | NC12N0300GET330 | Carbon Steel |
|                                 |    | Psi 5075 | inch 1,69 | 0,78 | 4,76  | 1,91 | - | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | 1,50 |       | 0,21      | 0,20         | 1,42 | 0,35 | 0,51 |                 |              |
| GE2 N3/4 + QC<br>PP 20 FEMALE   | 20 | MPa 25   | mm 57     | 25,4 | 146,5 | 62,5 | - | 14   | 75,5  | 49   | 180  | 105  | 47   | N 3/4 | 6,25      | 6            | 50   | 14   | 20   | NC12N0400GET430 | Carbon Steel |
|                                 |    | Psi 3625 | inch 2,24 | 1,00 | 5,77  | 2,46 | - | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | 1,85 |       | 0,25      | 0,24         | 1,97 | 0,55 | 0,79 |                 |              |
| GE2 N1 + QC<br>PP 25 FEMALE     | 25 | MPa 25   | mm 65     | 29,5 | 182   | 66,5 | - | 14   | 83,5  | 55   | 180  | 113  | 55   | N 1   | 6,25      | 6            | 50   | 14   | 25   | NC12N0500GET530 | Carbon Steel |
|                                 |    | Psi 3625 | inch 2,56 | 1,16 | 7,17  | 2,62 | - | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 2,17 |       | 0,25      | 0,24         | 1,97 | 0,55 | 0,98 |                 |              |



## GE2 SAE J1926-1 + ISO 7241/A FOR MALE/FEMALE PUSH-PULL

| TYPE                            | DN | PN       |           |      |       |      |   |       |       |      |      |      |      |        | ITEM CODE | Carbon Steel |      |      |      |                 |              |
|---------------------------------|----|----------|-----------|------|-------|------|---|-------|-------|------|------|------|------|--------|-----------|--------------|------|------|------|-----------------|--------------|
|                                 |    |          | A         | B    | C     | D    | d | E     | F     | G    | H    | I    | A/QC | ØM     | ØK*       | W*           | X*   | SW   | ØLW  |                 |              |
| GE2 SAE6 + QC<br>PP 10 FEMALE   | 10 | MPa 42   | mm 40     | 17,5 | 108,5 | 44,4 | - | 11,1  | 54,25 | 35   | 110  | 93   | 32   | 9/16   | 5,25      | 4,5          | 34   | 9    | 10   | NC12S0200GET230 | Carbon Steel |
|                                 |    | Psi 6090 | inch 1,57 | 0,69 | 4,27  | 1,75 | - | 0,44  | 2,14  | 1,38 | 4,33 | 3,66 | 1,26 |        | UNF       | 0,21         | 0,18 | 1,34 | 0,35 | 0,39            |              |
| GE2 SAE8 + QC<br>PP 12,5 FEMALE | 13 | MPa 35   | mm 43     | 19,7 | 121   | 48,4 | - | 11,1  | 57,25 | 37   | 110  | 97   | 38   | 3/4    | 5,25      | 5            | 36   | 9    | 13   | NC12S0300GET330 | Carbon Steel |
|                                 |    | Psi 5075 | inch 1,69 | 0,78 | 4,76  | 1,91 | - | 0,44  | 2,25  | 1,46 | 4,33 | 3,82 | 1,50 |        | UNF       | 0,21         | 0,20 | 1,42 | 0,35 | 0,51            |              |
| GE2 SAE12 + QC<br>PP 20 FEMALE  | 20 | MPa 25   | mm 57     | 25,4 | 146,5 | 62,5 | - | 14,35 | 75,5  | 49   | 180  | 105  | 47   | 1 1/16 | 6,25      | 6            | 50   | 14   | 20   | NC12S0400GET430 | Carbon Steel |
|                                 |    | Psi 3625 | inch 2,24 | 1,00 | 5,77  | 2,46 | - | 0,56  | 2,97  | 1,93 | 7,09 | 4,13 | 1,85 |        | UNF       | 0,25         | 0,24 | 1,97 | 0,55 | 0,79            |              |
| GE2 G1 + QC<br>PP 25 FEMALE     | 25 | MPa 25   | mm 65     | 29,5 | 182   | 66,5 | - | 14,35 | 83,5  | 55   | 180  | 113  | 55   | 1 5/16 | 6,25      | 6            | 50   | 14   | 25   | NC12S0500GET530 | Carbon Steel |
|                                 |    | Psi 3625 | inch 2,56 | 1,16 | 7,17  | 2,62 | - | 0,56  | 3,29  | 2,17 | 7,09 | 4,45 | 2,17 |        | UNF       | 0,25         | 0,24 | 1,97 | 0,55 | 0,98            |              |

## GE2 PP




## ■ GE2 DIN 2353 HEAVY SERIES + ISO 7241/A FOR MALE/FEMALE PUSH-PULL

CS

Carbon Steel

| TYPE                           | DN | PN                 | A                  | B            | C             | D            | d             | E          | F             | G          | H           | I           | A/QC       | ØM      | ØK*          | W*          | X*         | SW         | ØLW        | ØRA        | ITEM CODE       |
|--------------------------------|----|--------------------|--------------------|--------------|---------------|--------------|---------------|------------|---------------|------------|-------------|-------------|------------|---------|--------------|-------------|------------|------------|------------|------------|-----------------|
| GE2 12S + QC<br>PP 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 99<br>3,90    | 44,4<br>1,75 | 17,3<br>0,68  | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -          | M20x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 | NC11H0200GET230 |
| GE2 12S + QC<br>PP 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 110<br>4,33   | 44,4<br>1,75 | -             | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 32<br>1,26 | M20x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 | NC12H0200GET230 |
| GE2 14S + QC<br>PP 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 102,2<br>4,02 | 44,4<br>1,75 | 17,3<br>0,68  | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -          | M22x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 14<br>0,55 | NC11H0201GET230 |
| GE2 14S + QC<br>PP 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 113,2<br>4,46 | 44,4<br>1,75 | -             | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 32<br>1,26 | M22x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 14<br>0,55 | NC12H0201GET230 |
| GE2 16S + QC<br>PP 12,5 MALE   | 13 | MPa 35<br>Psi 5075 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 117,5<br>4,63 | 48,4<br>1,91 | 20,5<br>0,81  | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -          | M24x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 16<br>0,63 | NC11H0300GET330 |
| GE2 16S + QC<br>PP 12,5 FEMALE | 13 | MPa 35<br>Psi 5075 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 124<br>4,88   | 48,4<br>1,91 | -             | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50 | M24x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 16<br>0,63 | NC12H0300GET330 |
| GE2 20S + QC<br>PP 12,5 MALE   | 13 | MPa 35<br>Psi 5075 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 119,5<br>4,70 | 48,4<br>1,91 | 20,5<br>0,81  | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -          | M30x2   | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 20<br>0,79 | NC11H0301GET330 |
| GE2 20S + QC<br>PP 12,5 FEMALE | 13 | MPa 35<br>Psi 5075 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 126<br>4,96   | 48,4<br>1,91 | -             | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 38<br>1,50 | M30x2   | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 20<br>0,79 | NC12H0301GET330 |
| GE2 25S + QC<br>PP 20 MALE     | 20 | MPa 25<br>Psi 3625 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 142,5<br>5,61 | 62,5<br>2,46 | 29<br>1,14    | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | -          | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 25<br>0,98 | NC11H0400GET430 |
| GE2 25S + QC<br>PP 20 FEMALE   | 20 | MPa 25<br>Psi 3625 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 154,5<br>6,08 | 62,5<br>2,46 | -             | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | 47<br>1,85 | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 25<br>0,98 | NC12H0400GET430 |
| GE2 30S + QC<br>PP 25 MALE     | 25 | MPa 25<br>Psi 3625 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 170,6<br>6,72 | 66,5<br>2,62 | 34,34<br>1,35 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -          | M42x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 30<br>1,18 | NC11H0500GET530 |
| GE2 30S + QC<br>PP 25 FEMALE   | 25 | MPa 25<br>Psi 3625 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 186,1<br>7,33 | 66,5<br>2,62 | -             | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 55<br>2,17 | M42x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 30<br>1,18 | NC12H0500GET530 |
| GE2 38S + QC<br>PP 25 MALE     | 25 | MPa 25<br>Psi 3625 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 176<br>6,93   | 66,5<br>2,62 | 34,34<br>1,35 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -          | M52x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 38<br>1,50 | NC11H0501GET530 |
| GE2 38S + QC<br>PP 25 FEMALE   | 25 | MPa 25<br>Psi 3625 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 191,5<br>7,54 | 66,5<br>2,62 | -             | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 55<br>2,17 | M52x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 38<br>1,50 | NC12H0501GET530 |

## GE2 PP





## GE2 DIN 2353 LIGHT SERIES + ISO 7241/A FOR MALE/FEMALE PUSH-PULL

| TYPE                           | DN | PN       |           | A    | B     | C    | D     | d    | E     | F    | G    | H    | I    | A/QC    | ØM   | ØK*  | W*   | X*   | SW   | ØLW  | ØRA | CS | Carbon Steel    | ITEM CODE |
|--------------------------------|----|----------|-----------|------|-------|------|-------|------|-------|------|------|------|------|---------|------|------|------|------|------|------|-----|----|-----------------|-----------|
|                                |    |          |           |      |       |      |       |      |       |      |      |      |      |         |      |      |      |      |      |      |     |    |                 |           |
| GE2 10L + QC<br>PP 10 MALE     | 10 | MPa 42   | mm 40     | 17,4 | 99,2  | 44,4 | 17,3  | 11   | 54,25 | 35   | 110  | 93   | -    | M16x1,5 | 5,25 | 4,5  | 34   | 9    | 8    | 10   |     |    | NC11L0200GET230 |           |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 3,91  | 1,75 | 0,68  | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | -    |         | 0,21 | 0,18 | 1,34 | 0,35 | 0,31 | 0,39 |     |    |                 |           |
| GE2 10L + QC<br>PP 10 FEMALE   | 10 | MPa 42   | mm 40     | 17,4 | 110,2 | 44,4 | -     | 11   | 54,25 | 35   | 110  | 93   | 32   | M16x1,5 | 5,25 | 4,5  | 34   | 9    | 8    | 10   |     |    | NC12L0200GET230 |           |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 4,34  | 1,75 | -     | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | 1,26 |         | 0,21 | 0,18 | 1,34 | 0,35 | 0,31 | 0,39 |     |    |                 |           |
| GE2 12L + QC<br>PP 10 MALE     | 10 | MPa 42   | mm 40     | 17,4 | 100,8 | 44,4 | 17,3  | 11   | 54,25 | 35   | 110  | 93   | -    | M18x1,5 | 5,25 | 4,5  | 34   | 9    | 10   | 12   |     |    | NC11L0201GET230 |           |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 3,97  | 1,75 | 0,68  | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | -    |         | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 | 0,47 |     |    |                 |           |
| GE2 12L + QC<br>PP 10 FEMALE   | 10 | MPa 42   | mm 40     | 17,4 | 111,8 | 44,4 | -     | 11   | 54,25 | 35   | 110  | 93   | 32   | M18x1,5 | 5,25 | 4,5  | 34   | 9    | 10   | 12   |     |    | NC12L0201GET230 |           |
|                                |    | Psi 6090 | inch 1,57 | 0,69 | 4,40  | 1,75 | -     | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | 1,26 |         | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 | 0,47 |     |    |                 |           |
| GE2 15L + QC<br>PP 12,5 MALE   | 13 | MPa 35   | mm 43     | 19,7 | 116,5 | 48,4 | 20,5  | 11   | 57    | 37   | 110  | 97   | -    | M22x1,5 | 5,25 | 5    | 36   | 9    | 13   | 15   |     |    | NC11L0300GET330 |           |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,59  | 1,91 | 0,81  | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | -    |         | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | 0,59 |     |    |                 |           |
| GE2 15L + QC<br>PP 12,5 FEMALE | 13 | MPa 35   | mm 43     | 19,7 | 123   | 48,4 | -     | 11   | 57    | 37   | 110  | 97   | 38   | M22x1,5 | 5,25 | 5    | 36   | 9    | 13   | 15   |     |    | NC12L0300GET330 |           |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,84  | 1,91 | -     | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | 1,50 |         | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | 0,59 |     |    |                 |           |
| GE2 18L + QC<br>PP 12,5 MALE   | 13 | MPa 35   | mm 43     | 19,7 | 116,5 | 48,4 | 20,5  | 11   | 57    | 37   | 110  | 97   | -    | M26x1,5 | 5,25 | 5    | 36   | 9    | 13   | 18   |     |    | NC11L0301GET330 |           |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,59  | 1,91 | 0,81  | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | -    |         | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | 0,71 |     |    |                 |           |
| GE2 18L + QC<br>PP 12,5 FEMALE | 13 | MPa 35   | mm 43     | 19,7 | 123   | 48,4 | -     | 11   | 57    | 37   | 110  | 97   | 38   | M26x1,5 | 5,25 | 5    | 36   | 9    | 13   | 18   |     |    | NC12L0301GET330 |           |
|                                |    | Psi 5075 | inch 1,69 | 0,78 | 4,84  | 1,91 | -     | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | 1,50 |         | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | 0,71 |     |    |                 |           |
| GE2 22L + QC<br>PP 20 MALE     | 20 | MPa 25   | mm 57     | 25,4 | 142   | 62,5 | 29,1  | 14   | 75,5  | 49   | 180  | 105  | -    | M30x2   | 6,25 | 6    | 50   | 14   | 20   | 22   |     |    | NC11L0400GET430 |           |
|                                |    | Psi 3625 | inch 2,24 | 1,00 | 5,59  | 2,46 | 1,15  | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | -    |         | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 | 0,87 |     |    |                 |           |
| GE2 22L + QC<br>PP 20 FEMALE   | 20 | MPa 25   | mm 57     | 25,4 | 154   | 62,5 | -     | 14   | 75,5  | 49   | 180  | 105  | 47   | M30x2   | 6,25 | 6    | 50   | 14   | 20   | 22   |     |    | NC12L0400GET430 |           |
|                                |    | Psi 3625 | inch 2,24 | 1,00 | 6,06  | 2,46 | -     | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | 1,85 |         | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 | 0,87 |     |    |                 |           |
| GE2 28L + QC<br>PP 25 MALE     | 25 | MPa 25   | mm 65     | 29,5 | 169   | 66,5 | 34,4  | 14   | 83,5  | 55   | 180  | 113  | -    | M36x2   | 6,25 | 6    | 50   | 14   | 25   | 28   |     |    | NC11L0500GET530 |           |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 6,65  | 2,62 | 1,35  | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | -    |         | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | 1,10 |     |    |                 |           |
| GE2 28L + QC<br>PP 25 FEMALE   | 25 | MPa 25   | mm 65     | 29,5 | 184,5 | 66,5 | -     | 14   | 83,5  | 55   | 180  | 113  | 55   | M36x2   | 6,25 | 6    | 50   | 14   | 25   | 28   |     |    | NC12L0500GET530 |           |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 7,26  | 2,62 | -     | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 2,17 |         | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | 1,10 |     |    |                 |           |
| GE2 35L + QC<br>PP 25 MALE     | 25 | MPa 25   | mm 65     | 29,5 | 170   | 66,5 | 34,34 | 14   | 83,5  | 55   | 180  | 113  | -    | M45x2   | 6,25 | 6    | 50   | 14   | 25   | 35   |     |    | NC11L0501GET530 |           |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 6,69  | 2,62 | 1,35  | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | -    |         | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | 1,38 |     |    |                 |           |
| GE2 35L + QC<br>PP 25 FEMALE   | 25 | MPa 25   | mm 65     | 29,5 | 185,5 | 66,5 | -     | 14   | 83,5  | 55   | 180  | 113  | 55   | M45x2   | 6,25 | 6    | 50   | 14   | 25   | 35   |     |    | NC12L0501GET530 |           |
|                                |    | Psi 3625 | inch 2,56 | 1,16 | 7,30  | 2,62 | -     | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 2,17 |         | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | 1,38 |     |    |                 |           |

## GE2 VGA



FIXING HOLES INCLUDED

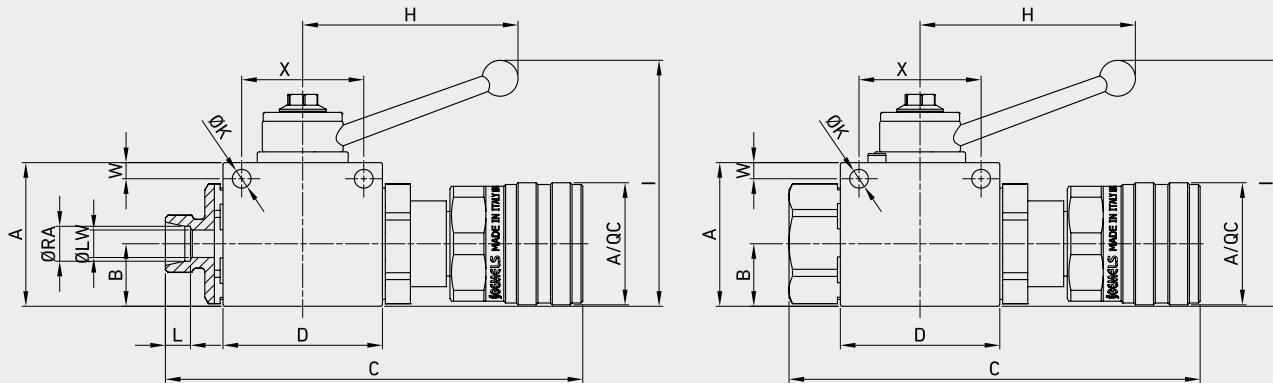


## ■ GE2 DIN/ISO 228 BSP + ISO 14541 SCREW-TO-CONNECT-COUPLEDGS

CS  
Carbon Steel


| TYPE                             | DN | PN       | A         | B    | C     | D    | E    | F     | G    | H    | I    | A/QC | ØM    | ØK*  | W*   | X*   | SW   | ØLW  | ITEM CODE       |
|----------------------------------|----|----------|-----------|------|-------|------|------|-------|------|------|------|------|-------|------|------|------|------|------|-----------------|
| GE2 G3/8 + QC<br>VGA 10 MALE     | 10 | MPa 42   | mm 40     | 17,4 | 114,5 | 44,4 | 11   | 54,25 | 35   | 110  | 93   | 34   | G 3/8 | 5,25 | 4,5  | 34   | 9    | 10   | NC15G0200GET230 |
|                                  |    | Psi 6090 | inch 1,57 | 0,69 | 4,51  | 1,75 | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | 1,34 |       | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 |                 |
| GE2 G3/8 + QC<br>VGA 10 FEMALE   | 10 | MPa 42   | mm 40     | 17,4 | 110   | 44,4 | 11   | 54,25 | 35   | 110  | 93   | -    | G 3/8 | 5,25 | 4,5  | 34   | 9    | 10   | NC16G0200GET230 |
|                                  |    | Psi 6090 | inch 1,57 | 0,69 | 4,33  | 1,75 | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | -    |       | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 |                 |
| GE2 G1/2 + QC<br>VGA 12,5 MALE   | 13 | MPa 42   | mm 43     | 19,7 | 127,3 | 48,4 | 11   | 57    | 37   | 110  | 97   | 43   | G 1/2 | 5,25 | 5    | 36   | 9    | 13   | NC15G0300GET330 |
|                                  |    | Psi 6090 | inch 1,69 | 0,78 | 5,01  | 1,91 | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | 1,69 |       | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 |                 |
| GE2 G1/2 + QC<br>VGA 12,5 FEMALE | 13 | MPa 42   | mm 43     | 19,7 | 117   | 48,4 | 11   | 57    | 37   | 110  | 97   | -    | G 1/2 | 5,25 | 5    | 36   | 9    | 13   | NC16G0300GET330 |
|                                  |    | Psi 6090 | inch 1,69 | 0,78 | 4,61  | 1,91 | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | -    |       | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 |                 |
| GE2 G3/4 + QC<br>VGA 20 MALE     | 20 | MPa 42   | mm 57     | 25,4 | 146,5 | 62,5 | 14   | 75,5  | 49   | 180  | 105  | 48   | G 3/4 | 6,25 | 6    | 50   | 14   | 20   | NC15G0400GET430 |
|                                  |    | Psi 6090 | inch 2,24 | 1,00 | 5,77  | 2,46 | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | 1,89 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 |                 |
| GE2 G3/4 + QC<br>VGA 20 FEMALE   | 20 | MPa 42   | mm 57     | 25,4 | 145,1 | 62,5 | 14   | 75,5  | 49   | 180  | 105  | -    | G 3/4 | 6,25 | 6    | 50   | 14   | 20   | NC16G0400GET430 |
|                                  |    | Psi 6090 | inch 2,24 | 1,00 | 5,71  | 2,46 | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | -    |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 |                 |
| GE2 G1 + QC<br>VGA 25 MALE       | 25 | MPa 35   | mm 65     | 29,5 | 178,5 | 66,5 | 14   | 83,5  | 55   | 180  | 113  | 57   | G 1   | 6,25 | 6    | 50   | 14   | 25   | NC15G0500GET530 |
|                                  |    | Psi 5075 | inch 2,56 | 1,16 | 7,03  | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 2,24 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 |                 |
| GE2 G1 + QC<br>VGA 25 FEMALE     | 25 | MPa 35   | mm 65     | 29,5 | 175   | 66,5 | 14   | 83,5  | 55   | 180  | 113  | -    | G 1   | 6,25 | 6    | 50   | 14   | 25   | NC16G0500GET530 |
|                                  |    | Psi 5075 | inch 2,56 | 1,16 | 6,89  | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | -    |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 |                 |

## GE2 VGA



## GE2 ANSI/ASME B1.20.1 NPT + ISO 14541 SCREW-TO-CONNECT-COUPLEDGS

| TYPE                             | DN | PN       |      | A    | B    | C    | D    | E    | F     | G    | H    | I     | A/QC | ØM    | ØK*  | W*   | X*    | SW   | ØLW  | ITEM CODE       |
|----------------------------------|----|----------|------|------|------|------|------|------|-------|------|------|-------|------|-------|------|------|-------|------|------|-----------------|
|                                  |    |          |      | MPa  | 42   | mm   | 40   | 17,4 | 114,5 | 44,4 | 11   | 54,25 | 35   | 110   | 93   | 34   | N 3/8 | 5,25 | 4,5  | 34              |
| GE2 N3/8 + QC<br>VGA 10 MALE     | 10 | Psi 6090 | inch | 1,57 | 0,69 | 4,51 | 1,75 | 0,43 | 2,14  | 1,38 | 4,33 | 3,66  | 1,34 |       | 0,21 | 0,18 | 1,34  | 0,35 | 0,39 | NC15N0200GET230 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |       |      |      |       |      |      | NC16N0200GET230 |
| GE2 N3/8 + QC<br>VGA 10 FEMALE   | 10 | Psi 6090 | inch | 1,57 | 0,69 | 4,33 | 1,75 | 0,43 | 2,14  | 1,38 | 4,33 | 3,66  | -    | N 3/8 | 5,25 | 4,5  | 34    | 9    | 10   | NC15N0200GET230 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |       |      |      |       |      |      | NC16N0200GET230 |
| GE2 N1/2 + QC<br>VGA 12,5 MALE   | 13 | Psi 6090 | inch | 1,69 | 0,78 | 5,01 | 1,91 | 0,43 | 2,24  | 1,46 | 4,33 | 3,82  | 1,69 | N 1/2 | 5,25 | 5    | 36    | 9    | 13   | NC15N0300GET330 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |       |      |      |       |      |      | NC16N0300GET330 |
| GE2 N1/2 + QC<br>VGA 12,5 FEMALE | 13 | Psi 6090 | inch | 1,69 | 0,78 | 4,61 | 1,91 | 0,43 | 2,24  | 1,46 | 4,33 | 3,82  | -    | N 1/2 | 5,25 | 5    | 36    | 9    | 13   | NC15N0300GET330 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |       |      |      |       |      |      | NC16N0300GET330 |
| GE2 N3/4 + QC<br>VGA 20 MALE     | 20 | Psi 6090 | inch | 2,24 | 1,00 | 5,77 | 2,46 | 0,55 | 2,97  | 1,93 | 7,09 | 4,13  | 1,89 | N 3/4 | 6,25 | 6    | 50    | 14   | 20   | NC15N0400GET430 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |       |      |      |       |      |      | NC16N0400GET430 |
| GE2 N3/4 + QC<br>VGA 20 FEMALE   | 20 | Psi 6090 | inch | 2,24 | 1,00 | 5,71 | 2,46 | 0,55 | 2,97  | 1,93 | 7,09 | 4,13  | -    | N 3/4 | 6,25 | 6    | 50    | 14   | 20   | NC15N0400GET430 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |       |      |      |       |      |      | NC16N0400GET430 |
| GE2 N1 + QC<br>VGA 25 MALE       | 25 | Psi 5075 | inch | 2,56 | 1,16 | 7,03 | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45  | 2,24 | N 1   | 6,25 | 6    | 50    | 14   | 25   | NC15N0500GET530 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |       |      |      |       |      |      | NC16N0500GET530 |
| GE2 N1 + QC<br>VGA 25 FEMALE     | 25 | Psi 5075 | inch | 2,56 | 1,16 | 6,89 | 2,62 | 0,56 | 3,29  | 2,17 | 7,09 | 4,45  | -    | N 1   | 6,25 | 6    | 50    | 14   | 25   | NC15N0500GET530 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |       |      |      |       |      |      | NC16N0500GET530 |






## GE2 SAE J1926-1 + ISO 14541 SCREW-TO-CONNECT-COUPLEDGS

| TYPE                             | DN | PN       |      | A    | B    | C    | D    | E    | F     | G    | H    | I     | A/QC | ØM     | ØK*  | W*   | X*   | SW   | ØLW  | ITEM CODE       |
|----------------------------------|----|----------|------|------|------|------|------|------|-------|------|------|-------|------|--------|------|------|------|------|------|-----------------|
|                                  |    |          |      | MPa  | 42   | mm   | 40   | 17,5 | 114,5 | 44,4 | 11,1 | 54,25 | 35   | 110    | 93   | 34   | 9/16 | 5,25 | 4,5  | 34              |
| GE2 SAE6 + QC<br>VGA 10 MALE     | 10 | Psi 6090 | inch | 1,57 | 0,69 | 4,51 | 1,75 | 0,44 | 2,14  | 1,38 | 4,33 | 3,66  | 1,34 | UNF    | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 | NC15S0200GET230 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |        |      |      |      |      |      | NC16S0200GET230 |
| GE2 SAE6 + QC<br>VGA 10 FEMALE   | 10 | Psi 6090 | inch | 1,57 | 0,69 | 4,33 | 1,75 | 0,44 | 2,14  | 1,38 | 4,33 | 3,66  | -    | 9/16   | 5,25 | 4,5  | 34   | 9    | 10   | NC15S0200GET230 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |        |      |      |      |      |      | NC16S0200GET230 |
| GE2 SAE8 + QC<br>VGA 12,5 MALE   | 13 | Psi 6090 | inch | 1,69 | 0,78 | 5,01 | 1,91 | 0,44 | 2,25  | 1,46 | 4,33 | 3,82  | 1,69 | UNF    | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | NC15S0300GET330 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |        |      |      |      |      |      | NC16S0300GET330 |
| GE2 SAE8 + QC<br>VGA 12,5 FEMALE | 13 | Psi 6090 | inch | 1,69 | 0,78 | 4,61 | 1,91 | 0,44 | 2,25  | 1,46 | 4,33 | 3,82  | -    | 9/16   | 5,25 | 5    | 36   | 9    | 13   | NC16S0300GET330 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |        |      |      |      |      |      | NC15S0300GET330 |
| GE2 SAE12 + QC<br>VGA 20 MALE    | 20 | Psi 6090 | inch | 2,24 | 1,00 | 5,77 | 2,46 | 0,56 | 2,97  | 1,93 | 7,09 | 4,13  | 1,89 | UNF    | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 | NC15S0400GET430 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |        |      |      |      |      |      | NC16S0400GET430 |
| GE2 SAE12 + QC<br>VGA 20 FEMALE  | 20 | Psi 6090 | inch | 2,24 | 1,00 | 5,71 | 2,46 | 0,56 | 2,97  | 1,93 | 7,09 | 4,13  | -    | 9/16   | 6,25 | 6    | 50   | 14   | 20   | NC15S0400GET430 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |        |      |      |      |      |      | NC16S0400GET430 |
| GE2 G1 + QC<br>VGA 25 MALE       | 25 | Psi 5075 | inch | 2,56 | 1,16 | 7,03 | 2,62 | 0,56 | 3,29  | 2,17 | 7,09 | 4,45  | 2,24 | 1 1/16 | 6,25 | 6    | 50   | 14   | 25   | NC15S0500GET530 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |        |      |      |      |      |      | NC16S0500GET530 |
| GE2 G1 + QC<br>VGA 25 FEMALE     | 25 | Psi 5075 | inch | 2,56 | 1,16 | 6,89 | 2,62 | 0,56 | 3,29  | 2,17 | 7,09 | 4,45  | -    | 1 1/16 | 6,25 | 6    | 50   | 14   | 25   | NC15S0500GET530 |
|                                  |    |          |      |      |      |      |      |      |       |      |      |       |      |        |      |      |      |      |      | NC16S0500GET530 |

## GE2 VGA

FIXING HOLES INCLUDED

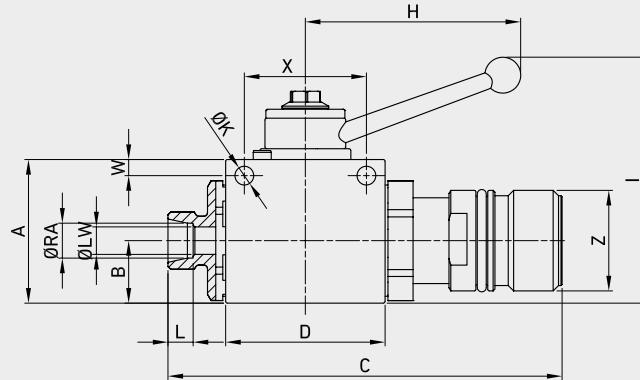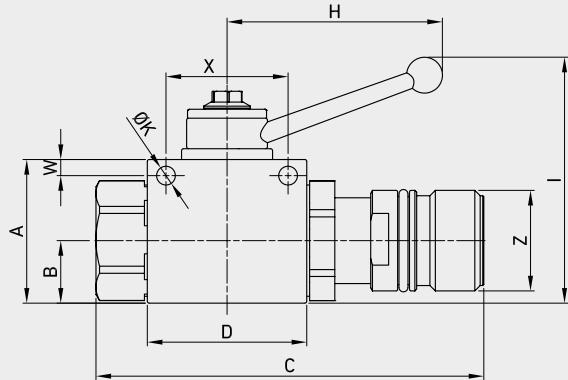


## GE2 DIN 2353 HEAVY SERIES + ISO 14541 SCREW-TO-CONNECT-COUPLEDGS

CS

Carbon Steel

| TYPE                            | DN | PN                 | A                  | B            | C             | D            | E          | F             | G          | H           | I           | A/QC       | ØM      | ØK*          | W*          | X*         | SW         | ØLW        | ØRA        | ITEM CODE       |
|---------------------------------|----|--------------------|--------------------|--------------|---------------|--------------|------------|---------------|------------|-------------|-------------|------------|---------|--------------|-------------|------------|------------|------------|------------|-----------------|
| GE2 12S + QC<br>VGA 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 116<br>4,57   | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 34<br>1,34 | M20x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 | NC15H0200GET230 |
| GE2 12S + QC<br>VGA 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 109,5<br>4,31 | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -          | M20x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 | NC16H0200GET230 |
| GE2 14S + QC<br>VGA 10 MALE     | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 119,2<br>4,69 | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | 34<br>1,34 | M22x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 14<br>0,55 | NC15H0201GET230 |
| GE2 14S + QC<br>VGA 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 112,7<br>4,44 | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | -          | M22x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 14<br>0,55 | NC16H0201GET230 |
| GE2 16S + QC<br>VGA 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 130,3<br>5,13 | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 43<br>1,69 | M24x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 16<br>0,63 | NC15H0300GET330 |
| GE2 16S + QC<br>VGA 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 120<br>4,72   | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -          | M24x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 16<br>0,63 | NC16H0300GET330 |
| GE2 20S + QC<br>VGA 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 132<br>5,20   | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | 43<br>1,69 | M30x2   | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 20<br>0,79 | NC15H0301GET330 |
| GE2 20S + QC<br>VGA 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 122<br>4,80   | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | -          | M30x2   | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 20<br>0,79 | NC16H0301GET330 |
| GE2 25S + QC<br>VGA 20 MALE     | 20 | MPa 42<br>Psi 6090 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 154<br>6,06   | 62,5<br>2,46 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | 48<br>1,89 | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 25<br>0,98 | NC15H0400GET430 |
| GE2 25S + QC<br>VGA 20 FEMALE   | 20 | MPa 42<br>Psi 6090 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 153,1<br>6,03 | 62,5<br>2,46 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | -          | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 25<br>0,98 | NC16H0400GET430 |
| GE2 30S + QC<br>VGA 25 MALE     | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 182,6<br>7,19 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 57<br>2,24 | M42x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 30<br>1,18 | NC15H0500GET530 |
| GE2 30S + QC<br>VGA 25 FEMALE   | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 179,1<br>7,05 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -          | M42x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 30<br>1,18 | NC16H0500GET530 |
| GE2 38S + QC<br>VGA 25 MALE     | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 188<br>7,26   | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | 57<br>2,24 | M52x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 38<br>1,50 | NC15H0501GET530 |
| GE2 38S + QC<br>VGA 25 FEMALE   | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 184,5<br>7,26 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | -          | M52x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 38<br>1,50 | NC16H0501GET530 |

## GE2 VGA



## GE2 DIN 2353 LIGHT SERIES + ISO 14541 SCREW-TO-CONNECT-COUPLEDGS

| TYPE                            | DN | PN                 | A  | B    | C     | D    | E  | F     | G  | H    | I   | A/QC | ØM      | ØK*  | W*  | X*   | SW | ØLW  | ØRA | ITEM CODE       |
|---------------------------------|----|--------------------|----|------|-------|------|----|-------|----|------|-----|------|---------|------|-----|------|----|------|-----|-----------------|
|                                 |    |                    | mm | inch | mm    | inch | mm | inch  | mm | inch | mm  | inch | mm      | inch | mm  | inch | mm | inch | mm  | inch            |
| GE2 10L + QC<br>VGA 10 MALE     | 10 | MPa 42<br>Psi 6090 | 40 | 17,4 | 116,2 | 44,4 | 11 | 54,25 | 35 | 110  | 93  | 34   | M16x1,5 | 5,25 | 4,5 | 34   | 9  | 8    | 10  | NC15L0200GET230 |
| GE2 10L + QC<br>VGA 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | 40 | 17,4 | 109,7 | 44,4 | 11 | 54,25 | 35 | 110  | 93  | -    | M16x1,5 | 5,25 | 4,5 | 34   | 9  | 8    | 10  | NC16L0200GET230 |
| GE2 12L + QC<br>VGA 10 MALE     | 10 | MPa 42<br>Psi 6090 | 40 | 17,4 | 117,8 | 44,4 | 11 | 54,25 | 35 | 110  | 93  | 34   | M18x1,5 | 5,25 | 4,5 | 34   | 9  | 10   | 12  | NC15L0201GET230 |
| GE2 12L + QC<br>VGA 10 FEMALE   | 10 | MPa 42<br>Psi 6090 | 40 | 17,4 | 111,3 | 44,4 | 11 | 54,25 | 35 | 110  | 93  | -    | M18x1,5 | 5,25 | 4,5 | 34   | 9  | 10   | 12  | NC16L0201GET230 |
| GE2 15L + QC<br>VGA 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | 43 | 19,7 | 129,3 | 48,4 | 11 | 57    | 37 | 110  | 97  | 43   | M22x1,5 | 5,25 | 5   | 36   | 9  | 13   | 15  | NC15L0300GET330 |
| GE2 15L + QC<br>VGA 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | 43 | 19,7 | 119   | 48,4 | 11 | 57    | 37 | 110  | 97  | -    | M22x1,5 | 5,25 | 5   | 36   | 9  | 13   | 15  | NC16L0300GET330 |
| GE2 18L + QC<br>VGA 12,5 MALE   | 13 | MPa 42<br>Psi 6090 | 43 | 19,7 | 129,3 | 48,4 | 11 | 57    | 37 | 110  | 97  | 43   | M26x1,5 | 5,25 | 5   | 36   | 9  | 13   | 18  | NC15L0301GET330 |
| GE2 18L + QC<br>VGA 12,5 FEMALE | 13 | MPa 42<br>Psi 6090 | 43 | 19,7 | 119   | 48,4 | 11 | 57    | 37 | 110  | 97  | -    | M26x1,5 | 5,25 | 5   | 36   | 9  | 13   | 18  | NC16L0301GET330 |
| GE2 22L + QC<br>VGA 20 MALE     | 20 | MPa 42<br>Psi 6090 | 57 | 25,4 | 153,5 | 62,5 | 14 | 75,5  | 49 | 180  | 105 | 48   | M30x2   | 6,25 | 6   | 50   | 14 | 20   | 22  | NC15L0400GET430 |
| GE2 22L + QC<br>VGA 20 FEMALE   | 20 | MPa 42<br>Psi 6090 | 57 | 25,4 | 152,6 | 62,5 | 14 | 75,5  | 49 | 180  | 105 | -    | M30x2   | 6,25 | 6   | 50   | 14 | 20   | 22  | NC16L0400GET430 |
| GE2 28L + QC<br>VGA 25 MALE     | 25 | MPa 35<br>Psi 5075 | 65 | 29,5 | 181   | 66,5 | 14 | 83,5  | 55 | 180  | 113 | 57   | M36x2   | 6,25 | 6   | 50   | 14 | 25   | 28  | NC15L0500GET530 |
| GE2 28L + QC<br>VGA 25 FEMALE   | 25 | MPa 35<br>Psi 5075 | 65 | 29,5 | 177,5 | 66,5 | 14 | 83,5  | 55 | 180  | 113 | -    | M36x2   | 6,25 | 6   | 50   | 14 | 25   | 28  | NC16L0500GET530 |
| GE2 35L + QC<br>VGA 25 MALE     | 25 | MPa 35<br>Psi 5075 | 65 | 29,5 | 182   | 66,5 | 14 | 83,5  | 55 | 180  | 113 | 57   | M45x2   | 6,25 | 6   | 50   | 14 | 25   | 35  | NC15L0501GET530 |
| GE2 35L + QC<br>VGA 25 FEMALE   | 25 | MPa 35<br>Psi 5075 | 65 | 29,5 | 178,5 | 66,5 | 14 | 83,5  | 55 | 180  | 113 | -    | M45x2   | 6,25 | 6   | 50   | 14 | 25   | 35  | NC16L0501GET530 |





## HIGH PRESSURE BALL VALVES FOR HYDRAULIC FIELD

For hydraulic and industrial field, since 50 years **GEMELS** produces high pressure ball valves, known all over the world as synonym of maximum reliability and high quality. **GEMELS** is one of the World Leader Manufacturer. The range includes valves with 2way/3way/4way and with different threads. We can also study customized products for our clients according to the application.

# BALL VALVES




# CUSTOMIZED LEAN SOLUTION

Edition. 21.4



## LEAN CUSTOMIZED SOLUTIONS

**GEMELS** studies and designs special lean customized solutions for our customers based on the specific requests. Thanks to the close collaboration between **GEMELS** technical department and the engineering department of our customers, we are able to study the best and most suitable solution for the application where our products will be mounted. **GEMELS** can realize prototypes and samples. Our customized solutions can range over different fields, like agriculture, fire-fighting, construction and building, lifting, automotive, steel plant, heavy equipment and marine.

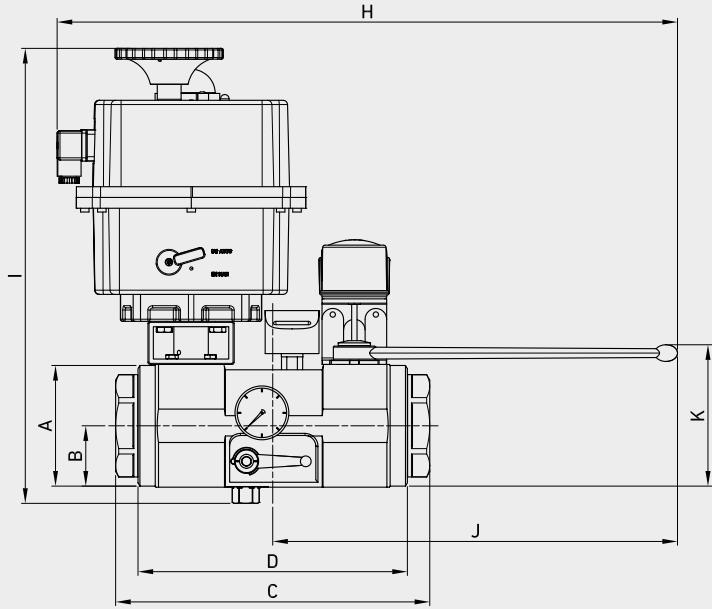


## FOR FIRE FIGHTING

| TYPE / ITEM CODE | DN | A                         | B          | C            | D           | G           | G1            | H            | I            | J            | K           | L           | CH | ØLW        |
|------------------|----|---------------------------|------------|--------------|-------------|-------------|---------------|--------------|--------------|--------------|-------------|-------------|----|------------|
| GB2 S6 1 1/2     | 4  | mm<br>112<br>inch<br>4,41 | 56<br>2,20 | 292<br>11,50 | 250<br>9,84 | 118<br>4,65 | 137,5<br>5,41 | 576<br>22,68 | 422<br>16,61 | 376<br>14,80 | 131<br>5,16 | 216<br>8,50 | 85 | 48<br>1,89 |

On request, VDS and FM approvals could be available

## CUSTOMIZED



## HYDRAULIC BALL VALVES

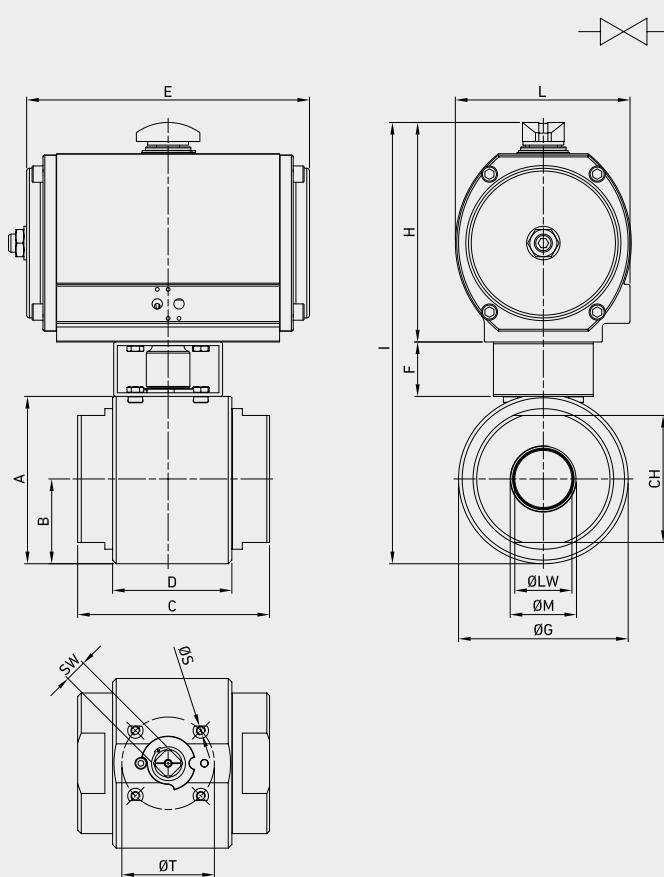

## FOR FIRE FIGHTING

| TYPE / ITEM CODE | DN  | A         | B    | C     | D     | E     | F    | ØG   | H    | I     | L     | ØM      | CH  | ØS  | ØT   | ISO 5211 | SW   | ØLW  |
|------------------|-----|-----------|------|-------|-------|-------|------|------|------|-------|-------|---------|-----|-----|------|----------|------|------|
| GHP G 1/2        | 13  | mm 53     | 27,5 | 119   | 79    | 150   | 40   | 55   | 96   | 190   | 70    | G 1/2   | 38  | M5  | 36   | F03      | 9    | 13   |
|                  |     | inch 2,09 | 1,08 | 4,69  | 3,11  | 5,91  | 1,57 | 2,17 | 3,78 | 7,48  | 2,76  |         |     |     | 1,42 |          | 0,35 | 0,51 |
| GHP G 3/4        | 20  | mm 70     | 38,5 | 149   | 99    | 206   | 40   | 77   | 143  | 253   | 112,5 | G 3/4   | 55  | M6  | 50   | F05      | 14   | 20   |
|                  |     | inch 2,76 | 1,52 | 5,87  | 3,90  | 8,11  | 1,57 | 3,03 | 5,63 | 9,96  | 4,43  |         |     |     | 1,97 |          | 0,55 | 0,79 |
| GHP G 1          | 20  | mm 80,5   | 45   | 168   | 105   | 206   | 40   | 90   | 143  | 263   | 112,5 | G 1     | 60  | M6  | 50   | F05      | 14   | 25   |
|                  |     | inch 3,17 | 1,77 | 6,61  | 4,13  | 8,11  | 1,57 | 3,54 | 5,63 | 10,35 | 4,43  |         |     |     | 1,97 |          | 0,55 | 0,98 |
| GHP G 1 1/4      | 20  | mm 95     | 48,5 | 156   | 106   | 218   | 40   | 97   | 165  | 300   | 137   | G 1 1/4 | 70  | M6  | 50   | F05      | 17   | 32   |
|                  |     | inch 3,74 | 1,91 | 6,14  | 4,17  | 8,58  | 1,57 | 3,82 | 6,50 | 11,81 | 5,39  |         |     |     | 1,97 |          | 0,67 | 1,26 |
| GHP G 1 1/2      | 20  | mm 111,5  | 58   | 166,5 | 110,5 | 218   | 40   | 116  | 165  | 317   | 137   | G 1 1/2 | 75  | M6  | 50   | F05      | 17   | 40   |
|                  |     | inch 4,39 | 2,28 | 6,56  | 4,35  | 8,58  | 1,57 | 4,57 | 6,50 | 12,48 | 5,39  |         |     |     | 1,97 |          | 0,67 | 1,57 |
| GHP G 2          | 20  | mm 118,5  | 61,5 | 175   | 115   | 266   | 40   | 123  | 200  | 359   | 158   | G 2     | 85  | M6  | 50   | F05      | 17   | 49   |
|                  |     | inch 4,67 | 2,42 | 6,89  | 4,53  | 10,47 | 1,57 | 4,84 | 7,87 | 14,13 | 6,22  |         |     |     | 1,97 |          | 0,67 | 1,93 |
| GHP G 2 1/2      | 20  | mm 184,5  | 93,5 | 211,5 | 131,5 | 266   | 60   | 187  | 200  | 425   | 158   | G 2 1/2 | 140 | M10 | 102  | F10      | 24   | 63   |
|                  |     | inch 7,26 | 3,68 | 8,33  | 5,18  | 10,47 | 2,36 | 7,36 | 7,87 | 16,73 | 6,22  |         |     |     | 4,02 |          | 0,94 | 2,48 |
| GHP G 3          | 20  | mm 200    | 102  | 239   | 162,5 | 358   | 60   | 204  | 248  | 508   | 198   | G 3     | 140 | M10 | 102  | F10      | 24   | 74   |
|                  |     | inch 7,87 | 4,02 | 9,41  | 6,40  | 14,09 | 2,36 | 8,03 | 9,76 | 20,00 | 7,80  |         |     |     | 4,02 |          | 0,94 | 2,91 |
| GHP G 4          | 100 | mm 236    | 120  | 295,5 | 219   | 358   | 60   | 240  | 248  | 544   | 198   | G 4     | 170 | M10 | 102  | F10      | 24   | 95   |
|                  |     | inch 9,29 | 4,72 | 11,63 | 8,62  | 14,09 | 2,36 | 9,45 | 9,76 | 21,42 | 7,80  |         |     |     | 4,02 |          | 0,94 | 3,74 |

On request, VDS and FM approvals could be available

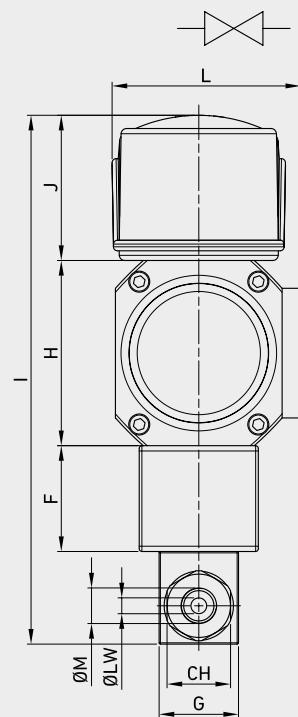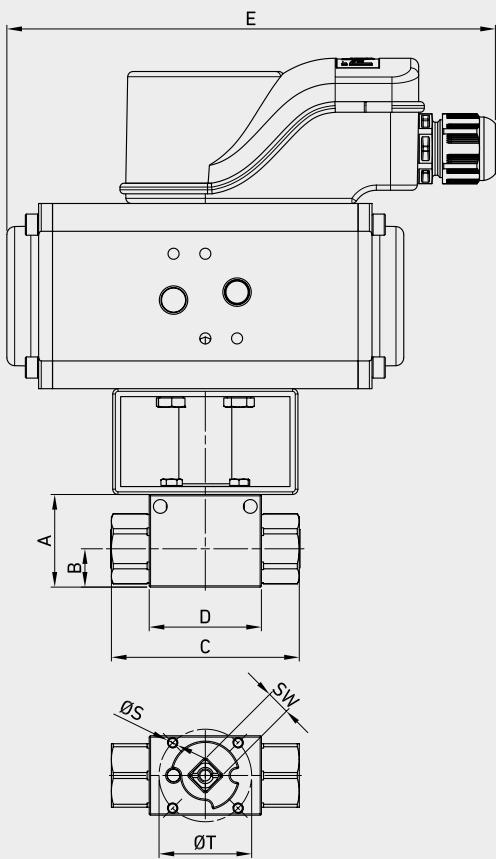


## FOR FIRE FIGHTING

| TYPE / ITEM CODE | DN | A         | B     | C     | D    | E    | F    | G    | H    | I     | J    | L    | ØM      | CH | ØS | ØT   | ISO 5211 | SW   | ØLW  |
|------------------|----|-----------|-------|-------|------|------|------|------|------|-------|------|------|---------|----|----|------|----------|------|------|
| GE2 G 1/8        | 4  | mm 35     | 14,5  | 71    | 42,4 | 185  | 40   | 30   | 70   | 200   | 55   | 72   | G 1/8   | 24 | M4 | 35   | F03      | 9    | 4    |
|                  |    | inch 1,38 | 0,57  | 2,80  | 1,67 | 7,28 | 1,57 | 1,18 | 2,76 | 7,87  | 2,17 | 2,83 |         |    |    | 1,38 |          | 0,35 | 0,16 |
| GE2 G 1/4        | 6  | mm 35     | 14,5  | 71    | 42,4 | 185  | 40   | 30   | 70   | 200   | 55   | 72   | G 1/4   | 24 | M4 | 35   | F03      | 9    | 6    |
|                  |    | inch 1,38 | 0,57  | 2,80  | 1,67 | 7,28 | 1,57 | 1,18 | 2,76 | 7,87  | 2,17 | 2,83 |         |    |    | 1,38 |          | 0,35 | 0,24 |
| GE2 G 3/8        | 10 | mm 40     | 17,4  | 73    | 44,4 | 185  | 40   | 35   | 70   | 205   | 55   | 72   | G 3/8   | 30 | M5 | 36   | F03      | 9    | 10   |
|                  |    | inch 1,57 | 0,69  | 2,87  | 1,75 | 7,28 | 1,57 | 1,38 | 2,76 | 8,07  | 2,17 | 2,83 |         |    |    | 1,42 |          | 0,35 | 0,39 |
| GE2 G 1/2        | 13 | mm 43     | 19,65 | 83    | 48,4 | 185  | 40   | 37   | 70   | 208   | 55   | 72   | G 1/2   | 32 | M5 | 36   | F03      | 9    | 13   |
|                  |    | inch 1,69 | 0,77  | 3,27  | 1,91 | 7,28 | 1,57 | 1,46 | 2,76 | 8,19  | 2,17 | 2,83 |         |    |    | 1,42 |          | 0,35 | 0,51 |
| GE2 G 3/4        | 20 | mm 57     | 25,4  | 95    | 62,5 | 213  | 40   | 49   | 118  | 270   | 55   | 113  | G 3/4   | 41 | M6 | 50   | F05      | 14   | 20   |
|                  |    | inch 2,24 | 1,00  | 3,74  | 2,46 | 8,39 | 1,57 | 1,93 | 4,65 | 10,63 | 2,17 | 4,45 |         |    |    | 1,97 |          | 0,55 | 0,79 |
| GE2 G 1          | 25 | mm 65     | 29,5  | 112,4 | 66,5 | 213  | 40   | 55   | 118  | 278   | 55   | 113  | G 1     | 50 | M6 | 50   | F05      | 14   | 25   |
|                  |    | inch 2,56 | 1,16  | 4,43  | 2,62 | 8,39 | 1,57 | 2,17 | 4,65 | 10,94 | 2,17 | 4,45 |         |    |    | 1,97 |          | 0,55 | 0,98 |
| GE2 G 1 1/4 R    | 25 | mm 65     | 29,5  | 120,4 | 66,5 | 213  | 40   | 55   | 118  | 278   | 55   | 113  | G 1 1/4 | 55 | M6 | 50   | F05      | 14   | 25   |
|                  |    | inch 2,56 | 1,16  | 4,74  | 2,62 | 8,39 | 1,57 | 2,17 | 4,65 | 10,94 | 2,17 | 4,45 |         |    |    | 1,97 |          | 0,55 | 0,98 |
| GE2 G 1 1/2 R    | 25 | mm 65     | 29,5  | 124,4 | 66,5 | 213  | 40   | 55   | 118  | 278   | 55   | 113  | G 1 1/2 | 60 | M6 | 50   | F05      | 14   | 25   |
|                  |    | inch 2,56 | 1,16  | 4,90  | 2,62 | 8,39 | 1,57 | 2,17 | 4,65 | 10,94 | 2,17 | 4,45 |         |    |    | 1,97 |          | 0,55 | 0,98 |

On request, VDS and FM approvals could be available


## CUSTOMIZED

## HYDRAULIC BALL VALVES

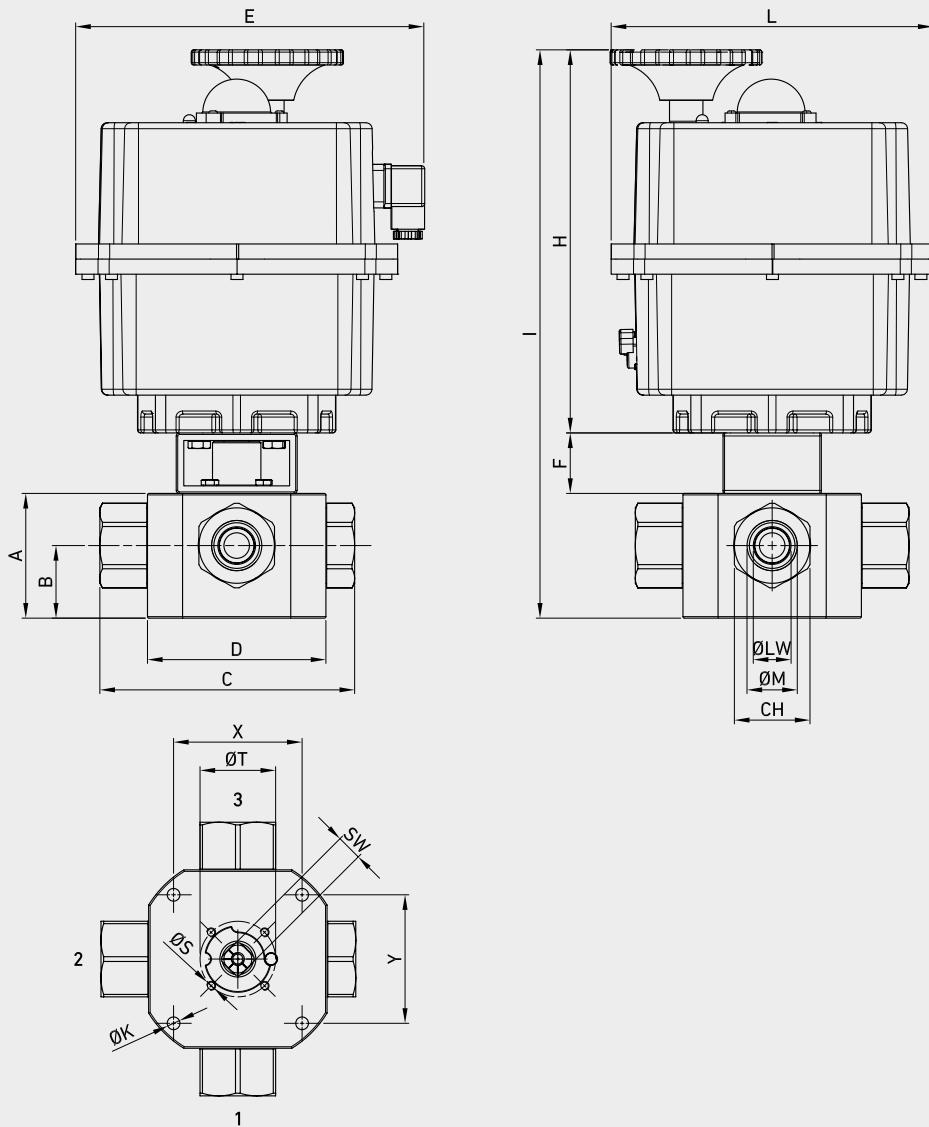

## FOR AUTOMOTIVE

| TYPE / ITEM CODE | DN | A                    | B          | C           | D           | E           | F          | H           | I            | L           | CH         | ØK          | ØT       | ØS          | X          | Y          | SW         | ØM         | ØLW |
|------------------|----|----------------------|------------|-------------|-------------|-------------|------------|-------------|--------------|-------------|------------|-------------|----------|-------------|------------|------------|------------|------------|-----|
| GEX G 2          | 25 | mm 82,5<br>inch 3,25 | 48<br>1,89 | 169<br>6,65 | 118<br>4,65 | 230<br>9,06 | 40<br>1,57 | 253<br>9,96 | 376<br>14,80 | 218<br>8,58 | 50<br>0,33 | 8,5<br>1,97 | 50<br>M6 | 8,5<br>3,35 | 85<br>3,35 | 17<br>0,67 | G 1<br>M 1 | 25<br>0,98 |     |

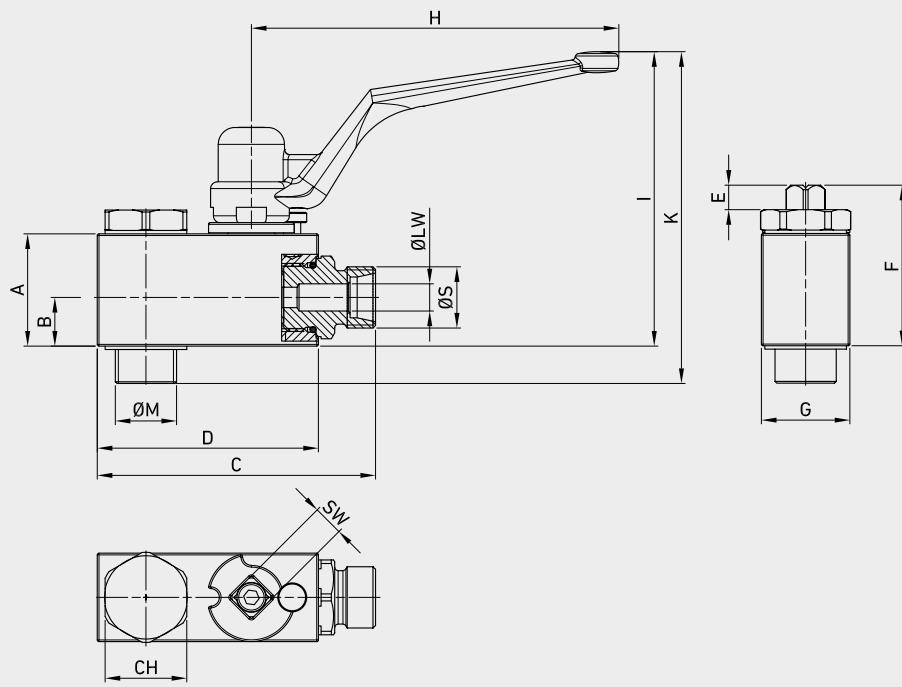


## FOR AGRICULTURAL

| TYPE / ITEM CODE | DN | A          | B          | C            | D            | E          | F           | G            | H          | I           | SW         | CH        | ØLW | K         | ØM           | ØS                 |
|------------------|----|------------|------------|--------------|--------------|------------|-------------|--------------|------------|-------------|------------|-----------|-----|-----------|--------------|--------------------|
| GE1 EXTENDED 1/4 | 6  | mm<br>inch | 33<br>1,30 | 14,3<br>0,56 | 81,8<br>3,22 | 65<br>2,56 | 7,2<br>0,28 | 47,2<br>1,86 | 26<br>1,02 | 108<br>4,25 | 87<br>3,43 | 9<br>0,35 | 24  | 6<br>0,24 | 97,5<br>3,84 | M18x1,5<br>M18x1,5 |


## CUSTOMIZED

### HYDRAULIC BALL VALVES

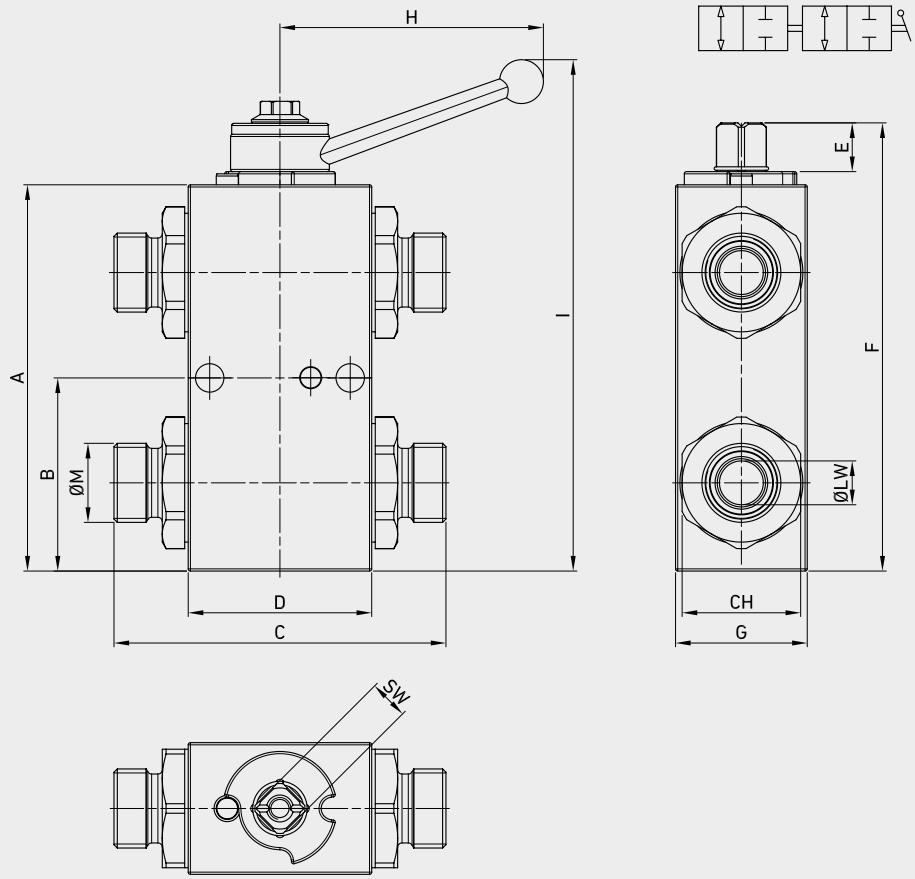

## FOR AGRICULTURAL

| TYPE / ITEM CODE  | DN | A    | B    | C    | D    | E    | F    | G    | H    | I    | Ø M  | CH      | SW | Ø LW |      |
|-------------------|----|------|------|------|------|------|------|------|------|------|------|---------|----|------|------|
| GE1 TANDEM DIN12L | 10 | mm   | 88   | 44   | 75,6 | 41,8 | 11,1 | 102  | 30   | 60   | 116  | M18x1,5 | 27 | 9    | 10   |
|                   |    | inch | 3,46 | 1,73 | 2,98 | 1,65 | 0,44 | 4,02 | 1,18 | 2,36 | 4,57 |         |    | 0,35 | 0,39 |
| GE1 TANDEM G3/8   | 10 | mm   | 88   | 44   | 71   | 41,8 | 11,1 | 102  | 30   | 104  | 130  | G3/8    | 27 | 9    | 10   |
|                   |    | inch | 3,46 | 1,73 | 2,80 | 1,65 | 0,44 | 4,02 | 1,18 | 4,09 | 5,12 |         |    | 0,35 | 0,39 |
| GE1 TANDEM DIN15L | 13 | mm   | 88   | 44   | 83   | 44,4 | 11,1 | 102  | 35   | 110  | 131  | M22x1,5 | 30 | 9    | 13   |
|                   |    | inch | 3,46 | 1,73 | 3,27 | 1,75 | 0,44 | 4,02 | 1,38 | 4,33 | 5,16 |         |    | 0,35 | 0,51 |
| GE1 TANDEM G1/2   | 13 | mm   | 88   | 44   | 83   | 44,4 | 11,1 | 102  | 35   | 110  | 131  | G1/2    | 30 | 9    | 12   |
|                   |    | inch | 3,46 | 1,73 | 3,27 | 1,75 | 0,44 | 4,02 | 1,38 | 4,33 | 5,16 |         |    | 0,35 | 0,47 |



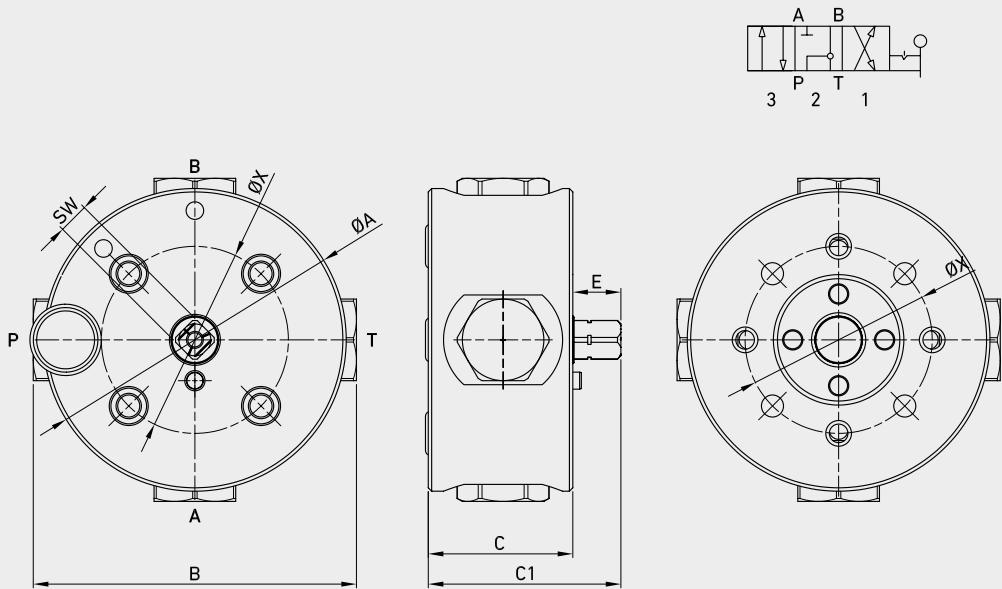


## FOR AGRICULTURAL

| TYPE / ITEM CODE | DN | ØA         | B          | C          | C1           | E          | ØX         | SW         |           |
|------------------|----|------------|------------|------------|--------------|------------|------------|------------|-----------|
| GP4K 1/4         | 6  | mm<br>inch | 89<br>3,50 | 95<br>3,74 | 42,5<br>1,67 | 57<br>2,24 | 14<br>0,55 | 55<br>2,17 | 9<br>0,35 |




## CUSTOMIZED

## HYDRAULIC BALL VALVES

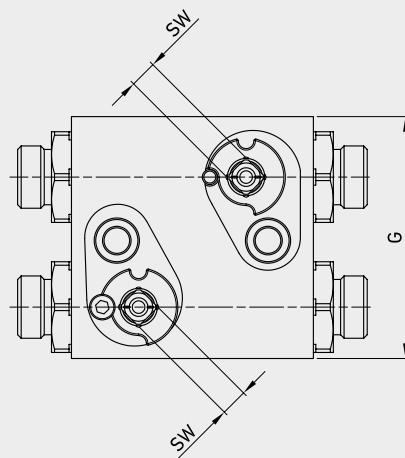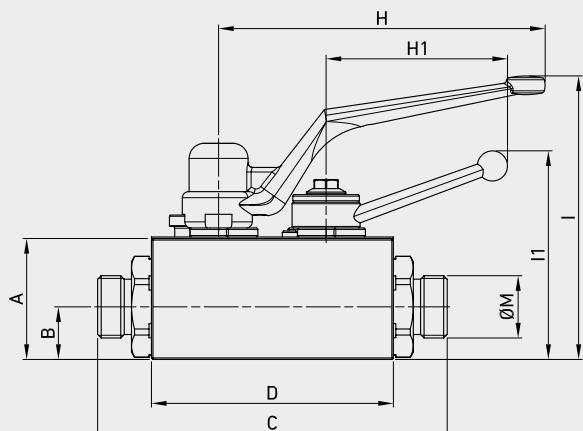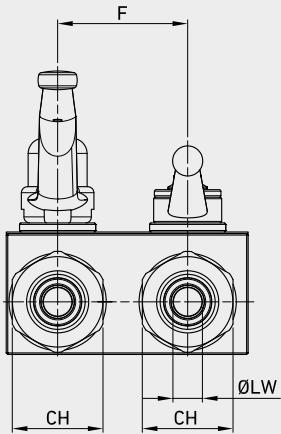

## FOR AGRICULTURAL

| TYPE / ITEM CODE | A         | B    | C     | D    | F    | G    | H    | H1   | I    | I1   | ØM      | ØLW  | CH | SW   |
|------------------|-----------|------|-------|------|------|------|------|------|------|------|---------|------|----|------|
| GT 3/8           | mm 40     | 17,4 | 115,6 | 80   | 43   | 80   | 180  | 60   | 94   | 69   | M15x1,5 | 10   | 30 | 9    |
|                  | inch 1,57 | 0,69 | 4,55  | 3,15 | 1,69 | 3,15 | 7,09 | 2,36 | 3,70 | 2,72 |         | 0,39 |    | 0,35 |

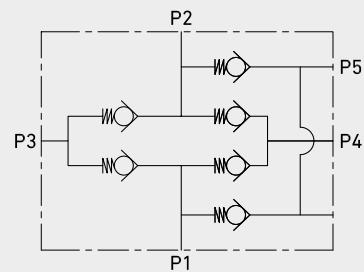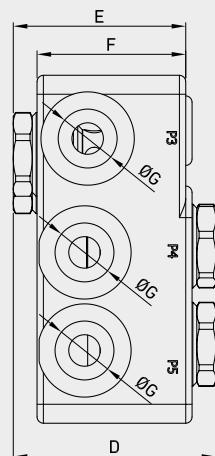
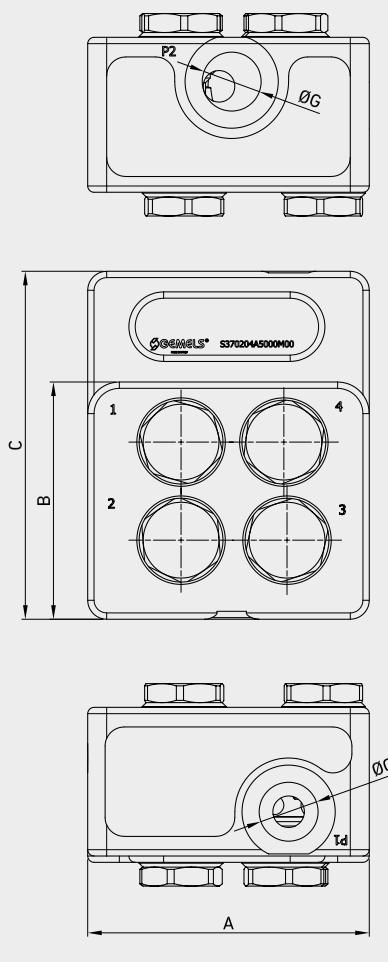


## FOR AGRICULTURAL

| TYPE / ITEM CODE    | DN | A          | B          | C          | D           | E          | F            | ØG         |
|---------------------|----|------------|------------|------------|-------------|------------|--------------|------------|
| GEMFOLD G1/2 85/50L | 25 | mm<br>inch | 89<br>3,50 | 75<br>2,95 | 110<br>4,33 | 64<br>2,52 | 54,5<br>2,15 | 47<br>1,85 |

## CUSTOMIZED

### HYDRAULIC BALL VALVES

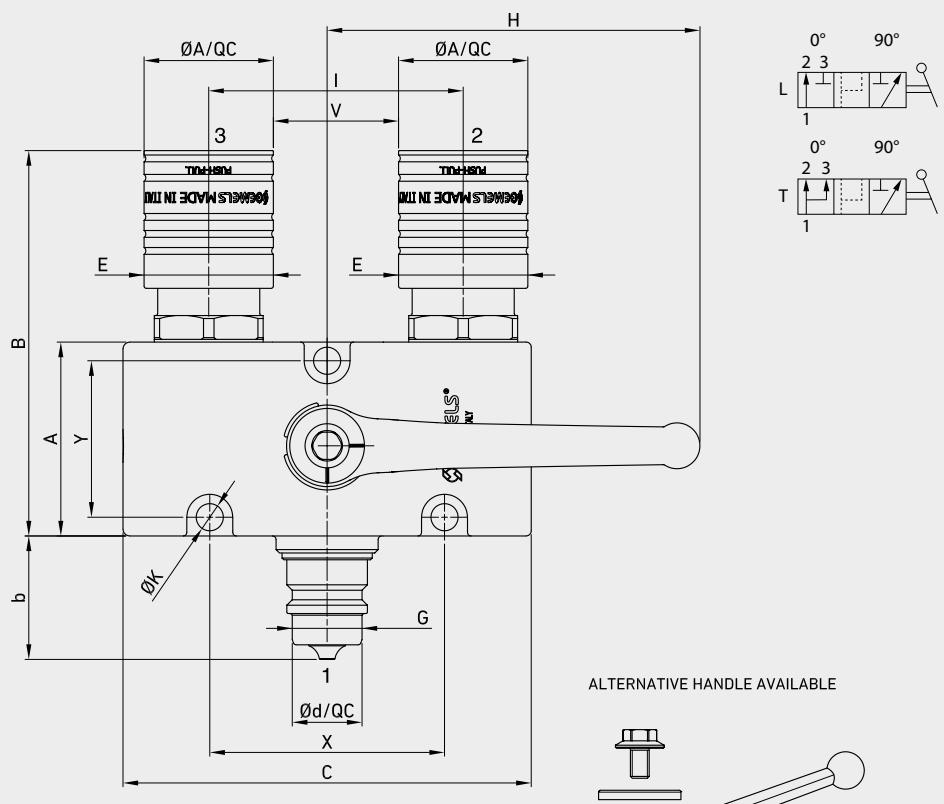
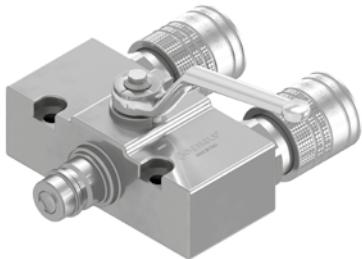


## FOR AGRICULTURAL

| TYPE / ITEM CODE | DN | A          | ØA/QC      | B          | b             | C            | Ød/QC       | E            | F                  | G                  | H             | I           | ØK         | X         | Y          | V          | SW           |            |
|------------------|----|------------|------------|------------|---------------|--------------|-------------|--------------|--------------------|--------------------|---------------|-------------|------------|-----------|------------|------------|--------------|------------|
| GQ3K             | 13 | mm<br>inch | 57<br>2,24 | 38<br>1,50 | 113,3<br>4,46 | 36,3<br>1,43 | 120<br>4,72 | 20,5<br>0,81 | ISO A/PP<br>Female | ISO A/PP<br>Female | ISO A<br>Male | 110<br>4,33 | 75<br>2,95 | 8<br>0,31 | 69<br>2,72 | 46<br>1,81 | 36,8<br>1,45 | 17<br>0,67 |



On request

- available with all models of quick couplings
- available also with short handles

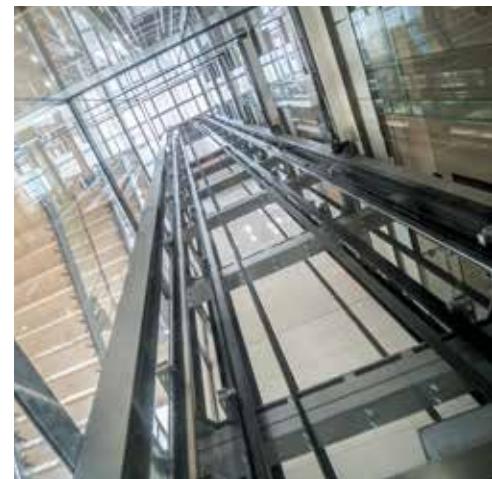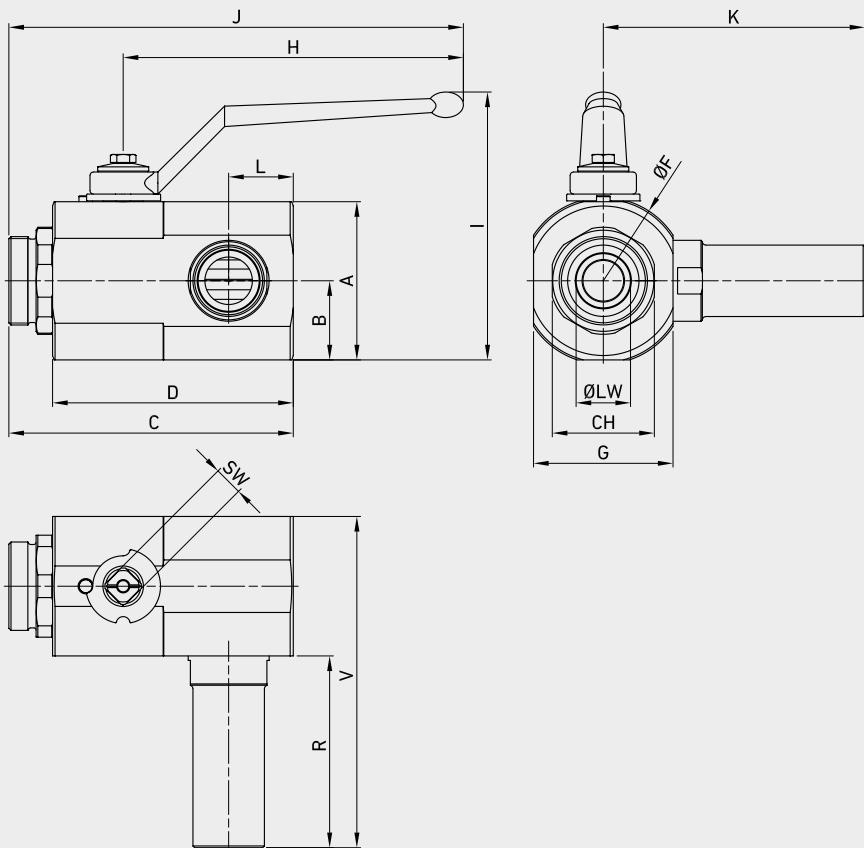

## FOR BUILDING

| TYPE / ITEM CODE           | DN | A         | B    | C     | D     | H    | I    | L    | J     | ØM      | ØLW  | CH | G    | ØF   | K    | R    | V    | SW   |
|----------------------------|----|-----------|------|-------|-------|------|------|------|-------|---------|------|----|------|------|------|------|------|------|
| VA DN25 35L<br>PIPE 35L    | 25 | mm 71     | 35,5 | 146   | 119,6 | 180  | 120  | 38   | 240   | M45x2   | 25   | 55 | 74   | 83,5 | 178  | 141  | 215  | 14   |
|                            |    | inch 2,80 | 1,40 | 5,75  | 4,71  | 7,09 | 4,72 | 1,50 | 9,45  |         | 0,98 |    | 2,91 | 3,29 | 7,01 | 5,55 | 8,46 | 0,55 |
| VA DN32 42L<br>PIPE 42L    | 32 | mm 93     | 46,5 | 163,2 | 137,5 | 200  | 158  | 38   | 263   | M52x2   | 32   | 60 | 82   | 98   | 161  | 120  | 202  | 17   |
|                            |    | inch 3,66 | 1,83 | 6,43  | 5,41  | 7,87 | 6,22 | 1,50 | 10,35 |         | 1,26 |    | 3,23 | 3,86 | 6,34 | 4,72 | 7,95 | 0,67 |
| VA DN32 G1 1/4 PIPE<br>35L | 32 | mm 93     | 46,5 | 157,5 | 137,5 | 200  | 158  | 38   | 257,5 | G 1 1/4 | 32   | 70 | 82   | 98   | 126  | 141  | 167  | 17   |
|                            |    | inch 3,66 | 1,83 | 6,20  | 5,41  | 7,87 | 6,22 | 1,50 | 10,14 |         | 1,26 |    | 3,23 | 3,86 | 4,96 | 5,55 | 6,57 | 0,67 |
| VA DN32 G1 1/2 PIPE<br>42L | 32 | mm 93     | 46,5 | 157,5 | 137,5 | 200  | 158  | 38   | 257,5 | G 1 1/2 | 32   | 70 | 82   | 98   | 161  | 120  | 202  | 17   |
|                            |    | inch 3,66 | 1,83 | 6,20  | 5,41  | 7,87 | 6,22 | 1,50 | 10,14 |         | 1,26 |    | 3,23 | 3,86 | 6,34 | 4,72 | 7,95 | 0,67 |

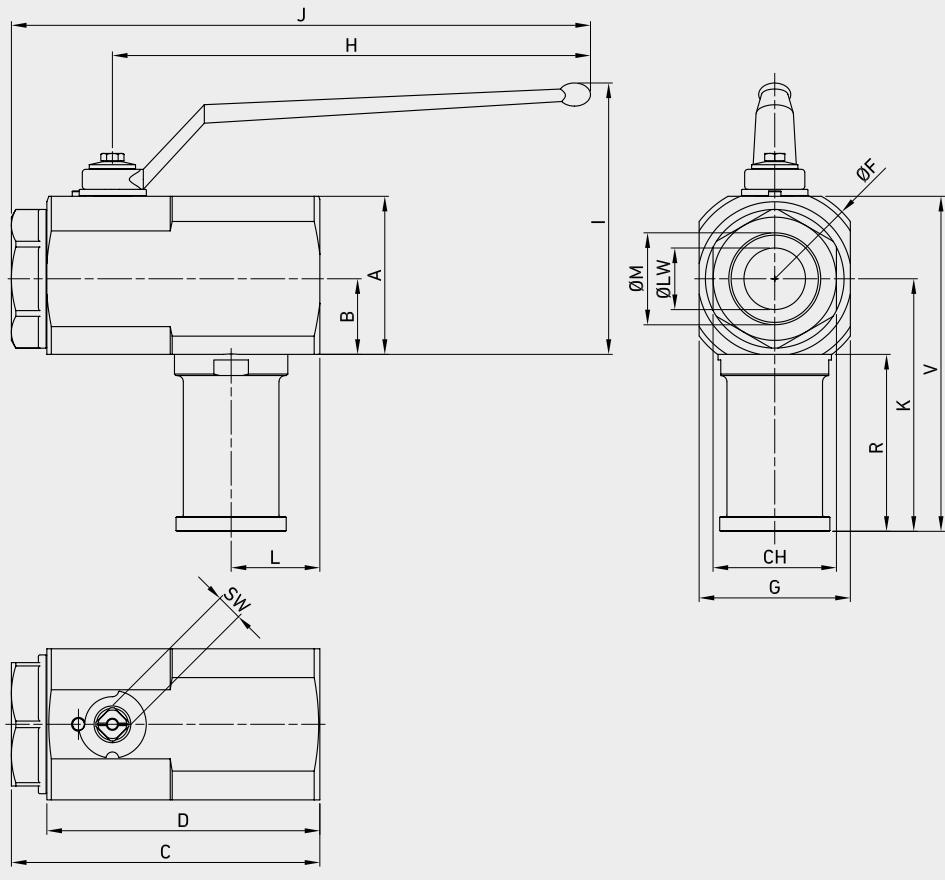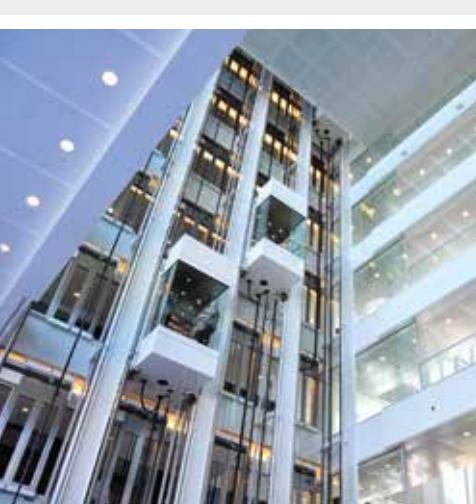

## FOR BUILDING



| TYPE / ITEM CODE            | DN | A         | B    | C    | D    | H     | I    | L    | J     | ØM | ØLW  | CH | G    | ØF   | K     | R    | V     | SW   |
|-----------------------------|----|-----------|------|------|------|-------|------|------|-------|----|------|----|------|------|-------|------|-------|------|
| VA DN40 G2R PIPE<br>SAE3000 | 40 | mm 102,5  | 49   | 200  | 177  | 310   | 176  | 57,5 | 375,5 | G2 | 40   | 80 | 98   | 123  | 164   | 115  | 217   | 17   |
|                             |    | inch 4,04 | 1,93 | 7,87 | 6,97 | 12,20 | 6,93 | 2,26 | 14,78 |    | 1,57 |    | 3,86 | 4,84 | 6,46  | 4,53 | 8,54  | 0,67 |
| VA DN40 G2R PIPE<br>42L     | 40 | mm 102,5  | 49   | 200  | 177  | 200   | 167  | 57,5 | 265,5 | G2 | 40   | 80 | 98   | 123  | 128,5 | 79,5 | 182   | 17   |
|                             |    | inch 4,04 | 1,93 | 7,87 | 6,97 | 7,87  | 6,57 | 2,26 | 10,45 |    | 1,57 |    | 3,86 | 4,84 | 5,06  | 3,13 | 7,17  | 0,67 |
| VA DN40 G2R PIPE<br>G2M     | 40 | mm 102,5  | 49   | 200  | 177  | 200   | 167  | 57,5 | 265,5 | G2 | 40   | 80 | 98   | 123  | 158   | 109  | 211,5 | 17   |
|                             |    | inch 4,04 | 1,93 | 7,87 | 6,97 | 7,87  | 6,57 | 2,26 | 10,45 |    | 1,57 |    | 3,86 | 4,84 | 6,22  | 4,29 | 8,33  | 0,67 |

On request

Supply and assembly of NUT and CUTTING RING

Supply of KIT for pipe separately

Pipe available with different threads

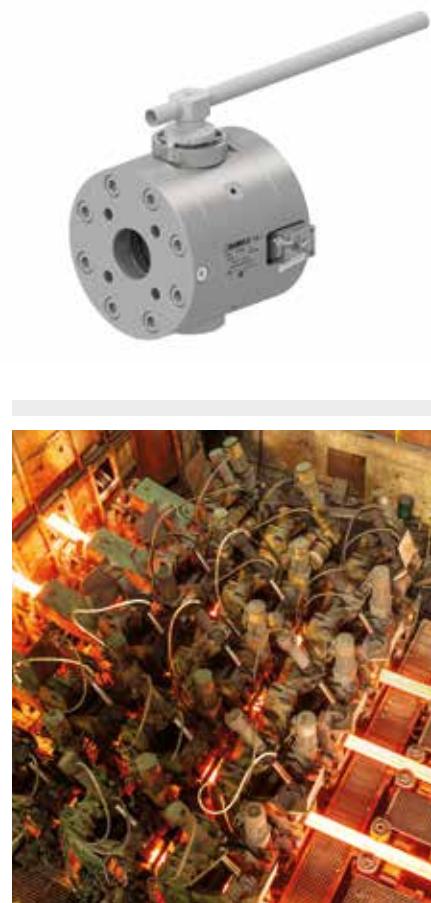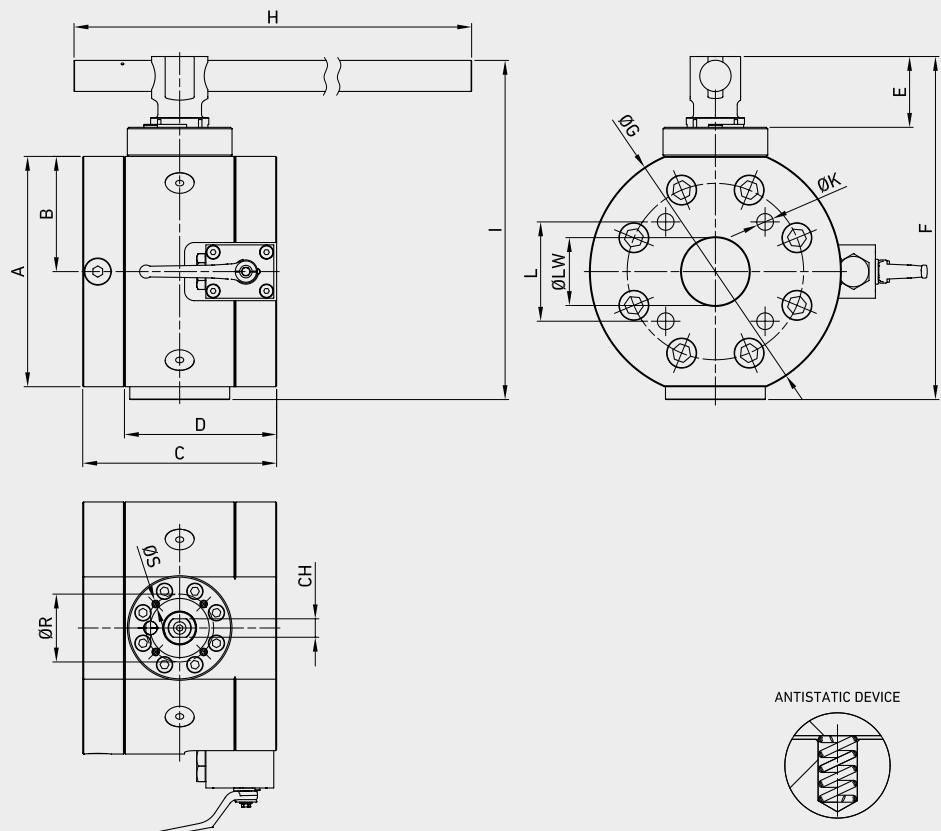


## FOR STEEL PLANT

| TYPE / ITEM CODE | DN  | A          | B    | C     | D     | E    | F     | ØG    | H     | I     | L     | ØK    | ØT   | ØS  | ISO5211 | CH   | ØLW |
|------------------|-----|------------|------|-------|-------|------|-------|-------|-------|-------|-------|-------|------|-----|---------|------|-----|
| GRY 3"           | 74  | mm 238     | 119  | 200   | 157   | 73   | 354   | 260   | 650   | 350   | 102,5 | 4xM20 | 70   | M8  | F07     | 19   | 74  |
|                  |     | inch 9,37  | 4,69 | 7,87  | 6,18  | 2,87 | 13,94 | 10,24 | 25,59 | 13,78 | 4,04  |       | 2,76 |     |         | 2,91 |     |
| GRY 4"           | 100 | mm 300     | 150  | 280   | 223,5 | 77   | 412   | 300   | 650   | 400   | 113,2 | 4xM24 | 102  | M10 | F10     | 24   | 100 |
|                  |     | inch 11,81 | 5,91 | 11,02 | 8,80  | 3,03 | 16,22 | 11,81 | 25,59 | 15,75 | 4,46  |       | 4,02 |     |         | 3,94 |     |


## CUSTOMIZED

### HYDRAULIC BALL VALVES

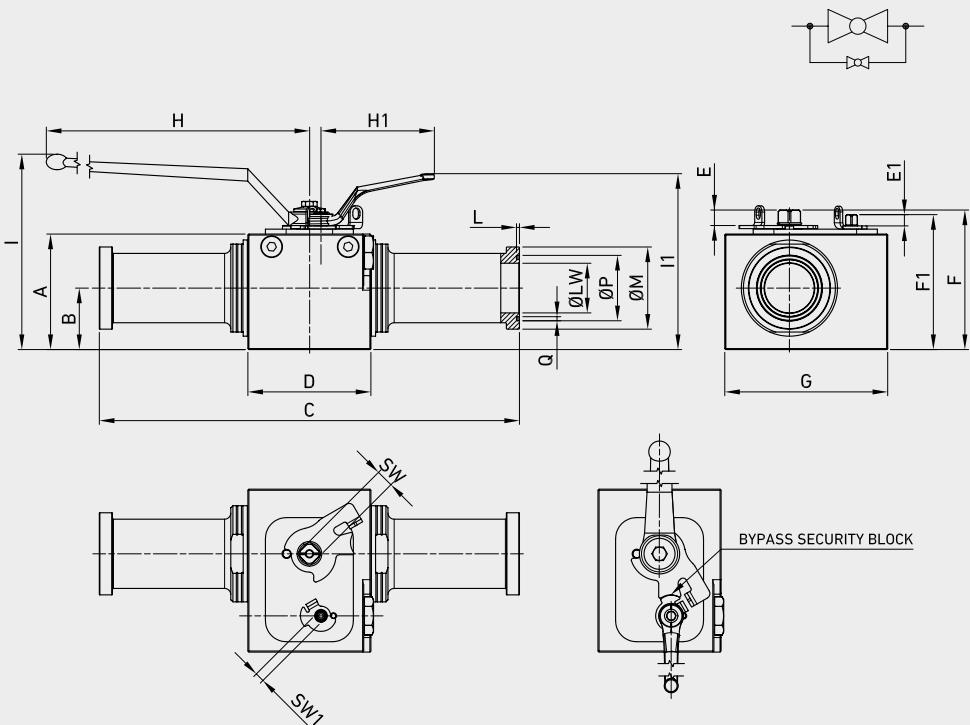


## FOR STEEL PLANT

| TYPE / ITEM CODE                     | DN | PN              | A             | B                   | C                     | D               | E               | E1                   | F                       | F1                    | G                    | H                    | H1                    | I                       | I1                      | ØM                   | ØP                | Q                 | SW | SW1 | ØLW |
|--------------------------------------|----|-----------------|---------------|---------------------|-----------------------|-----------------|-----------------|----------------------|-------------------------|-----------------------|----------------------|----------------------|-----------------------|-------------------------|-------------------------|----------------------|-------------------|-------------------|----|-----|-----|
| GBY56 (SAE J518 S6000<br>EXTRA LONG) | 50 | MPa<br>6090 Psi | 42 mm<br>inch | 112 60<br>4,41 2,36 | 406 119<br>15,98 4,69 | 15 0,59<br>0,43 | 11 5,31<br>5,16 | 135 131<br>6,20 5,16 | 157,5 310<br>12,20 4,33 | 310 110<br>12,20 4,33 | 110 189<br>4,33 7,44 | 189 170<br>7,44 6,69 | 170 79,4<br>6,69 3,13 | 79,4 63,25<br>3,13 2,49 | 63,25 3,94<br>2,49 0,16 | 3,94 17<br>0,16 0,67 | 17 9<br>0,67 0,35 | 9 48<br>0,35 1,89 |    |     |     |

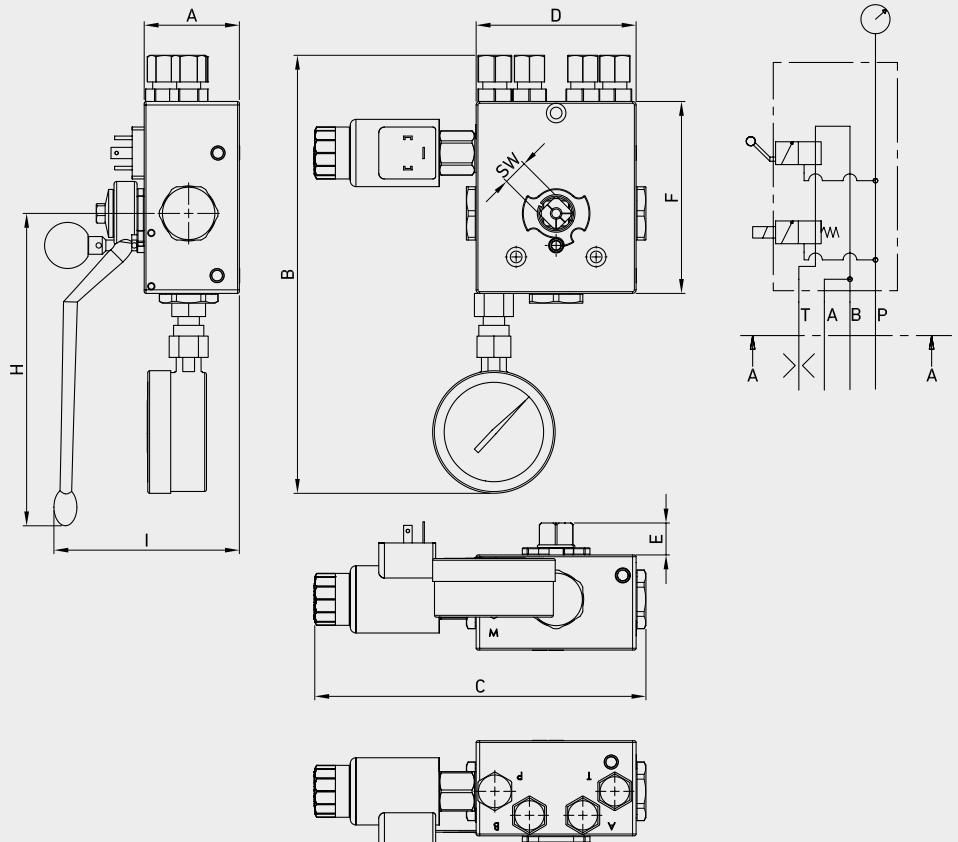




## FOR MARINE

| TYPE / ITEM CODE | DN | A          | B            | C           | D           | E          | F          | H           | I           | SW          |            |
|------------------|----|------------|--------------|-------------|-------------|------------|------------|-------------|-------------|-------------|------------|
| G3DB 3/8         | 10 | mm<br>inch | 53,5<br>2,11 | 247<br>9,72 | 186<br>7,32 | 90<br>3,54 | 18<br>0,71 | 108<br>4,25 | 178<br>7,01 | 104<br>4,09 | 14<br>0,55 |

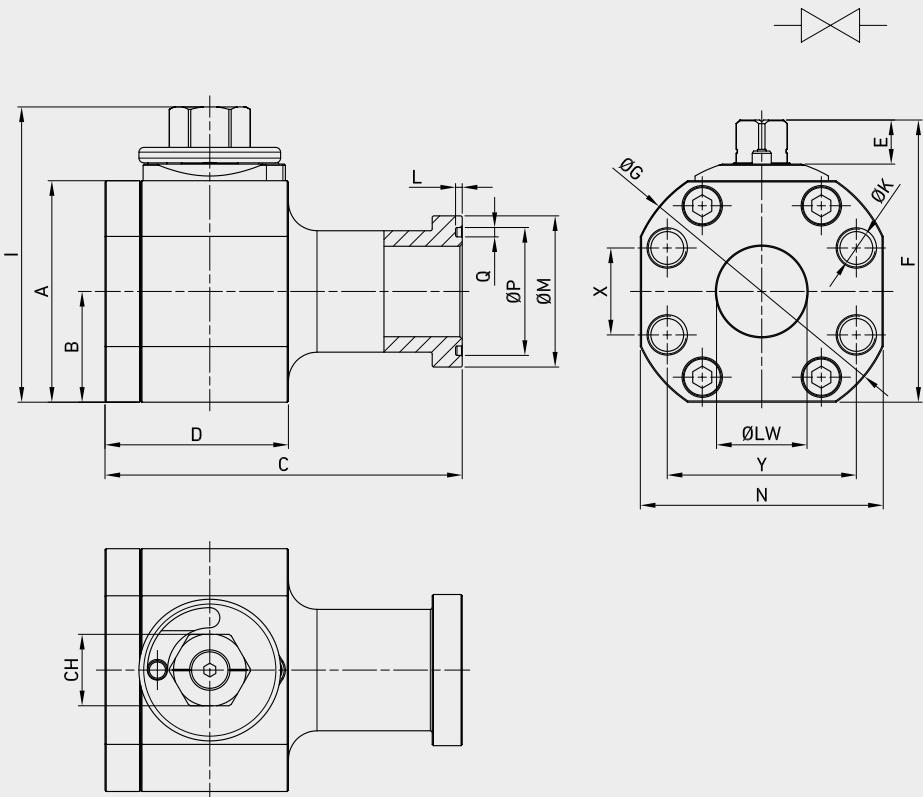



## ■ FOR BUILDING / HEAVY EQUIPMENT

| TYPE / ITEM CODE | DN | A    | B    | C    | D    | E    | F    | ØG    | I    | L    | ØM   | N     | CH   | ØP | Q     | X    | Y    | ØK   | ØLW   |      |
|------------------|----|------|------|------|------|------|------|-------|------|------|------|-------|------|----|-------|------|------|------|-------|------|
| GB2 S6 1 1/2     | 4  | mm   | 93   | 46,5 | 150  | 77   | 18,5 | 118,5 | 112  | 124  | 2,79 | 63,5  | 102  | 30 | 53,72 | 3,94 | 36,5 | 79,4 | 4xM16 | 38   |
|                  |    | inch | 3,66 | 1,83 | 5,91 | 3,03 | 0,73 | 4,67  | 4,41 | 4,88 | 0,11 | 2,50  | 4,02 |    | 2,11  | 0,16 | 1,44 | 3,13 |       | 1,50 |
| GB2 S3 2         | 25 | mm   | 93   | 46,5 | 150  | 77   | 18,5 | 118,5 | 112  | 124  | 2,79 | 71,75 | 102  | 30 | 63,25 | 3,94 | 42,9 | 77,8 | 4xM12 | 38   |
|                  |    | inch | 3,66 | 1,83 | 5,91 | 3,03 | 0,73 | 4,67  | 4,41 | 4,88 | 0,11 | 2,82  | 4,02 |    | 2,49  | 0,16 | 1,69 | 3,06 |       | 1,50 |

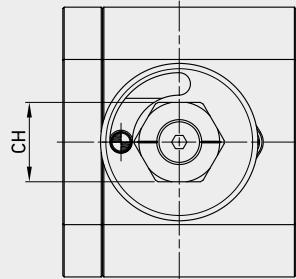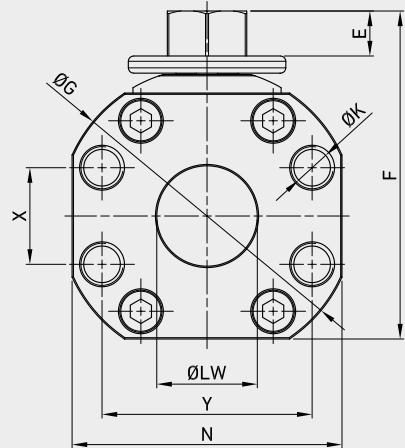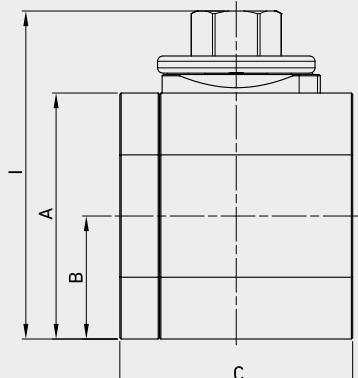

## FOR BUILDING / HEAVY EQUIPMENT

| TYPE / ITEM CODE | DN | A         | B    | C    | D | E    | F     | ØG   | I    | L | ØM | N    | CH | ØP | Q | X    | Y    | ØK    | ØLW |
|------------------|----|-----------|------|------|---|------|-------|------|------|---|----|------|----|----|---|------|------|-------|-----|
| GB2 S3 2         | 25 | mm 93     | 46,5 | 88   | - | 18,5 | 118,5 | 112  | 124  | - | -  | 102  | 30 | -  | - | 36,5 | 79,4 | 4xM16 | 38  |
|                  |    | inch 3,66 | 1,83 | 3,46 | - | 0,73 | 4,67  | 4,41 | 4,88 | - | -  | 4,02 |    | -  | - | 1,44 | 3,13 | 1,50  |     |

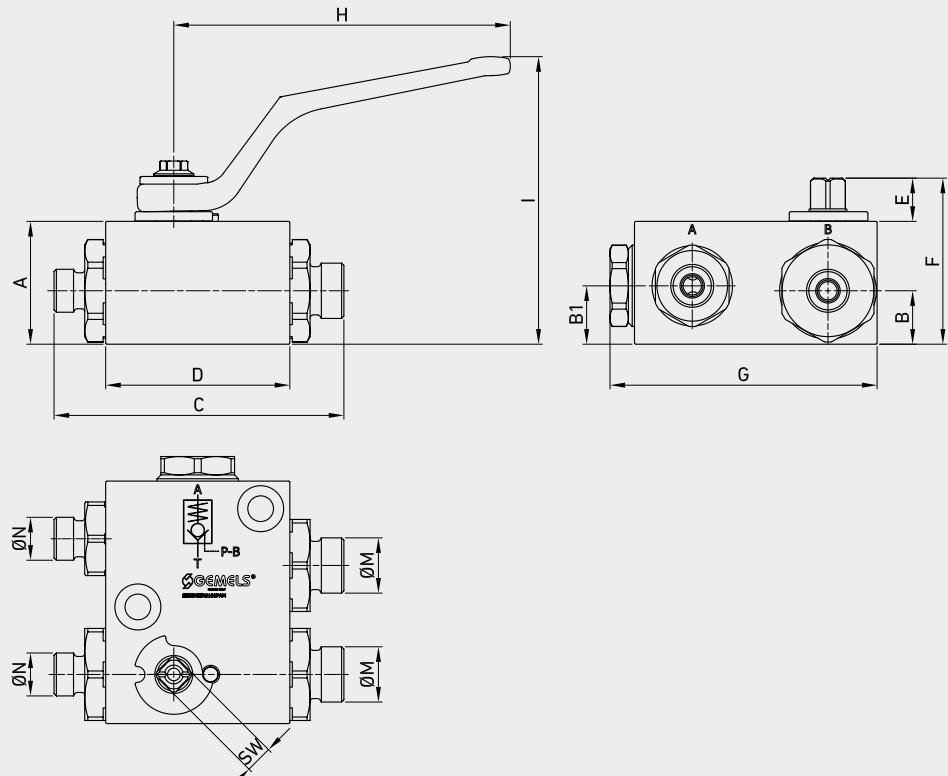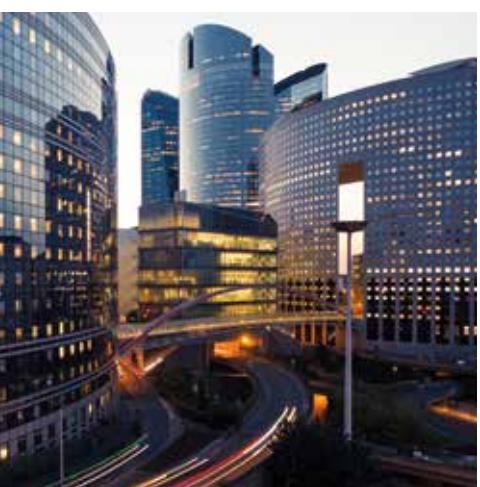

## ■ FOR BUILDING / HEAVY EQUIPMENT

| TYPE / ITEM CODE | DN | A    | B    | B1   | C    | D    | E    | F    | G    | H    | I    | ØM   | ØN      | SW     |
|------------------|----|------|------|------|------|------|------|------|------|------|------|------|---------|--------|
| GESP4 DIN12L/8L  | 10 | mm   | 40   | 17,4 | 19   | 94,4 | 60   | 14,1 | 54,1 | 87   | 110  | 94   | DIN 12L | DIN 8L |
| VBPE 3/8 DN10    |    | inch | 1,57 | 0,69 | 0,75 | 3,72 | 2,36 | 0,56 | 2,13 | 3,43 | 4,33 | 3,70 | -       | 0,35   |





# GH2

## 2-WAY HIGH PRESSURE BALL VALVES


- For hydrogen application
- Up to PN1000

Edition. 21.1

### SS Stainless Steel

- Type: ball valve 2 way high cycle
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN1000

### STANDARD COMPOSITION OF VALVE

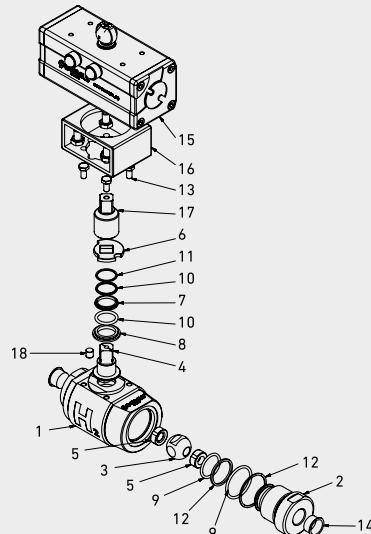

### SS Stainless Steel

| POS | DESCRIPTION     | Q.TY | MATERIAL         |
|-----|-----------------|------|------------------|
| 1   | Body            | 1    | ASTM A479 TP.316 |
| 2   | Adapter         | 1    | ASTM A479 TP.316 |
| 3   | Ball            | 1    | ASTM A182 FXM-19 |
| 4   | Stem            | 1    | ASTM A182 FXM-19 |
| 5   | Ball seat       | 2    | GEM_PA           |
| 6   | Washer          | 1    | AISI 316         |
| 7   | Upper Bushing   | 1    | GEM_PA           |
| 8   | Lower Bushing   | 1    | GEM_PA           |
| 9   | Adapter o-ring  | 2    | FKM AED          |
| 10  | Stem o-ring     | 2    | FKM AED          |
| 11  | Stem Back-up    | 1    | PTFE             |
| 12  | Adapter Back-up | 2    | PTFE             |
| 13  | Screws          | 8    | ISO 4017 A4      |
| 14  | Caps            | 2    | PVC              |
| 15  | Actuator        | 1    | N/A              |
| 16  | Connector       | 1    | 1.0737           |
| 17  | Joint           | 1    | 1.0737           |
| 18  | Pin             | 1    | AISI 316         |



## CODE DESCRIPTION STRUCTURE

**GH2    G1/2    DN13    4    4    J    4    A    B**

**Type and way of valve** \_\_\_\_\_

GH2 2-way

**Ends** \_\_\_\_\_

|                       |                 |             |
|-----------------------|-----------------|-------------|
| GAS DIN/ ISO 228/ BSP | NPT ANSI / ASME | SAE J1926-1 |
|                       |                 | B1.20.1     |
| G 1/4                 | N 1/4           | SAE4        |
| G 3/8                 | N 3/8           | SAE6        |
| G 1/2                 | N 1/2           | SAE8        |
| G 3/4                 | N 3/4           | SAE12       |
| G 1                   | N 1             | SAE16       |

**Size** \_\_\_\_\_

From DN6 to DN25

**Body Material** \_\_\_\_\_

ASTM A479 TP316

**Adapter material** \_\_\_\_\_

ASTM A479 TP316

**Steam material** \_\_\_\_\_

ASTM A182 FXM-19

**Ball Material** \_\_\_\_\_


ASTM A182 FXM-19


**Seat material** \_\_\_\_\_

GEM PA

**Seal material** \_\_\_\_\_


FKM AED

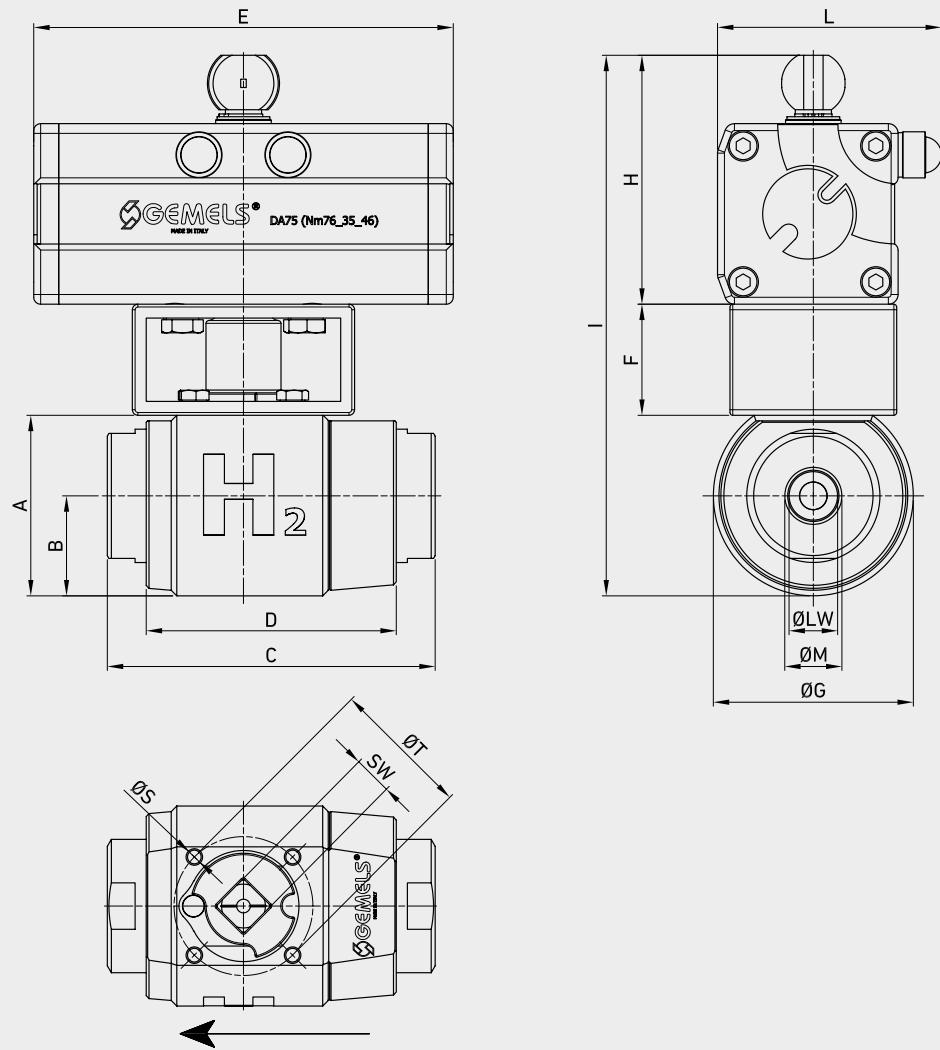




## GH2 DIN/ISO 228 BSP

| TYPE | DN | PN        | A         | B    | C    | D    | E    | F    | G    | H    | I    | ØM    | ØS | ØT   | ISO5211 | SW   | ØLW  |
|------|----|-----------|-----------|------|------|------|------|------|------|------|------|-------|----|------|---------|------|------|
| GH2  | 6  | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | G 1/4 | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |
| GH2  | 10 | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | G 3/8 | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |
| GH2  | 13 | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | G 1/2 | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |
| GH2  | 20 | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | G 3/4 | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |
| GH2  | 25 | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | G 1   | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |



## GH2 ANSI/ASME B1.20.1 NPT

| TYPE | DN | PN        | A         | B    | C    | D    | E    | F    | G    | H    | I    | ØM    | ØS | ØT   | ISO5211 | SW   | ØLW  |
|------|----|-----------|-----------|------|------|------|------|------|------|------|------|-------|----|------|---------|------|------|
| GH2  | 6  | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | N 1/4 | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |
| GH2  | 10 | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | N 3/8 | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |
| GH2  | 13 | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | N 1/2 | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |
| GH2  | 20 | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | N 3/4 | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |
| GH2  | 25 | MPa 100   | mm 65     | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | N 1   | M6 | 70   | F07     | 14   | 10   |
|      |    | Psi 14500 | inch 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 |       |    | 2,76 |         | 0,55 | 0,39 |


**GH2 SAE J1926-1**

| TYPE | DN | PN        |      | A    | B    | C    | D    | E    | F    | G    | H    | I    | ØM    | ØS | ØT         | ISO5211 | SW         | ØLW        |
|------|----|-----------|------|------|------|------|------|------|------|------|------|------|-------|----|------------|---------|------------|------------|
| GH2  | 6  | MPa 100   | mm   | 65   | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | 7/16  | M6 | 70<br>2,76 | F07     | 14<br>0,55 | 10<br>0,39 |
|      |    | Psi 14500 | inch | 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 | UNF   |    |            |         |            |            |
| GH2  | 10 | MPa 100   | mm   | 65   | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | 9/16  | M6 | 70<br>2,76 | F07     | 14<br>0,55 | 10<br>0,39 |
|      |    | Psi 14500 | inch | 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 | UNF   |    |            |         |            |            |
| GH2  | 13 | MPa 100   | mm   | 65   | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | 3/4   | M6 | 70<br>2,76 | F07     | 14<br>0,55 | 10<br>0,39 |
|      |    | Psi 14500 | inch | 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 | UNF   |    |            |         |            |            |
| GH2  | 20 | MPa 100   | mm   | 65   | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | 11/16 | M6 | 70<br>2,76 | F07     | 14<br>0,55 | 10<br>0,39 |
|      |    | Psi 14500 | inch | 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 | UNF   |    |            |         |            |            |
| GH2  | 25 | MPa 100   | mm   | 65   | 36   | 118  | 90   | 151  | 40   | 72   | 90   | 195  | 15/16 | M6 | 70<br>2,76 | F07     | 14<br>0,55 | 10<br>0,39 |
|      |    | Psi 14500 | inch | 2,56 | 1,42 | 4,65 | 3,54 | 5,94 | 1,57 | 2,83 | 3,54 | 7,68 | UNF   |    |            |         |            |            |





# GEM

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: DN6
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: DN6
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

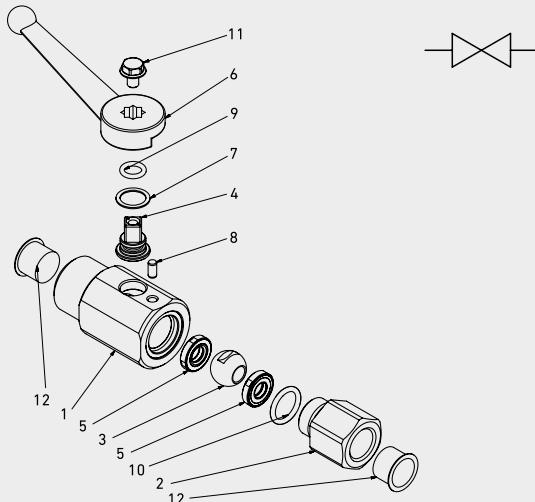

| POS | DESCRIPTION    | Q.TY | CS           | SS          |                 |
|-----|----------------|------|--------------|-------------|-----------------|
|     |                |      | Carbon Steel | MATERIAL    | Stainless Steel |
| 1   | Body           | 1    |              | 1,0737      | 1,4305          |
| 2   | Adapter        | 1    |              | 1,0737      | 1,4305          |
| 3   | Ball           | 1    |              | 1,0737      | 1,4404          |
| 4   | Stem           | 1    |              | 1,0737      | 1,4305          |
| 5   | Ball seat      | 2    | POM          | POM         | ZINC            |
| 6   | Handle         | 1    | ZINC         | ZINC        | POM             |
| 7   | Stem ring      | 1    | POM          | POM         | POM             |
| 8   | Pin            | 1    | 1,0737       | 1,4301      | NBR             |
| 9   | Stem o-ring    | 1    | NBR          | NBR         | NBR             |
| 10  | Adapter o-ring | 2    | NBR          | NBR         | NBR             |
| 11  | Screw          | 1    | DIN 6921 8.8 | DIN 6921 A2 | PVC             |
| 12  | Caps           | 2    |              |             | PVC             |



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GEM 2-way

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI SAE  
ISO 228 /ASME J1926-1  
BSP B1.20.1  
G 1/4 N 1/4 SAE4

Size \_\_\_\_\_

DN6

Body Material \_\_\_\_\_

- 1 = 1,0737
- 3 = 1,4305

Adapter material \_\_\_\_\_

- 1 = 1,0737 3 = 1,4305\*
- 3 = 1,4305

Stem material \_\_\_\_\_

- 1 = 1,0737 3 = 1,4305\*
- 3 = 1,4305

Ball Material \_\_\_\_\_

- 4 = 1,4404
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* C = PTFE\*





Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request


- Reduced bore
- Special threads
- Pressure class up to PN50 Mpa
- Locking device

For further special requests please consult our technical/commercial service.

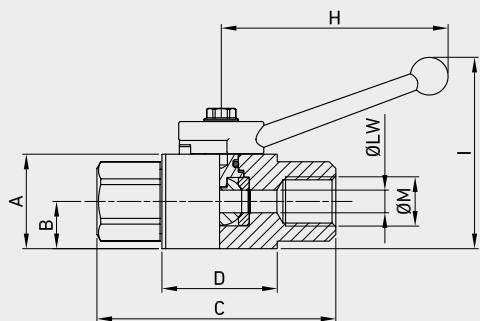


### GEM DIN/ISO 228 BSP

| TYPE      | DN | PN       |  | A  | B    | C    | D    | E  | F    | ØG   | H    | I  | ØM   | SW   | ØLW  | WEIGHT | ITEM CODE |    |      |    |       |   |   |          |         |                 |                 |
|-----------|----|----------|--|----|------|------|------|----|------|------|------|----|------|------|------|--------|-----------|----|------|----|-------|---|---|----------|---------|-----------------|-----------------|
|           |    |          |  | mm | inch | mm   | inch | mm | inch | mm   | inch | mm | inch | kg   | lb   |        |           |    |      |    |       |   |   |          |         |                 |                 |
| GEM G 1/4 | 6  | MPa 50   |  | 25 | 0,98 | 12,5 | 0,49 | 63 | 2,48 | 31,5 | 1,24 | 7  | 0,28 | 32,5 | 1,28 | 26,8   | 1,06      | 60 | 2,36 | 51 | G 1/4 | 6 | 6 | kg 0,195 | lb 0,43 | G12GGT15011A000 | G12GGT15033A000 |
|           |    | Psi 7250 |  |    |      |      |      |    |      |      |      |    |      |      |      |        |           |    |      |    |       |   |   |          |         |                 |                 |



### GEM ANSI/ASME B1.20.1 NPT

| TYPE      | DN | PN       |  | A  | B    | C    | D    | E  | F    | ØG   | H    | I  | ØM   | SW   | ØLW  | WEIGHT | ITEM CODE |    |      |    |       |   |   |          |         |                 |                 |
|-----------|----|----------|--|----|------|------|------|----|------|------|------|----|------|------|------|--------|-----------|----|------|----|-------|---|---|----------|---------|-----------------|-----------------|
|           |    |          |  | mm | inch | mm   | inch | mm | inch | mm   | inch | mm | inch | kg   | lb   |        |           |    |      |    |       |   |   |          |         |                 |                 |
| GEM N 1/4 | 6  | MPa 50   |  | 25 | 0,98 | 12,5 | 0,49 | 63 | 2,48 | 31,5 | 1,24 | 7  | 0,28 | 32,5 | 1,28 | 26,8   | 1,06      | 60 | 2,36 | 51 | N 1/4 | 6 | 6 | kg 0,195 | lb 0,43 | G12NNT15011A000 | G12NNT15033A000 |
|           |    | Psi 7250 |  |    |      |      |      |    |      |      |      |    |      |      |      |        |           |    |      |    |       |   |   |          |         |                 |                 |



## GEM SAE J1926-1

| TYPE     | DN | PN  |      | A    | B    | C    | D    | E    | F    | ØG   | H    | I    | ØM   | SW     | ØLW  | WEIGHT | ITEM CODE |      |                 |       |
|----------|----|-----|------|------|------|------|------|------|------|------|------|------|------|--------|------|--------|-----------|------|-----------------|-------|
|          |    |     |      | MPa  | 50   | mm   | 25   | 12,5 | 63   | 31,5 | 7    | 32,5 | 26,8 | 60     | 51   | 7/16-  | 6         | 6    | kg              | 0,195 |
| GEM SAE4 | 6  | Psi | 7250 | inch | 0,98 | 0,49 | 2,48 | 1,24 | 0,28 | 1,28 | 1,06 | 2,36 | 2,01 | 20 UNF | 0,24 | 0,24   | lb        | 0,43 | G12EEE05033A000 | SS    |

# GE1


## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0

### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN6 up to DN13
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

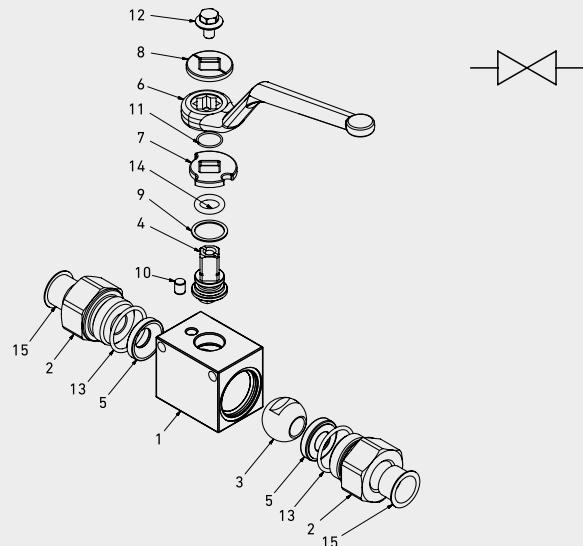

**CS**  
Carbon Steel

| POS | DESCRIPTION    | Q.TY | MATERIAL     |
|-----|----------------|------|--------------|
| 1   | Body           | 1    | 1,0737       |
| 2   | Adapter        | 2    | 1,0737       |
| 3   | Ball           | 1    | 1,0737       |
| 4   | Stem           | 1    | 1,0737       |
| 5   | Ball seat      | 2    | POM          |
| 6   | Handle         | 1    | ZINC         |
| 7   | Washer         | 1    | 1,0116       |
| 8   | Washer         | 1    | 1,0116       |
| 9   | Stem ring      | 1    | POM          |
| 10  | Pin            | 1    | 1,0737       |
| 11  | Seeger         | 1    | 1,4301       |
| 12  | Adapter o-ring | 2    | NBR          |
| 13  | Stem o-ring    | 1    | NBR          |
| 14  | Screw          | 1    | Din 6921 8.8 |
| 15  | Caps           | 2    | PVC          |



SMALLER DESIGN

## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE1 2-way

Ends \_\_\_\_\_

|                  |                |             |
|------------------|----------------|-------------|
| GAS DIN/ ISO 228 | NPT ANSI /ASME | SAE J1926-1 |
| BSP              | B1.20.1        |             |
| G 1/4            | N 1/4          | SAE4        |
| G 3/8            | N 3/8          | SAE6        |
| G 1/2            | N 1/2          | SAE8        |

Size \_\_\_\_\_

from DN6 to DN13

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM


Seal material \_\_\_\_\_

B = NBR


\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device

For further special requests please consult our technical/commercial service.

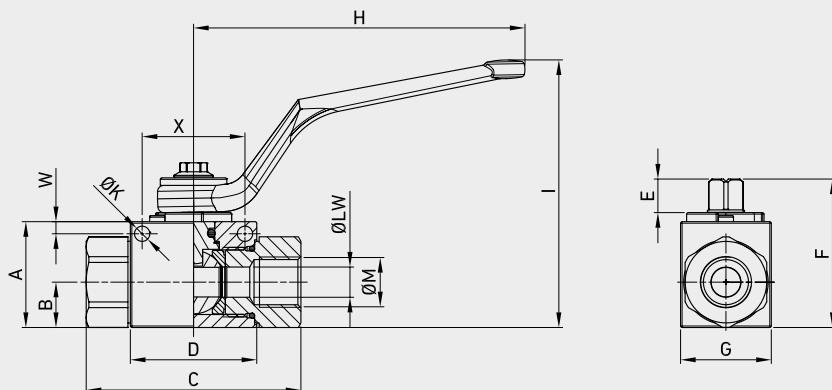


SMALLER DESIGN



## GE1 DIN/ISO 228 BSP

| TYPE      | DN | PN  |      | A    | B    | C    | D    | E    | F     | G    | H    | I    | ØM    | ØK   | W    | X    | SW   | ØLW  | WEIGHT   | ITEM CODE       |
|-----------|----|-----|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|------|------|----------|-----------------|
|           |    |     |      | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | mm   | mm    | inch | mm   | inch | kg   | lb   |          |                 |
| GE1 G 1/4 | 6  | MPa | 50   | 33   | 14,3 | 69   | 39,4 | 11,1 | 47,25 | 26   | 110  | 87   | G 1/4 | 5,10 | 4    | 34   | 9    | 6    | kg 0,378 | GE1GGT15011A000 |
|           |    | Psi | 7250 | 1,30 | 0,56 | 2,72 | 1,55 | 0,44 | 1,86  | 1,02 | 4,33 | 3,43 |       | 0,20 | 0,16 | 1,34 | 0,35 | 0,24 | lb 0,83  |                 |
| GE1 G 3/8 | 10 | MPa | 50   | 35   | 15   | 71   | 41,8 | 11,1 | 49,25 | 30   | 110  | 89   | G 3/8 | 5,1  | 4    | 34   | 9    | 10   | kg 0,467 | GE1GGT25011A000 |
|           |    | Psi | 7250 | 1,38 | 0,59 | 2,80 | 1,65 | 0,44 | 1,94  | 1,18 | 4,33 | 3,50 |       | 0,20 | 0,16 | 1,34 | 0,35 | 0,39 | lb 1,03  |                 |
| GE1 G 1/2 | 13 | MPa | 50   | 40   | 18,3 | 83   | 44,4 | 11,1 | 54,25 | 35   | 110  | 94   | G 1/2 | 5,1  | 4    | 36   | 9    | 13   | kg 0,635 | GE1GGT35011A000 |
|           |    | Psi | 7250 | 1,57 | 0,72 | 3,27 | 1,75 | 0,44 | 2,14  | 1,38 | 4,33 | 3,70 |       | 0,20 | 0,16 | 1,42 | 0,35 | 0,51 | lb 1,40  |                 |


FIXING HOLES INCLUDED



## GE1 ANSI/ASME B1.20.1 NPT

| TYPE      | DN | PN  |      | A    | B    | C    | D    | E    | F     | G    | H    | I    | ØM    | ØK   | W    | X    | SW   | ØLW  | WEIGHT   | ITEM CODE       |
|-----------|----|-----|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|------|------|----------|-----------------|
|           |    |     |      | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | mm   | mm    | inch | mm   | inch | kg   | lb   |          |                 |
| GE1 N 1/4 | 6  | MPa | 50   | 33   | 14,3 | 69   | 39,4 | 11,1 | 47,25 | 26   | 110  | 87   | N 1/4 | 5,10 | 4    | 34   | 9    | 6    | kg 0,378 | GE1NNT15011A000 |
|           |    | Psi | 7250 | 1,30 | 0,56 | 2,72 | 1,55 | 0,44 | 1,86  | 1,02 | 4,33 | 3,43 |       | 0,20 | 0,16 | 1,34 | 0,35 | 0,24 | lb 0,83  |                 |
| GE1 N 3/8 | 10 | MPa | 50   | 35   | 15   | 71   | 41,8 | 11,1 | 49,25 | 30   | 110  | 89   | N 3/8 | 5,1  | 4    | 34   | 9    | 10   | kg 0,467 | GE1NNT25011A000 |
|           |    | Psi | 7250 | 1,38 | 0,59 | 2,80 | 1,65 | 0,44 | 1,94  | 1,18 | 4,33 | 3,50 |       | 0,20 | 0,16 | 1,34 | 0,35 | 0,39 | lb 1,03  |                 |
| GE1 N 1/2 | 13 | MPa | 50   | 40   | 18,3 | 83   | 44,4 | 11,1 | 54,25 | 35   | 110  | 94   | N 1/2 | 5,1  | 4    | 36   | 9    | 13   | kg 0,635 | GE1NNT35011A000 |
|           |    | Psi | 7250 | 1,57 | 0,72 | 3,27 | 1,75 | 0,44 | 2,14  | 1,38 | 4,33 | 3,70 |       | 0,20 | 0,16 | 1,42 | 0,35 | 0,51 | lb 1,40  |                 |

FIXING HOLES INCLUDED



## GE1 SAE J1926-1

| TYPE     | DN | PN       |  | A    | B    | C    | D    | E    | F     | G    | H    | I    | ØM   | ØK   | W    | X    | SW   | ØLW  | WEIGHT   | ITEM CODE       |
|----------|----|----------|--|------|------|------|------|------|-------|------|------|------|------|------|------|------|------|------|----------|-----------------|
|          |    |          |  | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | mm   | inch | mm   | inch | mm   | inch | kg   | lb       |                 |
| GE1 SAE4 | 6  | MPa 50   |  | 33   | 14,3 | 69   | 39,4 | 11,1 | 47,25 | 26   | 110  | 87   | 7/16 | 5,10 | 4    | 34   | 9    | 6    | kg 0,378 | GE1EEE05011A000 |
|          |    | Psi 7250 |  | 1,30 | 0,56 | 2,72 | 1,55 | 0,44 | 1,86  | 1,02 | 4,33 | 3,43 | UNF  | 0,20 | 0,16 | 1,34 | 0,35 | 0,24 | lb 0,83  |                 |
| GE1 SAE6 | 10 | MPa 50   |  | 35   | 15   | 71   | 41,8 | 11,1 | 49,25 | 30   | 110  | 89   | 9/16 | 5,1  | 4    | 34   | 9    | 10   | kg 0,467 | GE1EEE15011A000 |
|          |    | Psi 7250 |  | 1,38 | 0,59 | 2,80 | 1,65 | 0,44 | 1,94  | 1,18 | 4,33 | 3,50 | UNF  | 0,20 | 0,16 | 1,34 | 0,35 | 0,39 | lb 1,03  |                 |
| GE1 SAE8 | 13 | MPa 50   |  | 40   | 18,3 | 83   | 44,4 | 11,1 | 54,25 | 35   | 110  | 94   | 3/4  | 5,1  | 4    | 36   | 9    | 13   | kg 0,635 | GE1EEE25011A000 |
|          |    | Psi 7250 |  | 1,57 | 0,72 | 3,27 | 1,75 | 0,44 | 2,14  | 1,38 | 4,33 | 3,70 | UNF  | 0,20 | 0,16 | 1,42 | 0,35 | 0,51 | lb 1,40  |                 |

FIXING HOLES  
INCLUDED



# GE2

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2

### CS Carbon Steel


- Type: ball valve 2 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

**DNV Certified**

### STANDARD COMPOSITION OF VALVE

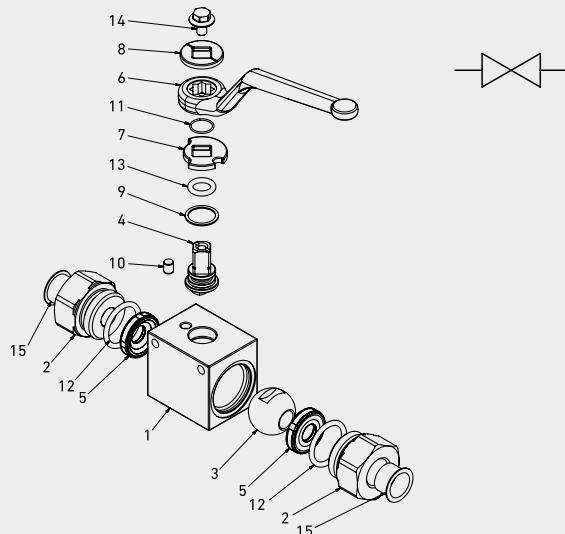

| POS | DESCRIPTION    | Q.TY | CS           | SS          |
|-----|----------------|------|--------------|-------------|
|     |                |      | Carbon Steel | MATERIAL    |
| 1   | Body           | 1    |              | 1,4404      |
| 2   | Adapter        | 2    |              | 1,4404      |
| 3   | Ball           | 1    |              | 1,4404      |
| 4   | Stem           | 1    |              | 1,4404      |
| 5   | Ball seat      | 2    | POM          | POM         |
| 6   | Handle         | 1    | ZINC         | ZINC        |
| 7   | Washer         | 1    | 1,0116       | 1,4301      |
| 8   | Washer         | 1    | 1,0116       | 1,4301      |
| 9   | Stem ring      | 1    | POM          | POM         |
| 10  | Pin            | 1    | 1,0737       | 1,4301      |
| 11  | Seeger         | 1    | 1,4301       | 1,4301      |
| 12  | Adapter o-ring | 2    | NBR          | NBR         |
| 13  | Stem o-ring    | 1    | NBR          | NBR         |
| 14  | Screw          | 1    | Din 6921 8.8 | Din 6921 A2 |
| 15  | Caps           | 2    | PVC          | PVC         |



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE2 2-way

Ends \_\_\_\_\_

| GAS DIN/<br>ISO 228<br>BSP | NPT ANSI<br>/ASME<br>B1.20.1 | SAE<br>J1926-1 | DIN 2353<br>HEAVY<br>SERIES | DIN 2353<br>LIGHT<br>SERIES |
|----------------------------|------------------------------|----------------|-----------------------------|-----------------------------|
| G 1/4                      | N 1/4                        | SAE4           | 8S                          | 6L                          |
| G 3/8                      | N 3/8                        | SAE6           | 10S                         | 8L                          |
| G 1/2                      | N 1/2                        | SAE8           | 12S                         | 10L                         |
| G 3/4                      | N 3/4                        | SAE12          | 14S                         | 12L                         |
| G 1                        | N 1                          | SAE16          | 16S                         | 15L                         |
| G 1 1/4 R                  | N 1 1/4 R                    | SAE20R         | 20S                         | 18L                         |
| G 1 1/2 R                  | N 1 1/2 R                    | SAE24R         | 25S<br>30S<br>38S           | 22L<br>28L<br>35L<br>42L    |

Size \_\_\_\_\_

from DN6 to DN25

Body Material \_\_\_\_\_

- **1** = 1,0737
- **4** = 1,4404

Adapter material \_\_\_\_\_

- **1** = 1,0737
- **4** = 1,4404

Stem material \_\_\_\_\_

- **1** = 1,0737 **4** = 1,4404\*
- **4** = 1,4404

Ball Material \_\_\_\_\_

- **1** = 1,0737 **4** = 1,4404\*
- **4** = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device
- Fixing holes for SS valves

For further special requests please consult our technical/commercial service.

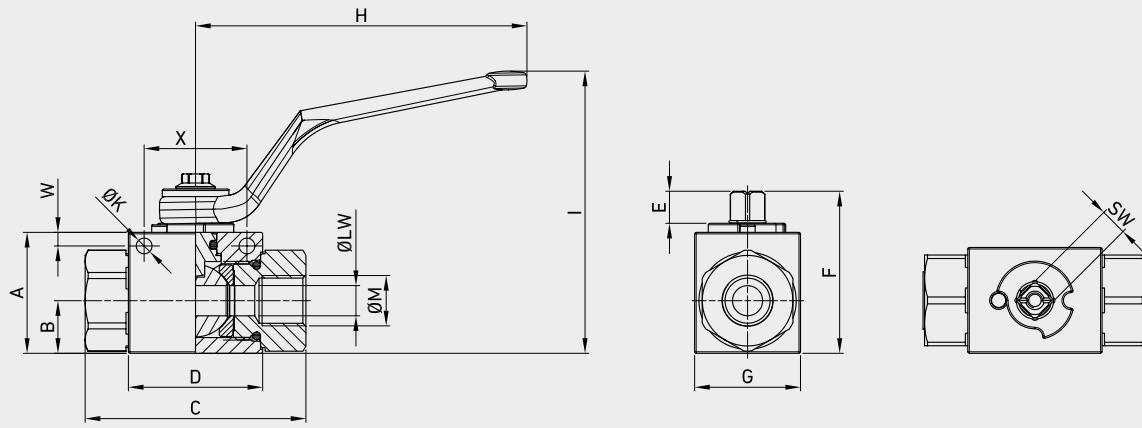


### GE2 DIN/ISO 228 BSP

| TYPE          | DN | PN                 | A                  | B            | C           | D            | E          | F             | G          | H           | I           | ØM      | ØK*          | W*          | X*         | SW         | ØLW        | WEIGHT              | ITEM CODE       |                 |
|---------------|----|--------------------|--------------------|--------------|-------------|--------------|------------|---------------|------------|-------------|-------------|---------|--------------|-------------|------------|------------|------------|---------------------|-----------------|-----------------|
|               |    |                    |                    |              |             |              |            |               |            |             |             |         |              |             |            |            |            |                     | CS              | SS              |
|               |    |                    |                    |              |             |              |            |               |            |             |             |         |              |             |            |            |            |                     | Carbon Steel    | Stainless Steel |
| GE2 G 1/4     | 6  | MPa 50<br>Psi 7250 | mm 35<br>inch 1,38 | 14,5<br>0,57 | 71<br>2,80  | 42,4<br>1,67 | 11<br>0,43 | 49<br>1,93    | 30<br>1,18 | 110<br>4,33 | 87<br>3,43  | G 1/4   | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 6<br>0,24  | kg 0,49<br>lb 1,08  | GE2GGT15011A000 | GE2GGT15044A000 |
| GE2 G 3/8     | 10 | MPa 50<br>Psi 7250 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 73<br>2,87  | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | G 3/8   | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | kg 0,644<br>lb 1,42 | GE2GGT25011A000 | GE2GGT25044A000 |
| GE2 G 1/2     | 13 | MPa 50<br>Psi 7250 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 83<br>3,27  | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | G 1/2   | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | kg 0,757<br>lb 1,67 | GE2GGT35011A000 | GE2GGT35044A000 |
| GE2 G 3/4     | 20 | MPa 42<br>Psi 6090 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 95<br>3,74  | 62,5<br>2,46 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | G 3/4   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | kg 1,438<br>lb 3,17 | GE2GGT44011A000 | GE2GGT44044A000 |
| GE2 G 1       | 25 | MPa 42<br>Psi 6090 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 112<br>4,41 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | G 1     | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,223<br>lb 4,90 | GE2GGT53011A000 | GE2GGT53044A000 |
| GE2 G 1 1/4 R | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 120<br>4,72 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | G 1 1/4 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,273<br>lb 5,01 | GE2GGR63011A000 | GE2GGR63044A000 |
| GE2 G 1 1/2 R | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 124<br>4,88 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | G 1 1/2 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,386<br>lb 5,26 | GE2GGR73011A000 | GE2GGR73044A000 |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE2 ANSI/ASME B1.20.1 NPT

| TYPE          | DN | PN  |      | A    | B    | C    | D    | E    | F     | G    | H    | I    | ØM    | ØK*  | W*   | X*   | SW   | ØLW  | WEIGHT   | ITEM CODE       |                 |
|---------------|----|-----|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|------|------|----------|-----------------|-----------------|
|               |    |     |      | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | mm   | inch  | kg   | lb   |      |      |      |          |                 |                 |
| GE2 N 1/4     | 6  | MPa | 50   | 35   | 14,5 | 71   | 42,4 | 11   | 49    | 30   | 110  | 87   | N 1/4 | 5,25 | 4,5  | 34   | 9    | 6    | kg 0,49  | GE2NNT15011A000 | GE2NNT15044A000 |
|               |    | Psi | 7250 | 1,38 | 0,57 | 2,80 | 1,67 | 0,43 | 1,93  | 1,18 | 4,33 | 3,43 |       | 0,21 | 0,18 | 1,34 | 0,35 | 0,24 | lb 1,08  |                 |                 |
| GE2 N 3/8     | 10 | MPa | 50   | 40   | 17,4 | 73   | 44,4 | 11   | 54,25 | 35   | 110  | 93   | N 3/8 | 5,25 | 4,5  | 34   | 9    | 10   | kg 0,644 | GE2NNT25011A000 | GE2NNT25044A000 |
|               |    | Psi | 7250 | 1,57 | 0,69 | 2,87 | 1,75 | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 |       | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 | lb 1,42  |                 |                 |
| GE2 N 1/2     | 13 | MPa | 50   | 43   | 19,7 | 83   | 48,4 | 11   | 57    | 37   | 110  | 97   | N 1/2 | 5,25 | 5    | 36   | 9    | 13   | kg 0,757 | GE2NNT35011A000 | GE2NNT35044A000 |
|               |    | Psi | 7250 | 1,69 | 0,78 | 3,27 | 1,91 | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 |       | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | lb 1,67  |                 |                 |
| GE2 N 3/4     | 20 | MPa | 42   | 57   | 25,4 | 95   | 62,5 | 14   | 75,5  | 49   | 180  | 105  | N 3/4 | 6,25 | 6    | 50   | 14   | 20   | kg 1,438 | GE2NNT44011A000 | GE2NNT44044A000 |
|               |    | Psi | 6090 | 2,24 | 1,00 | 3,74 | 2,46 | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 | lb 3,17  |                 |                 |
| GE2 N 1       | 25 | MPa | 42   | 65   | 29,5 | 112  | 66,5 | 14   | 83,5  | 55   | 180  | 113  | N 1   | 6,25 | 6    | 50   | 14   | 25   | kg 2,223 | GE2NNT53011A000 | GE2NNT53044A000 |
|               |    | Psi | 6090 | 2,56 | 1,16 | 4,41 | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | lb 4,90  |                 |                 |
| GE2 N 1 1/4 R | 25 | MPa | 35   | 65   | 29,5 | 120  | 66,5 | 14   | 83,5  | 55   | 180  | 113  | N 1   | 6,25 | 6    | 50   | 14   | 25   | kg 2,273 | GE2NNR63011A000 | GE2NNR63044A000 |
|               |    | Psi | 5075 | 2,56 | 1,16 | 4,72 | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | lb 5,01  |                 |                 |
| GE2 N 1 1/2 R | 25 | MPa | 35   | 65   | 29,5 | 124  | 66,5 | 14   | 83,5  | 55   | 180  | 113  | N 1   | 6,25 | 6    | 50   | 14   | 25   | kg 2,386 | GE2NNR73011A000 | GE2NNR73044A000 |
|               |    | Psi | 5075 | 2,56 | 1,16 | 4,88 | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | lb 5,26  |                 |                 |

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED





## GE2 SAE J1926-1

| TYPE       | DN | PN  |      | A    | B    | C     | D    | E     | F     | G    | H    | I    | ØM     | ØK*  | W*   | X*   | SW   | ØLW  | WEIGHT   | ITEM CODE       |                 |
|------------|----|-----|------|------|------|-------|------|-------|-------|------|------|------|--------|------|------|------|------|------|----------|-----------------|-----------------|
|            |    |     |      | mm   | inch | mm    | inch | mm    | inch  | mm   | inch | mm   | inch   | kg   | lb   |      |      |      |          |                 |                 |
| GE2 SAE4   | 6  | MPa | 50   | 35   | 14,5 | 71    | 42,4 | 11,1  | 49    | 30   | 110  | 87   | 7/16   | 5,25 | 4,5  | 34   | 9    | 6    | kg 0,512 | GE2EEE05011A000 | GE2EEE05044A000 |
|            |    | Psi | 7250 | 1,38 | 0,57 | 2,80  | 1,67 | 0,44  | 1,93  | 1,18 | 4,33 | 3,43 |        | 0,21 | 0,18 | 1,34 | 0,35 | 0,24 | lb 1,13  |                 |                 |
| GE2 SAE6   | 10 | MPa | 50   | 40   | 17,5 | 73    | 44,8 | 11,1  | 54,25 | 35   | 110  | 93   | 9/16   | 5,25 | 4,5  | 34   | 9    | 10   | kg 0,5   | GE2EEE15011A000 | GE2EEE15044A000 |
|            |    | Psi | 7250 | 1,57 | 0,69 | 2,87  | 1,76 | 0,44  | 2,14  | 1,38 | 4,33 | 3,66 |        | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 | lb 1,10  |                 |                 |
| GE2 SAE8   | 13 | MPa | 50   | 43   | 19,7 | 83    | 48,4 | 11,1  | 57,25 | 37   | 110  | 97   | 3/4    | 5,25 | 5    | 36   | 9    | 13   | kg 0,779 | GE2EEE25011A000 | GE2EEE25044A000 |
|            |    | Psi | 7250 | 1,69 | 0,78 | 3,27  | 1,91 | 0,44  | 2,25  | 1,46 | 4,33 | 3,82 |        | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | lb 1,72  |                 |                 |
| GE2 SAE12  | 20 | MPa | 42   | 57   | 25,4 | 95    | 62,5 | 14,35 | 75,5  | 49   | 180  | 105  | 1 1/16 | 6,25 | 6    | 50   | 9    | 10   | kg 1,441 | GE2EEE34011A000 | GE2EEE34044A000 |
|            |    | Psi | 6090 | 2,24 | 1,00 | 3,74  | 2,46 | 0,56  | 2,97  | 1,93 | 7,09 | 4,13 |        | 0,25 | 0,24 | 1,97 | 0,35 | 0,39 | lb 3,18  |                 |                 |
| GE2 SAE16  | 25 | MPa | 42   | 65   | 29,5 | 112,4 | 66,5 | 14,35 | 83,5  | 55   | 180  | 113  | 1 5/16 | 6,25 | 6    | 50   | 9    | 13   | kg 2,335 | GE2EEE43011A000 | GE2EEE43044A000 |
|            |    | Psi | 6090 | 2,56 | 1,16 | 4,43  | 2,62 | 0,56  | 3,29  | 2,17 | 7,09 | 4,45 |        | 0,25 | 0,24 | 1,97 | 0,35 | 0,51 | lb 5,15  |                 |                 |
| GE2 SAE20R | 25 | MPa | 35   | 65   | 29,5 | 120,4 | 66,5 | 14,35 | 83,5  | 55   | 180  | 113  | 1 5/8  | 6,25 | 6    | 50   | 9    | 10   | kg 2,307 | GE2EEE53011A000 | GE2EEE53044A000 |
|            |    | Psi | 5075 | 2,56 | 1,16 | 4,74  | 2,62 | 0,56  | 3,29  | 2,17 | 7,09 | 4,45 |        | 0,25 | 0,24 | 1,97 | 0,35 | 0,39 | lb 5,09  |                 |                 |
| GE2 SAE24R | 25 | MPa | 35   | 65   | 29,5 | 124,4 | 66,5 | 14,35 | 83,5  | 55   | 180  | 113  | 1 7/8  | 6,25 | 6    | 50   | 9    | 13   | kg 2,399 | GE2EEE63011A000 | GE2EEE63044A000 |
|            |    | Psi | 5075 | 2,56 | 1,16 | 4,90  | 2,62 | 0,56  | 3,29  | 2,17 | 7,09 | 4,45 |        | 0,25 | 0,24 | 1,97 | 0,35 | 0,51 | lb 5,29  |                 |                 |

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED

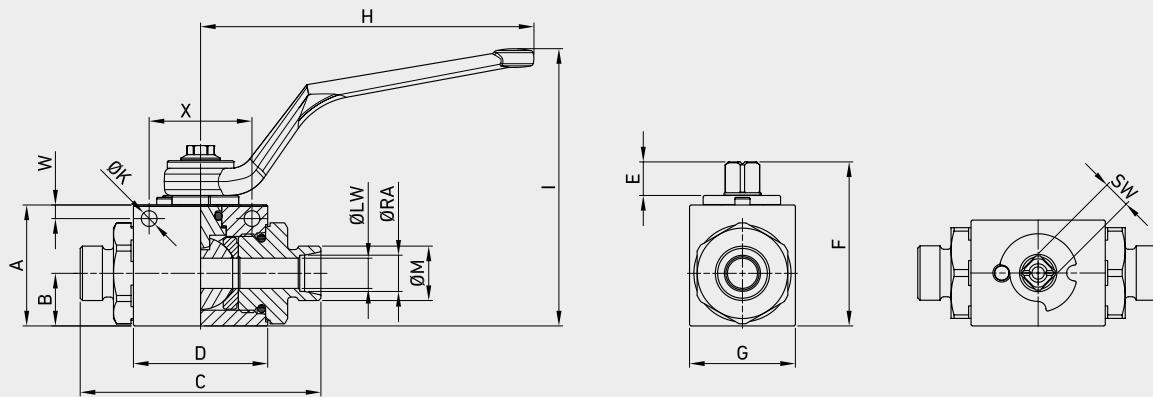


## GE2 DIN 2353 HEAVY SERIES

| TYPE    | DN | PN                 | A                  | B            | C            | D            | E            | F             | G          | H           | I           | ØM      | ØK*          | W*          | X*         | SW         | ØLW        | ØRA        | ITEM CODE           |                 |                 |
|---------|----|--------------------|--------------------|--------------|--------------|--------------|--------------|---------------|------------|-------------|-------------|---------|--------------|-------------|------------|------------|------------|------------|---------------------|-----------------|-----------------|
|         |    |                    |                    |              |              |              |              |               |            |             |             |         |              |             |            |            |            |            | CS                  | SS              |                 |
|         |    |                    |                    |              |              |              |              |               |            |             |             |         |              |             |            |            |            |            | Carbon Steel        | Stainless Steel |                 |
| GE2 8S  | 6  | MPa 50<br>Psi 7250 | mm 35<br>inch 1,38 | 14,5<br>0,57 | 76<br>2,99   | 42,4<br>1,67 | 11,1<br>0,44 | 49,25<br>1,94 | 30<br>1,18 | 110<br>4,33 | 87<br>3,43  | M16x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 4<br>0,16  | 8<br>0,31  | kg 0,501<br>lb 1,10 | GE2DDS05011A000 | GE2DDS05044A000 |
| GE2 10S | 6  | MPa 50<br>Psi 7250 | mm 35<br>inch 1,38 | 14,5<br>0,57 | 76<br>2,99   | 42,4<br>1,67 | 11,1<br>0,44 | 49,25<br>1,94 | 30<br>1,18 | 110<br>4,33 | 87<br>3,43  | M18x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 6<br>0,24  | 10<br>0,39 | kg 0,501<br>lb 1,10 | GE2DDS15011A000 | GE2DDS15044A000 |
| GE2 12S | 8  | MPa 50<br>Psi 7250 | mm 35<br>inch 1,38 | 14,5<br>0,57 | 76<br>2,99   | 42,4<br>1,67 | 11<br>0,43   | 49,25<br>1,94 | 30<br>1,18 | 110<br>4,33 | 87<br>3,43  | M20x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 8<br>0,31  | 12<br>0,47 | kg 0,501<br>lb 1,10 | GE2DDRS5011A000 | GE2DDRS5044A000 |
| GE2 12S | 10 | MPa 50<br>Psi 7250 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 76<br>2,99   | 44,4<br>1,75 | 11<br>0,43   | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | M20x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 | kg 0,599<br>lb 1,32 | GE2DDS25011A000 | GE2DDS25044A000 |
| GE2 14S | 10 | MPa 50<br>Psi 7250 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 82,5<br>3,25 | 44,4<br>1,75 | 11<br>0,43   | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  | M22x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 14<br>0,55 | kg 0,629<br>lb 1,39 | GE2DDS35011A000 | GE2DDS35044A000 |
| GE2 16S | 13 | MPa 50<br>Psi 7250 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 89<br>3,50   | 48,4<br>1,91 | 11<br>0,43   | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | M24x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 16<br>0,63 | kg 0,677<br>lb 1,48 | GE2DDS45011A000 | GE2DDS45044A000 |
| GE2 20S | 13 | MPa 50<br>Psi 7250 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 93<br>3,66   | 48,4<br>1,91 | 11<br>0,43   | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  | M30x2   | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 20<br>0,79 | kg 0,786<br>lb 1,73 | GE2DDS55011A000 | GE2DDS55044A000 |
| GE2 25S | 20 | MPa 40<br>Psi 5800 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 111<br>4,37  | 62,5<br>2,46 | 14<br>0,55   | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 25<br>0,98 | kg 1,485<br>lb 3,27 | GE2DDS64011A000 | GE2DDS64044A000 |
| GE2 30S | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 121<br>4,76  | 66,5<br>2,62 | 14<br>0,55   | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | M42x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 30<br>1,18 | kg 2,145<br>lb 4,73 | GE2DDS73011A000 | GE2DDS73044A000 |
| GE2 38S | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 131<br>5,16  | 66,5<br>2,62 | 14<br>0,55   | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 | M52x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 38<br>1,50 | kg 2,373<br>lb 5,23 | GE2DDS83011A000 | GE2DDS83044A000 |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED





## GE2 DIN 2353 LIGHT SERIES

| TYPE    | DN | PN                 |                    | A            | B            | C            | D          | E             | F          | G           | H           | I | ØM      | ØK*          | W*          | X*         | SW         | ØLW        | ØRA        | WEIGHT              | ITEM CODE          |                       |
|---------|----|--------------------|--------------------|--------------|--------------|--------------|------------|---------------|------------|-------------|-------------|---|---------|--------------|-------------|------------|------------|------------|------------|---------------------|--------------------|-----------------------|
|         |    |                    |                    |              |              |              |            |               |            |             |             |   |         |              |             |            |            |            |            |                     | CS<br>Carbon Steel | SS<br>Stainless Steel |
| GE2 6L  | 6  | MPa 50<br>Psi 7250 | mm 35<br>inch 1,38 | 14,5<br>0,57 | 76<br>2,99   | 42,4<br>1,67 | 11<br>0,43 | 49<br>1,93    | 30<br>1,18 | 110<br>4,33 | 87<br>3,43  |   | M12x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 6<br>0,24  | 6<br>0,24  | kg 0,475<br>lb 1,05 | GE2DDL05011A000    | GE2DDL05044A000       |
| GE2 8L  | 6  | MPa 50<br>Psi 7250 | mm 35<br>inch 1,38 | 14,5<br>0,57 | 76<br>2,99   | 42,4<br>1,67 | 11<br>0,43 | 49<br>1,93    | 30<br>1,18 | 110<br>4,33 | 87<br>3,43  |   | M14x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 6<br>0,24  | 8<br>0,31  | kg 0,477<br>lb 1,05 | GE2DDL15011A000    | GE2DDL15044A000       |
| GE2 10L | 6  | MPa 50<br>Psi 7250 | mm 35<br>inch 1,38 | 14,5<br>0,57 | 76<br>2,99   | 42,4<br>1,67 | 11<br>0,43 | 49<br>1,93    | 30<br>1,18 | 110<br>4,33 | 87<br>3,43  |   | M16x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 6<br>0,24  | 10<br>0,39 | kg 0,475<br>lb 1,05 | GE2DDRL5011A000    | GE2DDRL5044A000       |
| GE2 10L | 10 | MPa 50<br>Psi 7250 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 76,5<br>3,01 | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  |   | M16x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 8<br>0,31  | 10<br>0,39 | kg 0,597<br>lb 1,32 | GE2DDL25011A000    | GE2DDL25044A000       |
| GE2 12L | 10 | MPa 50<br>Psi 7250 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 79,5<br>3,13 | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 110<br>4,33 | 93<br>3,66  |   | M18x1,5 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | 12<br>0,47 | kg 0,616<br>lb 1,36 | GE2DDL35011A000    | GE2DDL35044A000       |
| GE2 15L | 13 | MPa 50<br>Psi 7250 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 87<br>3,43   | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  |   | M22x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 15<br>0,59 | kg 0,731<br>lb 1,61 | GE2DDL45011A000    | GE2DDL45044A000       |
| GE2 18L | 13 | MPa 50<br>Psi 7250 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 87<br>3,43   | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 110<br>4,33 | 97<br>3,82  |   | M26x1,5 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | 18<br>0,71 | kg 0,748<br>lb 1,65 | GE2DDL55011A000    | GE2DDL55044A000       |
| GE2 22L | 20 | MPa 40<br>Psi 5800 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 110<br>4,33  | 62,5<br>2,46 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 180<br>7,09 | 105<br>4,13 |   | M30x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | 22<br>0,87 | kg 1,463<br>lb 3,23 | GE2DDL64011A000    | GE2DDL64044A000       |
| GE2 28L | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 117<br>4,61  | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 |   | M36x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 28<br>1,10 | kg 2,131<br>lb 4,70 | GE2DDL73011A000    | GE2DDL73044A000       |
| GE2 35L | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 119<br>4,69  | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 |   | M45x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 35<br>1,38 | kg 2,163<br>lb 4,77 | GE2DDL83011A000    | GE2DDL83044A000       |
| GE2 42L | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 119<br>4,69  | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 180<br>7,09 | 113<br>4,45 |   | M52x2   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | 42<br>1,65 | kg 2,256<br>lb 4,97 | GE2DDL93011A000    | GE2DDL93044A000       |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED

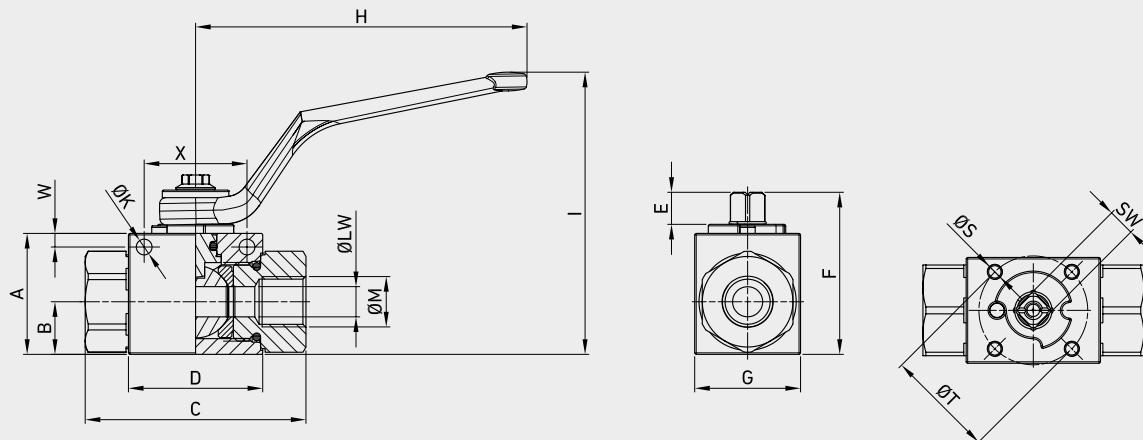


## GE2 DIN/ISO 228 BSP

Assembling threads per ISO5211

| TYPE          | DN | PN       | A    | B    | C    | D    | E    | F     | G    | H    | I    | ØM   | ØS | ØT   | ØK*  | W*   | X*   | ISO5211 | SW   | ØLW  | WEIGHT   | ITEM CODE       |
|---------------|----|----------|------|------|------|------|------|-------|------|------|------|------|----|------|------|------|------|---------|------|------|----------|-----------------|
|               |    |          | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | mm   | inch | mm | inch | mm   | inch | kg   | lb      |      |      |          |                 |
| GE2 G 1/4     | 6  | MPa 50   | 35   | 14,5 | 71   | 42,4 | 11   | 49    | 30   | 110  | 87   | G    | M4 | 35   | 5,25 | 4,5  | 34   | F03     | 9    | 6    | kg 0,49  | GE2GGT15011AF50 |
|               |    | Psi 7250 | 1,38 | 0,57 | 2,80 | 1,67 | 0,43 | 1,93  | 1,18 | 4,33 | 3,43 | 1/4  |    | 1,38 | 0,21 | 0,18 | 1,34 |         | 0,35 | 0,24 | lb 1,08  | GE2GGT15044AF50 |
| GE2 G 3/8     | 10 | MPa 50   | 40   | 17,4 | 73   | 44,4 | 11   | 54,25 | 35   | 110  | 93   | G    | M5 | 36   | 5,25 | 4,5  | 34   | F03     | 9    | 10   | kg 0,644 | GE2GGT25011AF50 |
|               |    | Psi 7250 | 1,57 | 0,69 | 2,87 | 1,75 | 0,43 | 2,14  | 1,38 | 4,33 | 3,66 | 3/8  |    | 1,42 | 0,21 | 0,18 | 1,34 |         | 0,35 | 0,39 | lb 1,42  | GE2GGT25044AF50 |
| GE2 G 1/2     | 13 | MPa 50   | 43   | 19,7 | 83   | 48,4 | 11   | 57    | 37   | 110  | 97   | G    | M5 | 36   | 5,25 | 5    | 36   | F03     | 9    | 13   | kg 0,757 | GE2GGT35011AF50 |
|               |    | Psi 7250 | 1,69 | 0,78 | 3,27 | 1,91 | 0,43 | 2,24  | 1,46 | 4,33 | 3,82 | 1/2  |    | 1,42 | 0,21 | 0,20 | 1,42 |         | 0,35 | 0,51 | lb 1,67  | GE2GGT35044AF50 |
| GE2 G 3/4     | 20 | MPa 42   | 57   | 25,4 | 95   | 62,5 | 14   | 75,5  | 49   | 180  | 105  | G    | M6 | 50   | 6,25 | 6    | 50   | F05     | 14   | 20   | kg 1,438 | GE2GGT44011AF50 |
|               |    | Psi 6090 | 2,24 | 1,00 | 3,74 | 2,46 | 0,55 | 2,97  | 1,93 | 7,09 | 4,13 | 3/4  |    | 1,97 | 0,25 | 0,24 | 1,97 |         | 0,55 | 0,79 | lb 3,17  | GE2GGT44044AF50 |
| GE2 G 1       | 25 | MPa 42   | 65   | 29,5 | 112  | 66,5 | 14   | 83,5  | 55   | 180  | 113  | G 1  | M6 | 50   | 6,25 | 6    | 50   | F05     | 14   | 25   | kg 2,223 | GE2GGT53011AF50 |
|               |    | Psi 6090 | 2,56 | 1,16 | 4,41 | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 1/2  |    | 1,97 | 0,25 | 0,24 | 1,97 |         | 0,55 | 0,98 | lb 4,90  | GE2GGT53044AF50 |
| GE2 G 1 1/4 R | 25 | MPa 35   | 65   | 29,5 | 120  | 66,5 | 14   | 83,5  | 55   | 180  | 113  | G 1  | M6 | 50   | 6,25 | 6    | 50   | F05     | 14   | 25   | kg 2,273 | GE2GGR63011AF50 |
|               |    | Psi 5075 | 2,56 | 1,16 | 4,72 | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 1/4  |    | 1,97 | 0,25 | 0,24 | 1,97 |         | 0,55 | 0,98 | lb 5,01  | GE2GGR63044AF50 |
| GE2 G 1 1/2 R | 25 | MPa 35   | 65   | 29,5 | 124  | 66,5 | 14   | 83,5  | 55   | 180  | 113  | G 1  | M6 | 50   | 6,25 | 6    | 50   | F05     | 14   | 25   | kg 2,386 | GE2GGR73011AF50 |
|               |    | Psi 5075 | 2,56 | 1,16 | 4,88 | 2,62 | 0,55 | 3,29  | 2,17 | 7,09 | 4,45 | 1/2  |    | 1,97 | 0,25 | 0,24 | 1,97 |         | 0,55 | 0,98 | lb 5,26  | GE2GGR73044AF50 |

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE2 ANSI/ASME B1.20.1 NPT

Assembling threads per ISO5211

| TYPE          | DN | PN                 | A  | B   | C  | D                                     | E   | F                  | G                   | H               | I               | ØM | ØS | ØT | ØK* | W* | X* | ISO5211 | SW | ØLW | WEIGHT | ITEM CODE | CS<br>Carbon Steel | SS<br>Stainless Steel |
|---------------|----|--------------------|--|---|----|---------------------------------------|-----|--------------------|---------------------|-----------------|-----------------|----|----|----|-----|----|----|---------|----|-----|--------|-----------|--------------------|-----------------------|
| GE2 N 1/4     | 6  | MPa 50<br>Psi 7250 | mm 35 14,5 71 42,4 11 49 30 110 87 N       | inch 1,38 0,57 2,80 1,67 0,43 1,93 1,18 4,33 3,43 1/4 | M4 | 35 5,25 4,5 34<br>1,38 0,21 0,18 1,34 | F03 | 9 6<br>0,35 0,24   | kg 0,49<br>lb 1,08  | GE2NNT15011AF50 | GE2NNT15044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 N 3/8     | 10 | MPa 50<br>Psi 7250 | mm 40 17,4 73 44,4 11 54,25 35 110 93 N    | inch 1,57 0,69 2,87 1,75 0,43 2,14 1,38 4,33 3,66 3/8 | M5 | 36 5,25 4,5 34<br>1,42 0,21 0,18 1,34 | F03 | 9 10<br>0,35 0,39  | kg 0,644<br>lb 1,42 | GE2NNT25011AF50 | GE2NNT25044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 N 1/2     | 13 | MPa 50<br>Psi 7250 | mm 43 19,7 83 48,4 11 57 37 110 97 N       | inch 1,69 0,78 3,27 1,91 0,43 2,24 1,46 4,33 3,82 1/2 | M5 | 36 5,25 5 36<br>1,42 0,21 0,20 1,42   | F03 | 9 13<br>0,35 0,51  | kg 0,757<br>lb 1,67 | GE2NNT35011AF50 | GE2NNT35044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 N 3/4     | 20 | MPa 42<br>Psi 6090 | mm 57 25,4 95 62,5 14 75,5 49 180 105 N    | inch 2,24 1,00 3,74 2,46 0,55 2,97 1,93 7,09 4,13 3/4 | M6 | 50 6,25 6 50<br>1,97 0,25 0,24 1,97   | F05 | 14 20<br>0,55 0,79 | kg 1,438<br>lb 3,17 | GE2NNT44011AF50 | GE2NNT44044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 N 1       | 25 | MPa 42<br>Psi 6090 | mm 65 29,5 112 66,5 14 83,5 55 180 113 N 1 | inch 2,56 1,16 4,41 2,62 0,55 3,29 2,17 7,09 4,45     | M6 | 50 6,25 6 50<br>1,97 0,25 0,24 1,97   | F05 | 14 25<br>0,55 0,98 | kg 2,223<br>lb 4,90 | GE2NNT53011AF50 | GE2NNT53044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 N 1 1/4 R | 25 | MPa 35<br>Psi 5075 | mm 65 29,5 120 66,5 14 83,5 55 180 113 N 1 | inch 2,56 1,16 4,72 2,62 0,55 3,29 2,17 7,09 4,45 1/4 | M6 | 50 6,25 6 50<br>1,97 0,25 0,24 1,97   | F05 | 14 25<br>0,55 0,98 | kg 2,273<br>lb 5,01 | GE2NNR63011AF50 | GE2NNR63044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 N 1 1/2 R | 25 | MPa 35<br>Psi 5075 | mm 65 29,5 124 66,5 14 83,5 55 180 113 N 1 | inch 2,56 1,16 4,88 2,62 0,55 3,29 2,17 7,09 4,45 1/2 | M6 | 50 6,25 6 50<br>1,97 0,25 0,24 1,97   | F05 | 14 25<br>0,55 0,98 | kg 2,386<br>lb 5,26 | GE2NNR73011AF50 | GE2NNR73044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



## GE2 SAE J1926-1

Assembling threads per ISO5211

| TYPE       | DN | PN                 | A  | B   | C  | D  | E   | F                 | G                   | H               | I               | ØM | ØS | ØT | ØK* | W* | X* | ISO5211 | SW | ØLW | WEIGHT | ITEM CODE | CS<br>Carbon Steel | SS<br>Stainless Steel |
|------------|----|--------------------|--|---|----|--|-----|-------------------|---------------------|-----------------|-----------------|----|----|----|-----|----|----|---------|----|-----|--------|-----------|--------------------|-----------------------|
| GE2 SAE4   | 6  | MPa 50<br>Psi 7250 | mm 35 14,5 71 42,4 11,1 49 30 110 87 7/16          | inch 1,38 0,57 2,80 1,67 0,44 1,93 1,18 4,33 3,43 | M4 | 35 0,21 0,18 1,34<br>1,38 5,25 4,5 34    | F03 | 9 6<br>0,35 0,24  | kg 0,512<br>lb 1,13 | GE2EEE05011AF50 | GE2EEE05044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 SAE6   | 10 | MPa 50<br>Psi 7250 | mm 40 17,5 73 44,8 11,1 54,25 35 110 93 9/16       | inch 1,57 0,69 2,87 1,76 0,44 2,14 1,38 4,33 3,66 | M4 | 35 0,21 0,18 1,34<br>1,38 5,25 5 36      | F03 | 9 10<br>0,35 0,39 | kg 0,5<br>lb 1,10   | GE1EEE15011AF50 | GE2EEE15044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 SAE8   | 13 | MPa 50<br>Psi 7250 | mm 43 19,7 83 48,4 11,1 57,25 37 110 97 3/4        | inch 1,69 0,78 3,27 1,91 0,44 2,25 1,46 4,33 3,82 | M5 | 36 0,21 0,20 1,42<br>1,42 6,25 6 50      | F03 | 9 13<br>0,35 0,51 | kg 0,779<br>lb 1,72 | GE1EEE25011AF50 | GE2EEE25044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 SAE12  | 20 | MPa 50<br>Psi 7250 | mm 57 25,4 95 62,5 14,35 75,5 49 180 105 1 1/16    | inch 2,24 1,00 3,74 2,46 0,56 2,97 1,93 7,09 4,13 | M5 | 36 0,25 0,24 1,97<br>1,42 6,25 6 50      | F05 | 9 20<br>0,35 0,79 | kg 1,441<br>lb 3,18 | GE2EEE34011AF50 | GE2EEE34044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 SAE16  | 25 | MPa 42<br>Psi 6090 | mm 65 29,5 112,4 66,5 14,35 83,5 55 180 113 1 5/16 | inch 2,56 1,16 4,43 2,62 0,56 3,29 2,17 7,09 4,45 | M6 | 50 0,25 0,24 1,97<br>1,97 6,25 6 50      | F05 | 9 25<br>0,35 0,98 | kg 2,335<br>lb 5,15 | GE2EEE43011AF50 | GE2EEE43044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 SAE20R | 25 | MPa 35<br>Psi 5075 | mm 65 29,5 120,4 66,5 14,35 83,5 55 180 113 1 5/8  | inch 2,56 1,16 4,74 2,62 0,56 3,29 2,17 7,09 4,45 | M6 | 50 0,25 0,24 1,97<br>1,97 6,25 6 50      | F05 | 9 25<br>0,35 0,98 | kg 2,307<br>lb 5,09 | GE2EEE53011AF50 | GE2EEE53044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |
| GE2 SAE24R | 25 | MPa 35<br>Psi 5075 | mm 65 29,5 124,4 66,5 14,35 83,5 55 180 113 1 7/8  | inch 2,56 1,16 4,90 2,62 0,56 3,29 2,17 7,09 4,45 | M6 | 50 0,25 0,24 1,97<br>1,97 0,25 0,24 1,97 | F05 | 9 25<br>0,35 0,98 | kg 2,399<br>lb 5,29 | GE2EEE63011AF50 | GE2EEE63044AF50 |    |    |    |     |    |    |         |    |     |        |           |                    |                       |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



# GE2 HC High Cyclicity

2-WAY HIGH PRESSURE  
BALL VALVES

**1.000.000 CYCLES**

Edition. 21.0


## CS Carbon Steel

- Type: ball valve 2 way high cycles
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

## SS Stainless Steel

- Type: ball valve 2 way high cycles
- Sizes: from DN6 up to DN32
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

## STANDARD COMPOSITION OF VALVE

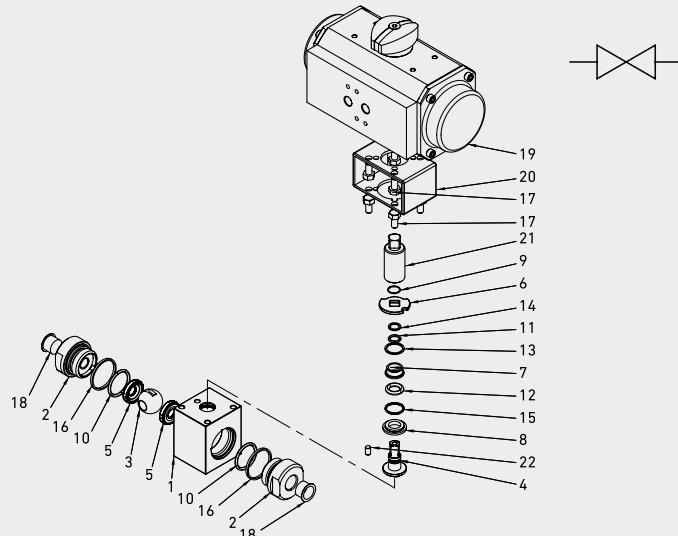

| POS | DESCRIPTION    |              |                 | CS<br>Carbon<br>Steel | SS<br>Stainless<br>Steel |          |  | CS<br>Carbon<br>Steel | SS<br>Stainless<br>Steel |
|-----|----------------|--------------|-----------------|-----------------------|--------------------------|----------|--|-----------------------|--------------------------|
|     |                | Q.TY DN10-13 | Q.TY DN20-25-32 |                       |                          | MATERIAL |  |                       |                          |
| 1   | Body           | 1            | 1               | 1,0737                | 1,4404                   |          |  | 12                    | Stem o-ring              |
| 2   | Adapter        | 2            | 2               | 1,0460                | 1,4404                   |          |  | 13                    | Stem Back-up             |
| 3   | Ball           | 1            | 1               | 1,4404                | 1,4404                   |          |  | 14                    | Stem Back-up             |
| 4   | Stem           | 1            | 1               | 1,4542                | 1,4542                   |          |  | 15                    | Stem quad-ring           |
| 5   | Ball seat      | 2            | 2               | POM                   | POM                      |          |  | 16                    | Closure gasket           |
| 6   | Washer         | 1            | 1               | 1,0116                | 1,0116                   |          |  | 17                    | Screws                   |
| 7   | Upper Bushing  | 1            | 1               | POM - A1000           | POM -A1000               |          |  | 18                    | Caps                     |
| 8   | Lower Bushing  | 1            | 1               | POM - A1000           | POM -A1000               |          |  | 19                    | Actuator                 |
| 9   | Seeger         | 1            | 1               | 1,4301                | 1,4301                   |          |  | 20                    | Connector                |
| 10  | Adapter o-ring | 2            | 2               | NBR                   | NBR                      |          |  | 21                    | Joint                    |
| 11  | Stem o-ring    | 1            | 1               | NBR                   | NBR                      |          |  | 22                    | Pin                      |



**STANDARD DESIGN: BARE STEM  
WITH ACTUATOR HOLES**

## CODE DESCRIPTION STRUCTURE

|        |       |      |   |   |   |   |   |   |
|--------|-------|------|---|---|---|---|---|---|
| GE2 HC | G 1/2 | DN13 | 1 | 2 | M | 4 | A | B |
|--------|-------|------|---|---|---|---|---|---|

Type and way of valve \_\_\_\_\_

GE2 HC 2-way

Ends \_\_\_\_\_

| GAS DIN/ ISO 228/ BSP | NPT ANSI / ASME | SAE J1926-1 |
|-----------------------|-----------------|-------------|
|                       |                 | B1.20.1     |
| G 1/4                 | N 1/4           | SAE4        |
| G 3/8                 | N 3/8           | SAE6        |
| G 1/2                 | N 1/2           | SAE8        |
| G 3/4                 | N 3/4           | SAE12       |
| G 1                   | N 1             | SAE16       |
| G 1 1/4               | N 1 1/4         | SAE20       |

Size \_\_\_\_\_

from DN6 to DN32

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0460
- 4 = 1,4404

Stem material \_\_\_\_\_

- M = 1,4542
- M = 1,4542

Ball Material \_\_\_\_\_

- 4 = 1,4404
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*

Seal material \_\_\_\_\_



B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Pneumatic and electrical actuator


For further special requests please consult our technical/commercial service.

**STANDARD DESIGN: BARE STEM WITH ACTUATOR HOLES**

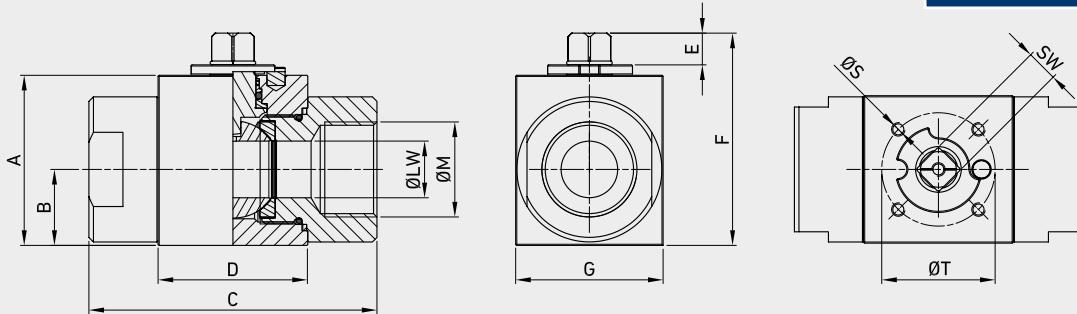


### GE2 HC DIN/ISO 228 BSP

| TYPE          | DN | PN       | A    | B     | C    | D    | E    | F    | G    | ØM    | ØS   | ØT         | ISO5211 | SW   | ØLW  | WEIGHT | ITEM CODE       |                 |
|---------------|----|----------|------|-------|------|------|------|------|------|-------|------|------------|---------|------|------|--------|-----------------|-----------------|
|               |    |          | mm   | inch  | mm   | inch | mm   | inch | mm   | mm    | inch | mm         | inch    | kg   | lb   | CS     | SS              |                 |
| GE2 G 1/4     | 6  | MPa 50   | 57   | 24,5  | 73   | 44   | 11   | 71,3 | 49   | G 1/4 | M6   | 50<br>1,97 | F05     | 9    | 10   | 0,505  | G590202A1301TAA | G590202A2P01TAA |
|               |    | Psi 7250 | 2,24 | 0,96  | 2,87 | 1,73 | 0,43 | 2,81 | 1,93 |       |      |            |         | 0,35 | 0,39 | 1,11   |                 |                 |
| GE2 G 3/8     | 10 | MPa 50   | 57   | 24,5  | 73   | 44   | 11   | 71,3 | 49   | G 3/8 | M6   | 50<br>1,97 | F05     | 9    | 10   | 0,744  | G590203A1301TAA | G590203A2P01TAA |
|               |    | Psi 7250 | 2,24 | 0,96  | 2,87 | 1,73 | 0,43 | 2,81 | 1,93 |       |      |            |         | 0,35 | 0,39 | 1,64   |                 |                 |
| GE2 G 1/2     | 13 | MPa 50   | 57   | 23,5  | 81   | 48   | 11   | 71,3 | 49   | G 1/2 | M6   | 50<br>1,97 | F05     | 9    | 13   | 1,238  | G590204A1301TAA | G590204A2P01TAA |
|               |    | Psi 7250 | 2,24 | 0,93  | 3,19 | 1,89 | 0,43 | 2,81 | 1,93 |       |      |            |         | 0,35 | 0,51 | 2,73   |                 |                 |
| GE2 G 3/4     | 20 | MPa 40   | 65   | 27    | 98   | 62   | 14   | 83,7 | 55   | G 3/4 | M6   | 50<br>1,97 | F05     | 14   | 20   | 1,818  | G590205A1301RAA | G590205A2P01RAA |
|               |    | Psi 5800 | 2,56 | 1,06  | 3,86 | 2,44 | 0,55 | 3,30 | 2,17 |       |      |            |         | 0,55 | 0,79 | 4,01   |                 |                 |
| GE2 G 1       | 25 | MPa 35   | 75   | 33,5  | 106  | 66   | 14   | 93,6 | 65   | G 1   | M6   | 50<br>1,97 | F05     | 14   | 25   | 2,323  | G590206A1301PAA | G590206A2P01PAA |
|               |    | Psi 5075 | 2,95 | 1,32  | 4,17 | 2,60 | 0,55 | 3,69 | 2,56 |       |      |            |         | 0,55 | 0,98 | 5,12   |                 |                 |
| GE2 G 1 1/4 R | 25 | MPa 35   | 75   | 33,5  | 127  | 66   | 14   | 93,6 | 65   | G 1/4 | M6   | 50<br>1,97 | F05     | 14   | 25   | 2,573  | G590207R1301PAA | G590207R2P01PAA |
|               |    | Psi 5075 | 2,95 | 1,32  | 5,00 | 2,60 | 0,55 | 3,69 | 2,56 |       |      |            |         | 0,55 | 0,98 | 5,67   |                 |                 |
| GE2 G 1 1/4   | 32 | MPa 35   | 87   | 40,75 | 127  | 83   | 14   | 93,6 | 80   | G 1/4 | M8   | 70<br>2,76 | F07     | 14   | 32   | 2,890  | G590207A1301PAA | G590207A2P01PAA |
|               |    | Psi 5075 | 3,43 | 1,60  | 5,00 | 3,27 | 0,55 | 3,69 | 3,15 |       |      |            |         | 0,55 | 1,26 | 6,37   |                 |                 |







### GE2 HC ANSI/ASME B1.20.1 NPT

| TYPE          | DN | PN                 |  | A         | B    | C    | D    | E    | F    | G    | ØM   | ØS | ØT    | ISO5211 | SW   | ØLW  | WEIGHT  | ITEM CODE       |                 |
|---------------|----|--------------------|--|-----------|------|------|------|------|------|------|------|----|-------|---------|------|------|---------|-----------------|-----------------|
|               |    |                    |  | MPa       | mm   | 57   | 24,5 | 73   | 44   | 11   | 71,3 | 49 | N 1/4 | M6      | 50   | F05  | 9       | 10              | kg 0,505        |
| GE2 N 1/4     | 6  | MPa 50<br>Psi 7250 |  | inch 2,24 | 0,96 | 2,87 | 1,73 | 0,43 | 2,81 | 1,93 |      |    | 1,97  |         | 0,35 | 0,39 | lb 1,11 | G590902A1301TAA | G590902A2P01TAA |
| GE2 N 3/8     | 10 | MPa 50<br>Psi 7250 |  | inch 2,24 | 0,96 | 2,87 | 1,73 | 0,43 | 2,81 | 1,93 |      |    | 1,97  |         | 0,35 | 0,39 | lb 1,64 | G590903A1301TAA | G590903A2P01TAA |
| GE2 N 1/2     | 13 | MPa 50<br>Psi 7250 |  | inch 2,24 | 0,93 | 3,19 | 1,89 | 0,43 | 2,81 | 1,93 |      |    | 1,97  |         | 0,35 | 0,51 | lb 2,73 | G590904A1301TAA | G590904A2P01TAA |
| GE2 N 3/4     | 20 | MPa 40<br>Psi 5800 |  | inch 2,56 | 1,06 | 3,86 | 2,44 | 0,55 | 3,30 | 2,17 |      |    | 1,97  |         | 0,55 | 0,79 | lb 4,01 | G590905A1301RAA | G590905A2P01RAA |
| GE2 N 1       | 25 | MPa 35<br>Psi 5075 |  | inch 2,95 | 1,32 | 4,17 | 2,60 | 0,55 | 3,69 | 2,56 |      |    | 1,97  |         | 0,55 | 0,98 | lb 5,12 | G590906A1301PAA | G590906A2P01PAA |
| GE2 N 1 1/4 R | 25 | MPa 35<br>Psi 5075 |  | inch 2,95 | 1,32 | 5,00 | 2,60 | 0,55 | 3,69 | 2,56 |      |    | 1,97  |         | 0,55 | 0,98 | lb 5,67 | G590907R1301PAA | G590907R2P01PAA |
| GE2 N 1 1/4   | 32 | MPa 35<br>Psi 5075 |  | inch 3,43 | 1,60 | 5,00 | 3,27 | 0,55 | 3,69 | 3,15 |      |    | 2,76  |         | 0,55 | 1,26 | lb 6,37 | G590907A1301PAA | G590907A2P01PAA |



### GE2 HC SAE J1926-1


| TYPE       | DN | PN                 |  | A         | B    | C    | D    | E    | F    | G    | ØM   | ØS | ØT   | ISO5211 | SW   | ØLW  | WEIGHT  | ITEM CODE       |                 |
|------------|----|--------------------|--|-----------|------|------|------|------|------|------|------|----|------|---------|------|------|---------|-----------------|-----------------|
|            |    |                    |  | MPa       | mm   | 57   | 24,5 | 73   | 44   | 11   | 71,3 | 49 | 7/16 | M6      | 50   | F05  | 9       | 10              | kg 0,505        |
| GE2 SAE4   | 6  | MPa 50<br>Psi 7250 |  | inch 2,24 | 0,96 | 2,87 | 1,73 | 0,43 | 2,81 | 1,93 |      |    | 1,97 |         | 0,35 | 0,39 | lb 1,11 | G590B02A1301TAA | G590B02A2P01TAA |
| GE2 SAE6   | 10 | MPa 50<br>Psi 7250 |  | inch 2,24 | 0,96 | 2,87 | 1,73 | 0,43 | 2,81 | 1,93 |      |    | 1,97 |         | 0,35 | 0,39 | lb 1,64 | G590B03A1301TAA | G590B03A2P01TAA |
| GE2 SAE8   | 13 | MPa 50<br>Psi 7250 |  | inch 2,24 | 0,93 | 3,19 | 1,89 | 0,43 | 2,81 | 1,93 |      |    | 1,97 |         | 0,35 | 0,51 | lb 2,73 | G590B04A1301TAA | G590B04A2P01TAA |
| GE2 SAE12  | 20 | MPa 40<br>Psi 5800 |  | inch 2,56 | 1,06 | 3,86 | 2,44 | 0,55 | 3,30 | 2,17 |      |    | 1,97 |         | 0,55 | 0,79 | lb 4,01 | G590B05A1301RAA | G590B05A2P01RAA |
| GE2 SAE16  | 25 | MPa 35<br>Psi 5075 |  | inch 2,95 | 1,32 | 4,17 | 2,60 | 0,55 | 3,69 | 2,56 |      |    | 1,97 |         | 0,55 | 0,98 | lb 5,12 | G590B06A1301PAA | G590B06A2P01PAA |
| GE2 SAE20R | 25 | MPa 35<br>Psi 5075 |  | inch 2,95 | 1,32 | 5,00 | 2,60 | 0,55 | 3,69 | 2,56 |      |    | 1,97 |         | 0,55 | 0,98 | lb 5,67 | G590B07R1301PAA | G590B07R2P01PAA |
| GE2 SAE20  | 32 | MPa 35<br>Psi 5075 |  | inch 3,43 | 1,60 | 5,00 | 3,27 | 0,55 | 3,69 | 3,15 |      |    | 2,76 |         | 0,55 | 1,26 | lb 6,37 | G590B07A1301PAA | G590B07A2P01PAA |

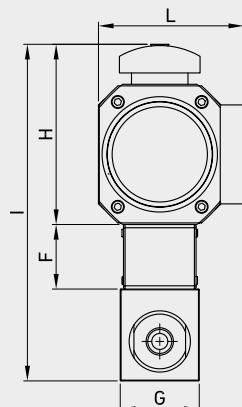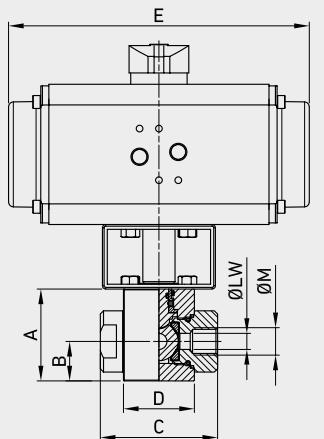
**CUSTOMIZED VALVES WITH  
SELECTED ACTUATORS**


### **GE2 HC DIN/ISO 228 BSP**

| TYPE          | DN | PN       | A         | B     | C    | D    | E    | F    | G    | H    | I     | L     | ØM    | ØS | ØT   | ISO5211 | SW   | ØLW      | WEIGHT   |
|---------------|----|----------|-----------|-------|------|------|------|------|------|------|-------|-------|-------|----|------|---------|------|----------|----------|
| GE2 G 1/4     | 6  | MPa 50   | mm 57     | 24,5  | 73   | 44   | 187  | 40   | 49   | 112  | 209   | 90    | G 1/4 | M6 | 50   | F05     | 9    | 10       | kg 1,11  |
|               |    | Psi 7250 | inch 2,24 | 0,96  | 2,87 | 1,73 | 7,36 | 1,57 | 1,93 | 4,41 | 8,23  | 3,54  |       |    | 1,97 | 0,35    | 0,39 | lb 2,45  |          |
| GE2 G 3/8     | 10 | MPa 50   | mm 57     | 24,5  | 73   | 44   | 187  | 40   | 49   | 112  | 209   | 90    | G 3/8 | M6 | 50   | F05     | 9    | 10       | kg 1,060 |
|               |    | Psi 7250 | inch 2,24 | 0,96  | 2,87 | 1,73 | 7,36 | 1,57 | 1,93 | 4,41 | 8,23  | 3,54  |       |    | 1,97 | 0,35    | 0,39 | lb 2,34  |          |
| GE2 G 1/2     | 13 | MPa 50   | mm 57     | 23,5  | 81   | 48   | 187  | 40   | 49   | 112  | 209   | 90    | G 1/2 | M6 | 50   | F05     | 9    | 13       | kg 1,187 |
|               |    | Psi 7250 | inch 2,24 | 0,93  | 3,19 | 1,89 | 7,36 | 1,57 | 1,93 | 4,41 | 8,23  | 3,54  |       |    | 1,97 | 0,35    | 0,51 | lb 2,62  |          |
| GE2 G 3/4     | 20 | MPa 40   | mm 65     | 27    | 98   | 62   | 206  | 40   | 55   | 143  | 248   | 113   | G 3/4 | M6 | 50   | F05     | 14   | 20       | kg 1,935 |
|               |    | Psi 5800 | inch 2,56 | 1,06  | 3,86 | 2,44 | 8,11 | 1,57 | 2,17 | 5,63 | 9,76  | 4,45  |       |    | 1,97 | 0,55    | 0,79 | lb 4,27  |          |
| GE2 G 1       | 25 | MPa 35   | mm 75     | 33,5  | 106  | 66   | 206  | 40   | 65   | 143  | 258   | 113   | G 1   | M6 | 50   | F05     | 14   | 25       | kg 2,787 |
|               |    | Psi 5075 | inch 2,95 | 1,32  | 4,17 | 2,60 | 8,11 | 1,57 | 2,56 | 5,63 | 10,16 | 4,45  |       |    | 1,97 | 0,55    | 0,98 | lb 6,14  |          |
| GE2 G 1 1/4 R | 25 | MPa 35   | mm 75     | 33,5  | 127  | 66   | 206  | 40   | 65   | 143  | 258   | 113   | G 1/4 | M6 | 50   | F05     | 14   | 25       | kg 4,768 |
|               |    | Psi 5075 | inch 2,95 | 1,32  | 5,00 | 2,60 | 8,11 | 1,57 | 2,56 | 5,63 | 10,16 | 4,45  |       |    | 1,97 | 0,55    | 0,98 | lb 10,51 |          |
| GE2 G 1 1/4   | 32 | MPa 35   | mm 87     | 40,75 | 127  | 83   | 218  | 40   | 80   | 165  | 292   | 136,7 | G 1/4 | M8 | 70   | F07     | 14   | 32       | kg 4,933 |
|               |    | Psi 5075 | inch 3,43 | 1,60  | 5,00 | 3,27 | 8,58 | 1,57 | 3,15 | 6,50 | 11,50 | 5,38  |       |    | 2,76 | 0,55    | 1,26 | lb 10,88 |          |


Customized valves with selected actuators



## GE2 HC ANSI/ASME B1.20.1 NPT

| TYPE          | DN | PN                 | A                  | B             | C           | D          | E           | F          | G          | H           | I            | L             | ØM          | ØS         | ØT  | ISO5211    | SW         | ØLW                  | WEIGHT |
|---------------|----|--------------------|--------------------|---------------|-------------|------------|-------------|------------|------------|-------------|--------------|---------------|-------------|------------|-----|------------|------------|----------------------|--------|
| GE2 N 1/4     | 6  | MPa 50<br>Psi 7250 | mm 57<br>inch 2,24 | 24,5<br>0,96  | 73<br>2,87  | 44<br>1,73 | 187<br>7,36 | 40<br>1,57 | 49<br>1,93 | 112<br>4,41 | 209<br>8,23  | 90<br>3,54    | N 1/4<br>M6 | 50<br>1,97 | F05 | 9<br>0,35  | 10<br>0,39 | kg 1,11<br>lb 2,45   |        |
| GE2 N 3/8     | 10 | MPa 50<br>Psi 7250 | mm 57<br>inch 2,24 | 24,5<br>0,96  | 73<br>2,87  | 44<br>1,73 | 187<br>7,36 | 40<br>1,57 | 49<br>1,93 | 112<br>4,41 | 209<br>8,23  | 90<br>3,54    | N 3/8<br>M6 | 50<br>1,97 | F05 | 9<br>0,35  | 10<br>0,39 | kg 1,210<br>lb 2,67  |        |
| GE2 N 1/2     | 13 | MPa 50<br>Psi 7250 | mm 57<br>inch 2,24 | 23,5<br>0,93  | 81<br>3,19  | 48<br>1,89 | 187<br>7,36 | 40<br>1,57 | 49<br>1,93 | 112<br>4,41 | 209<br>8,23  | 90<br>3,54    | N 1/2<br>M6 | 50<br>1,97 | F05 | 9<br>0,35  | 13<br>0,51 | kg 1,184<br>lb 2,61  |        |
| GE2 N 3/4     | 20 | MPa 40<br>Psi 5800 | mm 65<br>inch 2,56 | 27<br>1,06    | 98<br>3,86  | 62<br>2,44 | 206<br>8,11 | 40<br>1,57 | 55<br>2,17 | 143<br>5,63 | 248<br>9,76  | 113<br>4,45   | N 3/4<br>M6 | 50<br>1,97 | F05 | 14<br>0,55 | 20<br>0,79 | kg 2,04<br>lb 4,50   |        |
| GE2 N 1       | 25 | MPa 35<br>Psi 5075 | mm 75<br>inch 2,95 | 33,5<br>1,32  | 106<br>4,17 | 66<br>2,60 | 206<br>8,11 | 40<br>1,57 | 65<br>2,56 | 143<br>5,63 | 258<br>10,16 | 113<br>4,45   | N 1<br>M6   | 50<br>1,97 | F05 | 14<br>0,55 | 25<br>0,98 | kg 3,08<br>lb 6,79   |        |
| GE2 N 1 1/4 R | 25 | MPa 35<br>Psi 5075 | mm 75<br>inch 2,95 | 33,5<br>1,32  | 127<br>5,00 | 66<br>2,60 | 206<br>8,11 | 40<br>1,57 | 65<br>2,56 | 143<br>5,63 | 258<br>10,16 | 113<br>4,45   | N 1/4<br>M6 | 50<br>1,97 | F05 | 14<br>0,55 | 25<br>0,98 | kg 3,08<br>lb 6,79   |        |
| GE2 N 1 1/4   | 32 | MPa 35<br>Psi 5075 | mm 87<br>inch 3,43 | 40,75<br>1,60 | 127<br>5,00 | 83<br>3,27 | 218<br>8,58 | 40<br>1,57 | 80<br>3,15 | 165<br>6,50 | 292<br>11,50 | 136,7<br>5,38 | N 1/4<br>M8 | 70<br>2,76 | F07 | 14<br>0,55 | 32<br>1,26 | kg 4,933<br>lb 10,88 |        |

Customized valves with selected actuators



## GE2 HC SAE J1926-1

| TYPE       | DN | PN                 | A                  | B             | C           | D          | E           | F          | G          | H           | I            | L             | ØM             | ØS         | ØT  | ISO5211    | SW         | ØLW                  | WEIGHT |
|------------|----|--------------------|--------------------|---------------|-------------|------------|-------------|------------|------------|-------------|--------------|---------------|----------------|------------|-----|------------|------------|----------------------|--------|
| GE2 SAE4   | 6  | MPa 50<br>Psi 7250 | mm 57<br>inch 2,24 | 24,5<br>0,96  | 73<br>2,87  | 44<br>1,73 | 187<br>7,36 | 40<br>1,57 | 49<br>1,93 | 112<br>4,41 | 209<br>8,23  | 90<br>3,54    | 7/16<br>UNF    | M6<br>1,97 | F05 | 9<br>0,35  | 10<br>0,39 | kg 1,11<br>lb 2,45   |        |
| GE2 SAE6   | 10 | MPa 50<br>Psi 7250 | mm 57<br>inch 2,24 | 24,5<br>0,96  | 73<br>2,87  | 44<br>1,73 | 187<br>7,36 | 40<br>1,57 | 49<br>1,93 | 112<br>4,41 | 209<br>8,23  | 90<br>3,54    | 9/16<br>UNF    | M6<br>1,97 | F05 | 9<br>0,35  | 10<br>0,39 | kg 1,210<br>lb 2,67  |        |
| GE2 SAE8   | 13 | MPa 50<br>Psi 7250 | mm 57<br>inch 2,24 | 23,5<br>0,93  | 81<br>3,19  | 48<br>1,89 | 187<br>7,36 | 40<br>1,57 | 49<br>1,93 | 112<br>4,41 | 209<br>8,23  | 90<br>3,54    | 3/4 UNF<br>UNF | M6<br>1,97 | F05 | 9<br>0,35  | 13<br>0,51 | kg 1,187<br>lb 2,62  |        |
| GE2 SAE12  | 20 | MPa 40<br>Psi 5800 | mm 65<br>inch 2,56 | 27<br>1,06    | 98<br>3,86  | 62<br>2,44 | 206<br>8,11 | 40<br>1,57 | 55<br>2,17 | 143<br>5,63 | 248<br>9,76  | 113<br>4,45   | 1 1/16<br>UNF  | M6<br>1,97 | F05 | 14<br>0,55 | 20<br>0,79 | kg 1,935<br>lb 4,27  |        |
| GE2 SAE16  | 25 | MPa 35<br>Psi 5075 | mm 75<br>inch 2,95 | 33,5<br>1,32  | 106<br>4,17 | 66<br>2,60 | 206<br>8,11 | 40<br>1,57 | 65<br>2,56 | 143<br>5,63 | 258<br>10,16 | 113<br>4,45   | 1 5/16<br>UNF  | M6<br>1,97 | F05 | 14<br>0,55 | 25<br>0,98 | kg 2,787<br>lb 6,14  |        |
| GE2 SAE20R | 25 | MPa 35<br>Psi 5075 | mm 75<br>inch 2,95 | 33,5<br>1,32  | 127<br>5,00 | 66<br>2,60 | 206<br>8,11 | 40<br>1,57 | 65<br>2,56 | 143<br>5,63 | 258<br>10,16 | 113<br>4,45   | 1 5/8<br>UNF   | M6<br>1,97 | F05 | 14<br>0,55 | 25<br>0,98 | kg 4,768<br>lb 10,51 |        |
| GE2 SAE20  | 32 | MPa 35<br>Psi 5075 | mm 87<br>inch 3,43 | 40,75<br>1,60 | 127<br>5,00 | 83<br>3,27 | 218<br>8,58 | 40<br>1,57 | 80<br>3,15 | 165<br>6,50 | 292<br>11,50 | 136,7<br>5,38 | 1 5/8<br>UNF   | M8<br>2,76 | F07 | 14<br>0,55 | 32<br>1,26 | kg 4,934<br>lb 10,88 |        |

Customized valves with selected actuators



# GE3

## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1




### CS Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE-DIN
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

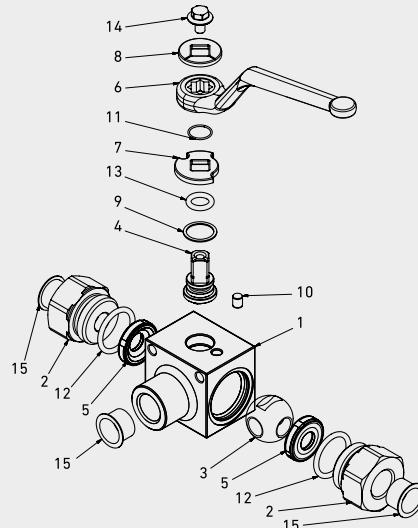

| POS | DESCRIPTION    | Q.TY | CS           | SS          |
|-----|----------------|------|--------------|-------------|
|     |                |      | Carbon Steel | MATERIAL    |
| 1   | Body           | 1    | 1,0737       | 1,4404      |
| 2   | Adapter        | 2    | 1,0737       | 1,4404      |
| 3   | Ball           | 1    | 1,0737       | 1,4404      |
| 4   | Stem           | 1    | 1,0737       | 1,4404      |
| 5   | Ball seat      | 2    | POM          | POM         |
| 6   | Handle         | 1    | ZINC         | ZINC        |
| 7   | Washer         | 1    | 1,0116       | 1,4301      |
| 8   | Washer         | 1    | 1,0116       | 1,4301      |
| 9   | Stem ring      | 1    | POM          | POM         |
| 10  | Pin            | 1    | 1,0737       | 1,4301      |
| 11  | Seeger         | 1    | 1,4301       | 1,4301      |
| 12  | Adapter o-ring | 2    | NBR          | NBR         |
| 13  | Stem o-ring    | 1    | NBR          | NBR         |
| 14  | Screw          | 1    | Din 6921 8.8 | Din 6921 A2 |
| 15  | Caps           | 3    | PVC          | PVC         |



## CODE DESCRIPTION STRUCTURE

GE3 G 1/2 DN13 1 1 1 1 A B

Type and way of valve

GE3 3-way

Ends

| GAS DIN/<br>ISO 228<br>BSP | NPT ANSI<br>/ASME<br>B1.20.1 | SAE<br>J1926-1 | DIN 2353<br>HEAVY<br>SERIES | DIN 2353<br>LIGHT<br>SERIES |  |  |  |  |  |
|----------------------------|------------------------------|----------------|-----------------------------|-----------------------------|--|--|--|--|--|
| G 1/4                      | N 1/4                        | SAE4           | 8S                          | 6L                          |  |  |  |  |  |
| G 3/8                      | N 3/8                        | SAE6           | 10S                         | 8L                          |  |  |  |  |  |
| G 1/2                      | N 1/2                        | SAE8           | 12S                         | 10L                         |  |  |  |  |  |
| G 3/4                      | N 3/4                        | SAE12          | 14S                         | 12L                         |  |  |  |  |  |
| G 1                        | N 1                          | SAE16          | 16S                         | 15L                         |  |  |  |  |  |
| G 1 1/4 R                  | N 1 1/4 R                    | SAE20R         | 20S                         | 18L                         |  |  |  |  |  |
| G 1 1/2 R                  | N 1 1/2 R                    | SAE24R         | 25S                         | 22L                         |  |  |  |  |  |
|                            |                              |                | 30S                         | 28L                         |  |  |  |  |  |
|                            |                              |                | 38S                         | 35L                         |  |  |  |  |  |

Size

from DN6 to DN25

Body Material

- 1 = 1,0737
- 4 = 1,4404

Adapter material

- 1 = 1,0737
- 4 = 1,4404

Stem material

- 1 = 1,0737
- 4 = 1,4404\*
- 4 = 1,4404

Ball Material

- 1 = 1,0737
- 4 = 1,4404\*
- 4 = 1,4404

Seat material

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN40 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device
- Fixing holes for SS valves

For further special requests please consult our technical/commercial service.

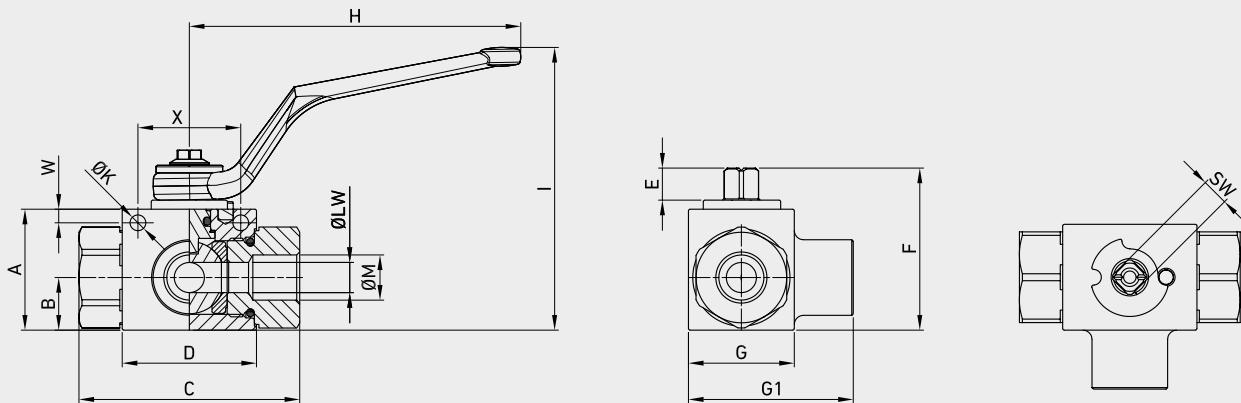


### GE3 DIN/ISO 228 BSP

| TYPE          | DN | PN       | A    | B    | C    | D    | E    | F     | G    | G1   | H    | I    | ØM    | ØK*  | W*   | X*   | SW   | ØLW  | WEIGHT          | ITEM CODE          |                 |
|---------------|----|----------|------|------|------|------|------|-------|------|------|------|------|-------|------|------|------|------|------|-----------------|--------------------|-----------------|
|               |    |          | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | mm   | inch | mm    | inch | mm   | inch | kg   | lb   | CS Carbon Steel | SS Stainless Steel |                 |
| GE3 G 1/4     | 6  | MPa 50   | 35   | 14,5 | 71   | 42,4 | 11   | 49    | 30   | 48,5 | 110  | 87   | G 1/4 | 5,25 | 4,5  | 34   | 9    | 6    | kg 0,536        | GE3GGT14011A000    | GE3GGT14044A000 |
|               |    | Psi 7250 | 1,38 | 0,57 | 2,80 | 1,67 | 0,43 | 1,93  | 1,18 | 1,91 | 4,33 | 3,43 |       | 0,21 | 0,18 | 1,34 | 0,35 | 0,24 | lb 1,18         |                    |                 |
| GE3 G 3/8     | 10 | MPa 50   | 40   | 17,4 | 73   | 44,4 | 11   | 54,25 | 35   | 54,5 | 110  | 93   | G 3/8 | 5,25 | 4,5  | 34   | 9    | 10   | kg 0,695        | GE3GGT24011A000    | GE3GGT24044A000 |
|               |    | Psi 7250 | 1,57 | 0,69 | 2,87 | 1,75 | 0,43 | 2,14  | 1,38 | 2,15 | 4,33 | 3,66 |       | 0,21 | 0,18 | 1,34 | 0,35 | 0,39 | lb 1,53         |                    |                 |
| GE3 G 1/2     | 13 | MPa 50   | 43   | 19,7 | 83   | 48,4 | 11   | 57    | 37   | 58,5 | 110  | 97   | G 1/2 | 5,25 | 5    | 36   | 9    | 13   | kg 0,825        | GE3GGT33011A000    | GE3GGT33044A000 |
|               |    | Psi 7250 | 1,69 | 0,78 | 3,27 | 1,91 | 0,43 | 2,24  | 1,46 | 2,30 | 4,33 | 3,82 |       | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | lb 1,82         |                    |                 |
| GE3 G 3/4     | 20 | MPa 42   | 57   | 25,4 | 95   | 62,5 | 14   | 75,5  | 49   | 75   | 180  | 105  | G 3/4 | 6,25 | 6    | 50   | 14   | 20   | kg 1,583        | GE3GGT44011A000    | GE3GGT43044A000 |
|               |    | Psi 6090 | 2,24 | 1,00 | 3,74 | 2,46 | 0,55 | 2,97  | 1,93 | 2,95 | 7,09 | 4,13 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 | lb 3,49         |                    |                 |
| GE3 G 1       | 25 | MPa 42   | 65   | 29,5 | 112  | 66,5 | 14   | 83,5  | 55   | 89   | 180  | 113  | G 1   | 6,25 | 6    | 50   | 14   | 25   | kg 2,421        | GE3GGT53011A000    | GE3GGT53044A000 |
|               |    | Psi 6090 | 2,56 | 1,16 | 4,41 | 2,62 | 0,55 | 3,29  | 2,17 | 3,50 | 7,09 | 4,45 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | lb 5,34         |                    |                 |
| GE3 G 1 1/4 R | 25 | MPa 35   | 65   | 29,5 | 120  | 66,5 | 14   | 83,5  | 55   | 89   | 180  | 113  | G 1   | 6,25 | 6    | 50   | 14   | 25   | kg 2,601        | GE3GGR63011A000    | GE3GGR63044A000 |
|               |    | Psi 5075 | 2,56 | 1,16 | 4,72 | 2,62 | 0,55 | 3,29  | 2,17 | 3,50 | 7,09 | 4,45 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | lb 5,73         |                    |                 |
| GE3 G 1 1/2 R | 25 | MPa 35   | 65   | 29,5 | 124  | 66,5 | 14   | 83,5  | 55   | 89   | 180  | 113  | G 1   | 6,25 | 6    | 50   | 14   | 25   | kg 2,756        | GE3GGR73011A000    | GE3GGR73044A000 |
|               |    | Psi 5075 | 2,56 | 1,16 | 4,88 | 2,62 | 0,55 | 3,29  | 2,17 | 3,50 | 7,09 | 4,45 |       | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | lb 6,08         |                    |                 |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE3 ANSI/ASME B1.20.1 NPT

| TYPE          | DN | PN                 |  | A          | B            | C           | D            | E          | F             | G          | G1           | H           | I           | ØM    | ØK*          | W*          | X*         | SW         | ØLW        | WEIGHT              | ITEM CODE                          |  |
|---------------|----|--------------------|--|------------|--------------|-------------|--------------|------------|---------------|------------|--------------|-------------|-------------|-------|--------------|-------------|------------|------------|------------|---------------------|------------------------------------|--|
|               |    |                    |  | mm         | inch         | mm          | inch         | mm         | inch          | mm         | inch         | mm          | inch        | mm    | inch         | kg          | lb         | kg         | lb         |                     |                                    |  |
| GE3 N 1/4     | 6  | MPa 50<br>Psi 7250 |  | 35<br>1,38 | 14,5<br>0,57 | 71<br>2,80  | 42,4<br>1,67 | 11<br>0,43 | 49<br>1,93    | 30<br>1,18 | 48,5<br>1,91 | 110<br>4,33 | 87<br>3,43  | N 1/4 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 6<br>0,24  | kg 0,536<br>lb 1,18 | GE3NNT14011A000<br>GE3NNT14044A000 |  |
| GE3 N 3/8     | 10 | MPa 50<br>Psi 7250 |  | 40<br>1,57 | 17,4<br>0,69 | 73<br>2,87  | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 54,5<br>2,15 | 110<br>4,33 | 93<br>3,66  | N 3/8 | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | kg 0,695<br>lb 1,53 | GE3NNT24011A000<br>GE3NNT24044A000 |  |
| GE3 N 1/2     | 13 | MPa 50<br>Psi 7250 |  | 43<br>1,69 | 19,7<br>0,78 | 83<br>3,27  | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 58,5<br>2,30 | 110<br>4,33 | 97<br>3,82  | N 1/2 | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | kg 0,825<br>lb 1,82 | GE3NNT33011A000<br>GE3NNT33044A000 |  |
| GE3 N 3/4     | 20 | MPa 42<br>Psi 6090 |  | 57<br>2,24 | 25,4<br>1,00 | 95<br>3,74  | 62,5<br>2,46 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 75<br>2,95   | 180<br>7,09 | 105<br>4,13 | N 3/4 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | kg 1,583<br>lb 3,49 | GE3NNT44011A000<br>GE3NNT43044A000 |  |
| GE3 N 1       | 25 | MPa 42<br>Psi 6090 |  | 65<br>2,56 | 29,5<br>1,16 | 112<br>4,41 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | N 1   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,421<br>lb 5,34 | GE3NNT53011A000<br>GE3NNT53044A000 |  |
| GE3 N 1 1/4 R | 25 | MPa 35<br>Psi 5075 |  | 65<br>2,56 | 29,5<br>1,16 | 120<br>4,72 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | N 1   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,601<br>lb 5,73 | GE3NNR63011A000<br>GE3NNR63044A000 |  |
| GE3 N 1 1/2 R | 25 | MPa 35<br>Psi 5075 |  | 65<br>2,56 | 29,5<br>1,16 | 124<br>4,88 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | N 1   | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,756<br>lb 6,08 | GE3NNR73011A000<br>GE3NNR73044A000 |  |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED





## GE3 SAE J1926-1

| TYPE       | DN | PN                 |  | A          | B            | C           | D            | E          | F             | G          | G1           | H           | I           | ØM     | ØK*          | W*          | X*         | SW         | ØLW        | WEIGHT              | ITEM CODE                          |  |
|------------|----|--------------------|--|------------|--------------|-------------|--------------|------------|---------------|------------|--------------|-------------|-------------|--------|--------------|-------------|------------|------------|------------|---------------------|------------------------------------|--|
|            |    |                    |  | mm         | inch         | mm          | inch         | mm         | inch          | mm         | inch         | mm          | inch        | mm     | inch         | kg          | lb         | kg         | lb         |                     |                                    |  |
| GE3 SAE4   | 6  | MPa 50<br>Psi 7250 |  | 35<br>1,38 | 14,5<br>0,57 | 71<br>2,80  | 42,4<br>1,67 | 11<br>0,43 | 49<br>1,93    | 30<br>1,18 | 48,5<br>1,91 | 110<br>4,33 | 87<br>3,43  | 7/16   | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 6<br>0,24  | kg 0,512<br>lb 1,13 | GE3EEE04011A000<br>GE3EEE04044A000 |  |
| GE3 SAE6   | 10 | MPa 50<br>Psi 7250 |  | 40<br>1,57 | 17,5<br>0,69 | 73<br>2,87  | 44,8<br>1,76 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 54,5<br>2,15 | 110<br>4,33 | 93<br>3,66  | 9/16   | 5,25<br>0,21 | 4,5<br>0,18 | 34<br>1,34 | 9<br>0,35  | 10<br>0,39 | kg 0,695<br>lb 1,53 | GE3EEE14011A000<br>GE3EEE14044A000 |  |
| GE3 SAE8   | 13 | MPa 50<br>Psi 7250 |  | 43<br>1,69 | 19,7<br>0,78 | 83<br>3,27  | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 58,5<br>2,30 | 110<br>4,33 | 97<br>3,82  | 3/4    | 5,25<br>0,21 | 5<br>0,20   | 36<br>1,42 | 9<br>0,35  | 13<br>0,51 | kg 0,825<br>lb 1,82 | GE3EEE23011A000<br>GE3EEE23044A000 |  |
| GE3 SAE12  | 20 | MPa 42<br>Psi 6090 |  | 57<br>2,24 | 25,4<br>1,00 | 95<br>3,74  | 62,5<br>2,46 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 75<br>2,95   | 180<br>7,09 | 105<br>4,13 | 1 1/16 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 20<br>0,79 | kg 1,583<br>lb 3,49 | GE3EEE34011A000<br>GE3EEE34044A000 |  |
| GE3 SAE16  | 25 | MPa 42<br>Psi 6090 |  | 65<br>2,56 | 29,4<br>1,16 | 112<br>4,41 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | 1 5/16 | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,421<br>lb 5,34 | GE3EEE43011A000<br>GE3EEE43044A000 |  |
| GE3 SAE20R | 25 | MPa 35<br>Psi 5075 |  | 65<br>2,56 | 29,4<br>1,16 | 120<br>4,72 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | UNF    | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,601<br>lb 5,73 | GE3EEE53011A000<br>GE3EEE53044A000 |  |
| GE3 SAE24R | 25 | MPa 35<br>Psi 5075 |  | 65<br>2,56 | 29,4<br>1,16 | 124<br>4,88 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | 1 7/8  | 6,25<br>0,25 | 6<br>0,24   | 50<br>1,97 | 14<br>0,55 | 25<br>0,98 | kg 2,756<br>lb 6,08 | GE3EEE63011A000<br>GE3EEE63044A000 |  |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED

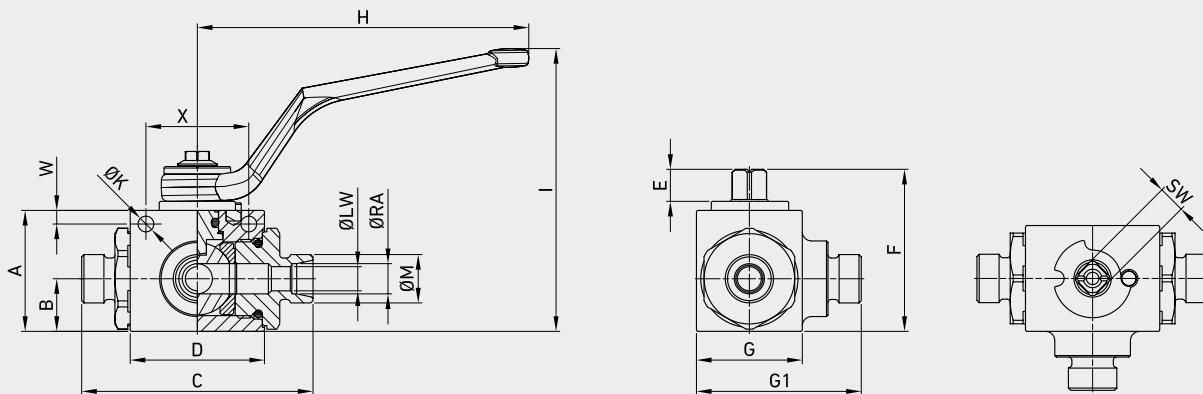


## GE3 DIN 2353 HEAVY SERIES

| TYPE    | DN | PN   | ITEM CODE                                    |   |   |   |   |   |   |    |   |   |         |                |                |          |                 |                 |
|---------|----|--|--|---|---|---|---|---|---|----|---|---|---------|----------------|----------------|----------|-----------------|-----------------|
|         |    |  | A  | B | C | D | E | F | G | G1 | H | I | ØM      | ØK*            | W*             | X*       | SW              | ØLW             |
| GE3 8S  | 6  | MPa 50<br>Psi 7250                                     | mm 35 14,5 76 42,4 11 49 30 48,5 110 87      |   |   |   |   |   |   |    |   |   | M16x1,5 | 5,25 4,5 34    | 9 4 8          | kg 0,53  | GE3DDS04011A000 | GE3DDS04044A000 |
|         |    | inch 1,38 0,57 2,99 1,67 0,43 1,93 1,18 1,91 4,33 3,43 |  |   |   |   |   |   |   |    |   |   |         | 0,21 0,18 1,34 | 0,35 0,16 0,31 | lb 1,17  |                 |                 |
| GE3 10S | 6  | MPa 50<br>Psi 7250                                     | mm 35 14,5 76 42,4 11 49 30 48,5 110 87      |   |   |   |   |   |   |    |   |   | M18x1,5 | 5,25 4,5 34    | 9 6 10         | kg 0,532 | GE3DDS14011A000 | GE3DDS14044A000 |
|         |    | inch 1,38 0,57 2,99 1,67 0,43 1,93 1,18 1,91 4,33 3,43 |  |   |   |   |   |   |   |    |   |   |         | 0,21 0,18 1,34 | 0,35 0,24 0,39 | lb 1,17  |                 |                 |
| GE3 12S | 8  | MPa 50<br>Psi 7250                                     | mm 35 14,5 76 42,4 11 49 30 48,5 110 87      |   |   |   |   |   |   |    |   |   | M20x1,5 | 5,25 4,5 34    | 9 8 12         | kg 0,535 | GE3DDRS4011A000 | GE3DDRS4044A000 |
|         |    | inch 1,38 0,57 2,99 1,67 0,43 1,93 1,18 1,91 4,33 3,43 |  |   |   |   |   |   |   |    |   |   |         | 0,21 0,18 1,34 | 0,35 0,31 0,47 | lb 1,18  |                 |                 |
| GE3 12S | 10 | MPa 50<br>Psi 7250                                     | mm 40 17,4 76 44,4 11 54,25 35 54,5 110 93   |   |   |   |   |   |   |    |   |   | M20x1,5 | 5,25 4,5 34    | 9 10 12        | kg 0,633 | GE3DDS24011A000 | GE3DDS24044A000 |
|         |    | inch 1,57 0,69 2,99 1,75 0,43 2,14 1,38 2,15 4,33 3,66 |  |   |   |   |   |   |   |    |   |   |         | 0,21 0,18 1,34 | 0,35 0,39 0,47 | lb 1,40  |                 |                 |
| GE3 14S | 10 | MPa 50<br>Psi 7250                                     | mm 40 17,4 82,5 44,4 11 54,25 35 54,5 110 93 |   |   |   |   |   |   |    |   |   | M22x1,5 | 5,25 4,5 34    | 9 10 14        | kg 0,665 | GE3DDS34011A000 | GE3DDS34044A000 |
|         |    | inch 1,57 0,69 3,25 1,75 0,43 2,14 1,38 2,15 4,33 3,66 |  |   |   |   |   |   |   |    |   |   |         | 0,21 0,18 1,34 | 0,35 0,39 0,55 | lb 1,47  |                 |                 |
| GE3 16S | 13 | MPa 50<br>Psi 7250                                     | mm 43 19,7 89 48,4 11 57 37 59 110 97        |   |   |   |   |   |   |    |   |   | M24x1,5 | 5,25 5 36      | 9 13 16        | kg 0,722 | GE3DDS43011A000 | GE3DDS43044A000 |
|         |    | inch 1,69 0,78 3,50 1,91 0,43 2,24 1,46 2,32 4,33 3,82 |  |   |   |   |   |   |   |    |   |   |         | 0,21 0,20 1,42 | 0,35 0,51 0,63 | lb 1,59  |                 |                 |
| GE3 20S | 13 | MPa 50<br>Psi 7250                                     | mm 43 19,7 93 48,4 11 57 37 59 110 97        |   |   |   |   |   |   |    |   |   | M30x2   | 5,25 5 36      | 9 13 20        | kg 0,861 | GE3DDS53011A000 | GE3DDS53044A000 |
|         |    | inch 1,69 0,78 3,66 1,91 0,43 2,24 1,46 2,32 4,33 3,82 |  |   |   |   |   |   |   |    |   |   |         | 0,21 0,20 1,42 | 0,35 0,51 0,79 | lb 1,90  |                 |                 |
| GE3 25S | 20 | MPa 35 40<br>Psi 5075 5800                             | mm 57 25,4 111 62,5 14 75,5 49 75 180 105    |   |   |   |   |   |   |    |   |   | M36x2   | 6,25 6 50      | 14 20 25       | kg 1,639 | GE3DDS64011A000 | GE3DDS63044A000 |
|         |    | inch 2,24 1,00 4,37 2,46 0,55 2,97 1,93 2,95 7,09 4,13 |  |   |   |   |   |   |   |    |   |   |         | 0,25 0,24 1,97 | 0,55 0,79 0,98 | lb 3,61  |                 |                 |
| GE3 30S | 25 | MPa 35<br>Psi 5075                                     | mm 65 29,5 121 66,5 14 83,5 55 89 180 113    |   |   |   |   |   |   |    |   |   | M42x2   | 6,25 6 50      | 14 25 30       | kg 2,361 | GE3DDS73011A000 | GE3DDS73044A000 |
|         |    | inch 2,56 1,16 4,76 2,62 0,55 3,29 2,17 3,50 7,09 4,45 |  |   |   |   |   |   |   |    |   |   |         | 0,25 0,24 1,97 | 0,55 0,98 1,18 | lb 5,21  |                 |                 |
| GE3 38S | 25 | MPa 35<br>Psi 5075                                     | mm 65 29,5 131 66,5 14 83,5 55 89 180 113    |   |   |   |   |   |   |    |   |   | M52x2   | 6,25 6 50      | 14 25 38       | kg 2,655 | GE3DDS83011A000 | GE3DDS83044A000 |
|         |    | inch 2,56 1,16 5,16 2,62 0,55 3,29 2,17 3,50 7,09 4,45 |  |   |   |   |   |   |   |    |   |   |         | 0,25 0,24 1,97 | 0,55 0,98 1,50 | lb 5,85  |                 |                 |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE3 DIN 2353 LIGHT SERIES

| TYPE    | DN | PN  |             | A    | B    | C    | D    | E    | F    | G     | G1   | H    | I    | ØM   | ØK*     | W*   | X*      | SW   | ØLW  | ØRA  | WEIGHT | ITEM CODE |       |                 |                 |
|---------|----|-----|-------------|------|------|------|------|------|------|-------|------|------|------|------|---------|------|---------|------|------|------|--------|-----------|-------|-----------------|-----------------|
|         |    |     |             | MPa  | 50   | mm   | 35   | 14,5 | 76   | 42,4  | 11   | 49   | 30   | 48,5 | 110     | 87   | M12x1,5 | 5,25 | 4,5  | 34   | 9      | 6         | 6     | kg              | 0,53            |
|         |    | Psi | 7250        | inch | 1,38 | 0,57 | 2,99 | 1,67 | 0,43 | 1,93  | 1,18 | 1,91 | 4,33 | 3,43 |         | 0,21 | 0,18    | 1,34 | 0,35 | 0,24 | 0,24   | lb        | 1,17  | GE3DDL04011A000 | GE3DDL04044A000 |
| GE3 6L  | 6  | MPa | 50          | mm   | 35   | 14,5 | 76   | 42,4 | 11   | 49    | 30   | 48,5 | 110  | 87   | M14x1,5 | 5,25 | 4,5     | 34   | 9    | 6    | 8      | kg        | 0,532 | GE3DDL14011A000 | GE3DDL14044A000 |
|         |    | Psi | 7250        | inch | 1,38 | 0,57 | 2,99 | 1,67 | 0,43 | 1,93  | 1,18 | 1,91 | 4,33 | 3,43 |         | 0,21 | 0,18    | 1,34 | 0,35 | 0,24 | 0,31   | lb        | 1,17  |                 |                 |
| GE3 8L  | 6  | MPa | 50          | mm   | 35   | 14,5 | 76   | 42,4 | 11   | 49    | 30   | 48,5 | 110  | 87   | M16x1,5 | 5,25 | 4,5     | 34   | 9    | 6    | 10     | kg        | 0,535 | GE3DDL4011A000  | GE3DDL4044A000  |
|         |    | Psi | 7250        | inch | 1,38 | 0,57 | 2,99 | 1,67 | 0,43 | 1,93  | 1,18 | 1,91 | 4,33 | 3,43 |         | 0,21 | 0,18    | 1,34 | 0,35 | 0,24 | 0,39   | lb        | 1,18  |                 |                 |
| GE3 10L | 6  | MPa | 50          | mm   | 35   | 14,5 | 76   | 42,4 | 11   | 49    | 30   | 48,5 | 110  | 87   | M16x1,5 | 5,25 | 4,5     | 34   | 9    | 6    | 10     | kg        | 0,535 | GE3DDL4011A000  | GE3DDL4044A000  |
|         |    | Psi | 7250        | inch | 1,38 | 0,57 | 2,99 | 1,67 | 0,43 | 1,93  | 1,18 | 1,91 | 4,33 | 3,43 |         | 0,21 | 0,18    | 1,34 | 0,35 | 0,24 | 0,39   | lb        | 1,18  |                 |                 |
| GE3 10L | 10 | MPa | 50          | mm   | 40   | 17,4 | 76,5 | 44,4 | 11   | 54,25 | 35   | 54,5 | 110  | 93   | M16x1,5 | 5,25 | 4,5     | 34   | 9    | 10   | 10     | kg        | 0,633 | GE3DDL24011A000 | GE3DDL24044A000 |
|         |    | Psi | 7250        | inch | 1,57 | 0,69 | 3,01 | 1,75 | 0,43 | 2,14  | 1,38 | 2,15 | 4,33 | 3,66 |         | 0,21 | 0,18    | 1,34 | 0,35 | 0,39 | 0,39   | lb        | 1,40  |                 |                 |
| GE3 12L | 10 | MPa | 50          | mm   | 40   | 17,4 | 79,5 | 44,4 | 11   | 54,25 | 35   | 54,5 | 110  | 93   | M18x1,5 | 5,25 | 4,5     | 34   | 9    | 10   | 12     | kg        | 0,665 | GE3DDL34011A000 | GE3DDL34044A000 |
|         |    | Psi | 7250        | inch | 1,57 | 0,69 | 3,13 | 1,75 | 0,43 | 2,14  | 1,38 | 2,15 | 4,33 | 3,66 |         | 0,21 | 0,18    | 1,34 | 0,35 | 0,39 | 0,47   | lb        | 1,47  |                 |                 |
| GE3 15L | 13 | MPa | 50          | mm   | 43   | 19,7 | 87   | 48,4 | 11   | 57    | 37   | 59   | 110  | 97   | M22x1,5 | 5,25 | 5       | 36   | 9    | 13   | 15     | kg        | 0,722 | GE3DDL43011A000 | GE3DDL43044A000 |
|         |    | Psi | 7250        | inch | 1,69 | 0,78 | 3,43 | 1,91 | 0,43 | 2,24  | 1,46 | 2,32 | 4,33 | 3,82 |         | 0,21 | 0,20    | 1,42 | 0,35 | 0,51 | 0,59   | lb        | 1,59  |                 |                 |
| GE3 18L | 13 | MPa | 50          | mm   | 43   | 19,7 | 87   | 48,4 | 11   | 57    | 37   | 59   | 110  | 97   | M26x1,5 | 5,25 | 5       | 36   | 9    | 13   | 18     | kg        | 0,861 | GE3DDL53011A000 | GE3DDL53044A000 |
|         |    | Psi | 7250        | inch | 1,69 | 0,78 | 3,43 | 1,91 | 0,43 | 2,24  | 1,46 | 2,32 | 4,33 | 3,82 |         | 0,21 | 0,20    | 1,42 | 0,35 | 0,51 | 0,71   | lb        | 1,90  |                 |                 |
| GE3 22L | 20 | MPa | 35   40     | mm   | 57   | 25,4 | 110  | 62,5 | 14   | 75,5  | 49   | 75   | 180  | 105  | M30x2   | 6,25 | 6       | 50   | 14   | 20   | 22     | kg        | 1,639 | GE3DDL64011A000 | GE3DDL63044A000 |
|         |    | Psi | 5075   5800 | inch | 2,24 | 1,00 | 4,33 | 2,46 | 0,55 | 2,97  | 1,93 | 2,95 | 7,09 | 4,13 |         | 0,25 | 0,24    | 1,97 | 0,55 | 0,79 | 0,87   | lb        | 3,61  |                 |                 |
| GE3 28L | 25 | MPa | 35          | mm   | 65   | 29,5 | 117  | 66,5 | 14   | 83,5  | 55   | 89   | 180  | 113  | M36x2   | 6,25 | 6       | 50   | 14   | 25   | 28     | kg        | 2,361 | GE3DDL73011A000 | GE3DDL73044A000 |
|         |    | Psi | 5075        | inch | 2,56 | 1,16 | 4,61 | 2,62 | 0,55 | 3,29  | 2,17 | 3,50 | 7,09 | 4,45 |         | 0,25 | 0,24    | 1,97 | 0,55 | 0,98 | 1,10   | lb        | 5,21  |                 |                 |
| GE3 35L | 25 | MPa | 35          | mm   | 65   | 29,5 | 119  | 66,5 | 14   | 83,5  | 55   | 89   | 180  | 113  | M45x2   | 6,25 | 6       | 50   | 14   | 25   | 35     | kg        | 2,361 | GE3DDL83011A000 | GE3DDL83044A000 |
|         |    | Psi | 5075        | inch | 2,56 | 1,16 | 4,69 | 2,62 | 0,55 | 3,29  | 2,17 | 3,50 | 7,09 | 4,45 |         | 0,25 | 0,24    | 1,97 | 0,55 | 0,98 | 1,38   | lb        | 5,21  |                 |                 |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED

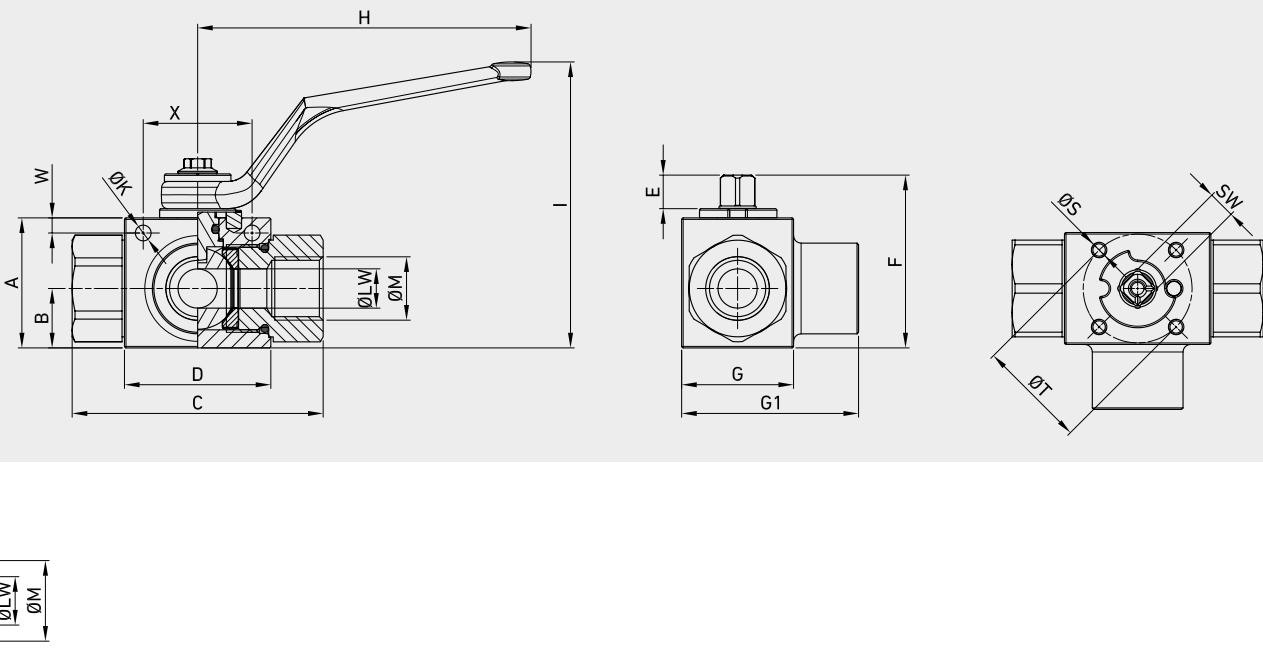


## GE3 DIN/ISO 228 BSP

Assembling threads per ISO5211

| TYPE          | DN | PN                 | A                  | B            | C           | D            | E          | F             | G          | G1           | H           | I           | ØM         | ØS         | ØT         | ØK*          | W*          | X*         | IS05211     | SW         | ØLW        | WEIGHT              | ITEM CODE       |                 |              |                 |
|---------------|----|--------------------|--------------------|--------------|-------------|--------------|------------|---------------|------------|--------------|-------------|-------------|------------|------------|------------|--------------|-------------|------------|-------------|------------|------------|---------------------|-----------------|-----------------|--------------|-----------------|
|               |    |                    |                    |              |             |              |            |               |            |              |             |             |            |            |            |              |             |            |             |            |            |                     | CS              | SS              |              |                 |
|               |    |                    |                    |              |             |              |            |               |            |              |             |             |            |            |            |              |             |            |             |            |            |                     |                 |                 | Carbon Steel | Stainless Steel |
| GE3 G 1/4     | 6  | MPa 50<br>Psi 7250 | mm 35<br>inch 1,38 | 14,5<br>0,57 | 71<br>2,80  | 42,4<br>1,67 | 11<br>0,43 | 49<br>1,93    | 30<br>1,18 | 48,5<br>1,91 | 110<br>4,33 | 87<br>3,43  | G<br>1/4   | M4<br>1,38 | 35<br>0,21 | 5,25<br>0,18 | 4,5<br>1,34 | 34<br>1,34 | F03<br>0,35 | 9<br>0,24  | 6<br>1,18  | kg 0,536<br>lb 1,18 | GE3GGT14011AF50 | GE3GGT14044AF50 |              |                 |
| GE3 G 3/8     | 10 | MPa 50<br>Psi 7250 | mm 40<br>inch 1,57 | 17,4<br>0,69 | 73<br>2,87  | 44,4<br>1,75 | 11<br>0,43 | 54,25<br>2,14 | 35<br>1,38 | 54,5<br>2,15 | 110<br>4,33 | 93<br>3,66  | G<br>3/8   | M5<br>1,42 | 36<br>0,21 | 5,25<br>0,18 | 4,5<br>1,34 | 34<br>1,34 | F03<br>0,35 | 9<br>0,39  | 10<br>1,53 | kg 0,695<br>lb 1,53 | GE3GGT24011AF50 | GE3GGT24044AF50 |              |                 |
| GE3 G 1/2     | 13 | MPa 50<br>Psi 7250 | mm 43<br>inch 1,69 | 19,7<br>0,78 | 83<br>3,27  | 48,4<br>1,91 | 11<br>0,43 | 57<br>2,24    | 37<br>1,46 | 58,5<br>2,30 | 110<br>4,33 | 97<br>3,82  | G<br>1/2   | M5<br>1,42 | 36<br>0,21 | 5,25<br>0,20 | 5<br>1,42   | 36<br>1,42 | F03<br>0,35 | 9<br>0,51  | 13<br>1,82 | kg 0,825<br>lb 1,82 | GE3GGT33011AF50 | GE3GGT33044AF50 |              |                 |
| GE3 G 3/4     | 20 | MPa 42<br>Psi 6090 | mm 57<br>inch 2,24 | 25,4<br>1,00 | 95<br>3,74  | 62,5<br>2,46 | 14<br>0,55 | 75,5<br>2,97  | 49<br>1,93 | 75<br>2,95   | 180<br>7,09 | 105<br>4,13 | G<br>3/4   | M6<br>1,97 | 50<br>0,25 | 6,25<br>0,24 | 6<br>1,97   | 50<br>1,97 | F05<br>0,55 | 14<br>0,79 | 20<br>3,49 | kg 1,583<br>lb 3,49 | GE3GGT44011AF50 | GE3GGT43044AF50 |              |                 |
| GE3 G 1       | 25 | MPa 42<br>Psi 6090 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 112<br>4,41 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | G 1<br>1/4 | M6<br>1,97 | 50<br>0,25 | 6,25<br>0,24 | 6<br>1,97   | 50<br>1,97 | F05<br>0,55 | 14<br>0,98 | 25<br>5,34 | kg 2,421<br>lb 5,34 | GE3GGT53011AF50 | GE3GGT53044AF50 |              |                 |
| GE3 G 1 1/4 R | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 120<br>4,72 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | G 1<br>1/4 | M6<br>1,97 | 50<br>0,25 | 6,25<br>0,24 | 6<br>1,97   | 50<br>1,97 | F05<br>0,55 | 14<br>0,98 | 25<br>5,73 | kg 2,601<br>lb 5,73 | GE3GGR63011AF50 | GE3GGR63044AF50 |              |                 |
| GE3 G 1 1/2 R | 25 | MPa 35<br>Psi 5075 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 124<br>4,88 | 66,5<br>2,62 | 14<br>0,55 | 83,5<br>3,29  | 55<br>2,17 | 89<br>3,50   | 180<br>7,09 | 113<br>4,45 | G 1<br>1/2 | M6<br>1,97 | 50<br>0,25 | 6,25<br>0,24 | 6<br>1,97   | 50<br>1,97 | F05<br>0,55 | 14<br>0,98 | 25<br>6,08 | kg 2,756<br>lb 6,08 | GE3GGR73011AF50 | GE3GGR73044AF50 |              |                 |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE3 ANSI/ASME B1.20.1 NPT

Assembling threads per ISO5211

| TYPE          | DN | PN                 | A  | B    | C   | D    | E  | F    | G  | G1   | H   | I    | ØM | ØS   | ØT | ØK*  | W*  | X*   | ISO5211 | SW | ØLW                | WEIGHT                | ITEM CODE                             |  |
|---------------|----|--------------------|----|------|-----|------|----|------|----|------|-----|------|----|------|----|------|-----|------|---------|----|--------------------|-----------------------|---------------------------------------|--|
|               |    |                    | mm | inch | mm  | inch | mm | inch | mm | inch | mm  | inch | mm | inch | mm | inch | mm  | inch | kg      | lb | CS<br>Carbon Steel | SS<br>Stainless Steel |                                       |  |
| GE3 N 1/4     | 6  | MPa 50<br>Psi 7250 | 35 | 14,5 | 71  | 42,4 | 11 | 49   | 30 | 48,5 | 110 | 87   | N  | M4   | 35 | 5,25 | 4,5 | 34   | F03     | 9  | 6                  | kg 0,536<br>lb 1,18   | GE3NNNT14011AF50<br>GE3NNNT14044AF50  |  |
| GE3 N 3/8     | 10 | MPa 50<br>Psi 7250 | 40 | 17,4 | 73  | 44,4 | 11 | 54,3 | 35 | 54,5 | 110 | 93   | N  | M5   | 36 | 5,25 | 4,5 | 34   | F03     | 9  | 10                 | kg 0,695<br>lb 1,53   | GE3NNNT24011AF50<br>GE3NNNT24044AF50  |  |
| GE3 N 1/2     | 13 | MPa 50<br>Psi 7250 | 43 | 19,7 | 83  | 48,4 | 11 | 57   | 37 | 58,5 | 110 | 97   | N  | M5   | 36 | 5,25 | 5   | 36   | F03     | 9  | 13                 | kg 0,825<br>lb 1,82   | GE3NNNT33011AF50<br>GE3NNNT33044AF50  |  |
| GE3 N 3/4     | 20 | MPa 42<br>Psi 6090 | 57 | 25,4 | 95  | 62,5 | 14 | 75,5 | 49 | 75   | 180 | 105  | N  | M6   | 50 | 6,25 | 6   | 50   | F05     | 14 | 20                 | kg 1,583<br>lb 3,49   | GE3NNNT 44011AF50<br>GE3NNNT43044AF50 |  |
| GE3 N 1       | 25 | MPa 42<br>Psi 6090 | 65 | 29,5 | 112 | 66,5 | 14 | 83,5 | 55 | 89   | 180 | 113  | N  | M6   | 50 | 6,25 | 6   | 50   | F05     | 14 | 25                 | kg 2,421<br>lb 5,34   | GE3NNNT53011AF50<br>GE3NNNT53044AF50  |  |
| GE3 N 1 1/4 R | 25 | MPa 35<br>Psi 5075 | 65 | 29,5 | 120 | 66,5 | 14 | 83,5 | 55 | 89   | 180 | 113  | N  | M6   | 50 | 6,25 | 6   | 50   | F05     | 14 | 25                 | kg 2,601<br>lb 5,73   | GE3NNR63011AF50<br>GE3NNR63044AF50    |  |
| GE3 N 1 1/2 R | 25 | MPa 35<br>Psi 5075 | 65 | 29,5 | 124 | 66,5 | 14 | 83,5 | 55 | 89   | 180 | 113  | N  | M6   | 50 | 6,25 | 6   | 50   | F05     | 14 | 25                 | kg 2,756<br>lb 6,08   | GE3NNR73011AF50<br>GE3NNR73044AF50    |  |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



## GE3 SAE J1926-1

Assembling threads per ISO5211

| TYPE       | DN | PN                 | A  | B    | C   | D    | E  | F    | G  | G1   | H   | I    | ØM     | ØS   | ØT | ØK*  | W*  | X*   | ISO5211 | SW | ØLW                | WEIGHT                | ITEM CODE                          |  |
|------------|----|--------------------|----|------|-----|------|----|------|----|------|-----|------|--------|------|----|------|-----|------|---------|----|--------------------|-----------------------|------------------------------------|--|
|            |    |                    | mm | inch | mm  | inch | mm | inch | mm | inch | mm  | inch | mm     | inch | mm | inch | mm  | inch | kg      | lb | CS<br>Carbon Steel | SS<br>Stainless Steel |                                    |  |
| GE3 SAE4   | 6  | MPa 50<br>Psi 7250 | 35 | 14,5 | 71  | 42,4 | 11 | 49   | 30 | 48,5 | 110 | 87   | 7/16   | M4   | 35 | 5,25 | 4,5 | 34   | F03     | 9  | 6                  | kg 0,512<br>lb 1,13   | GE3EEE04011AF50<br>GE3EEE04044AF50 |  |
| GE3 SAE6   | 10 | MPa 50<br>Psi 7250 | 40 | 17,5 | 73  | 44,4 | 11 | 54,3 | 35 | 54,5 | 110 | 93   | 9/16   | M4   | 35 | 5,25 | 4,5 | 34   | F03     | 9  | 10                 | kg 0,695<br>lb 1,53   | GE3EEE14011AF50<br>GE3EEE14044AF50 |  |
| GE3 SAE8   | 13 | MPa 50<br>Psi 7250 | 43 | 19,7 | 83  | 48,4 | 11 | 57   | 37 | 58,5 | 110 | 97   | 3/4    | M5   | 36 | 5,25 | 5   | 36   | F03     | 9  | 13                 | kg 0,825<br>lb 1,82   | GE3EEE23011AF50<br>GE3EEE23044AF50 |  |
| GE3 SAE12  | 20 | MPa 42<br>Psi 6090 | 57 | 25,4 | 95  | 62,5 | 14 | 75,5 | 49 | 75   | 180 | 105  | 1 1/16 | M5   | 36 | 6,25 | 6   | 50   | F03     | 14 | 20                 | kg 1,583<br>lb 3,49   | GE3EEE34011AF50<br>GE3EEE34044AF50 |  |
| GE3 SAE16  | 25 | MPa 42<br>Psi 6090 | 65 | 29,4 | 112 | 66,5 | 14 | 83,5 | 55 | 89   | 180 | 113  | 1 5/16 | M6   | 50 | 6,25 | 6   | 50   | F05     | 14 | 25                 | kg 2,421<br>lb 5,34   | GE3EEE43011AF50<br>GE3EEE43044AF50 |  |
| GE3 SAE20R | 25 | MPa 35<br>Psi 5075 | 65 | 29,4 | 120 | 66,5 | 14 | 83,5 | 55 | 89   | 180 | 113  | 1 5/8  | M6   | 50 | 6,25 | 6   | 50   | F05     | 14 | 25                 | kg 2,601<br>lb 5,73   | GE3EEE53011AF50<br>GE3EEE53044AF50 |  |
| GE3 SAE24R | 25 | MPa 35<br>Psi 5075 | 65 | 29,4 | 124 | 66,5 | 14 | 83,5 | 55 | 89   | 180 | 113  | 1 7/8  | M6   | 50 | 6,25 | 6   | 50   | F05     | 14 | 25                 | kg 2,756<br>lb 6,08   | GE3EEE63011AF50<br>GE3EEE63044AF50 |  |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



# GE5



## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0



### **CS** Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN13
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

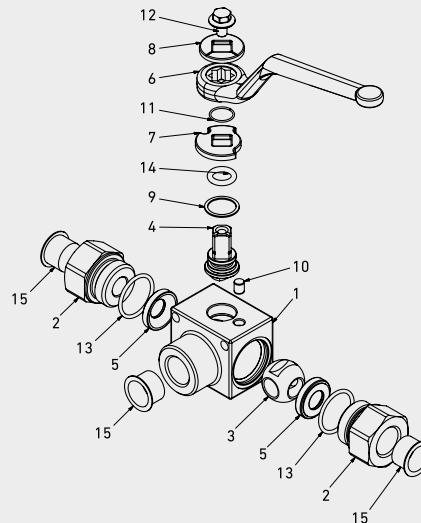

**WARNING!**  
Pressure inlet only  
from center port 1



|     |                | <b>CS</b><br>Carbon Steel | MATERIAL     |
|-----|----------------|---------------------------|--------------|
| POS | DESCRIPTION    | Q.TY                      |              |
| 1   | Body           | 1                         | 1,0737       |
| 2   | Adapter        | 2                         | 1,0737       |
| 3   | Ball           | 1                         | 1,0737       |
| 4   | Stem           | 1                         | 1,0737       |
| 5   | Ball seat      | 2                         | POM          |
| 6   | Handle         | 1                         | ZINC         |
| 7   | Washer         | 1                         | 1,0116       |
| 8   | Washer         | 1                         | 1,0116       |
| 9   | Stem ring      | 1                         | POM          |
| 10  | Pin            | 1                         | 1,0737       |
| 11  | Seeger         | 1                         | 1,4301       |
| 12  | Adapter o-ring | 2                         | NBR          |
| 13  | Stem o-ring    | 1                         | NBR          |
| 14  | Screw          | 1                         | Din 6921 8.8 |
| 15  | Caps           | 3                         | PVC          |



SMALLER DESIGN

## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE5 3-way

Ends \_\_\_\_\_

|          |          |         |
|----------|----------|---------|
| GAS DIN/ | NPT ANSI | SAE     |
| ISO 228  | /ASME    | J1926-1 |
| BSP      | B1.20.1  |         |
| G 1/4    | N 1/4    | SAE4    |
| G 3/8    | N 3/8    | SAE6    |
| G 1/2    | N 1/2    | SAE8    |

Size \_\_\_\_\_

from DN6 to DN13

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM



Seal material \_\_\_\_\_

B = NBR



\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 Mpa
- Pneumatic and electrical actuator
- Security block
- Locking device

For further special requests please consult our technical/commercial service.

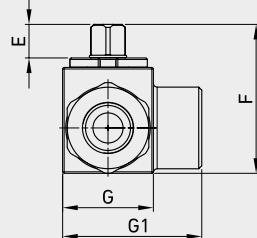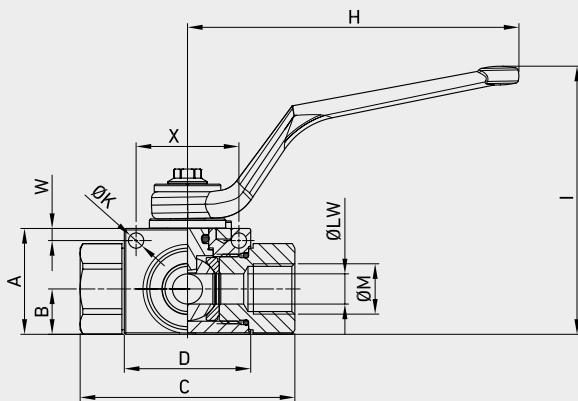


SMALLER DESIGN



## GE5 DIN/ISO 228 BSP

| TYPE      | DN | PN  |      | A    | B    | C    | D    | E    | F     | G    | G1   | H    | I    | ØM    | ØK   | W | X  | SW | ØLW | WEIGHT   | ITEM CODE       |
|-----------|----|-----|------|------|------|------|------|------|-------|------|------|------|------|-------|------|---|----|----|-----|----------|-----------------|
|           |    |     |      | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | mm   | inch | kg    | lb   |   |    |    |     |          |                 |
| GE5 G 1/4 | 6  | MPa | 50   | 33   | 14,3 | 69   | 40,4 | 11,1 | 47,15 | 26   | 42   | 110  | 87   | G 1/4 | 5,10 | 4 | 34 | 9  | 6   | kg 0,411 | GE5GGT15011A000 |
|           |    | Psi | 7250 | 1,30 | 0,56 | 2,72 | 1,59 | 0,44 | 1,86  | 1,02 | 1,65 | 4,33 | 3,43 |       |      |   |    |    |     |          |                 |
| GE5 G 3/8 | 10 | MPa | 50   | 35   | 15   | 71   | 41,8 | 11,1 | 49,15 | 30   | 46   | 110  | 89   | G 3/8 | 5,1  | 4 | 34 | 9  | 10  | kg 0,512 | GE5GGT25011A000 |
|           |    | Psi | 7250 | 1,38 | 0,59 | 2,80 | 1,65 | 0,44 | 1,94  | 1,18 | 1,81 | 4,33 | 3,50 |       |      |   |    |    |     |          |                 |
| GE5 G 1/2 | 13 | MPa | 50   | 40   | 18,3 | 83   | 44,4 | 11,1 | 54,15 | 35   | 54   | 110  | 94   | G 1/2 | 5,1  | 4 | 36 | 9  | 13  | kg 0,72  | GE5GGT35011A000 |
|           |    | Psi | 7250 | 1,57 | 0,72 | 3,27 | 1,75 | 0,44 | 2,13  | 1,38 | 2,13 | 4,33 | 3,70 |       |      |   |    |    |     |          |                 |


FIXING HOLES INCLUDED



## GE5 ANSI/ASME B1.20.1 NPT

| TYPE      | DN | PN  |      | A    | B    | C    | D    | E    | F     | G    | G1   | H    | I    | ØM    | ØK   | W | X  | SW | ØLW | WEIGHT   | ITEM CODE        |
|-----------|----|-----|------|------|------|------|------|------|-------|------|------|------|------|-------|------|---|----|----|-----|----------|------------------|
|           |    |     |      | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | mm   | inch | kg    | lb   |   |    |    |     |          |                  |
| GE5 N 1/4 | 6  | MPa | 50   | 33   | 14,3 | 69   | 40,4 | 11,1 | 47,15 | 26   | 42   | 110  | 87   | N 1/4 | 5,10 | 4 | 34 | 9  | 6   | kg 0,411 | GE5NNNT15011A000 |
|           |    | Psi | 7250 | 1,30 | 0,56 | 2,72 | 1,59 | 0,44 | 1,86  | 1,02 | 1,65 | 4,33 | 3,43 |       |      |   |    |    |     |          |                  |
| GE5 N 3/8 | 10 | MPa | 50   | 35   | 15   | 71   | 41,8 | 11,1 | 49,15 | 30   | 46   | 110  | 89   | N 3/8 | 5,1  | 4 | 34 | 9  | 10  | kg 0,512 | GE5NNNT25011A000 |
|           |    | Psi | 7250 | 1,38 | 0,59 | 2,80 | 1,65 | 0,44 | 1,94  | 1,18 | 1,81 | 4,33 | 3,50 |       |      |   |    |    |     |          |                  |
| GE5 N 1/2 | 13 | MPa | 50   | 40   | 18,3 | 83   | 44,4 | 11,1 | 54,15 | 35   | 54   | 110  | 94   | N 1/2 | 5,1  | 4 | 36 | 9  | 13  | kg 0,72  | GE5NNNT35011A000 |
|           |    | Psi | 7250 | 1,57 | 0,72 | 3,27 | 1,75 | 0,44 | 2,13  | 1,38 | 2,13 | 4,33 | 3,70 |       |      |   |    |    |     |          |                  |

FIXING HOLES INCLUDED



## GE5 SAE J1926-1

| TYPE                  | DN | PN  |      | A    | B    | C    | D    | E    | F    | G    | G1   | H     | I    | ØM   | ØK  | W    | X    | SW   | ØLW  | WEIGHT | ITEM CODE |                 |
|-----------------------|----|-----|------|------|------|------|------|------|------|------|------|-------|------|------|-----|------|------|------|------|--------|-----------|-----------------|
|                       |    |     |      | MPa  | 50   | mm   | 33   | 14,3 | 69   | 40,4 | 11,1 | 47,15 | 26   | 42   | 110 | 87   | 7/16 | 5,10 | 4    | 34     | 9         | 6               |
| GE5 SAE4              | 6  | Psİ | 7250 | inch | 1,30 | 0,56 | 2,72 | 1,59 | 0,44 | 1,86 | 1,02 | 1,65  | 4,33 | 3,43 | UNF | 0,20 | 0,16 | 1,34 | 0,35 | 0,24   | lb 0,91   |                 |
|                       |    | Psİ | 7250 | inch | 1,38 | 0,59 | 2,80 | 1,65 | 0,43 | 1,94 | 1,18 | 1,81  | 4,33 | 3,50 | UNF | 0,20 | 0,16 | 1,34 | 0,35 | 0,39   | lb 1,13   | GE5EEE15011A000 |
| GE5 SAE6              | 10 | Psİ | 7250 | inch | 1,38 | 0,59 | 2,80 | 1,65 | 0,43 | 1,94 | 1,18 | 1,81  | 4,33 | 3,50 | UNF | 0,20 | 0,16 | 1,34 | 0,35 | 0,39   | lb 1,13   |                 |
|                       |    | Psİ | 7250 | inch | 1,57 | 0,72 | 3,27 | 1,75 | 0,44 | 2,13 | 1,38 | 2,13  | 4,33 | 3,70 | UNF | 0,20 | 0,16 | 1,42 | 0,35 | 0,51   | lb 1,59   | GE5EEE25011A000 |
| FIXING HOLES INCLUDED |    |     |      |      |      |      |      |      |      |      |      |       |      |      |     |      |      |      |      |        |           |                 |



# GE3K

## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0





### CS Carbon Steel

- Type: ball valve 3 way special seats, zero leakage
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C


### SS Stainless Steel

- Type: ball valve 3 way special seats, zero leakage
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

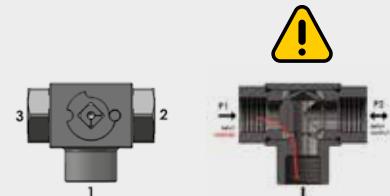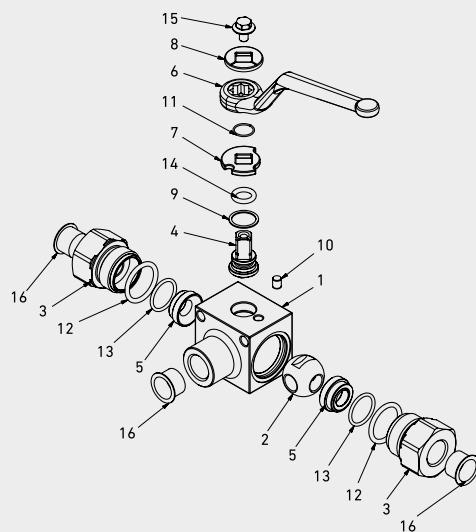

**GE3K ball valve the seal on the left (a) is pushed towards the ball by the pressure (p1) the floating ball is pushed against the seal on the right (b) creating a watertight seal without any leakages.**



| POS | DESCRIPTION    | Q.TY | CS           | SS              |
|-----|----------------|------|--------------|-----------------|
|     |                |      | Carbon Steel | Stainless Steel |
| 1   | Body           | 1    | 1,0737       | 1,4404          |
| 2   | Adapter        | 2    | 1,0737       | 1,4404          |
| 3   | Ball           | 1    | 1,0737       | 1,4404          |
| 4   | Stem           | 1    | 1,0737       | 1,4404          |
| 5   | Ball seat      | 2    | POM          | POM             |
| 6   | Handle         | 1    | ZINC         | ZINC            |
| 7   | Washer         | 1    | 1,0116       | 1,0116          |
| 8   | Washer         | 1    | 1,0116       | 1,4301          |
| 9   | Stem ring      | 1    | POM          | POM             |
| 10  | Pin            | 1    | 1,0737       | 1,4301          |
| 11  | Seeger         | 1    | 1,4301       | 1,4301          |
| 12  | Adapter o-ring | 2    | NBR          | NBR             |
| 13  | Seal o-ring    | 2    | NBR          | NBR             |
| 14  | Stem o-ring    | 1    | NBR          | NBR             |
| 15  | Screw          | 1    | Din 6921 8.8 | Din 6921 A2     |
| 16  | Caps           | 3    | PVC          | PVC             |



## CODE DESCRIPTION STRUCTURE

**GE3K** **G1/2** **DN13** **1** **1** **1** **1** **A** **B**

Type and way of valve \_\_\_\_\_

GE3K 3-way

Ends \_\_\_\_\_

| GAS DIN/ ISO 228 | NPT ANSI /ASME | SAE J1926-1 |
|------------------|----------------|-------------|
| BSP              | B1.20.1        |             |
| G 1/4            | N 1/4          | SAE4        |
| G 3/8            | N 3/8          | SAE6        |
| G 1/2            | N 1/2          | SAE8        |
| G 3/4            | N 3/4          | SAE12       |
| G 1              | N 1            | SAE16       |
| G 1 1/4 R        | N 1 1/4 R      | SAE20R      |
| G 1 1/2 R        | N 1 1/2 R      | SAE24R      |

Size \_\_\_\_\_

from DN6 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN40 Mpa
- Pneumatic and electrical actuator
- Security block
- Locking device

For further special requests please consult our technical/commercial service.

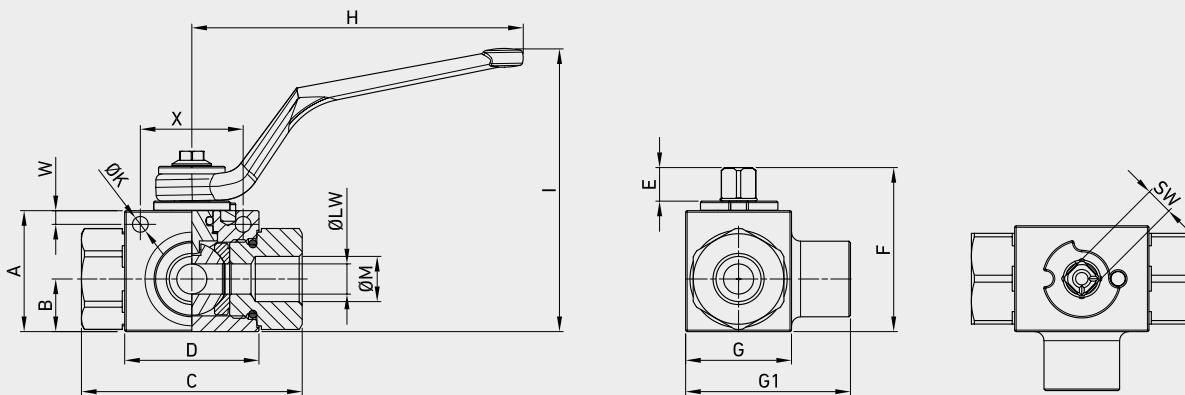


## GE3K DIN/ISO 228 BSP

| TYPE           | DN | PN            | A  | B    | C   | D    | E    | F     | G    | G1   | H    | I    | ØM   | ØK*   | W*   | X*   | SW   | ØLW  | WEIGHT          | ITEM CODE          |                 |                 |
|----------------|----|---------------|----|------|-----|------|------|-------|------|------|------|------|------|-------|------|------|------|------|-----------------|--------------------|-----------------|-----------------|
|                |    |               | mm | inch | mm  | inch | mm   | inch  | mm   | inch | mm   | inch | mm   | inch  | mm   | inch | kg   | lb   | CS Carbon Steel | SS Stainless Steel |                 |                 |
| GE3K G 1/4     | 6  | MPa 50        | 35 | 1,38 | 71  | 42,4 | 1,18 | 49    | 1,18 | 48,5 | 1,91 | 110  | 3,43 | G 1/4 | 5,25 | 4,5  | 34   | 9    | 6               | kg 0,536           | GK3GGT14011A000 | GK3GGT14044A000 |
|                |    | Psi 7250      |    |      |     |      |      |       |      |      |      |      |      | 0,21  | 0,18 | 1,34 | 0,35 | 0,24 | lb 1,18         |                    |                 |                 |
| GE3K G 3/8     | 10 | MPa 50        | 40 | 1,57 | 73  | 44,4 | 1,69 | 54,25 | 1,75 | 54,5 | 1,91 | 110  | 93   | G 3/8 | 5,25 | 4,5  | 34   | 9    | 10              | kg 0,695           | GK3GGT24011A000 | GK3GGT24044A000 |
|                |    | Psi 7250      |    |      |     |      |      |       |      |      |      |      |      | 0,21  | 0,18 | 1,34 | 0,35 | 0,39 | lb 1,53         |                    |                 |                 |
| GE3K G 1/2     | 13 | MPa 50        | 43 | 1,69 | 83  | 48,4 | 0,78 | 57    | 1,91 | 58,5 | 1,91 | 110  | 97   | G 1/2 | 5,25 | 5    | 36   | 9    | 13              | kg 0,825           | GK3GGT33011A000 | GK3GGT33044A000 |
|                |    | Psi 7250      |    |      |     |      |      |       |      |      |      |      |      | 0,21  | 0,20 | 1,42 | 0,35 | 0,51 | lb 1,82         |                    |                 |                 |
| GE3K G 3/4     | 20 | MPa 40 35     | 57 | 2,24 | 95  | 62,5 | 1,00 | 75,5  | 2,46 | 49   | 1,93 | 75   | 180  | G 3/4 | 6,25 | 6    | 50   | 14   | 20              | kg 1,583           | GK3GGT44011A000 | GK3GGT43044A000 |
|                |    | Psi 5800 5075 |    |      |     |      |      |       |      |      |      |      |      | 0,25  | 0,24 | 1,97 | 0,55 | 0,79 | lb 3,49         |                    |                 |                 |
| GE3K G 1       | 25 | MPa 35        | 65 | 2,56 | 105 | 66,5 | 1,16 | 83,5  | 4,13 | 55   | 1,21 | 89   | 180  | G 1   | 6,25 | 6    | 50   | 14   | 25              | kg 2,421           | GK3GGT53011A000 | GK3GGT53044A000 |
|                |    | Psi 5075      |    |      |     |      |      |       |      |      |      |      |      | 0,25  | 0,24 | 1,97 | 0,55 | 0,98 | lb 5,34         |                    |                 |                 |
| GE3K G 1 1/4 R | 25 | MPa 35        | 65 | 2,56 | 120 | 66,5 | 1,16 | 83,5  | 4,72 | 55   | 1,21 | 89   | 180  | G 1   | 6,25 | 6    | 50   | 14   | 25              | kg 2,601           | GK3GGR63011A000 | GK3GGR63044A000 |
|                |    | Psi 5075      |    |      |     |      |      |       |      |      |      |      |      | 0,25  | 0,24 | 1,97 | 0,55 | 0,98 | lb 5,73         |                    |                 |                 |
| GE3K G 1 1/2 R | 25 | MPa 35        | 65 | 2,56 | 124 | 66,5 | 1,16 | 83,5  | 4,88 | 55   | 1,21 | 89   | 180  | G 1   | 6,25 | 6    | 50   | 14   | 25              | kg 2,756           | GK3GGR73011A000 | GK3GGR73044A000 |
|                |    | Psi 5075      |    |      |     |      |      |       |      |      |      |      |      | 0,25  | 0,24 | 1,97 | 0,55 | 0,98 | lb 6,08         |                    |                 |                 |

Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED




## GE3K ANSI/ASME B1.20.1 NPT

| TYPE           | DN | PN                      |  | A  | B    | C   | D    | E  | F     | G  | G1   | H   | I    | ØM    | ØK*  | W*  | X* | SW | ØLW | WEIGHT              | ITEM CODE                           |  |
|----------------|----|-------------------------|--|----|------|-----|------|----|-------|----|------|-----|------|-------|------|-----|----|----|-----|---------------------|-------------------------------------|--|
|                |    |                         |  | mm | inch | mm  | inch | mm | inch  | mm | inch | mm  | inch | mm    | inch | kg  | lb | kg | lb  |                     |                                     |  |
| GE3K N 1/4     | 6  | MPa 50<br>Psi 7250      |  | 35 | 14,5 | 71  | 42,4 | 11 | 49    | 30 | 48,5 | 110 | 87   | N 1/4 | 5,25 | 4,5 | 34 | 9  | 6   | kg 0,536<br>lb 1,18 | GK3NNNT14011A000<br>GK3NNT14044A000 |  |
| GE3K N 3/8     | 10 | MPa 50<br>Psi 7250      |  | 40 | 17,4 | 73  | 44,4 | 11 | 54,25 | 35 | 54,5 | 110 | 93   | N 3/8 | 5,25 | 4,5 | 34 | 9  | 10  | kg 0,695<br>lb 1,53 | GK3NNNT24011A000<br>GK3NNT24044A000 |  |
| GE3K N 1/2     | 13 | MPa 50<br>Psi 7250      |  | 43 | 19,7 | 83  | 48,4 | 11 | 57    | 37 | 58,5 | 110 | 97   | N 1/2 | 5,25 | 5   | 36 | 9  | 13  | kg 0,825<br>lb 1,82 | GK3NNNT33011A000<br>GK3NNT33044A000 |  |
| GE3K N 3/4     | 20 | MPa 40<br>Psi 5800 5075 |  | 57 | 25,4 | 95  | 62,5 | 14 | 75,5  | 49 | 75   | 180 | 105  | N 3/4 | 6,25 | 6   | 50 | 14 | 20  | kg 1,583<br>lb 3,49 | GK3NNNT44011A000<br>GK3NNT43044A000 |  |
| GE3K N 1       | 25 | MPa 35<br>Psi 5075      |  | 65 | 29,5 | 105 | 66,5 | 14 | 83,5  | 55 | 89   | 180 | 113  | N 1   | 6,25 | 6   | 50 | 14 | 25  | kg 2,421<br>lb 5,34 | GK3NNNT53011A000<br>GK3NNT53044A000 |  |
| GE3K N 1 1/4 R | 25 | MPa 35<br>Psi 5075      |  | 65 | 29,5 | 120 | 66,5 | 14 | 83,5  | 55 | 89   | 180 | 113  | N 1   | 6,25 | 6   | 50 | 14 | 25  | kg 2,601<br>lb 5,73 | GK3NNR63011A000<br>GK3NNR63044A000  |  |
| GE3K N 1 1/2 R | 25 | MPa 35<br>Psi 5075      |  | 65 | 29,5 | 124 | 66,5 | 14 | 83,5  | 55 | 89   | 180 | 113  | N 1   | 6,25 | 6   | 50 | 14 | 25  | kg 2,756<br>lb 6,08 | GK3NNR73011A000<br>GK3NNR73044A000  |  |

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



## GE3K SAE J1926-1

| TYPE        | DN | PN                      |  | A  | B    | C   | D    | E  | F     | G  | G1   | H   | I    | ØM     | ØK*  | W*  | X* | SW | ØLW | WEIGHT              | ITEM CODE                          |  |
|-------------|----|-------------------------|--|----|------|-----|------|----|-------|----|------|-----|------|--------|------|-----|----|----|-----|---------------------|------------------------------------|--|
|             |    |                         |  | mm | inch | mm  | inch | mm | inch  | mm | inch | mm  | inch | mm     | inch | kg  | lb | kg | lb  |                     |                                    |  |
| GE3K SAE4   | 6  | MPa 50<br>Psi 7250      |  | 35 | 14,5 | 71  | 42,4 | 11 | 49    | 30 | 48,5 | 110 | 87   | 7/16   | 5,25 | 4,5 | 34 | 9  | 6   | kg 0,536<br>lb 1,18 | GK3EEE04011A000<br>GK3EEE04044A000 |  |
| GE3K SAE6   | 10 | MPa 50<br>Psi 7250      |  | 40 | 17,4 | 73  | 44,4 | 11 | 54,25 | 35 | 54,5 | 110 | 93   | 9/16   | 5,25 | 4,5 | 34 | 9  | 10  | kg 0,695<br>lb 1,53 | GK3EEE14011A000<br>GK3EEE14044A000 |  |
| GE3K SAE8   | 13 | MPa 50<br>Psi 7250      |  | 43 | 19,7 | 83  | 48,4 | 11 | 57    | 37 | 58,5 | 110 | 97   | 3/4    | 5,25 | 5   | 36 | 9  | 13  | kg 0,825<br>lb 1,82 | GK3EEE23011A000<br>GK3EEE23044A000 |  |
| GE3K SAE12  | 20 | MPa 40<br>Psi 5800 5075 |  | 57 | 25,4 | 95  | 62,5 | 14 | 75,5  | 49 | 75   | 180 | 105  | 1 1/16 | 6,25 | 6   | 50 | 14 | 20  | kg 1,583<br>lb 3,49 | GK3EEE34011A000<br>GK3EEE34044A000 |  |
| GE3K SAE16  | 25 | MPa 35<br>Psi 5075      |  | 65 | 29,5 | 105 | 66,5 | 14 | 83,5  | 55 | 89   | 180 | 113  | 1 5/16 | 6,25 | 6   | 50 | 14 | 25  | kg 2,421<br>lb 5,34 | GK3EEE43011A000<br>GK3EEE43044A000 |  |
| GE3K SAE20R | 25 | MPa 35<br>Psi 5075      |  | 65 | 29,5 | 120 | 66,5 | 14 | 83,5  | 55 | 89   | 180 | 113  | 1 5/8  | 6,25 | 6   | 50 | 14 | 25  | kg 2,601<br>lb 5,73 | GK3EEE53011A000<br>GK3EEE53044A000 |  |
| GE3K SAE24R | 25 | MPa 35<br>Psi 5075      |  | 65 | 29,5 | 124 | 66,5 | 14 | 83,5  | 55 | 89   | 180 | 113  | 1 7/8  | 6,25 | 6   | 50 | 14 | 25  | kg 2,756<br>lb 6,08 | GK3EEE63011A000<br>GK3EEE63044A000 |  |

■ Size only for carbon steel valves with fixing holes included.

FIXING HOLES INCLUDED



# GEF

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2


### Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: -20°C to +100°C

### Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

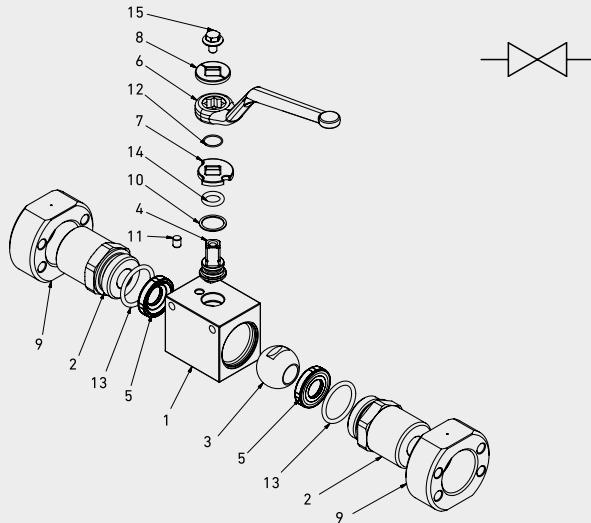

| POS | DESCRIPTION    | Q.TY | CS           | SS       |                 |
|-----|----------------|------|--------------|----------|-----------------|
|     |                |      | Carbon Steel | MATERIAL | Stainless Steel |
| 1   | Body           | 1    |              | 1,0737   | 1,4404          |
| 2   | Adapter        | 2    |              | 1,0737   | 1,4404          |
| 3   | Ball           | 1    |              | 1,0737   | 1,4404          |
| 4   | Stem           | 1    |              | 1,0737   | 1,4404          |
| 5   | Ball seat      | 2    | POM          |          | POM             |
| 6   | Handle         | 1    | ZINC         |          | ZINC            |
| 7   | Washer         | 1    | 1,0116       |          | 1,4301          |
| 8   | Washer         | 1    | 1,0116       |          | 1,4301          |
| 9   | Flange         | 2    | 1,0737       |          | 1,4404          |
| 10  | Stem ring      | 1    | POM          |          | POM             |
| 11  | Pin            | 1    | 1,0737       |          | 1,4301          |
| 12  | Seeger         | 1    | 1,4301       |          | 1,4301          |
| 13  | Adapter o-ring | 2    | NBR          |          | NBR             |
| 14  | Stem o-ring    | 1    | NBR          |          | NBR             |
| 15  | Screw          | 1    | Din 6921 8.8 |          | Din 6921 A2     |



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GE 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension   dimension  
of pressure   of pressure  
(PSI) F3      (PSI) F6

S3000      S6000

Size \_\_\_\_\_  
from DN13 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN6000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

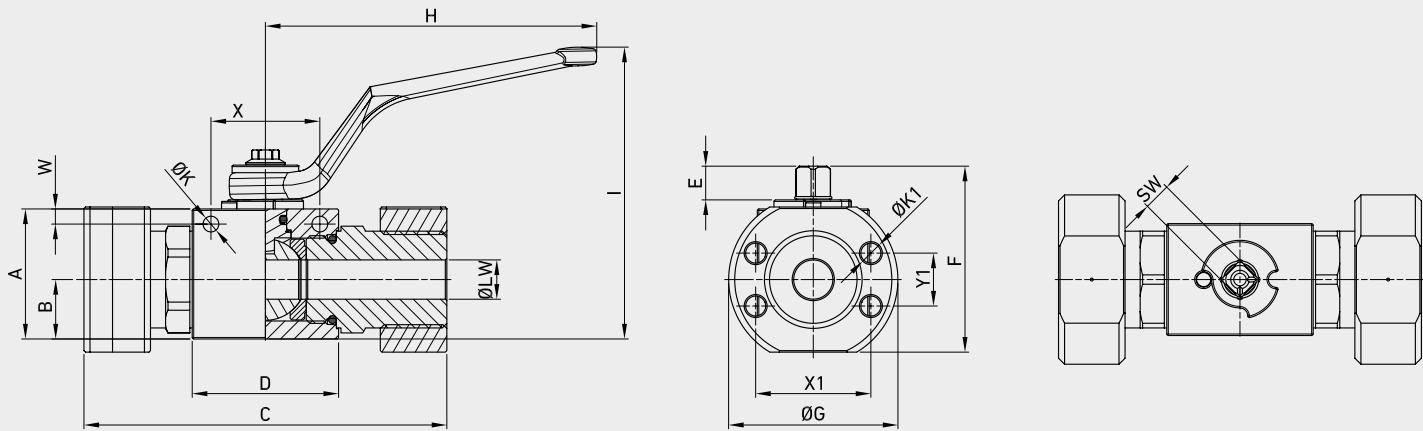

## ■ GEF SAE J518 S3000 - F61

| TYPE | DN | PN                 |   | A   | B                         | C                   | D               | E               | F | ØG | H | I | ØK1 | X1 | Y1 | ØK* | W* | X* | ØLW | SW | WEIGHT | ITEM CODE |    |
|------|----|--------------------|---|-----|---------------------------|---------------------|-----------------|-----------------|---|----|---|---|-----|----|----|-----|----|----|-----|----|--------|-----------|----|
|      |    |                    |   |     |                           |                     |                 |                 |   |    |   |   |     |    |    |     |    |    |     |    |        | CS        | SS |
| GEF3 | 13 | MPa 35<br>Psi 5075 | mm 43 19,7 120 48,4 11 61,5 56 110 95<br>inch 1,69 0,78 4,72 1,91 0,43 2,42 2,20 4,33 3,74  | M8  | 38,1 17,5 5,25 5 36 13 9  | kg 1,504<br>lb 3,32 | GE2FFC0L011A000 | GE2FFC0L044A000 |   |    |   |   |     |    |    |     |    |    |     |    |        |           |    |
| GEF3 | 20 | MPa 35<br>Psi 5075 | mm 57 25,4 136 62,5 14 80,1 72 180 105<br>inch 2,24 1,00 5,35 2,46 0,55 3,15 2,83 7,09 4,13 | M10 | 47,6 22,2 6,25 6 50 20 14 | kg 2,608<br>lb 5,75 | GE2FFC1L011A000 | GE2FFC1L044A000 |   |    |   |   |     |    |    |     |    |    |     |    |        |           |    |
| GEF3 | 25 | MPa 35<br>Psi 5075 | mm 65 29,5 148 66,5 14 89 81 180 113<br>inch 2,56 1,16 5,83 2,62 0,55 3,50 3,19 7,09 4,45   | M10 | 52,4 26,2 6,25 6 50 25 14 | kg 3,891<br>lb 8,58 | GE2FFC2L011A000 | GE2FFC2L044A000 |   |    |   |   |     |    |    |     |    |    |     |    |        |           |    |

■ Size only for carbon steel valves with fixing holes included.

## ■ GEF SAE J518 S3000 UNC - F61

| TYPE | DN | PN                 |   | A | B                   | C               | D               | E | F | ØG | H | I | ØK1 | X1 | Y1 | ØK* | W* | X* | ØLW | SW | WEIGHT | ITEM CODE |    |
|------|----|--------------------|---|---|---------------------|-----------------|-----------------|---|---|----|---|---|-----|----|----|-----|----|----|-----|----|--------|-----------|----|
|      |    |                    |   |   |                     |                 |                 |   |   |    |   |   |     |    |    |     |    |    |     |    |        | CS        | SS |
| GEF3 | 13 | MPa 35<br>Psi 5075 | mm 43 19,7 120 48,4 11 61,5 56 110 95 5/16-18 38,1 17,5 5,25 5 36 13 9<br>inch 1,69 0,78 4,72 1,91 0,43 2,42 2,20 4,33 3,74 UNC 1,50 0,69 0,21 0,20 1,42 0,51 0,35  |   | kg 1,504<br>lb 3,32 | GE2FUC0L011A000 | GE2FUC0L044A000 |   |   |    |   |   |     |    |    |     |    |    |     |    |        |           |    |
| GEF3 | 20 | MPa 35<br>Psi 5075 | mm 57 25,4 136 62,5 14 80,1 72 180 105 3/8-16 47,6 22,2 6,25 6 50 20 14<br>inch 2,24 1,00 5,35 2,46 0,55 3,15 2,83 7,09 4,13 UNC 1,87 0,87 0,25 0,24 1,97 0,79 0,55 |   | kg 2,608<br>lb 5,75 | GE2FUC1L011A000 | GE2FUC1L044A000 |   |   |    |   |   |     |    |    |     |    |    |     |    |        |           |    |
| GEF3 | 25 | MPa 35<br>Psi 5075 | mm 65 29,5 148 66,5 14 89 81 180 113 3/8-16 52,4 26,2 6,25 6 50 25 14<br>inch 2,56 1,16 5,83 2,62 0,55 3,50 3,19 7,09 4,45 UNC 2,06 1,03 0,25 0,24 1,97 0,98 0,55   |   | kg 3,891<br>lb 8,58 | GE2FUC2L011A000 | GE2FUC2L044A000 |   |   |    |   |   |     |    |    |     |    |    |     |    |        |           |    |

■ Size only for carbon steel valves with fixing holes included.

**■ GEF SAE J518 S6000 - F62**

| TYPE | DN | PN     |          | A  | B    | C   | D    | E  | F    | ØG | H    | I   | ØK1 | X1   | Y1   | ØK*  | W*   | X*   | ØLW  | SW   | WEIGHT    | ITEM CODE |                 |                 |
|------|----|--------|----------|----|------|-----|------|----|------|----|------|-----|-----|------|------|------|------|------|------|------|-----------|-----------|-----------------|-----------------|
|      |    | MPa    | Psi      | mm | inch | mm  | inch | mm | inch | mm | inch | mm  | mm  | inch | mm   | inch | mm   | inch | kg   | lb   | GEF Steel | GEF SS    |                 |                 |
| GEF6 | 13 | MPa 42 | Psi 6090 | 43 | 19,7 | 120 | 48,4 | 11 | 61,5 | 56 | 110  | 95  | M8  | 40,5 | 18,2 | 5,25 | 5    | 36   | 13   | 9    | kg 1,504  | lb 3,32   | GE2FFC6G011A000 | GE2FFC6G044A000 |
|      |    |        |          |    |      |     |      |    |      |    |      |     |     | 1,59 | 0,72 | 0,21 | 0,20 | 1,42 | 0,51 | 0,35 |           |           |                 |                 |
| GEF6 | 20 | MPa 42 | Psi 6090 | 57 | 25,4 | 136 | 62,5 | 14 | 80,1 | 72 | 180  | 105 | M10 | 50,8 | 23,8 | 6,25 | 6    | 50   | 20   | 14   | kg 2,608  | lb 5,75   | GE2FFC74011A000 | GE2FFC74044A000 |
|      |    |        |          |    |      |     |      |    |      |    |      |     |     | 2,00 | 0,94 | 0,25 | 0,24 | 1,97 | 0,79 | 0,55 |           |           |                 |                 |
| GEF6 | 25 | MPa 42 | Psi 6090 | 65 | 29,5 | 148 | 66,5 | 14 | 89   | 81 | 180  | 113 | M12 | 57,2 | 27,8 | 6,25 | 6    | 50   | 25   | 14   | kg 3,891  | lb 8,58   | GE2FFC83011A000 | GE2FFC83044A000 |
|      |    |        |          |    |      |     |      |    |      |    |      |     |     | 2,25 | 1,09 | 0,25 | 0,24 | 1,97 | 0,98 | 0,55 |           |           |                 |                 |

■ Size only for carbon steel valves with fixing holes included.

**■ GEF SAE J518 S6000 UNC - F62**

| TYPE | DN | PN     |          | A  | B    | C   | D    | E  | F    | ØG | H    | I   | ØK1     | X1   | Y1   | ØK*  | W*   | X*   | ØLW  | SW   | WEIGHT    | ITEM CODE |                 |                 |
|------|----|--------|----------|----|------|-----|------|----|------|----|------|-----|---------|------|------|------|------|------|------|------|-----------|-----------|-----------------|-----------------|
|      |    | MPa    | Psi      | mm | inch | mm  | inch | mm | inch | mm | inch | mm  | mm      | inch | mm   | inch | mm   | inch | kg   | lb   | GEF Steel | GEF SS    |                 |                 |
| GEF6 | 13 | MPa 42 | Psi 6090 | 43 | 19,7 | 120 | 48,4 | 11 | 61,5 | 56 | 110  | 95  | 5/16-18 | 40,5 | 18,2 | 5,25 | 5    | 36   | 13   | 9    | kg 1,504  | lb 3,32   | GE2FUC6G011A000 | GE2FUC6G044A000 |
|      |    |        |          |    |      |     |      |    |      |    |      |     |         | 1,59 | 0,72 | 0,21 | 0,20 | 1,42 | 0,51 | 0,35 |           |           |                 |                 |
| GEF6 | 20 | MPa 42 | Psi 6090 | 57 | 25,4 | 136 | 62,5 | 14 | 75,5 | 72 | 180  | 105 | 3/8-16  | 50,8 | 23,8 | 6,25 | 6    | 50   | 20   | 14   | kg 2,608  | lb 5,75   | GE2FUC74011A000 | GE2FUC74044A000 |
|      |    |        |          |    |      |     |      |    |      |    |      |     |         | 2,00 | 0,94 | 0,25 | 0,24 | 1,97 | 0,79 | 0,55 |           |           |                 |                 |
| GEF6 | 25 | MPa 42 | Psi 6090 | 65 | 29,5 | 148 | 66,5 | 14 | 89   | 81 | 180  | 113 | 7/16-14 | 57,2 | 27,8 | 6,25 | 6    | 50   | 25   | 14   | kg 3,891  | lb 8,58   | GE2FUC83011A000 | GE2FUC83044A000 |
|      |    |        |          |    |      |     |      |    |      |    |      |     |         | 2,25 | 1,09 | 0,25 | 0,24 | 1,97 | 0,98 | 0,55 |           |           |                 |                 |

■ Size only for carbon steel valves with fixing holes included.



# GES

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2


### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: SAE J518
- Pressure: up to PN420 / S6000
- Temp range: -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: SAE J518
- Pressure: up to PN420 / S6000
- Temp range: -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

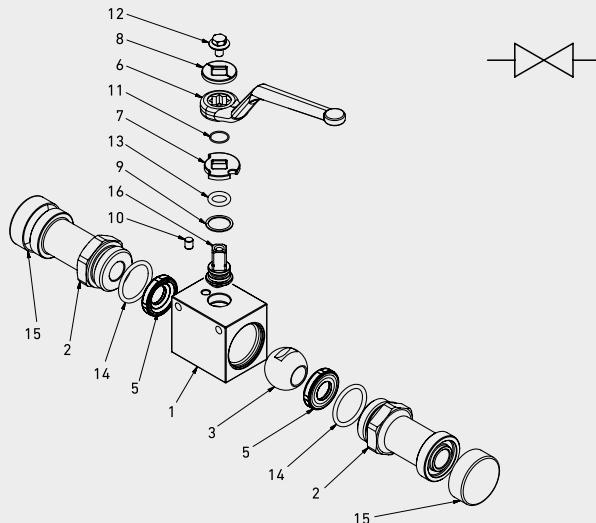

| POS | DESCRIPTION    | Q.TY | CS           | SS          |                 |
|-----|----------------|------|--------------|-------------|-----------------|
|     |                |      | Carbon Steel | MATERIAL    | Stainless Steel |
| 1   | Body           | 1    |              | 1,4404      |                 |
| 2   | Adapter        | 2    |              | 1,4404      |                 |
| 3   | Ball           | 1    |              | 1,4404      |                 |
| 4   | Stem           | 1    |              | 1,4404      |                 |
| 5   | Ball seat      | 2    | POM          | POM         |                 |
| 6   | Handle         | 1    | ZINC         | ZINC        |                 |
| 7   | Washer         | 1    | 1,0116       | 1,4301      |                 |
| 8   | Washer         | 1    | 1,0116       | 1,4301      |                 |
| 9   | Stem ring      | 1    | POM          | POM         |                 |
| 10  | Pin            | 1    | 1,0737       | 1,4301      |                 |
| 11  | Seeger         | 1    | 1,4301       | 1,4301      |                 |
| 12  | Adapter o-ring | 2    | NBR          | NBR         |                 |
| 13  | Stem o-ring    | 1    | NBR          | NBR         |                 |
| 14  | Screw          | 1    | Din 6921 8.8 | Din 6921 A2 |                 |
| 15  | Caps           | 2    | PVC          | PVC         |                 |



## CODE DESCRIPTION STRUCTURE

|    |       |      |   |   |   |   |   |   |
|----|-------|------|---|---|---|---|---|---|
| GE | FS-S3 | DN13 | 1 | 1 | 1 | 1 | A | B |
|----|-------|------|---|---|---|---|---|---|

Type and way of valve \_\_\_\_\_

GE 2-way

Ends \_\_\_\_\_  
Valves Valves  
dimension dimension  
of pressure of pressure  
(PSI) S3 (PSI) S6  
S3000 S6000

Size \_\_\_\_\_  
from DN13 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*

Stem material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*

Ball Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN6000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

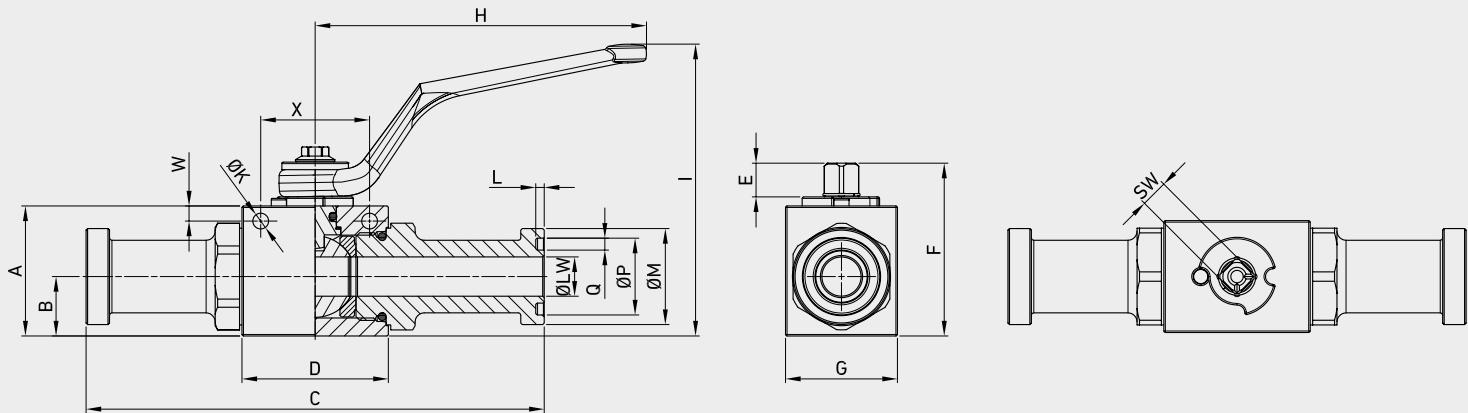

## ■ GES SAE J518 S3000 - C61

| TYPE | DN | PN       | A         | B    | C     | D    | E    | F    | G    | H    | I     | L    | ØM   | ØP    | Q    | ØK*  | W*   | X*   | SW   | ØLW  | WEIGHT   | ITEM CODE          |                       |
|------|----|----------|-----------|------|-------|------|------|------|------|------|-------|------|------|-------|------|------|------|------|------|------|----------|--------------------|-----------------------|
|      |    |          |           |      |       |      |      |      |      |      |       |      |      |       |      |      |      |      |      |      |          | CS<br>Carbon Steel | SS<br>Stainless Steel |
| GES3 | 13 | MPa 35   | mm 43     | 19,7 | 151,5 | 48,4 | 11   | 57   | 37   | 110  | 99,5  | 2,79 | 30,2 | 25,4  | 3,94 | 5,25 | 5    | 36   | 9    | 13   | kg 0,96  | GE2SSC0L011A000    | GE2SSC0L044A000       |
|      |    | Psi 5075 | inch 1,69 | 0,78 | 5,96  | 1,91 | 0,43 | 2,24 | 1,46 | 4,33 | 3,92  | 0,11 | 1,19 | 1,00  | 0,16 | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | lb 2,12  |                    |                       |
| GES3 | 20 | MPa 35   | mm 55     | 25,4 | 162   | 62,5 | 14   | 75,5 | 45   | 180  | 106,5 | 2,79 | 38,1 | 31,75 | 3,94 | 6,25 | 6    | 50   | 14   | 20   | kg 1,717 | GE2SSC1L011A000    | GE2SSC1L044A000       |
|      |    | Psi 5075 | inch 2,17 | 1,00 | 6,38  | 2,46 | 0,55 | 2,97 | 1,77 | 7,09 | 4,19  | 0,11 | 1,50 | 1,25  | 0,16 | 0,25 | 0,24 | 1,97 | 0,55 | 0,79 | lb 3,79  |                    |                       |
| GES3 | 25 | MPa 35   | mm 65     | 29,5 | 178   | 66,5 | 14   | 83,5 | 55   | 180  | 116,5 | 2,79 | 44,4 | 39,2  | 3,94 | 6,25 | 6    | 50   | 14   | 25   | kg 2,597 | GE2SSC2L011A000    | GE2SSC2L044A000       |
|      |    | Psi 5075 | inch 2,56 | 1,16 | 7,01  | 2,62 | 0,55 | 3,29 | 2,17 | 7,09 | 4,59  | 0,11 | 1,75 | 1,54  | 0,16 | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | lb 5,73  |                    |                       |

■ Size only for carbon steel valves with fixing holes included.

## ■ GES3 SAE J518 S3000 EXTRA LONG - C61

| TYPE | DN | PN       | A         | B    | C    | D    | E     | F     | G    | H    | I     | L    | ØM    | ØP    | Q    | ØK*  | W*   | X*   | SW   | ØLW  | WEIGHT  | ITEM CODE          |  |
|------|----|----------|-----------|------|------|------|-------|-------|------|------|-------|------|-------|-------|------|------|------|------|------|------|---------|--------------------|--|
|      |    |          |           |      |      |      |       |       |      |      |       |      |       |       |      |      |      |      |      |      |         | CS<br>Carbon Steel |  |
| GES3 | 13 | MPa 35   | mm 43     | 19,7 | 170  | 48,4 | 11,1  | 57,25 | 37   | 110  | 97    | 2,79 | 30,2  | 25,4  | 3,94 | 5,25 | 5    | 36   | 9    | 13   | kg 1,02 | GE2SXC0L011A000    |  |
|      |    | Psi 5075 | inch 1,69 | 0,78 | 6,69 | 1,91 | 0,44  | 2,25  | 1,46 | 4,33 | 3,82  | 0,11 | 1,19  | 1,00  | 0,16 | 0,21 | 0,20 | 1,42 | 0,35 | 0,51 | lb 2,25 |                    |  |
| GES3 | 20 | MPa 35   | mm 57     | 25,4 | 200  | 62,5 | 14,35 | 75,5  | 49   | 180  | 105   | 2,79 | 38,1  | 31,75 | 3,94 | 6,25 | 6    | 50   | 14   | 19   | kg 2,07 | GE2SXC1L011A000    |  |
|      |    | Psi 5075 | inch 2,24 | 1,00 | 7,87 | 2,46 | 0,56  | 2,97  | 1,93 | 7,09 | 4,13  | 0,11 | 1,50  | 1,25  | 0,16 | 0,25 | 0,24 | 1,97 | 0,55 | 0,75 | lb 4,56 |                    |  |
| GES3 | 25 | MPa 35   | mm 65     | 29,5 | 215  | 66,5 | 14,35 | 83,5  | 55   | 180  | 112,6 | 2,79 | 44,45 | 39,62 | 3,94 | 6,25 | 6    | 50   | 14   | 25   | kg 2,79 | GE2SXC2L011A000    |  |
|      |    | Psi 5075 | inch 2,56 | 1,16 | 8,46 | 2,62 | 0,56  | 3,29  | 2,17 | 7,09 | 4,43  | 0,11 | 1,75  | 1,56  | 0,16 | 0,25 | 0,24 | 1,97 | 0,55 | 0,98 | lb 6,15 |                    |  |

■ Size only for carbon steel valves with fixing holes included.

**GES SAE J518 S6000 - C62**

| TYPE | DN | PN       | A    | B    | C    | D    | E    | F     | G    | H    | I    | L     | ØM   | ØP   | Q     | ØK*  | W*   | X*   | SW   | ØLW  | WEIGHT | ITEM CODE |       |                 |                 |
|------|----|----------|------|------|------|------|------|-------|------|------|------|-------|------|------|-------|------|------|------|------|------|--------|-----------|-------|-----------------|-----------------|
|      |    |          | MPa  | 42   | mm   | 43   | 19,7 | 151,5 | 48,4 | 11   | 57   | 37    | 110  | 99,5 | 2,79  | 31,6 | 25,4 | 3,94 | 5,25 | 5    | 36     | 9         | 13    | kg              | 0,956           |
| GES6 | 13 | MPa 42   | inch | 1,69 | 0,78 | 5,96 | 1,91 | 0,43  | 2,24 | 1,46 | 4,33 | 3,92  | 0,11 | 1,24 | 1,00  | 0,16 | 0,21 | 0,20 | 1,42 | 0,35 | 0,51   | lb        | 2,11  |                 |                 |
|      |    | Psi 6090 | inch | 2,17 | 1,00 | 6,85 | 2,46 | 0,55  | 2,97 | 1,77 | 7,09 | 4,19  | 0,11 | 1,63 | 1,25  | 0,16 | 0,25 | 0,24 | 1,97 | 0,55 | 0,79   | lb        | 3,95  | GE2SSC74011A000 | GE2SSC74044A000 |
| GES6 | 20 | MPa 42   | mm   | 55   | 25,4 | 174  | 62,5 | 14    | 75,5 | 45   | 180  | 106,5 | 2,79 | 41,3 | 31,75 | 3,94 | 6,25 | 6    | 50   | 14   | 20     | kg        | 1,792 |                 |                 |
|      |    | Psi 6090 | inch | 2,56 | 1,16 | 7,80 | 2,62 | 0,55  | 3,29 | 2,17 | 7,09 | 4,59  | 0,11 | 1,88 | 1,54  | 0,16 | 0,25 | 0,24 | 1,97 | 0,55 | 0,79   | lb        | 3,95  | GE2SSC83011A000 | GE2SSC83044A000 |
| GES6 | 25 | MPa 42   | mm   | 65   | 29,5 | 198  | 66,5 | 14    | 83,5 | 55   | 180  | 116,5 | 2,79 | 47,8 | 39,2  | 3,94 | 6,25 | 6    | 50   | 14   | 25     | kg        | 2,759 |                 |                 |
|      |    | Psi 6090 | inch | 2,56 | 1,16 | 7,80 | 2,62 | 0,55  | 3,29 | 2,17 | 7,09 | 4,59  | 0,11 | 1,88 | 1,54  | 0,16 | 0,25 | 0,24 | 1,97 | 0,55 | 0,98   | lb        | 6,08  | GE2SSC83011A000 | GE2SSC83044A000 |

Size only for carbon steel valves with fixing holes included.

**GES6 SAE J518 S6000 EXTRA LONG - C62**

| TYPE | DN | PN       | A    | B    | C    | D    | E    | F     | G    | H    | I     | L     | ØM   | ØP    | Q     | ØK*   | W*   | X*   | SW   | ØLW  | WEIGHT | ITEM CODE |      |                 |                 |
|------|----|----------|------|------|------|------|------|-------|------|------|-------|-------|------|-------|-------|-------|------|------|------|------|--------|-----------|------|-----------------|-----------------|
|      |    |          | MPa  | 42   | mm   | 43   | 19,7 | 180   | 48,4 | 11,1 | 57,25 | 37    | 110  | 97    | 2,79  | 31,75 | 25,4 | 3,94 | 5,25 | 5    | 36     | 9         | 13   | kg              | 1,05            |
| GES6 | 13 | MPa 42   | inch | 1,69 | 0,78 | 7,09 | 1,91 | 0,44  | 2,25 | 1,46 | 4,33  | 3,82  | 0,11 | 1,25  | 1,00  | 0,16  | 0,21 | 0,20 | 1,42 | 0,35 | 0,51   | lb        | 2,31 |                 |                 |
|      |    | Psi 6090 | inch | 2,24 | 1,00 | 7,87 | 2,46 | 0,56  | 2,97 | 1,93 | 7,09  | 4,13  | 0,11 | 1,63  | 1,25  | 0,16  | 0,25 | 0,24 | 1,97 | 0,55 | 0,75   | lb        | 4,65 | GE2SXC74011A000 | GE2SXC74044A000 |
| GES6 | 20 | MPa 42   | mm   | 57   | 25,4 | 200  | 62,5 | 14,35 | 75,5 | 49   | 180   | 105   | 2,79 | 41,3  | 31,75 | 3,94  | 6,25 | 6    | 50   | 14   | 19     | kg        | 2,11 |                 |                 |
|      |    | Psi 6090 | inch | 2,56 | 1,16 | 7,80 | 2,62 | 0,55  | 3,29 | 2,17 | 7,09  | 4,43  | 0,11 | 1,88  | 1,54  | 0,16  | 0,25 | 0,24 | 1,97 | 0,55 | 0,75   | lb        | 4,65 | GE2SXC83011A000 | GE2SXC83044A000 |
| GES6 | 25 | MPa 42   | mm   | 65   | 29,5 | 250  | 66,5 | 14,35 | 83,5 | 55   | 180   | 112,6 | 2,79 | 47,63 | 39,62 | 3,94  | 6,25 | 6    | 50   | 14   | 25     | kg        | 3,07 |                 |                 |
|      |    | Psi 6090 | inch | 2,56 | 1,16 | 9,84 | 2,62 | 0,56  | 3,29 | 2,17 | 7,09  | 4,43  | 0,11 | 1,88  | 1,56  | 0,16  | 0,25 | 0,24 | 1,97 | 0,55 | 0,98   | lb        | 6,77 | GE2SXC83011A000 | GE2SXC83044A000 |

Size only for carbon steel valves with fixing holes included.



# GEF-S

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2


### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN25
- Ends: ISO6162-1/-2  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

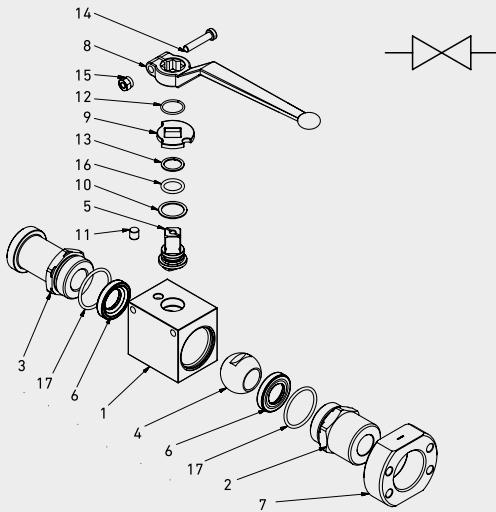

| POS | DESCRIPTION    | Q.TY | CS           | SS              |
|-----|----------------|------|--------------|-----------------|
|     |                |      | Carbon Steel | Stainless Steel |
| 1   | Body           | 1    | 1,0737       | 1,4404          |
| 2   | Adapter        | 1    | 1,0737       | 1,4404          |
| 3   | Plug           | 1    | 1,0737       | 1,4404          |
| 4   | Ball           | 1    | 1,0737       | 1,4404          |
| 5   | Stem           | 1    | 1,0737       | 1,4404          |
| 6   | Ball seat      | 2    | POM          | POM             |
| 7   | Flange         | 1    | 1,0737       | 1,4404          |
| 8   | Handle         | 1    | ZINC         | ZINC            |
| 9   | Washer         | 1    | 1,0116       | 1,4404          |
| 10  | Stem ring      | 1    | POM          | POM             |
| 11  | Pin            | 1    | 1,0737       | 1,4404          |
| 12  | Seeger         | 1    | 1,4301       | 1,4301          |
| 13  | Stem back up   | 1    | PTFE         | PTFE            |
| 14  | Lever screw    | 1    | ISO1207 8.8  | ISO1207 8.8     |
| 15  | Lever nut      | 1    | ISO7040      | ISO7040         |
| 16  | Stem o-ring    | 1    | NBR          | NBR             |
| 17  | Adapter o-ring | 2    | NBR          | NBR             |



## CODE DESCRIPTION STRUCTURE

|    |       |      |   |   |   |   |   |   |
|----|-------|------|---|---|---|---|---|---|
| GE | F3-S3 | DN13 | 1 | 1 | 1 | 1 | A | B |
|----|-------|------|---|---|---|---|---|---|

Type and way of valve \_\_\_\_\_

GE 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension   dimension  
of pressure   of pressure  
(PSI) F3/S3 (PSI) F6/S6

S3000      S6000

Size \_\_\_\_\_

from DN13 to DN25

Body Material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 1 = 1,0737
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN6000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

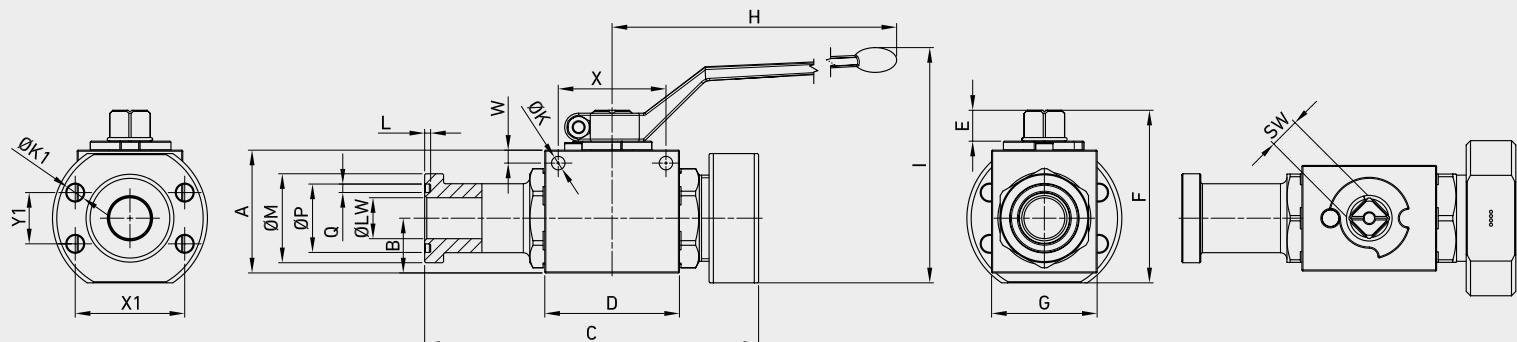

## GEFS3

**CS** Carbon Steel    **SS** Stainless Steel

| TYPE  | DN | PN                 | A                     | B                        | C                   | D              | E       | F        | G        | H         | I         | L   | ØK1        | ØM         | ØP        | Q         | ØK*    | W*      | X*        | X1        | Y1      | ØLW     | SW      | WEIGHT          | ITEM CODE       |
|-------|----|--------------------|-----------------------|--------------------------|---------------------|----------------|---------|----------|----------|-----------|-----------|-----|------------|------------|-----------|-----------|--------|---------|-----------|-----------|---------|---------|---------|-----------------|-----------------|
| GEFS3 | 13 | MPa 35<br>Psi 5075 | mm 43 19,7 135,7 48,4 | inch 1,69 0,77 5,34 1,91 | 11,1 0,44 2,42 1,46 | 61,5 4,33 3,98 | 37 0,11 | 110 1,42 | 101 1,46 | 2,79 4,33 | 3,98 0,11 | M8  | 30,2 1,19  | 25,4 1,00  | 3,94 0,16 | 5,25 0,21 | 5 0,20 | 36 1,42 | 38,1 1,50 | 17,5 0,69 | 13 0,51 | kg 0,35 | lb 2,70 | GE2SFC0L011A000 | GE2SFC0L044A000 |
| GEFS3 | 20 | MPa 35<br>Psi 5075 | mm 57 25,4 149 62,5   | inch 2,24 1,00 5,87 2,46 | 14,35 0,56 3,15     | 80,1 1,93 7,09 | 49 4,29 | 180 0,11 | 109 2,79 | 2,79 4,29 | 0,11      | M10 | 38,1 1,50  | 31,75 1,25 | 3,94 0,16 | 6,25 0,25 | 6 0,24 | 50 1,97 | 47,6 1,87 | 22,2 0,87 | 19 0,75 | kg 0,55 | lb 5,18 | GE2SFC1L011A000 | GE2SFC1L044A000 |
| GEFS3 | 25 | MPa 35<br>Psi 5075 | mm 65 29,5 163 66,5   | inch 2,56 1,16 6,42 2,62 | 14,35 0,56 3,50     | 89 2,17 7,09   | 55 4,65 | 180 0,11 | 118 2,79 | 2,79 4,65 | 0,11      | M10 | 44,45 1,75 | 39,62 1,56 | 3,94 0,16 | 6,25 0,25 | 6 0,24 | 50 1,97 | 52,4 2,06 | 26,2 1,03 | 25 0,98 | kg 0,55 | lb 7,09 | GE2SFC2L011A000 | GE2SFC2L044A000 |

Size only for carbon steel valves with fixing holes included.

## GEFS3 U

**CS** Carbon Steel    **SS** Stainless Steel

| TYPE  | DN | PN                 | A                     | B                        | C                   | D              | E       | F        | G        | H         | I         | L   | ØK1        | ØM         | ØP        | Q         | ØK*    | W*      | X*        | X1        | Y1      | ØLW     | SW      | WEIGHT          | ITEM CODE       |
|-------|----|--------------------|-----------------------|--------------------------|---------------------|----------------|---------|----------|----------|-----------|-----------|-----|------------|------------|-----------|-----------|--------|---------|-----------|-----------|---------|---------|---------|-----------------|-----------------|
| GEFS3 | 13 | MPa 35<br>Psi 5075 | mm 43 19,7 135,7 48,4 | inch 1,69 0,77 5,34 1,91 | 11,1 0,44 2,42 1,46 | 61,5 4,33 3,98 | 37 0,11 | 110 1,42 | 101 1,46 | 2,79 4,33 | 3,98 0,11 | M8  | 30,2 1,19  | 25,4 1,00  | 3,94 0,16 | 5,25 0,21 | 5 0,20 | 36 1,42 | 38,1 1,50 | 17,5 0,69 | 13 0,51 | kg 0,35 | lb 2,70 | GE2SOC0L011A000 | GE2SOC0L044A000 |
| GEFS3 | 20 | MPa 35<br>Psi 5075 | mm 57 25,4 149 62,5   | inch 2,24 1,00 5,87 2,46 | 14,35 0,56 3,15     | 80,1 1,93 7,09 | 49 4,29 | 180 0,11 | 109 2,79 | 2,79 4,29 | 0,11      | M10 | 38,1 1,50  | 31,75 1,25 | 3,94 0,16 | 6,25 0,25 | 6 0,24 | 50 1,97 | 47,6 1,87 | 22,2 0,87 | 19 0,75 | kg 0,55 | lb 5,18 | GE2SOC1L011A000 | GE2SOC1L044A000 |
| GEFS3 | 25 | MPa 35<br>Psi 5075 | mm 65 29,5 163 66,5   | inch 2,56 1,16 6,42 2,62 | 14,35 0,56 3,50     | 89 2,17 7,09   | 55 4,65 | 180 0,11 | 118 2,79 | 2,79 4,65 | 0,11      | M10 | 44,45 1,75 | 39,62 1,56 | 3,94 0,16 | 6,25 0,25 | 6 0,24 | 50 1,97 | 52,4 2,06 | 26,2 1,03 | 25 0,98 | kg 0,55 | lb 7,09 | GE2SOC2L011A000 | GE2SOC2L044A000 |

Size only for carbon steel valves with fixing holes included.

**GEFS6**

| TYPE  | DN | PN                 | A   | B   | C   | D                   | E                                  | F | G | H | I | L | ØK1 | ØM | ØP | Q | ØK* | W* | X* | X1 | Y1 | ØLW | SW | WEIGHT | ITEM CODE |    |  |
|-------|----|--------------------|---|-----|---|---------------------|------------------------------------|---|---|---|---|---|-----|----|----|---|-----|----|----|----|----|-----|----|--------|-----------|----|--|
|       |    |                    |   |     |   |                     |                                    |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        | CS        | SS |  |
|       |    |                    |   |     |   |                     |                                    |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        |           |    |  |
| GEFS6 | 13 | MPa 42<br>Psi 6090 | mm 43 19,7 135,8 48,4 11,1 61,5 37 110 101 2,79<br>inch 1,69 0,77 5,34 1,91 0,44 2,42 1,46 4,33 3,98 0,11 | M8  | 31,75 25,4 3,94 5,25 5 36 40,5 18,2 13<br>1,25 1,00 0,16 0,21 0,20 1,42 1,59 0,72 0,51  | kg 1,217<br>lb 2,68 | GE2SFC6G011A000<br>GE2SFC6G044A000 |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        |           |    |  |
| GEFS6 | 20 | MPa 42<br>Psi 6090 | mm 57 25,4 155 62,5 14,35 80,1 49 180 109 2,79<br>inch 2,24 1,00 6,10 2,46 0,56 3,15 1,93 7,09 4,29 0,11  | M10 | 41,3 31,75 3,94 6,25 6 50 50,8 23,8 19<br>1,63 1,25 0,16 0,25 0,24 1,97 2,00 0,94 0,75  | kg 2,273<br>lb 5,01 | GE2SFC74011A000<br>GE2SFC74044A000 |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        |           |    |  |
| GEFS6 | 25 | MPa 42<br>Psi 6090 | mm 65 29,5 173 66,5 14,35 89 55 180 118 2,79<br>inch 2,56 1,16 6,81 2,62 0,56 3,50 2,17 7,09 4,65 0,11    | M12 | 47,63 39,62 3,94 6,25 6 50 57,2 27,8 25<br>1,88 1,56 0,16 0,25 0,24 1,97 2,25 1,09 0,98 | kg 3,309<br>lb 7,30 | GE2SFC83011A000<br>GE2SFC83044A000 |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        |           |    |  |

■ Size only for carbon steel valves with fixing holes included.

**GEFS6 U**

| TYPE  | DN | PN                 | A   | B   | C  | D                   | E                                  | F | G | H | I | L | ØK1 | ØM | ØP | Q | ØK* | W* | X* | X1 | Y1 | ØLW | SW | WEIGHT | ITEM CODE |    |  |
|-------|----|--------------------|---|-----|--|---------------------|------------------------------------|---|---|---|---|---|-----|----|----|---|-----|----|----|----|----|-----|----|--------|-----------|----|--|
|       |    |                    |   |     |  |                     |                                    |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        | CS        | SS |  |
|       |    |                    |   |     |  |                     |                                    |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        |           |    |  |
| GEFS6 | 13 | MPa 42<br>Psi 6090 | mm 43 19,7 135,8 48,4 11,1 61,5 37 110 101 2,79<br>inch 1,69 0,77 5,34 1,91 0,44 2,42 1,46 4,33 3,98 0,11 | UNC | 1,25 1,00 0,16 0,21 0,20 1,42 1,59 0,72 0,51 | kg 1,217<br>lb 2,68 | GE2SOC6G011A000<br>GE2SOC6G044A000 |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        |           |    |  |
| GEFS6 | 20 | MPa 42<br>Psi 6090 | mm 57 25,4 155 62,5 14,35 80,1 49 180 109 2,79<br>inch 2,24 1,00 6,10 2,46 0,56 3,15 1,93 7,09 4,29 0,11  | UNC | 1,63 1,25 0,16 0,25 0,24 1,97 2,00 0,94 0,75 | kg 2,273<br>lb 5,01 | GE2SOC74011A000<br>GE2SOC74044A000 |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        |           |    |  |
| GEFS6 | 25 | MPa 42<br>Psi 6090 | mm 65 29,5 173 66,5 14,35 89 55 180 118 2,79<br>inch 2,56 1,16 6,81 2,62 0,56 3,50 2,17 7,09 4,65 0,11    | UNC | 1,88 1,56 0,16 0,25 0,24 1,97 2,25 1,09 0,98 | kg 3,309<br>lb 7,30 | GE2SOC83011A000<br>GE2SOC83044A000 |   |   |   |   |   |     |    |    |   |     |    |    |    |    |     |    |        |           |    |  |

■ Size only for carbon steel valves with fixing holes included.



# GB1

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1

### CS Carbon Steel


- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN420
- Temp range: from -30°C to +100°C (body -46°C)

### SS Stainless Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN420
- Temp range: from -30°C to +100°C (body -46°C)

DNV Certified

### STANDARD COMPOSITION OF VALVE

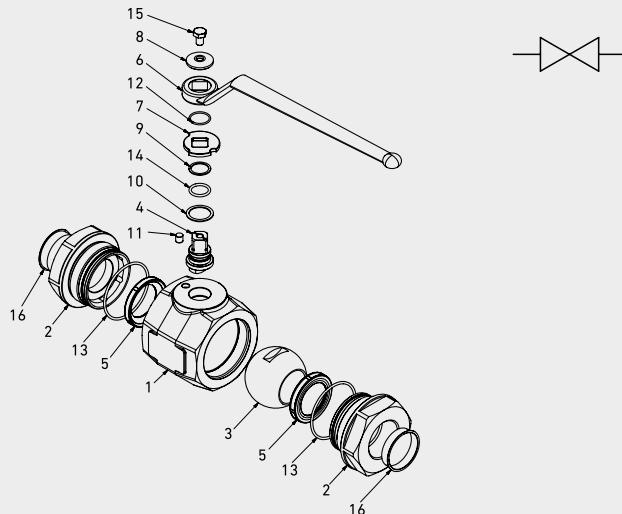

| POS | DESCRIPTION    | Q.TY | CS           | SS              |
|-----|----------------|------|--------------|-----------------|
|     |                |      | Carbon Steel | Stainless Steel |
| 1   | Body           | 1    | 1,0570       | 1,4404          |
| 2   | Adapter        | 2    | 1,0570       | 1,4404          |
| 3   | Ball           | 1    | 1,0737       | 1,4404          |
| 4   | Stem           | 1    | 1,0737       | 1,4301          |
| 5   | Ball seat      | 2    | POM          | POM             |
| 6   | Handle         | 1    | 1,0116       | 1,0116          |
| 7   | Washer         | 1    | 1,0116       | 1,4031          |
| 8   | Washer         | 1    | 1,0737       | 1,4031          |
| 9   | Back-up        | 1    | PTFE         | PTFE            |
| 10  | Stem ring      | 1    | POM          | POM             |
| 11  | Pin            | 1    | 1,0737       | 1,4404          |
| 12  | Seeger         | 1    | 1,4301       | 1,4301          |
| 13  | Adapter o-ring | 4    | NBR          | NBR             |
| 14  | Stem o-ring    | 1    | NBR          | NBR             |
| 15  | Screw          | 1    | ISO4017 8.8  | ISO4017 A2      |
| 16  | Caps           | 2    | PVC          | PVC             |



## CODE DESCRIPTION STRUCTURE

**GB1 G 1 1/2 DN32 L L 1 1 A B**

Type and way of valve \_\_\_\_\_

GB1 2-way

Ends \_\_\_\_\_

|          |          |         |
|----------|----------|---------|
| GAS DIN/ | NPT ANSI | SAE     |
| ISO 228  | /ASME    | J1926-1 |
| BSP      | B1.20.1  |         |
| G 1 1/4  | N 1 1/4  | SAE20   |
| G 1 1/2  | N 1 1/2  | SAE24   |
| G 2      | N 2      | SAE32   |

Size \_\_\_\_\_

from DN32 to DN50

Body Material \_\_\_\_\_

- L = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- L = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN42 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device


For further special requests please consult our technical/commercial service.

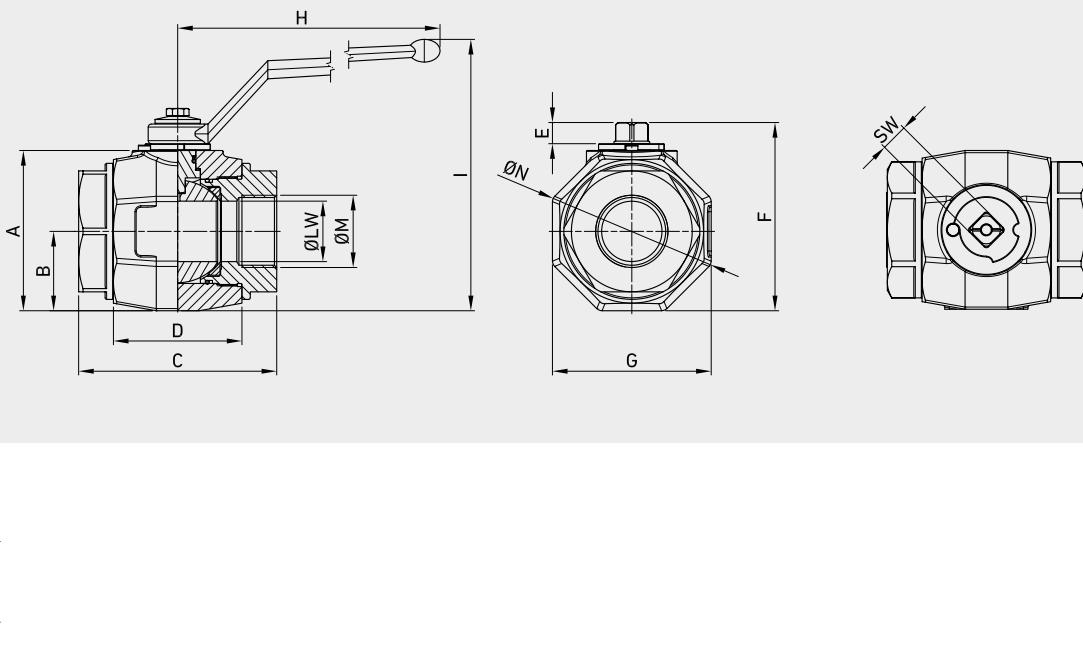

## ■ GB1 DIN/ISO 228 BSP


**CS** Carbon Steel      **SS** Stainless Steel

| TYPE        | DN | PN       | A         | B    | C    | D     | E    | F     | ØN   | H     | I     | ØM  | G    | SW   | ØLW  | WEIGHT   | ITEM CODE       |
|-------------|----|----------|-----------|------|------|-------|------|-------|------|-------|-------|-----|------|------|------|----------|-----------------|
| GB1 G 1 1/4 | 32 | MPa 42   | mm 89     | 42,5 | 115  | 75    | 14   | 107,5 | 92   | 310   | 162,5 | G 1 | 85   | 17   | 32   | kg 4,489 | GB1GGT6G0L1A000 |
|             |    | Psi 6090 | inch 3,50 | 1,67 | 4,53 | 2,95  | 0,55 | 4,23  | 3,62 | 12,20 | 6,40  | 1/4 | 3,35 | 0,67 | 1,26 | lb 9,90  | GB1GGT6G044A000 |
| GB1 G 1 1/2 | 40 | MPa 42   | mm 106    | 52,5 | 131  | 85    | 14   | 124,5 | 113  | 310   | 179,5 | G 1 | 105  | 17   | 40   | kg 6,750 | GB1GGT7G0L1A000 |
|             |    | Psi 6090 | inch 4,17 | 2,07 | 5,16 | 3,35  | 0,55 | 4,90  | 4,45 | 12,20 | 7,07  | 1/2 | 4,13 | 0,67 | 1,57 | lb 14,88 | GB1GGT7G044A000 |
| GB1 G 2     | 50 | MPa 42   | mm 115,5  | 58,5 | 140  | 97,85 | 14   | 134   | 126  | 310   | 189   | G 2 | 117  | 17   | 50   | kg 8,708 | GB1GGT8G0L1A000 |
|             |    | Psi 6090 | inch 4,55 | 2,30 | 5,51 | 3,85  | 0,55 | 5,28  | 4,96 | 12,20 | 7,44  |     | 4,61 | 0,67 | 1,97 | lb 19,20 | GB1GGT8G044A000 |



## GB1 ANSI/ASME B1.20.1 NPT

| TYPE        | DN | PN       |           |      |      |       |      |       |      |       |       |     |      |      |      | ITEM CODE | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-------------|----|----------|-----------|------|------|-------|------|-------|------|-------|-------|-----|------|------|------|-----------|--------------------|-----------------------|
|             |    |          | A         | B    | C    | D     | E    | F     | ØN   | H     | I     | ØM  | G    | SW   | ØLW  | WEIGHT    |                    |                       |
| GB1 N 1 1/4 | 32 | MPa 42   | mm 89     | 42,5 | 115  | 75    | 14   | 107,5 | 92   | 310   | 162,5 | N 1 | 85   | 17   | 32   | kg 4,489  | GB1NNNT6G0L1A000   | GB1NNNT6G044A000      |
|             |    | Psi 6090 | inch 3,50 | 1,67 | 4,53 | 2,95  | 0,55 | 4,23  | 3,62 | 12,20 | 6,40  | 1/4 | 3,35 | 0,67 | 1,26 | lb 9,90   |                    |                       |
| GB1 N 1 1/2 | 40 | MPa 42   | mm 106    | 52,5 | 131  | 85    | 14   | 124,5 | 113  | 310   | 179,5 | N 1 | 105  | 17   | 40   | kg 6,774  | GB1NNNT7G0L1A000   | GB1NNNT7G044A000      |
|             |    | Psi 6090 | inch 4,17 | 2,07 | 5,16 | 3,35  | 0,55 | 4,90  | 4,45 | 12,20 | 7,07  | 1/2 | 4,13 | 0,67 | 1,57 | lb 14,93  |                    |                       |
| GB1 N 2     | 50 | MPa 42   | mm 115,5  | 58,5 | 140  | 97,85 | 14   | 134   | 126  | 310   | 189   | N 2 | 117  | 17   | 50   | kg 8,708  | GB1NNNT8G0L1A000   | GB1NNNT8G044A000      |
|             |    | Psi 6090 | inch 4,55 | 2,30 | 5,51 | 3,85  | 0,55 | 5,28  | 4,96 | 12,20 | 7,44  |     | 4,61 | 0,67 | 1,97 | lb 19,20  |                    |                       |



## GB1 SAE J1926-1

| TYPE      | DN | PN       |           |      |      |       |      |       |      |       |       |       |     |      |      | ITEM CODE | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----------|----|----------|-----------|------|------|-------|------|-------|------|-------|-------|-------|-----|------|------|-----------|--------------------|-----------------------|
|           |    |          | A         | B    | C    | D     | E    | F     | ØN   | H     | I     | ØM    | G   | SW   | ØLW  | WEIGHT    |                    |                       |
| GB1 SAE20 | 32 | MPa 42   | mm 89     | 42,5 | 115  | 75    | 14   | 107,5 | 92   | 310   | 162,5 | 1 5/8 | 85  | 17   | 32   | kg 4,489  | GB1EEE5G0L1A000    | GB1EEE5G044A000       |
|           |    | Psi 6090 | inch 3,50 | 1,67 | 4,53 | 2,95  | 0,55 | 4,23  | 3,62 | 12,20 | 6,40  |       | UNF | 3,35 | 0,67 | 1,26      | lb 9,90            |                       |
| GB1 SAE24 | 40 | MPa 42   | mm 106    | 52,5 | 131  | 85    | 14   | 124,5 | 113  | 310   | 179,5 | 1 7/8 | 105 | 17   | 40   | kg 6,822  | GB1EEE6G0L1A000    | GB1EEE6G044A000       |
|           |    | Psi 6090 | inch 4,17 | 2,07 | 5,16 | 3,35  | 0,55 | 4,90  | 4,45 | 12,20 | 7,07  |       | UNF | 4,13 | 0,67 | 1,57      | lb 15,04           |                       |
| GB1 SAE32 | 50 | MPa 42   | mm 115,5  | 58,5 | 140  | 97,85 | 14   | 134   | 126  | 310   | 189   | 1 1/2 | 117 | 17   | 50   | kg 8,708  | GB1EEE7G0L1A000    | GB1EEE7G044A000       |
|           |    | Psi 6090 | inch 4,55 | 2,30 | 5,51 | 3,85  | 0,55 | 5,28  | 4,96 | 12,20 | 7,44  |       | UNF | 4,61 | 0,67 | 1,97      | lb 19,20           |                       |



# GB3

## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1



### CS Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT
- Pressure: up to PN350
- Temp range: from -20°C to +100°C



### SS Stainless Steel

- Type: ball valve 3 way
- Sizes: from DN32 up to DN50
- Ends: BSP-NPT
- Pressure: up to PN350
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

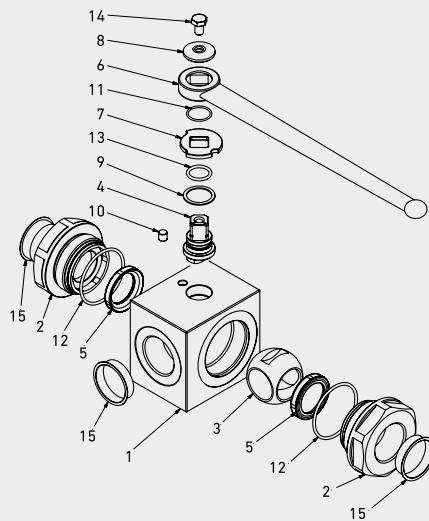

**WARNING!**  
Pressure inlet only  
from center port 1



| POS | DESCRIPTION    | Q.TY | CS           | SS         |
|-----|----------------|------|--------------|------------|
|     |                |      | Carbon Steel | MATERIAL   |
| 1   | Body           | 1    | 1,0570       | 1,4404     |
| 2   | Adapter        | 2    | 1,0570       | 1,4404     |
| 3   | Ball           | 1    | 1,0737       | 1,4404     |
| 4   | Stem           | 1    | 1,0737       | 1,4404     |
| 5   | Ball seat      | 2    | POM          | POM        |
| 6   | Handle         | 1    | 1,0116       | 1,0116     |
| 7   | Washer         | 1    | 1,0116       | 1,4301     |
| 8   | Washer         | 1    | 1,0116       | 1,4301     |
| 9   | Stem ring      | 1    | POM          | POM        |
| 10  | Pin            | 1    | 1,0737       | 1,4301     |
| 11  | Seeger         | 1    | 1,4301       | 1,4301     |
| 12  | Adapter o-ring | 4    | NBR          | NBR        |
| 13  | Stem o-ring    | 1    | NBR          | NBR        |
| 14  | Screw          | 1    | ISO4017 8.8  | ISO4017 A2 |
| 15  | Caps           | 3    | PVC          | PVC        |



## CODE DESCRIPTION STRUCTURE

**GB3 G1 1/2 DN40 2 2 1 1 A B**

Type and way of valve \_\_\_\_\_

GB3 3-way

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G1 1/4 N1 1/4

G1 1/2 N1 1/2

G2 N2

Size \_\_\_\_\_

from DN32 to DN50

Body Material \_\_\_\_\_

● 2 = 1,0570

● 4 = 1,4404

Adapter material \_\_\_\_\_

● 2 = 1,0570

● 4 = 1,4404

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

● 4 = 1,4404

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

● 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request


- Reduced bore
- Special threads
- Pressure class up to PN35 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

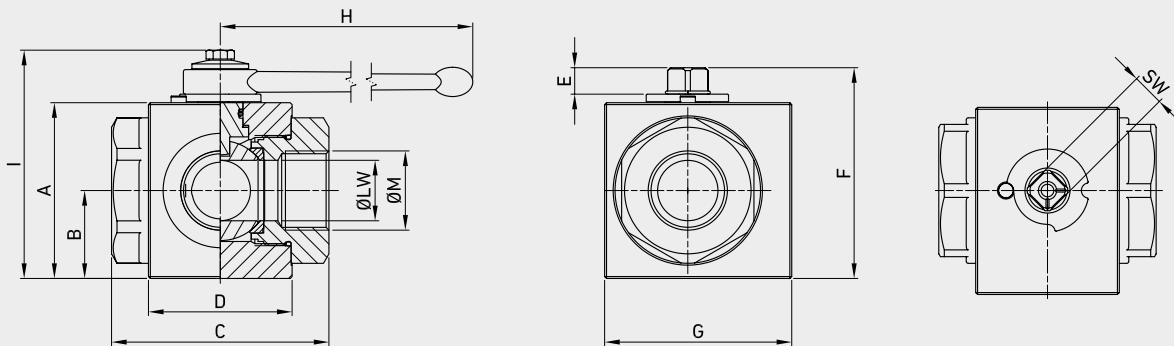



### GB3 DIN/ISO 228 BSP

| TYPE       | DN | PN                 | A                   | B            | C           | D          | E            | F             | G           | H            | I             | ØM      | SW         | ØLW        | WEIGHT                | ITEM CODE       |                 |
|------------|----|--------------------|---------------------|--------------|-------------|------------|--------------|---------------|-------------|--------------|---------------|---------|------------|------------|-----------------------|-----------------|-----------------|
|            |    |                    |                     |              |             |            |              |               |             |              |               |         |            |            |                       | CS              | SS              |
|            |    |                    |                     |              |             |            |              |               |             |              |               |         |            |            |                       | Carbon Steel    | Stainless Steel |
| GB3 G1 1/4 | 32 | MPa 35<br>Psi 5075 | mm 93<br>inch 3,66  | 46,5<br>1,83 | 115<br>4,53 | 75<br>2,95 | 13,5<br>0,53 | 111,5<br>4,39 | 99<br>3,90  | 300<br>11,81 | 120,5<br>4,74 | G 1 1/4 | 17<br>0,67 | 32<br>1,26 | kg 5,725<br>lb 12,62  | GB3GGT63021A000 | GB3GGT63044A000 |
| GB3 G1 1/2 | 40 | MPa 35<br>Psi 5075 | mm 107<br>inch 4,21 | 53,5<br>2,11 | 131<br>5,16 | 85<br>3,35 | 13,5<br>0,53 | 125,5<br>4,94 | 115<br>4,53 | 300<br>11,81 | 134,5<br>5,30 | G 1 1/2 | 17<br>0,67 | 40<br>1,57 | kg 8,632<br>lb 19,03  | GB3GGT73021A000 | GB3GGT73044A000 |
| GB3 G 2    | 50 | MPa 35<br>Psi 5075 | mm 114<br>inch 4,49 | 57<br>2,24   | 140<br>5,51 | 98<br>3,86 | 13,5<br>0,53 | 132,5<br>5,22 | 128<br>5,04 | 300<br>11,81 | 141,5<br>5,57 | G 2     | 17<br>0,67 | 50<br>1,97 | kg 10,607<br>lb 23,38 | GB3GGT83021A000 | GB3GGT83044A000 |



### GB3 ANSI/ASME B1.20.1 NPT


| TYPE        | DN | PN                 | A                   | B            | C           | D          | E            | F             | G           | H            | I             | ØM      | SW         | ØLW        | WEIGHT                | ITEM CODE       |                 |
|-------------|----|--------------------|---------------------|--------------|-------------|------------|--------------|---------------|-------------|--------------|---------------|---------|------------|------------|-----------------------|-----------------|-----------------|
|             |    |                    |                     |              |             |            |              |               |             |              |               |         |            |            |                       | CS              | SS              |
|             |    |                    |                     |              |             |            |              |               |             |              |               |         |            |            |                       | Carbon Steel    | Stainless Steel |
| GB3 N 1 1/4 | 32 | MPa 35<br>Psi 5075 | mm 93<br>inch 3,66  | 46,5<br>1,83 | 115<br>4,53 | 75<br>2,95 | 13,5<br>0,53 | 111,5<br>4,39 | 99<br>3,90  | 300<br>11,81 | 120,5<br>4,74 | N 1 1/4 | 17<br>0,67 | 32<br>1,26 | kg 5,725<br>lb 12,62  | GB3NNT63021A000 | GB3NNT63044A000 |
| GB3 N 1 1/2 | 40 | MPa 35<br>Psi 5075 | mm 107<br>inch 4,21 | 53,5<br>2,11 | 131<br>5,16 | 85<br>3,35 | 13,5<br>0,53 | 125,5<br>4,94 | 115<br>4,53 | 300<br>11,81 | 134,5<br>5,30 | N 1 1/2 | 17<br>0,67 | 40<br>1,57 | kg 8,632<br>lb 19,03  | GB3NNT73021A000 | GB3NNT73044A000 |
| GB3 N 2     | 50 | MPa 35<br>Psi 5075 | mm 114<br>inch 4,49 | 57<br>2,24   | 140<br>5,51 | 98<br>3,86 | 13,5<br>0,53 | 132,5<br>5,22 | 128<br>5,04 | 300<br>11,81 | 141,5<br>5,57 | N 2     | 17<br>0,67 | 50<br>1,97 | kg 10,607<br>lb 23,38 | GB3NNT83021A000 | GB3NNT83044A000 |

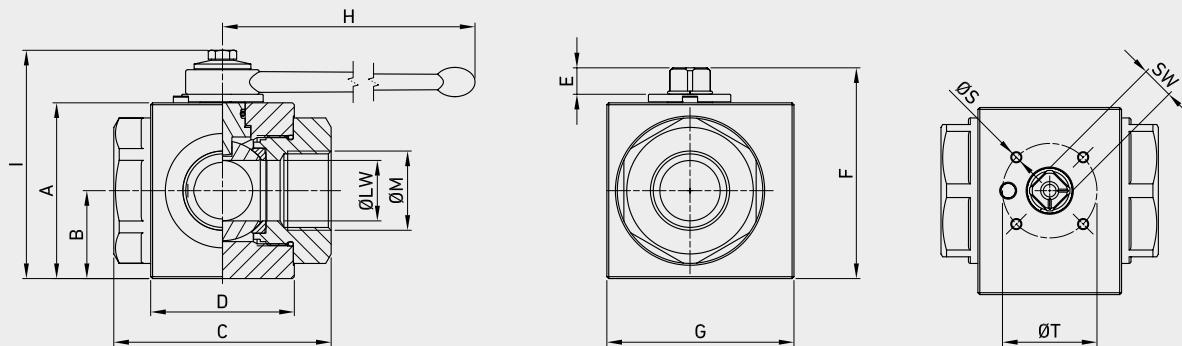

## GB3 DIN/ISO 228 BSP

Assembling threads per ISO5211

| TYPE        | DN | PN                 | A                   | B            | C           | D          | E            | F             | G           | H            | I             | ØM         | ØS         | ØT        | ISO5211    | SW         | ØLW                   | WEIGHT          | ITEM CODE       | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-------------|----|--------------------|---------------------|--------------|-------------|------------|--------------|---------------|-------------|--------------|---------------|------------|------------|-----------|------------|------------|-----------------------|-----------------|-----------------|--------------------|-----------------------|
| GB3 G 1 1/4 | 32 | MPa 35<br>Psi 5075 | mm 93<br>inch 3,66  | 46,5<br>1,83 | 115<br>4,53 | 75<br>2,95 | 13,5<br>0,53 | 111,5<br>4,39 | 99<br>3,90  | 300<br>11,81 | 120,5<br>4,74 | G 1<br>1/4 | M6<br>1,97 | 50<br>F05 | 17<br>0,67 | 32<br>1,26 | kg 5,725<br>lb 12,62  | GB3GGT63021AF50 | GB3GGT63044AF50 |                    |                       |
| GB3 G 1 1/2 | 40 | MPa 35<br>Psi 5075 | mm 107<br>inch 4,21 | 53,5<br>2,11 | 131<br>5,16 | 85<br>3,35 | 13,5<br>0,53 | 125,5<br>4,94 | 115<br>4,53 | 300<br>11,81 | 134,5<br>5,30 | G 1<br>1/2 | M6<br>1,97 | 50<br>F05 | 17<br>0,67 | 40<br>1,57 | kg 8,632<br>lb 19,03  | GB3GGT73021AF50 | GB3GGT73044AF50 |                    |                       |
| GB3 G 2     | 50 | MPa 35<br>Psi 5075 | mm 114<br>inch 4,49 | 57<br>2,24   | 140<br>5,51 | 98<br>3,86 | 13,5<br>0,53 | 132,5<br>5,22 | 128<br>5,04 | 300<br>11,81 | 141,5<br>5,57 | G 2<br>N 2 | M6<br>1,97 | 50<br>F05 | 17<br>0,67 | 50<br>1,97 | kg 10,607<br>lb 23,38 | GB3GGT83021AF50 | GB3GGT83044AF50 |                    |                       |



## GB3 ANSI/ASME B1.20.1 NPT

Assembling threads per ISO5211

| TYPE        | DN | PN                 | A                   | B            | C           | D          | E            | F             | G           | H            | I             | ØM         | ØS         | ØT        | ISO5211    | SW         | ØLW                   | WEIGHT          | ITEM CODE       | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-------------|----|--------------------|---------------------|--------------|-------------|------------|--------------|---------------|-------------|--------------|---------------|------------|------------|-----------|------------|------------|-----------------------|-----------------|-----------------|--------------------|-----------------------|
| GB3 N 1 1/4 | 32 | MPa 35<br>Psi 5075 | mm 93<br>inch 3,66  | 46,5<br>1,83 | 115<br>4,53 | 75<br>2,95 | 13,5<br>0,53 | 111,5<br>4,39 | 99<br>3,90  | 300<br>11,81 | 120,5<br>4,74 | N 1<br>1/4 | M6<br>1,97 | 50<br>F05 | 17<br>0,67 | 32<br>1,26 | kg 5,725<br>lb 12,62  | GB3NNT63021AF50 | GB3NNT63044AF50 |                    |                       |
| GB3 N 1 1/2 | 40 | MPa 35<br>Psi 5075 | mm 107<br>inch 4,21 | 53,5<br>2,11 | 131<br>5,16 | 85<br>3,35 | 13,5<br>0,53 | 125,5<br>4,94 | 115<br>4,53 | 300<br>11,81 | 134,5<br>5,30 | N 1<br>1/2 | M6<br>1,97 | 50<br>F05 | 17<br>0,67 | 40<br>1,57 | kg 8,632<br>lb 19,03  | GB3NNT73021AF50 | GB3NNT73044AF50 |                    |                       |
| GB3 N 2     | 50 | MPa 35<br>Psi 5075 | mm 114<br>inch 4,49 | 57<br>2,24   | 140<br>5,51 | 98<br>3,86 | 13,5<br>0,53 | 132,5<br>5,22 | 128<br>5,04 | 300<br>11,81 | 141,5<br>5,57 | N 2<br>N 2 | M6<br>1,97 | 50<br>F05 | 17<br>0,67 | 50<br>1,97 | kg 10,607<br>lb 23,38 | GB3NNT83021AF50 | GB3NNT83044AF50 |                    |                       |



# GBF

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2


### Carbon Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2,  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C (body -46°C)

### Stainless Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2,  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C (body -46°C)

### STANDARD COMPOSITION OF VALVE

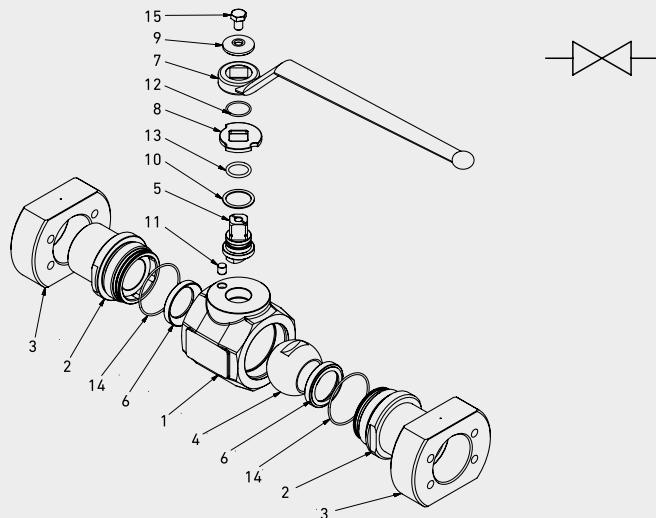

| POS | DESCRIPTION    | Q.TY | CS           | SS       |                 |
|-----|----------------|------|--------------|----------|-----------------|
|     |                |      | Carbon Steel | MATERIAL | Stainless Steel |
| 1   | Body           | 1    |              | 1,0570   | 1,4404          |
| 2   | Adapter        | 2    |              | 1,0570   | 1,4404          |
| 3   | Ball           | 1    |              | 1,0737   | 1,4404          |
| 4   | Stem           | 1    |              | 1,0737   | 1,4301          |
| 5   | Ball seat      | 2    | POM          |          | POM             |
| 6   | Handle         | 1    | 1,0116       |          | 1,0116          |
| 7   | Washer         | 1    | 1,0116       |          | 1,4301          |
| 8   | Washer         | 1    | 1,0737       |          | 1,4301          |
| 9   | Flange         | 2    | 1,0570       |          | 1,4044          |
| 10  | Stem ring      | 1    | POM          |          | POM             |
| 11  | Pin            | 1    | 1,0737       |          | 1,4301          |
| 12  | Seeger         | 1    | 1,4301       |          | 1,4301          |
| 13  | Adapter o-ring | 4    | NBR          |          | NBR             |
| 14  | Stem o-ring    | 1    | NBR          |          | NBR             |
| 15  | Screw          | 1    | ISO4017 8.8  |          | ISO4017 A2      |



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GB 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension   dimension  
of pressure   of pressure  
(PSI) F3      (PSI) F6

S3000      S6000

Size \_\_\_\_\_

from DN32 to DN50

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN5000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

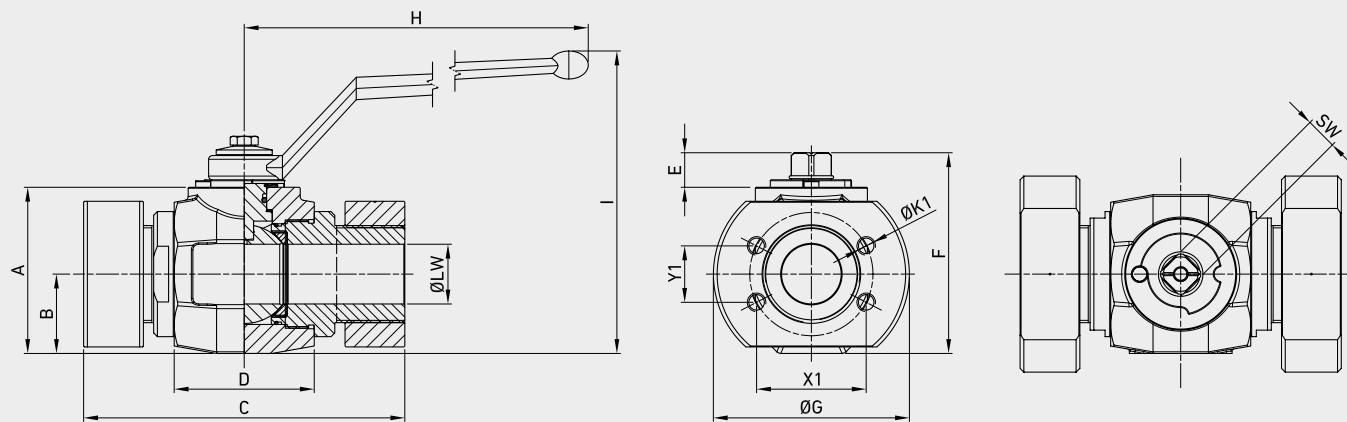

### GBF SAE J518 S3000 - F61

| TYPE | DN | PN       |           | A    | B     | C    | D    | E     | F    | ØG    | H    | I   | ØK1  | X1   | Y1   | SW   | ØLW       | WEIGHT          | ITEM CODE       |                 |
|------|----|----------|-----------|------|-------|------|------|-------|------|-------|------|-----|------|------|------|------|-----------|-----------------|-----------------|-----------------|
|      |    |          |           |      |       |      |      |       |      |       |      |     |      |      |      |      |           |                 | CS              | SS              |
|      |    |          |           |      |       |      |      |       |      |       |      |     |      |      |      |      |           |                 | Carbon Steel    | Stainless Steel |
| GBF3 | 32 | MPa 28   | mm 89     | 42,5 | 172   | 75   | 14   | 107,5 | 105  | 310   | 162  | M10 | 58,7 | 30,2 | 17   | 32   | kg 8,102  | GB2FFC3L021A000 | GB2FFC3L044A000 |                 |
|      |    | Psi 4060 | inch 3,50 | 1,67 | 6,77  | 2,95 | 0,55 | 4,23  | 4,13 | 12,20 | 6,38 |     | 2,31 | 1,19 | 0,67 | 1,26 | lb 17,86  |                 |                 |                 |
| GBF3 | 40 | MPa 21   | mm 106    | 52,5 | 176,5 | 85   | 14   | 124,5 | 120  | 310   | 180  | M12 | 69,8 | 35,7 | 17   | 40   | kg 11,142 | GB2FFC4L021A000 | GB2FFC4L044A000 |                 |
|      |    | Psi 3045 | inch 4,17 | 2,07 | 6,95  | 3,35 | 0,55 | 4,90  | 4,72 | 12,20 | 7,09 |     | 2,75 | 1,41 | 0,67 | 1,57 | lb 24,56  |                 |                 |                 |
| GBF3 | 50 | MPa 21   | mm 115,5  | 58,5 | 196   | 98   | 14   | 134   | 145  | 310   | 190  | M12 | 77,8 | 42,9 | 17   | 50   | kg 15,343 | GB2FFC5L021A000 | GB2FFC5L044A000 |                 |
|      |    | Psi 3045 | inch 4,55 | 2,30 | 7,72  | 3,86 | 0,55 | 5,28  | 5,71 | 12,20 | 7,48 |     | 3,06 | 1,69 | 0,67 | 1,97 | lb 33,83  |                 |                 |                 |

### GBF SAE J518 S3000 UNC - F61

| TYPE | DN | PN       |           | A    | B     | C    | D    | E     | F    | ØG    | H    | I       | ØK1  | X1   | Y1   | SW   | ØLW       | WEIGHT          | ITEM CODE       |                 |
|------|----|----------|-----------|------|-------|------|------|-------|------|-------|------|---------|------|------|------|------|-----------|-----------------|-----------------|-----------------|
|      |    |          |           |      |       |      |      |       |      |       |      |         |      |      |      |      |           |                 | CS              | SS              |
|      |    |          |           |      |       |      |      |       |      |       |      |         |      |      |      |      |           |                 | Carbon Steel    | Stainless Steel |
| GBF3 | 32 | MPa 28   | mm 89     | 42,5 | 172   | 75   | 14   | 107,5 | 98   | 310   | 163  | 7/16-14 | 58,7 | 30,2 | 17   | 32   | kg 8,102  | GB2FUC3L021A000 | GB2FUC3L044A000 |                 |
|      |    | Psi 4060 | inch 3,50 | 1,67 | 6,77  | 2,95 | 0,55 | 4,23  | 3,86 | 12,20 | 6,42 | UNC     | 2,31 | 1,19 | 0,67 | 1,26 | lb 17,86  |                 |                 |                 |
| GBF3 | 40 | MPa 21   | mm 106    | 52,5 | 176,5 | 85   | 14   | 124,5 | 113  | 310   | 180  | 1/2-13  | 69,8 | 35,7 | 17   | 40   | kg 11,142 | GB2FUC4L021A000 | GB2FUC4L044A000 |                 |
|      |    | Psi 3045 | inch 4,17 | 2,07 | 6,95  | 3,35 | 0,55 | 4,90  | 4,45 | 12,20 | 7,09 | UNC     | 2,75 | 1,41 | 0,67 | 1,57 | lb 24,56  |                 |                 |                 |
| GBF3 | 50 | MPa 21   | mm 115,5  | 58,5 | 196   | 98   | 14   | 134   | 123  | 310   | 190  | 1/2-13  | 77,8 | 42,9 | 17   | 50   | kg 15,343 | GB2FUC5L021A000 | GB2FUC5L044A000 |                 |
|      |    | Psi 3045 | inch 4,55 | 2,30 | 7,72  | 3,86 | 0,55 | 5,28  | 4,84 | 12,20 | 7,48 | UNC     | 3,06 | 1,69 | 0,67 | 1,97 | lb 33,83  |                 |                 |                 |

**GBF SAE J518 S6000 - F62**

| TYPE | DN | PN  |      | A    | B     | C    | D     | E    | F    | ØG    | H    | I     | ØK1  | X1  | Y1   | SW   | ØLW  | WEIGHT | ITEM CODE |        |                 |                 |
|------|----|-----|------|------|-------|------|-------|------|------|-------|------|-------|------|-----|------|------|------|--------|-----------|--------|-----------------|-----------------|
|      |    | MPa | 42   | mm   | 89    | 42,5 | 172   | 75   | 14   | 107,5 | 98   | 310   | 160  | M12 | 66,7 | 31,8 | 17   | 32     | kg        | 8,102  | GB2FFC93021A000 | GB2FFC93044A000 |
| GBF6 | 32 | Psi | 6090 | inch | 3,50  | 1,67 | 6,77  | 2,95 | 0,55 | 4,23  | 3,86 | 12,20 | 6,30 | M16 | 2,63 | 1,25 | 0,67 | 1,26   | lb        | 17,86  | GB2FFCA3021A000 | GB2FFCA3044A000 |
|      |    | MPa | 42   | mm   | 106   | 52,5 | 176,5 | 85   | 14   | 124,5 | 113  | 310   | 180  |     | 79,4 | 36,5 | 17   | 40     | kg        | 11,142 |                 |                 |
| GBF6 | 40 | Psi | 6090 | inch | 4,17  | 2,07 | 6,95  | 3,35 | 0,55 | 4,90  | 4,45 | 12,20 | 7,09 | M20 | 3,13 | 1,44 | 0,67 | 1,57   | lb        | 24,56  | GB2FFCB3021A000 | GB2FFCB3044A000 |
|      |    | MPa | 42   | mm   | 115,5 | 58,5 | 196   | 98   | 14   | 134   | 123  | 310   | 190  |     | 96,8 | 44,5 | 17   | 50     | kg        | 15,343 |                 |                 |
| GBF6 | 50 | Psi | 6090 | inch | 4,55  | 2,30 | 7,72  | 3,86 | 0,55 | 5,28  | 4,84 | 12,20 | 7,48 | UNC | 3,81 | 1,75 | 0,67 | 1,97   | lb        | 33,83  | GB2FFCB3021A000 | GB2FFCB3044A000 |

**GBF SAE J518 S6000 UNC - F62**

| TYPE | DN | PN  |      | A    | B     | C    | D     | E    | F    | ØG    | H    | I     | ØK1  | X1     | Y1     | SW   | ØLW  | WEIGHT | ITEM CODE |        |                 |                 |
|------|----|-----|------|------|-------|------|-------|------|------|-------|------|-------|------|--------|--------|------|------|--------|-----------|--------|-----------------|-----------------|
|      |    | MPa | 42   | mm   | 89    | 42,5 | 172   | 75   | 14   | 107,5 | 98   | 310   | 163  | 1/2-13 | 66,7   | 31,8 | 17   | 32     | kg        | 8,102  | GB2FUC93021A000 | GB2FUC93044A000 |
| GBF6 | 32 | Psi | 6090 | inch | 3,50  | 1,67 | 6,77  | 2,95 | 0,55 | 4,23  | 3,86 | 12,20 | 6,42 | UNC    | 2,63   | 1,25 | 0,67 | 1,26   | lb        | 17,86  | GB2FUCA3021A000 | GB2FUCA3044A000 |
|      |    | MPa | 42   | mm   | 106   | 52,5 | 176,5 | 85   | 14   | 124,5 | 113  | 310   | 180  |        | 5/8-11 | 79,4 | 36,5 | 17     | 40        | kg     | 11,142          |                 |
| GBF6 | 40 | Psi | 6090 | inch | 4,17  | 2,07 | 6,95  | 3,35 | 0,55 | 4,90  | 4,45 | 12,20 | 7,09 | UNC    | 3,13   | 1,44 | 0,67 | 1,57   | lb        | 24,56  | GB2FUCB3021A000 | GB2FUCB3044A000 |
|      |    | MPa | 42   | mm   | 115,5 | 58,5 | 196   | 98   | 14   | 134   | 123  | 310   | 190  | 3/4-10 | 96,8   | 44,5 | 17   | 50     | kg        | 15,343 |                 |                 |
| GBF6 | 50 | Psi | 6090 | inch | 4,55  | 2,30 | 7,72  | 3,86 | 0,55 | 5,28  | 4,84 | 12,20 | 7,48 | UNC    | 3,81   | 1,75 | 0,67 | 1,97   | lb        | 33,83  | GB2FUCB3021A000 | GB2FUCB3044A000 |



# GBS

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2


### CS Carbon Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: SAE J518
- Pressure: up to PN420 / S6000
- Temp range: from -30°C to +100°C (body -46°C)

### SS Stainless Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: SAE J518
- Pressure: up to PN420 / S6000
- Temp range: from -30°C to +100°C (body -46°C)

### STANDARD COMPOSITION OF VALVE

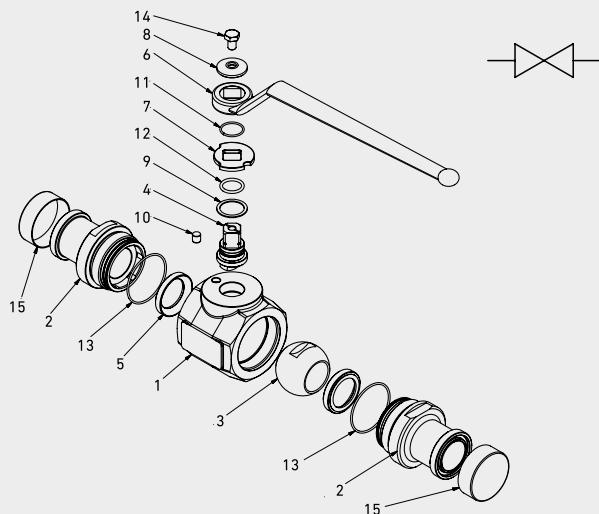

| POS | DESCRIPTION    | Q.TY | CS           | SS         |                 |
|-----|----------------|------|--------------|------------|-----------------|
|     |                |      | Carbon Steel | MATERIAL   | Stainless Steel |
| 1   | Body           | 1    |              | 1,4404     |                 |
| 2   | Adapter        | 2    |              | 1,4404     |                 |
| 3   | Ball           | 1    | 1,0570       | 1,4404     |                 |
| 4   | Stem           | 1    | 1,0737       | 1,4404     |                 |
| 5   | Ball seat      | 2    | POM          | POM        |                 |
| 6   | Handle         | 1    | 1,0116       | 1,0116     |                 |
| 7   | Washer         | 1    | 1,0116       | 1,4301     |                 |
| 8   | Washer         | 1    | 1,0737       | 1,4301     |                 |
| 9   | Stem ring      | 1    | POM          | POM        |                 |
| 10  | Pin            | 1    | 1,0737       | 1,4301     |                 |
| 11  | Seeger         | 1    | 1,4301       | 1,4301     |                 |
| 12  | Adapter o-ring | 4    | NBR          | NBR        |                 |
| 13  | Stem o-ring    | 1    | NBR          | NBR        |                 |
| 14  | Screw          | 1    | ISO4017 8.8  | ISO4017 A2 |                 |
| 15  | Caps           | 2    | PVC          | PVC        |                 |



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GB 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension   dimension  
of pressure   of pressure  
(PSI) F3      (PSI) F6

S3000      S6000

Size \_\_\_\_\_

from DN32 to DN50

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN5000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

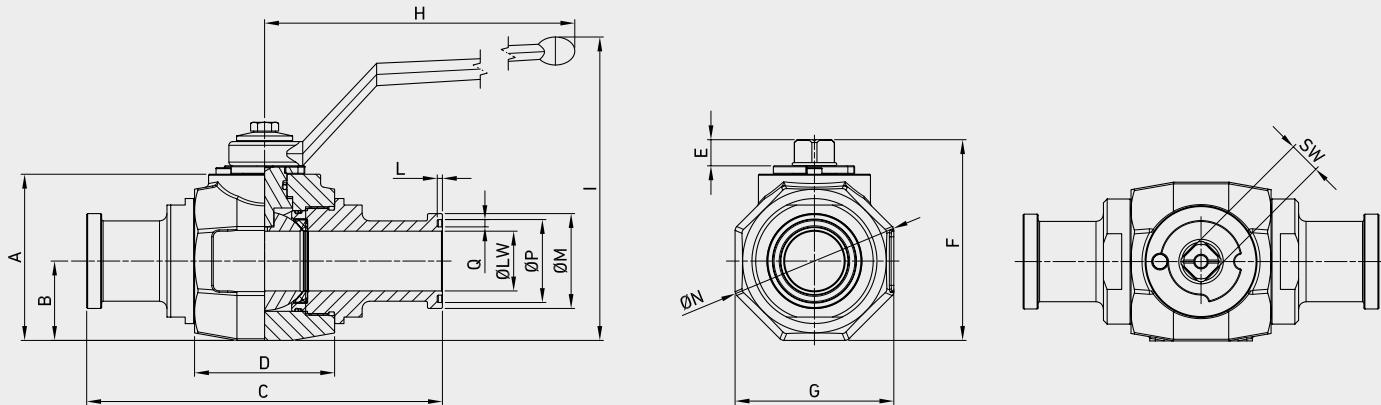

### GBS SAE J518 S3000 - C61

| TYPE | DN | PN       |   | ITEM CODE |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|------|----|----------|---|-----------|-----------------|-----------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
|      |    |          |   | CS        | SS              |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|      |    |          |   |           |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| GBS3 | 32 | MPa 28   | mm 89 42,5 190,5 75 14 107,5 85 310 162,5 2,79 50,8 91,5 44,45 3,94 17 32             | kg 5,429  | GB2SSC3L021A000 | GB2SSC3L044A000 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|      |    | Psi 4060 | inch 3,50 1,67 7,50 2,95 0,55 4,23 3,35 12,20 6,40 0,11 2,00 3,60 1,75 0,16 0,67 1,26 | lb 11,97  |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| GBS3 | 40 | MPa 21   | mm 106 52,5 230,5 85 14 124,5 105 310 180 2,79 60,26 112 53,72 3,94 17 40             | kg 8,265  | GB2SSC4L021A000 | GB2SSC4L044A000 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|      |    | Psi 3045 | inch 4,17 2,07 9,07 3,35 0,55 4,90 4,13 12,20 7,09 0,11 2,37 4,41 2,11 0,16 0,67 1,57 | lb 18,22  |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| GBS3 | 50 | MPa 21   | mm 115,5 58,5 232 98 14 134 117 310 190 2,79 71,4 126 63,25 3,94 17 50                | kg 9,865  | GB2SSC5L021A000 | GB2SSC5L044A000 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|      |    | Psi 3045 | inch 4,55 2,30 9,13 3,86 0,55 5,28 4,61 12,20 7,48 0,11 2,81 4,96 2,49 0,16 0,67 1,97 | lb 21,75  |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

### GBS3 SAE J518 S3000 EXTRA LONG - C61

| TYPE | DN | PN       |  | ITEM CODE |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|------|----|----------|--|-----------|-----------------|-----------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
|      |    |          |  | CS        | Carbon Steel    |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|      |    |          |  |           |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| GBS3 | 32 | MPa 28   | mm 89 42,5 275 75 14 107,5 85 310 162,5 2,79 50,8 91,5 44,45 3,94 17 30                | kg 5,206  | GB2SXC3L021A000 | GB2SXC3L044A000 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|      |    | Psi 4060 | inch 3,50 1,67 10,83 2,95 0,55 4,23 3,35 12,20 6,40 0,11 2,00 3,60 1,75 0,16 0,67 1,18 | lb 11,48  |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| GBS3 | 40 | MPa 21   | mm 106 52,5 321 85 14 124,5 105 310 180 2,79 60,33 112 53,72 3,94 17 38                | kg 8,323  | GB2SXC4L021A000 | GB2SXC4L044A000 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|      |    | Psi 3045 | inch 4,17 2,07 12,64 3,35 0,55 4,90 4,13 12,20 7,09 0,11 2,38 4,41 2,11 0,16 0,67 1,50 | lb 18,35  |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| GBS3 | 50 | MPa 21   | mm 115,5 58,5 323 97,85 14 134 117 310 190 2,79 71,4 126 63,25 3,94 17 48              | kg 10,097 | GB2SXC5L021A000 | GB2SXC5L044A000 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|      |    | Psi 3045 | inch 4,55 2,30 12,72 3,85 0,55 5,28 4,61 12,20 7,48 0,11 2,81 4,96 2,49 0,16 0,67 1,89 | lb 22,26  |                 |                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

**GBS SAE J518 S6000 - C62**

| TYPE | DN | PN  |      | A     | B    | C     | D    | E    | F     | G    | H     | I     | L    | ØM    | ØN   | ØP    | Q    | SW   | ØLW  | WEIGHT             | ITEM CODE             |                 |
|------|----|-----|------|-------|------|-------|------|------|-------|------|-------|-------|------|-------|------|-------|------|------|------|--------------------|-----------------------|-----------------|
|      |    |     |      | mm    | inch | mm    | inch | mm   | inch  | mm   | inch  | mm    | inch | mm    | inch | mm    | inch | kg   | lb   | CS<br>Carbon Steel | SS<br>Stainless Steel |                 |
| GBS6 | 32 | MPa | 42   | 89    | 42,5 | 223   | 75   | 14   | 107,5 | 85   | 310   | 162,5 | 2,79 | 54    | 91,5 | 44,45 | 3,94 | 17   | 32   | kg 5,828           | GB2SSC93021A000       | GB2SSC93044A000 |
|      |    | Psi | 6090 | 3,50  | 1,67 | 8,78  | 2,95 | 0,55 | 4,23  | 3,35 | 12,20 | 6,40  | 0,11 | 2,13  | 3,60 | 1,75  | 0,16 | 0,67 | 1,26 | lb 12,85           |                       |                 |
| GBS6 | 40 | MPa | 42   | 106   | 52,5 | 281   | 85   | 14   | 124,5 | 105  | 310   | 180   | 2,79 | 63,46 | 112  | 53,67 | 3,94 | 17   | 40   | kg 8,251           | GB2SSCA3021A000       | GB2SSCA3044A000 |
|      |    | Psi | 6090 | 4,17  | 2,07 | 11,06 | 3,35 | 0,55 | 4,90  | 4,13 | 12,20 | 7,09  | 0,11 | 2,50  | 4,41 | 2,11  | 0,16 | 0,67 | 1,57 | lb 18,19           |                       |                 |
| GBS6 | 50 | MPa | 42   | 115,5 | 58,5 | 316   | 98   | 14   | 134   | 117  | 310   | 190   | 2,79 | 79,4  | 126  | 63,25 | 3,94 | 17   | 50   | kg 11,774          | GB2SSCB3021A000       | GB2SSCB3044A000 |
|      |    | Psi | 6090 | 4,55  | 2,30 | 12,44 | 3,86 | 0,55 | 5,28  | 4,61 | 12,20 | 7,48  | 0,11 | 3,13  | 4,96 | 2,49  | 0,16 | 0,67 | 1,97 | lb 25,96           |                       |                 |

**GBS6 SAE J518 S6000 EXTRA LONG - C62**

| TYPE | DN | PN  |      | A     | B    | C     | D     | E    | F     | G    | H     | I     | L    | ØM    | ØN   | ØP    | Q    | SW   | ØLW  | WEIGHT             | ITEM CODE             |                 |
|------|----|-----|------|-------|------|-------|-------|------|-------|------|-------|-------|------|-------|------|-------|------|------|------|--------------------|-----------------------|-----------------|
|      |    |     |      | mm    | inch | mm    | inch  | mm   | inch  | mm   | inch  | mm    | inch | mm    | inch | mm    | inch | kg   | lb   | CS<br>Carbon Steel | SS<br>Stainless Steel |                 |
| GBS6 | 32 | MPa | 42   | 89    | 42,5 | 322   | 75    | 14   | 107,5 | 85   | 310   | 162,5 | 2,79 | 54    | 91,5 | 44,45 | 3,94 | 17   | 32   | kg 5,828           | GB2SXC93021A000       | GB2SXC93044A000 |
|      |    | Psi | 6090 | 3,50  | 1,67 | 12,68 | 2,95  | 0,55 | 4,23  | 3,35 | 12,20 | 6,40  | 0,11 | 2,13  | 3,60 | 1,75  | 0,16 | 0,67 | 1,26 | lb 12,85           |                       |                 |
| GBS6 | 40 | MPa | 42   | 106   | 52,5 | 380   | 85    | 14   | 124,5 | 105  | 310   | 180   | 2,79 | 63,46 | 112  | 53,72 | 3,94 | 17   | 38   | kg 8,47            | GB2SXCA3021A000       | GB2SXCA3044A000 |
|      |    | Psi | 6090 | 4,17  | 2,07 | 14,96 | 3,35  | 0,55 | 4,90  | 4,13 | 12,20 | 7,09  | 0,11 | 2,50  | 4,41 | 2,11  | 0,16 | 0,67 | 1,50 | lb 18,67           |                       |                 |
| GBS6 | 50 | MPa | 42   | 115,5 | 58,5 | 385   | 97,85 | 14   | 134   | 117  | 310   | 190   | 2,79 | 79,4  | 126  | 63,25 | 3,94 | 17   | 48   | kg 12,058          | GB2SXCB3021A000       | GB2SXCB3044A000 |
|      |    | Psi | 6090 | 4,55  | 2,30 | 15,16 | 3,85  | 0,55 | 5,28  | 4,61 | 12,20 | 7,48  | 0,11 | 3,13  | 4,96 | 2,49  | 0,16 | 0,67 | 1,89 | lb 26,58           |                       |                 |



# GBF-S

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2


### CS Carbon Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2,  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C (body -46°C)

### SS Stainless Steel

- Type: forged ball valve 2 way
- Sizes: from DN32 up to DN50
- Ends: ISO6162-1/-2,  
SAEJ518-1/-2
- Pressure: up to PN420 / S6000
- Temp range: from -30°C  
to +100°C (body -46°C)

### STANDARD COMPOSITION OF VALVE

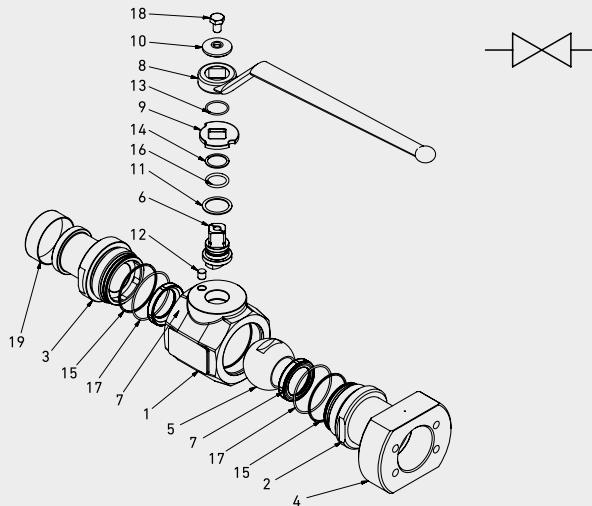

| POS | DESCRIPTION     | Q.TY | CS           | SS          |
|-----|-----------------|------|--------------|-------------|
|     |                 |      | Carbon Steel | MATERIAL    |
| 1   | Body            | 1    | 1,0570       | 1,4404      |
| 2   | Adapter         | 1    | 1,0570       | 1,4404      |
| 3   | Plug            | 1    | 1,0570       | 1,4404      |
| 4   | Flange          | 1    | 1,0570       | 1,4404      |
| 5   | Ball            | 1    | 1,0737       | 1,4440      |
| 6   | Stem            | 1    | 1,0737       | 1,4404      |
| 7   | Ball seat       | 2    | POM          | POM         |
| 8   | Handle          | 1    | 1,0116       | 1,0116      |
| 9   | Washer          | 1    | 1,0116       | 1,4404      |
| 10  | Washer          | 1    | 1,0737       | 1,4404      |
| 11  | Stem ring       | 1    | POM          | POM         |
| 12  | Pin             | 1    | 1,0737       | 1,4404      |
| 13  | Seeger          | 1    | 1,4301       | 1,4301      |
| 14  | Stem back up    | 1    | PTFE         | PTFE        |
| 15  | Adapter back up | 2    | PTFE         | PTFE        |
| 16  | Stem o ring     | 1    | NBR          | NBR         |
| 17  | Adapter o ring  | 2    | NBR          | NBR         |
| 18  | Screw           | 1    | ISO4017 8.8  | ISO4017 8.8 |
| 19  | Cap             | 1    | PVC          | PVC         |



## CODE DESCRIPTION STRUCTURE

|           |              |             |          |          |          |          |          |          |
|-----------|--------------|-------------|----------|----------|----------|----------|----------|----------|
| <b>GB</b> | <b>F3-S3</b> | <b>DN32</b> | <b>2</b> | <b>2</b> | <b>1</b> | <b>1</b> | <b>A</b> | <b>B</b> |
|-----------|--------------|-------------|----------|----------|----------|----------|----------|----------|

Type and way of valve \_\_\_\_\_

GB 2-way

Ends \_\_\_\_\_

Valves      Valves  
dimension    dimension  
of pressure   of pressure  
(PSI) F3/S3 (PSI) F6/S6

S3000      S6000

Size \_\_\_\_\_  
from DN32 to DN50

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Ball Material \_\_\_\_\_

- 1 = 1,0737 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN5000 Psi
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

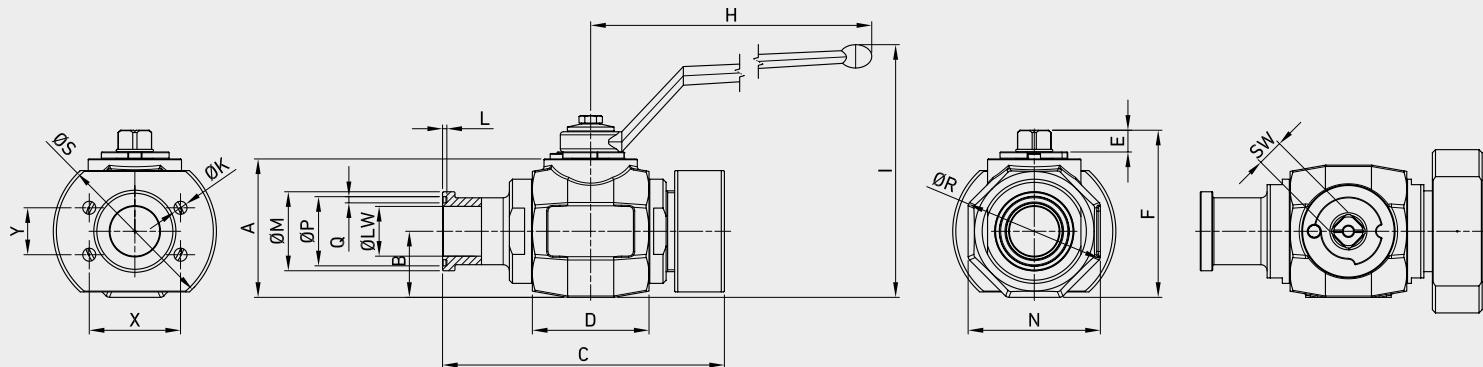

## ■ GBFS3

| TYPE  | DN | PN                 | A                     | B            | C             | D             | E          | F             | H            | I             | L            | ØK         | ØM            | N           | ØP            | Q            | ØR            | ØS          | X            | Y            | SW         | ØLW        | ITEM CODE             |                       |                 |
|-------|----|--------------------|-----------------------|--------------|---------------|---------------|------------|---------------|--------------|---------------|--------------|------------|---------------|-------------|---------------|--------------|---------------|-------------|--------------|--------------|------------|------------|-----------------------|-----------------------|-----------------|
|       |    |                    |                       |              |               |               |            |               |              |               |              |            |               |             |               |              |               |             |              |              |            |            | CS<br>Carbon Steel    | SS<br>Stainless Steel |                 |
| GBFS3 | 32 | MPa 28<br>Psi 4060 | mm 89<br>inch 3,50    | 42,5<br>1,67 | 181,2<br>7,14 | 75<br>2,95    | 14<br>0,55 | 107,5<br>4,23 | 310<br>12,20 | 162,5<br>6,40 | 2,79<br>0,11 | M10<br>UNC | 50,8<br>2,00  | 85<br>3,35  | 44,45<br>1,75 | 3,94<br>0,16 | 91,5<br>3,60  | 105<br>4,13 | 58,7<br>2,31 | 30,2<br>1,19 | 17<br>0,67 | 32<br>1,26 | kg 5,955<br>lb 13,13  | GB2SFC3L021A000       | GB2SFC3L044A000 |
| GBFS3 | 40 | MPa 21<br>Psi 3045 | mm 106<br>inch 4,17   | 52,5<br>2,07 | 203,5<br>8,01 | 85<br>3,35    | 14<br>0,55 | 124,5<br>4,90 | 310<br>12,20 | 180<br>7,09   | 2,79<br>0,11 | M12<br>UNC | 60,33<br>2,38 | 105<br>4,13 | 53,72<br>2,11 | 3,94<br>0,16 | 112,8<br>4,44 | 120<br>4,72 | 69,8<br>2,75 | 35,7<br>1,41 | 17<br>0,67 | 38<br>1,50 | kg 9,118<br>lb 20,10  | GB2SFC4L021A000       | GB2SFC4L044A000 |
| GBFS3 | 50 | MPa 21<br>Psi 3045 | mm 115,5<br>inch 4,55 | 58,5<br>2,30 | 214<br>8,43   | 97,85<br>3,85 | 14<br>0,55 | 134<br>5,28   | 310<br>12,20 | 190<br>7,48   | 2,79<br>0,11 | M12<br>UNC | 71,42<br>2,81 | 117<br>4,61 | 63,25<br>2,49 | 3,94<br>0,16 | 125,8<br>4,95 | 145<br>5,71 | 77,8<br>3,06 | 42,9<br>1,69 | 17<br>0,67 | 48<br>1,89 | kg 12,032<br>lb 26,53 | GB2SFC5L021A000       | GB2SFC5L044A000 |

## ■ GBFS3 U

| TYPE  | DN | PN                 | A                     | B            | C             | D             | E          | F             | H            | I             | L            | ØK             | ØM            | N           | ØP            | Q            | ØR            | ØS          | X            | Y            | SW         | ØLW        | ITEM CODE            |                       |                 |
|-------|----|--------------------|-----------------------|--------------|---------------|---------------|------------|---------------|--------------|---------------|--------------|----------------|---------------|-------------|---------------|--------------|---------------|-------------|--------------|--------------|------------|------------|----------------------|-----------------------|-----------------|
|       |    |                    |                       |              |               |               |            |               |              |               |              |                |               |             |               |              |               |             |              |              |            |            | CS<br>Carbon Steel   | SS<br>Stainless Steel |                 |
| GBFS3 | 32 | MPa 28<br>Psi 4060 | mm 89<br>inch 3,50    | 42,5<br>1,67 | 181,2<br>7,14 | 75<br>2,95    | 14<br>0,55 | 107,5<br>4,23 | 310<br>12,20 | 162,5<br>6,40 | 2,79<br>0,11 | 7/16-14<br>UNC | 50,8<br>2,00  | 85<br>3,35  | 44,45<br>1,75 | 3,94<br>0,16 | 91,5<br>3,60  | 105<br>4,13 | 58,7<br>2,31 | 30,2<br>1,19 | 17<br>0,67 | 32<br>1,26 | kg 5,955<br>lb 13,13 | GB2SOC3L021A000       | GB2SOC3L044A000 |
| GBFS3 | 40 | MPa 21<br>Psi 3045 | mm 106<br>inch 4,17   | 52,5<br>2,07 | 203,5<br>8,01 | 85<br>3,35    | 14<br>0,55 | 124,5<br>4,90 | 310<br>12,20 | 180<br>7,09   | 2,79<br>0,11 | 1/2-13<br>UNC  | 60,33<br>2,38 | 105<br>4,13 | 53,72<br>2,11 | 3,94<br>0,16 | 112,8<br>4,44 | 120<br>4,72 | 69,8<br>2,75 | 35,7<br>1,41 | 17<br>0,67 | 38<br>1,50 | kg 9,118<br>lb 20,10 | GB2SOC4L021A000       | GB2SOC4L044A000 |
| GBFS3 | 50 | MPa 21<br>Psi 3045 | mm 115,5<br>inch 4,55 | 58,5<br>2,30 | 214<br>8,43   | 97,85<br>3,85 | 14<br>0,55 | 134<br>5,28   | 310<br>12,20 | 190<br>7,48   | 2,79<br>0,11 | 1/2-13<br>UNC  | 71,42<br>2,81 | 117<br>4,61 | 63,25<br>2,49 | 3,94<br>0,16 | 125,8<br>4,95 | 145<br>5,71 | 77,8<br>3,06 | 42,9<br>1,69 | 17<br>0,67 | 48<br>1,89 | kg 12,03<br>lb 26,53 | GB2SOC5L021A000       | GB2SOC5L044A000 |

**GBFS6**

| TYPE  | DN | PN       | A     | B    | C    | D    | E     | F     | H     | I    | L  | ØK    | ØM  | N     | ØP    | Q    | ØR  | ØS   | X    | Y    | SW   | ØLW   | WEIGHT | ITEM CODE |       |     |      |      |    |    |           |          |                 |                 |
|-------|----|----------|-------|------|------|------|-------|-------|-------|------|----|-------|-----|-------|-------|------|-----|------|------|------|------|-------|--------|-----------|-------|-----|------|------|----|----|-----------|----------|-----------------|-----------------|
|       |    |          | mm    | inch | mm   | inch | mm    | inch  | mm    | inch | mm | inch  | mm  | inch  | mm    | inch | mm  | inch | mm   | inch | kg   | lb    | kg     | lb        |       |     |      |      |    |    |           |          |                 |                 |
| GBFS6 | 32 | MPa 42   | 89    | 3,50 | 42,5 | 1,67 | 197,5 | 7,78  | 75    | 0,55 | 14 | 4,23  | 310 | 12,20 | 162,5 | 2,79 | M12 | 54   | 2,13 | 85   | 3,35 | 44,45 | 1,75   | 3,94      | 91,5  | 105 | 66,7 | 31,8 | 17 | 32 | kg 6,145  | lb 13,55 | GB2SFC93021A000 | GB2SFC93044A000 |
|       |    | Psi 6090 |       |      |      |      |       |       |       |      |    |       |     |       |       |      |     |      |      |      |      |       |        |           |       |     |      |      |    |    |           |          |                 |                 |
| GBFS6 | 40 | MPa 42   | 106   | 4,17 | 52,5 | 2,07 | 228,5 | 9,00  | 85    | 0,55 | 14 | 124,5 | 310 | 10,08 | 180   | 2,79 | M16 | 63,5 | 2,50 | 105  | 4,13 | 53,72 | 2,11   | 3,94      | 112,8 | 120 | 79,4 | 36,5 | 17 | 38 | kg 9,085  | lb 20,03 | GB2SFCA3021A000 | GB2SFCA3044A000 |
|       |    | Psi 6090 |       |      |      |      |       |       |       |      |    |       |     |       |       |      |     |      |      |      |      |       |        |           |       |     |      |      |    |    |           |          |                 |                 |
| GBFS6 | 50 | MPa 42   | 115,5 | 4,55 | 58,5 | 2,30 | 256   | 10,08 | 97,85 | 0,55 | 14 | 134   | 310 | 10,08 | 190   | 2,79 | M20 | 79,4 | 3,13 | 117  | 4,61 | 63,25 | 2,49   | 3,94      | 125,8 | 145 | 96,8 | 44,5 | 17 | 48 | kg 12,885 | lb 28,35 | GB2SFCB3021A000 | GB2SFCB3044A000 |
|       |    | Psi 6090 |       |      |      |      |       |       |       |      |    |       |     |       |       |      |     |      |      |      |      |       |        |           |       |     |      |      |    |    |           |          |                 |                 |

**GBFS6 U**

| TYPE  | DN | PN       | A     | B    | C    | D    | E     | F     | H     | I    | L  | ØK    | ØM  | N     | ØP    | Q    | ØR     | ØS   | X    | Y    | SW   | ØLW   | WEIGHT | ITEM CODE |       |     |      |      |    |    |           |          |                 |                 |
|-------|----|----------|-------|------|------|------|-------|-------|-------|------|----|-------|-----|-------|-------|------|--------|------|------|------|------|-------|--------|-----------|-------|-----|------|------|----|----|-----------|----------|-----------------|-----------------|
|       |    |          | mm    | inch | mm   | inch | mm    | inch  | mm    | inch | mm | inch  | mm  | inch  | mm    | inch | mm     | inch | mm   | inch | kg   | lb    | kg     | lb        |       |     |      |      |    |    |           |          |                 |                 |
| GBFS6 | 32 | MPa 42   | 89    | 3,50 | 42,5 | 1,67 | 197,5 | 7,78  | 75    | 0,55 | 14 | 4,23  | 310 | 12,20 | 162,5 | 2,79 | 1/2-13 | 54   | 2,13 | 85   | 3,35 | 44,45 | 1,75   | 3,94      | 91,5  | 105 | 66,7 | 31,8 | 17 | 32 | kg 6,145  | lb 13,55 | GB2SOC93021A000 | GB2SOC93044A000 |
|       |    | Psi 6090 |       |      |      |      |       |       |       |      |    |       |     |       |       |      |        |      |      |      |      |       |        |           |       |     |      |      |    |    |           |          |                 |                 |
| GBFS6 | 40 | MPa 42   | 106   | 4,17 | 52,5 | 2,07 | 228,5 | 9,00  | 85    | 0,55 | 14 | 124,5 | 310 | 10,08 | 180   | 2,79 | 5/8-11 | 63,5 | 2,50 | 105  | 4,13 | 53,72 | 2,11   | 3,94      | 112,8 | 120 | 79,4 | 36,5 | 17 | 38 | kg 9,085  | lb 20,03 | GB2SOCA3021A000 | GB2SOCA3044A000 |
|       |    | Psi 6090 |       |      |      |      |       |       |       |      |    |       |     |       |       |      |        |      |      |      |      |       |        |           |       |     |      |      |    |    |           |          |                 |                 |
| GBFS6 | 50 | MPa 42   | 115,5 | 4,55 | 58,5 | 2,30 | 256   | 10,08 | 97,85 | 0,55 | 14 | 134   | 310 | 10,08 | 190   | 2,79 | 3/4-10 | 79,4 | 3,13 | 117  | 4,61 | 63,25 | 2,49   | 3,94      | 125,8 | 145 | 96,8 | 44,5 | 17 | 48 | kg 12,885 | lb 28,41 | GB2SOCB3021A000 | GB2SOCB3044A000 |
|       |    | Psi 6090 |       |      |      |      |       |       |       |      |    |       |     |       |       |      |        |      |      |      |      |       |        |           |       |     |      |      |    |    |           |          |                 |                 |



# ■ GV2


## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1

### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN10 up to DN32
- Ends: BSP-NPT-SAE / ISO6162-1
- Pressure: up to PN500 / S6000
- Temp range: from -20°C to +100°C

### ■ STANDARD COMPOSITION OF VALVE

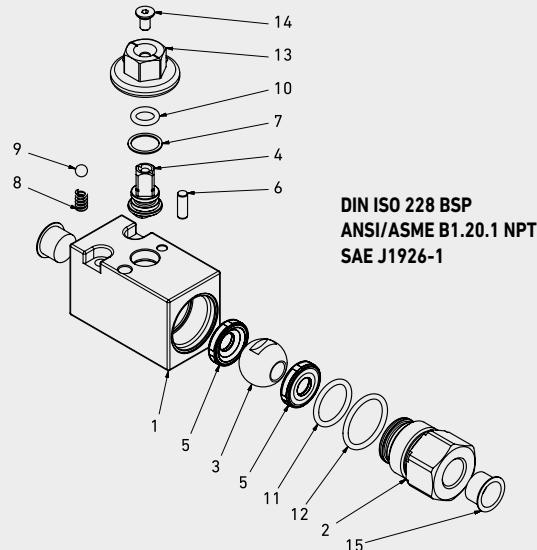

| POS | DESCRIPTION       | Q.TY | CS<br>Carbon Steel | MATERIAL     |
|-----|-------------------|------|--------------------|--------------|
| 1   | Body              | 1    |                    | 1,0737       |
| 2   | Adapter           | 1    |                    | 1,0737       |
| 3   | Ball              | 1    |                    | 1,0737       |
| 4   | Stem              | 1    |                    | 1,0737       |
| 5   | Ball seat         | 2    |                    | POM          |
| 6   | Pin               | 1    |                    | 1,0737       |
| 7   | Stem ring         | 1    |                    | POM          |
| 8   | Spring UNI17223-1 | 1    |                    | 1,0116       |
| 9   | Spring ball       | 1    |                    | 1,0116       |
| 10  | Stem o-ring       | 1    |                    | FKM          |
| 11  | Adapter o-ring    | 1    |                    | FKM          |
| 12  | Adapter o-ring    | 1    |                    | FKM          |
| 13  | Washer            | 1    |                    | 1,0737       |
| 14  | Screw             | 1    |                    | DIN 7991 8.8 |
| 15  | Caps              | 2    |                    | PVC          |



## CODE DESCRIPTION STRUCTURE

**GV2 G 1/2 DN13 1 1 1 1 A B**

Type and way of valve

GV2 2-way

Ends

GAS DIN/ NPT ANSI SAE IS06162

ISO 228 /ASME J1926-1

BSP B1.20.1

G 3/8 N 3/8 SAE6 S6000

G 1/2 N 1/2 SAE8

G 3/4 N 3/4 SAE12

G 1 N 1 SAE16

G 1 1/4 R N 1 1/4 R SAE20R

G 1 1/4 N 1 1/4 SAE20

Size

from DN10 to DN32

Body Material

● 1 = 1,0737

Adapter material

● 1 = 1,0737

Stem material

● 1 = 1,0737

Ball Material

● 1 = 1,0737

Seat material

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 Mpa
- Pressure class up to PN6000 Psi
- Locking device

For further special requests please consult our technical/commercial service.

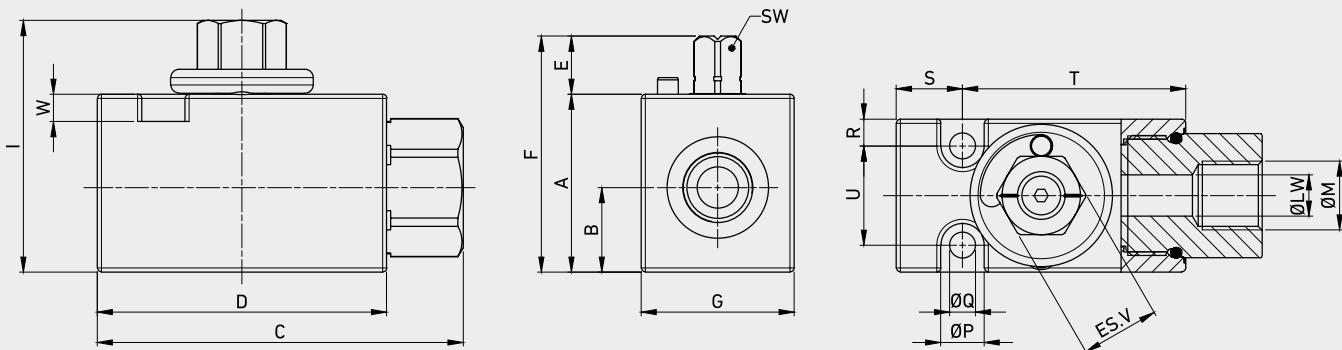

## ■ GV2 DIN/ISO 228 BSP

**CS**  
Carbon Steel

| TYPE          | DN | PN                 | A                  | B            | C             | D           | E            | ES.V       | F            | G          | I            | ØM        | ØP           | ØQ           | R           | S            | T            | U          | W           | SW         | ØLW        | WEIGHT               | ITEM CODE       |
|---------------|----|--------------------|--------------------|--------------|---------------|-------------|--------------|------------|--------------|------------|--------------|-----------|--------------|--------------|-------------|--------------|--------------|------------|-------------|------------|------------|----------------------|-----------------|
| GV2 G 3/8     | 10 | MPa 50<br>Psi 7250 | mm 43<br>inch 1,69 | 20,4<br>0,80 | 88,5<br>3,48  | 70<br>2,76  | 14,1<br>0,56 | 19<br>0,75 | 57,1<br>2,25 | 37<br>1,46 | 60,9<br>2,40 | G 3/8     | 10,5<br>0,41 | 6,25<br>0,25 | 6,5<br>0,26 | 16<br>0,63   | 54<br>2,13   | 24<br>0,94 | 6,6<br>0,26 | 9<br>0,35  | 10<br>0,39 | kg 0,919<br>lb 2,03  | GV2GGT25011B000 |
| GV2 G 1/2     | 13 | MPa 50<br>Psi 7250 | mm 45<br>inch 1,77 | 21,7<br>0,85 | 103,5<br>4,07 | 80<br>3,15  | 14,1<br>0,56 | 19<br>0,75 | 59,1<br>2,33 | 45<br>1,77 | 62,9<br>2,48 | G 1/2     | 10,5<br>0,41 | 6,25<br>0,25 | 6,5<br>0,26 | 23<br>0,91   | 57<br>2,24   | 32<br>1,26 | 6,6<br>0,26 | 9<br>0,35  | 13<br>0,51 | kg 1,307<br>lb 2,88  | GV2GGT35011B000 |
| GV2 G 3/4     | 20 | MPa 50<br>Psi 7250 | mm 55<br>inch 2,17 | 23,4<br>0,92 | 129,5<br>5,10 | 101<br>3,98 | 18,5<br>0,73 | 24<br>0,94 | 73,5<br>2,89 | 55<br>2,17 | 78<br>3,07   | G 3/4     | 13,5<br>0,53 | 9<br>0,35    | 7,5<br>0,30 | 25,5<br>1,00 | 75,5<br>2,97 | 40<br>1,57 | 8<br>0,31   | 14<br>0,55 | 20<br>0,79 | kg 2,424<br>lb 5,34  | GV2GGT45011B000 |
| GV2 G 1       | 25 | MPa 50<br>Psi 7250 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 133,5<br>5,26 | 105<br>4,13 | 18,5<br>0,73 | 24<br>0,94 | 83,5<br>3,29 | 65<br>2,56 | 88<br>3,46   | G 1       | 13,5<br>0,53 | 9<br>0,35    | 8,5<br>0,33 | 27,5<br>1,08 | 77,5<br>3,05 | 48<br>1,89 | 8<br>0,31   | 14<br>0,55 | 25<br>0,98 | kg 3,446<br>lb 7,60  | GV2GGT55011B000 |
| GV2 G 1 1/4 R | 25 | MPa 50<br>Psi 7250 | mm 65<br>inch 2,56 | 29,5<br>1,16 | 133,5<br>5,26 | 105<br>4,13 | 18,5<br>0,73 | 24<br>0,94 | 83,5<br>3,29 | 65<br>2,56 | 88<br>3,46   | G 1 1/4 R | 13,5<br>0,53 | 9<br>0,35    | 8,5<br>0,33 | 27,5<br>1,08 | 77,5<br>3,05 | 48<br>1,89 | 8<br>0,31   | 14<br>0,55 | 25<br>0,98 | kg 3,265<br>lb 7,20  | GV2GGR65011B000 |
| GV2 G 1 1/4   | 32 | MPa 50<br>Psi 7250 | mm 80<br>inch 3,15 | 33,5<br>1,32 | 133,5<br>5,26 | 105<br>4,13 | 18,5<br>0,73 | 30<br>1,18 | 98,5<br>3,88 | 80<br>3,15 | 104<br>4,09  | G 1 1/4   | 13,5<br>0,53 | 9<br>0,35    | 10<br>0,39  | 24,5<br>0,96 | 80,5<br>3,17 | 60<br>2,36 | 8<br>0,31   | 17<br>0,67 | 32<br>1,26 | kg 4,991<br>lb 11,00 | GV2GGT65011B000 |

**■ GV2 ANSI/ASME B1.20.1 NPT**
CS  
**Carbon Steel**

| TYPE          | DN | PN       | A         | B    | C     | D    | E    | ES.V | F    | G    | I    | ØM    | ØP   | ØQ   | R    | S    | T    | U    | W    | SW   | ØLW  | WEIGHT   | ITEM CODE       |
|---------------|----|----------|-----------|------|-------|------|------|------|------|------|------|-------|------|------|------|------|------|------|------|------|------|----------|-----------------|
| GV2 N 3/8     | 10 | MPa 50   | mm 43     | 20,4 | 88,5  | 70   | 14,1 | 19   | 57,1 | 37   | 60,9 | N 3/8 | 10,5 | 6,25 | 6,5  | 16   | 54   | 24   | 6,6  | 9    | 10   | kg 0,919 | GV2NNT25011B000 |
|               |    | Psi 7250 | inch 1,69 | 0,80 | 3,48  | 2,76 | 0,56 | 0,75 | 2,25 | 1,46 | 2,40 |       | 0,41 | 0,25 | 0,26 | 0,63 | 2,13 | 0,94 | 0,26 | 0,35 | 0,39 | lb 2,03  |                 |
| GV2 N 1/2     | 13 | MPa 50   | mm 45     | 21,7 | 103,5 | 80   | 14,1 | 19   | 59,1 | 45   | 62,9 | N 1/2 | 10,5 | 6,25 | 6,5  | 23   | 57   | 32   | 6,6  | 9    | 13   | kg 1,307 | GV2NNT35011B000 |
|               |    | Psi 7250 | inch 1,77 | 0,85 | 4,07  | 3,15 | 0,56 | 0,75 | 2,33 | 1,77 | 2,48 |       | 0,41 | 0,25 | 0,26 | 0,91 | 2,24 | 1,26 | 0,26 | 0,35 | 0,51 | lb 2,88  |                 |
| GV2 N 3/4     | 20 | MPa 50   | mm 55     | 23,4 | 129,5 | 101  | 18,5 | 24   | 73,5 | 55   | 78   | N 3/4 | 13,5 | 9    | 7,5  | 25,5 | 75,5 | 40   | 8    | 14   | 20   | kg 2,424 | GV2NNT45011B000 |
|               |    | Psi 7250 | inch 2,17 | 0,92 | 5,10  | 3,98 | 0,73 | 0,94 | 2,89 | 2,17 | 3,07 |       | 0,53 | 0,35 | 0,30 | 1,00 | 2,97 | 1,57 | 0,31 | 0,55 | 0,79 | lb 5,34  |                 |
| GV2 N 1       | 25 | MPa 50   | mm 65     | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 88   | N 1   | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg 3,446 | GV2NNT55011B000 |
|               |    | Psi 7250 | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,46 |       | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98 | lb 7,60  |                 |
| GV2 N 1 1/4 R | 25 | MPa 50   | mm 65     | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 88   | N 1   | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg 3,265 | GV2NNR65011B000 |
|               |    | Psi 7250 | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,46 |       | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98 | lb 7,20  |                 |
| GV2 N 1 1/4   | 32 | MPa 50   | mm 80     | 33,5 | 133,5 | 105  | 18,5 | 30   | 98,5 | 80   | 104  | N 1   | 13,5 | 9    | 10   | 24,5 | 80,5 | 60   | 8    | 17   | 32   | kg 4,991 | GV2NNT65011B000 |
|               |    | Psi 7250 | inch 3,15 | 1,32 | 5,26  | 4,13 | 0,73 | 1,18 | 3,88 | 3,15 | 4,09 |       | 0,53 | 0,35 | 0,39 | 0,96 | 3,17 | 2,36 | 0,31 | 0,67 | 1,26 | lb 11,00 |                 |

**■ GV2 SAE J1926-1**
CS  
**Carbon Steel**

| TYPE       | DN | PN       | A         | B    | C     | D    | E    | ES.V | F    | G    | I    | ØM  | ØP   | ØQ   | R    | S    | T    | U    | W    | SW   | ØLW  | WEIGHT   | ITEM CODE       |
|------------|----|----------|-----------|------|-------|------|------|------|------|------|------|-----|------|------|------|------|------|------|------|------|------|----------|-----------------|
| GV2 SAE6   | 10 | MPa 50   | mm 43     | 20,4 | 88,5  | 70   | 14,1 | 19   | 57,1 | 37   | 60,9 | SAE | 10,5 | 6,25 | 6,5  | 16   | 54   | 24   | 6,6  | 9    | 10   | kg 0,919 | GV2EEE15011B000 |
|            |    | Psi 7250 | inch 1,69 | 0,80 | 3,48  | 2,76 | 0,56 | 0,75 | 2,25 | 1,46 | 2,40 |     | 0,41 | 0,25 | 0,26 | 0,63 | 2,13 | 0,94 | 0,26 | 0,35 | 0,39 | lb 2,03  |                 |
| GV2 SAE8   | 13 | MPa 50   | mm 45     | 21,7 | 103,5 | 80   | 14,1 | 19   | 59,1 | 45   | 62,9 | SAE | 10,5 | 6,25 | 6,5  | 23   | 57   | 32   | 6,6  | 9    | 13   | kg 1,307 | GV2EEE25011B000 |
|            |    | Psi 7250 | inch 1,77 | 0,85 | 4,07  | 3,15 | 0,56 | 0,75 | 2,33 | 1,77 | 2,48 |     | 0,41 | 0,25 | 0,26 | 0,91 | 2,24 | 1,26 | 0,26 | 0,35 | 0,51 | lb 2,88  |                 |
| GV2 SAE12  | 20 | MPa 50   | mm 55     | 23,4 | 129,5 | 101  | 18,5 | 24   | 73,5 | 55   | 78   | SAE | 13,5 | 9    | 7,5  | 25,5 | 75,5 | 40   | 8    | 14   | 20   | kg 2,424 | GV2EEE35011B000 |
|            |    | Psi 7250 | inch 2,17 | 0,92 | 5,10  | 3,98 | 0,73 | 0,94 | 2,89 | 2,17 | 3,07 |     | 0,53 | 0,35 | 0,30 | 1,00 | 2,97 | 1,57 | 0,31 | 0,55 | 0,79 | lb 5,34  |                 |
| GV2 SAE16  | 25 | MPa 50   | mm 65     | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 88   | SAE | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg 3,446 | GV2EEE45011B000 |
|            |    | Psi 7250 | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,46 |     | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98 | lb 7,60  |                 |
| GV2 SAE20R | 25 | MPa 50   | mm 65     | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 88   | SAE | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg 3,265 | GV2EEE85011B000 |
|            |    | Psi 7250 | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,46 |     | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98 | lb 7,20  |                 |
| GV2 SAE20  | 32 | MPa 50   | mm 80     | 33,5 | 133,5 | 105  | 18,5 | 30   | 98,5 | 80   | 104  | SAE | 13,5 | 9    | 10   | 24,5 | 80,5 | 60   | 8    | 17   | 32   | kg 4,991 | GV2EEE55011B000 |
|            |    | Psi 7250 | inch 3,15 | 1,32 | 5,26  | 4,13 | 0,73 | 1,18 | 3,88 | 3,15 | 4,09 |     | 0,53 | 0,35 | 0,39 | 0,96 | 3,17 | 2,36 | 0,31 | 0,67 | 1,26 | lb 11,00 |                 |



# GV3



## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1



### CS Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN10 up to DN32
- Ends: BSP-NPT-SAE / ISO6162-1
- Pressure: up to PN500 / S6000
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

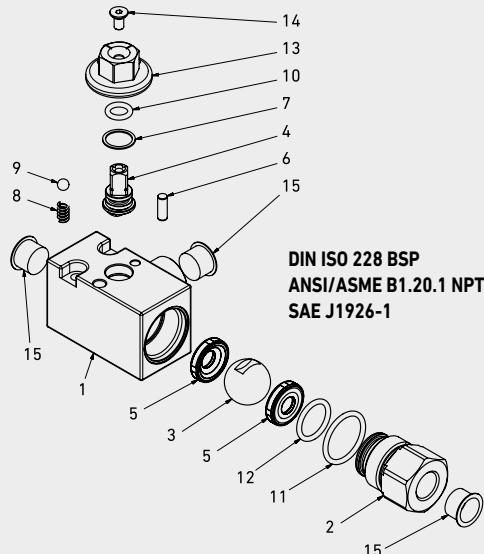

**WARNING!**  
Pressure inlet only  
from center port 1



|    |  | POS | DESCRIPTION       | Q.TY | CS<br>Carbon Steel | MATERIAL     |
|----|--|-----|-------------------|------|--------------------|--------------|
| 1  |  |     | Body              | 1    |                    | 1,0737       |
| 2  |  |     | Adapter           | 1    |                    | 1,0737       |
| 3  |  |     | Ball              | 1    |                    | 1,0737       |
| 4  |  |     | Stem              | 1    |                    | 1,0737       |
| 5  |  |     | Ball seat         | 2    |                    | POM          |
| 6  |  |     | Pin               | 1    |                    | 1,0737       |
| 7  |  |     | Stem ring         | 1    |                    | POM          |
| 8  |  |     | Spring UNI17223-1 | 1    |                    | 1,0116       |
| 9  |  |     | Spring ball       | 1    |                    | 1,0116       |
| 10 |  |     | Stem o-ring       | 1    |                    | FKM          |
| 11 |  |     | Adapter o-ring    | 1    |                    | FKM          |
| 12 |  |     | Adapter o-ring    | 1    |                    | FKM          |
| 13 |  |     | Washer            | 1    |                    | 1,0737       |
| 14 |  |     | Screw             | 1    |                    | DIN 7991 8.8 |
| 15 |  |     | Caps              | 2    |                    | PVC          |



## CODE DESCRIPTION STRUCTURE

**GV3 G 1/2 DN13 1 1 1 1 A B**

Type and way of valve \_\_\_\_\_

GV3 3-way

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI SAE ISO6162

ISO 228 /ASME J1926-1

BSP B1.20.1

G 3/8 N 3/8 SAE6 S6000

G 1/2 N 1/2 SAE8

G 3/4 N 3/4 SAE12

G 1 N 1 SAE16

G 1 1/4 R N 1 1/4 R SAE20R

G 1 1/4 N 1 1/4 SAE20

Size \_\_\_\_\_

from DN10 to DN32

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737

Ball Material \_\_\_\_\_

● 1 = 1,0737

Seat material \_\_\_\_\_

A = POM D = PEEK\* K = GEMPTFE\* C = PTFE\*




Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 Mpa
- Pressure class up to PN6000 Psi
- Locking device

For further special requests please consult our technical/commercial service.

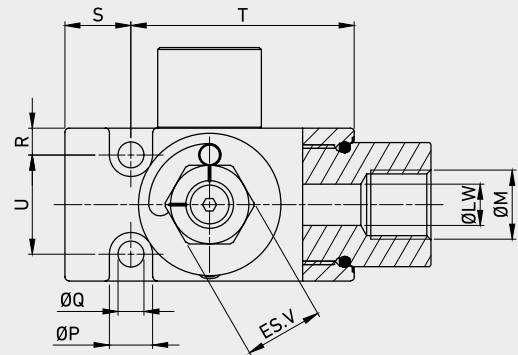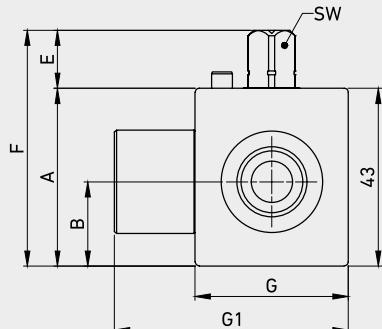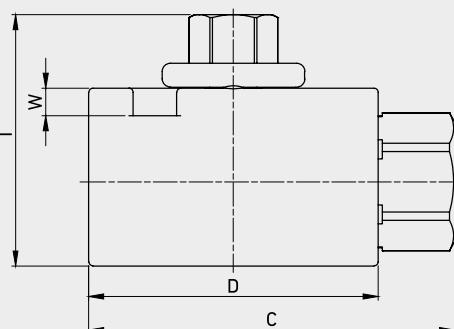

## ■ GV3 DIN/ISO 228 BSP

| TYPE          | DN | PN                 | A         | B    | C     | D    | E    | ES.V | F    | G    | G1   | I    | ØM        | ØP   | ØQ   | R    | S    | T    | U    | W    | SW   | ØLW  | WEIGHT   | ITEM CODE       |
|---------------|----|--------------------|-----------|------|-------|------|------|------|------|------|------|------|-----------|------|------|------|------|------|------|------|------|------|----------|-----------------|
|               |    |                    | MPa       | inch | mm    | inch | mm   | inch | mm   | inch | mm   | inch | mm        | inch | mm   | inch | mm   | inch | mm   | inch | mm   | kg   |          |                 |
| GV3 G 3/8     | 10 | MPa 50<br>Psi 7250 | 43        | 20,4 | 88,5  | 70   | 14,1 | 19   | 57,1 | 37   | 61   | 60,9 | G 3/8     | 10,5 | 6,25 | 6,5  | 16   | 54   | 24   | 6,6  | 9    | 10   | kg 1,15  | GV3GGT24011B000 |
|               |    | Psi 7250           | inch 1,69 | 0,80 | 3,48  | 2,76 | 0,56 | 0,75 | 2,25 | 1,46 | 2,40 | 2,40 |           | 0,41 | 0,25 | 0,26 | 0,63 | 2,13 | 0,94 | 0,26 | 0,35 | 0,39 | lb 2,54  |                 |
| GV3 G 1/2     | 13 | MPa 50<br>Psi 7250 | 45        | 21,7 | 103,5 | 80   | 14,1 | 19   | 59,1 | 45   | 66,5 | 62,9 | G 1/2     | 10,5 | 6,25 | 6,5  | 23   | 57   | 32   | 6,6  | 9    | 13   | kg 1,362 | GV3GGT33011B000 |
|               |    | Psi 7250           | inch 1,77 | 0,85 | 4,07  | 3,15 | 0,56 | 0,75 | 2,33 | 1,77 | 2,62 | 2,48 |           | 0,41 | 0,25 | 0,26 | 0,91 | 2,24 | 1,26 | 0,26 | 0,35 | 0,51 | lb 3,00  |                 |
| GV3 G 3/4     | 20 | MPa 35<br>Psi 5075 | 55        | 23,4 | 129,5 | 101  | 18,5 | 24   | 73,5 | 55   | 85   | 78   | G 3/4     | 13,5 | 9    | 7,5  | 25,5 | 75,5 | 40   | 8    | 14   | 20   | kg 2,51  | GV3GGT43011B000 |
|               |    | Psi 5075           | inch 2,17 | 0,92 | 5,10  | 3,98 | 0,73 | 0,94 | 2,89 | 2,17 | 3,35 | 3,07 |           | 0,53 | 0,35 | 0,30 | 1,00 | 2,97 | 1,57 | 0,31 | 0,55 | 0,79 | lb 5,53  |                 |
| GV3 G 1       | 25 | MPa 35<br>Psi 5075 | 65        | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 97,5 | 88   | G 1       | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg 3,564 | GV3GGT53011B000 |
|               |    | Psi 5075           | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,84 | 3,46 |           | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98 | lb 7,86  |                 |
| GV3 G 1 1/4 R | 25 | MPa 35<br>Psi 5075 | 65        | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 99   | 88   | G 1 1/4 R | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg 3,485 | GV3GGR63011B000 |
|               |    | Psi 5075           | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,90 | 3,46 |           | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98 | lb 7,68  |                 |
| GV3 G 1 1/4   | 32 | MPa 35<br>Psi 5075 | 80        | 33,5 | 133,5 | 105  | 18,5 | 30   | 98,5 | 80   | 118  | 104  | G 1 1/4   | 13,5 | 9    | 10   | 24,5 | 80,5 | 60   | 8    | 17   | 32   | kg 5,32  | GV3GGT63011B000 |
|               |    | Psi 5075           | inch 3,15 | 1,32 | 5,26  | 4,13 | 0,73 | 1,18 | 3,88 | 3,15 | 4,65 | 4,09 |           | 0,53 | 0,35 | 0,39 | 0,96 | 3,17 | 2,36 | 0,31 | 0,67 | 1,26 | lb 11,73 |                 |

**■ GV3 ANSI/ASME B1.20.1 NPT**

| TYPE          | DN | PN       | A         | B    | C     | D    | E    | ES.V | F    | G    | G1   | I    | ØM    | ØP   | ØQ   | R    | S    | T    | U    | W    | SW   | ØLW  | Carbon Steel |       | ITEM CODE       |
|---------------|----|----------|-----------|------|-------|------|------|------|------|------|------|------|-------|------|------|------|------|------|------|------|------|------|--------------|-------|-----------------|
|               |    |          |           |      |       |      |      |      |      |      |      |      |       |      |      |      |      |      |      |      |      |      |              |       |                 |
| GV3 N 3/8     | 10 | MPa 50   | mm 43     | 20,4 | 88,5  | 70   | 14,1 | 19   | 57,1 | 37   | 61   | 60,9 | N 3/8 | 10,5 | 6,25 | 6,5  | 16   | 54   | 24   | 6,6  | 9    | 10   | kg           | 1,15  | GV3NNT24011B000 |
|               |    | Psi 7250 | inch 1,69 | 0,80 | 3,48  | 2,76 | 0,56 | 0,75 | 2,25 | 1,46 | 2,40 | 2,40 |       | 0,41 | 0,25 | 0,26 | 0,63 | 2,13 | 0,94 | 0,26 | 0,35 | 0,39 | lb           | 2,54  |                 |
| GV3 N 1/2     | 13 | MPa 50   | mm 45     | 21,7 | 103,5 | 80   | 14,1 | 19   | 59,1 | 45   | 66,5 | 62,9 | N 1/2 | 10,5 | 6,25 | 6,5  | 23   | 57   | 32   | 6,6  | 9    | 13   | kg           | 1,362 | GV3NNT33011B000 |
|               |    | Psi 7250 | inch 1,77 | 0,85 | 4,07  | 3,15 | 0,56 | 0,75 | 2,33 | 1,77 | 2,62 | 2,48 |       | 0,41 | 0,25 | 0,26 | 0,91 | 2,24 | 1,26 | 0,26 | 0,35 | 0,51 | lb           | 3,00  |                 |
| GV3 N 3/4     | 20 | MPa 35   | mm 55     | 23,4 | 129,5 | 101  | 18,5 | 24   | 73,5 | 55   | 85   | 78   | N 3/4 | 13,5 | 9    | 7,5  | 25,5 | 75,5 | 40   | 8    | 14   | 20   | kg           | 2,51  | GV3NNT43011B000 |
|               |    | Psi 5075 | inch 2,17 | 0,92 | 5,10  | 3,98 | 0,73 | 0,94 | 2,89 | 2,17 | 3,35 | 3,07 |       | 0,53 | 0,35 | 0,30 | 1,00 | 2,97 | 1,57 | 0,31 | 0,55 | 0,79 | lb           | 5,53  |                 |
| GV3 N 1       | 25 | MPa 35   | mm 65     | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 97,5 | 88   | N 1   | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg           | 3,564 | GV3NNT53011B000 |
|               |    | Psi 5075 | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,90 | 3,46 |       | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98 | lb           | 7,86  |                 |
| GV3 N 1 1/4 R | 25 | MPa 35   | mm 65     | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 99   | 88   | N 1   | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg           | 3,485 | GV3NNR63011B000 |
|               |    | Psi 5075 | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,90 | 3,46 |       | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98 | lb           | 7,68  |                 |
| GV3 N 1 1/4   | 32 | MPa 35   | mm 80     | 33,5 | 133,5 | 105  | 18,5 | 30   | 98,5 | 80   | 118  | 104  | N 1   | 13,5 | 9    | 10   | 24,5 | 80,5 | 60   | 8    | 17   | 32   | kg           | 5,32  | GV3NNT63011B000 |
|               |    | Psi 5075 | inch 3,15 | 1,32 | 5,26  | 4,13 | 0,73 | 1,18 | 3,88 | 3,15 | 4,65 | 4,09 |       | 1/4  | 0,53 | 0,35 | 0,39 | 0,96 | 3,17 | 2,36 | 0,31 | 0,67 | 1,26         | lb    | 11,73           |

**■ GV3 SAE J1926-1**

| TYPE       | DN | PN       | A         | B    | C     | D    | E    | ES.V | F    | G    | G1   | I    | ØM  | ØP   | ØQ   | R    | S    | T    | U    | W    | SW   | ØLW  | Carbon Steel |       | ITEM CODE       |
|------------|----|----------|-----------|------|-------|------|------|------|------|------|------|------|-----|------|------|------|------|------|------|------|------|------|--------------|-------|-----------------|
|            |    |          |           |      |       |      |      |      |      |      |      |      |     |      |      |      |      |      |      |      |      |      |              |       |                 |
| GV3 SAE6   | 10 | MPa 50   | mm 43     | 20,4 | 88,5  | 70   | 14,1 | 19   | 57,1 | 37   | 61   | 60,9 | SAE | 10,5 | 6,25 | 6,5  | 16   | 54   | 24   | 6,6  | 9    | 10   | kg           | 1,15  | GV3EEE14011B000 |
|            |    | Psi 7250 | inch 1,69 | 0,80 | 3,48  | 2,76 | 0,56 | 0,75 | 2,25 | 1,46 | 2,40 | 2,40 |     | 6    | 0,41 | 0,25 | 0,26 | 0,63 | 2,13 | 0,94 | 0,26 | 0,35 | 0,39         | lb    | 2,54            |
| GV3 SAE8   | 13 | MPa 50   | mm 45     | 21,7 | 103,5 | 80   | 14,1 | 19   | 59,1 | 45   | 66,5 | 62,9 | SAE | 10,5 | 6,25 | 6,5  | 23   | 57   | 32   | 6,6  | 9    | 13   | kg           | 1,362 | GV3EEE23011B000 |
|            |    | Psi 7250 | inch 1,77 | 0,85 | 4,07  | 3,15 | 0,56 | 0,75 | 2,33 | 1,77 | 2,62 | 2,48 |     | 8    | 0,41 | 0,25 | 0,26 | 0,91 | 2,24 | 1,26 | 0,26 | 0,35 | 0,51         | lb    | 3,00            |
| GV3 SAE12  | 20 | MPa 35   | mm 55     | 23,4 | 129,5 | 101  | 18,5 | 24   | 73,5 | 55   | 85   | 78   | SAE | 13,5 | 9    | 7,5  | 25,5 | 75,5 | 40   | 8    | 14   | 20   | kg           | 2,51  | GV3EEE33011B000 |
|            |    | Psi 5075 | inch 2,17 | 0,92 | 5,10  | 3,98 | 0,73 | 0,94 | 2,89 | 2,17 | 3,35 | 3,07 |     | 12   | 0,53 | 0,35 | 0,30 | 1,00 | 2,97 | 1,57 | 0,31 | 0,55 | 0,79         | lb    | 5,53            |
| GV3 SAE16  | 25 | MPa 35   | mm 65     | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 97,5 | 88   | SAE | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg           | 3,564 | GV3EEE43011B000 |
|            |    | Psi 5075 | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,84 | 3,46 |     | 16   | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98         | lb    | 7,86            |
| GV3 SAE20R | 25 | MPa 35   | mm 65     | 29,5 | 133,5 | 105  | 18,5 | 24   | 83,5 | 65   | 99   | 88   | SAE | 13,5 | 9    | 8,5  | 27,5 | 77,5 | 48   | 8    | 14   | 25   | kg           | 3,485 | GV3EEE83011B000 |
|            |    | Psi 5075 | inch 2,56 | 1,16 | 5,26  | 4,13 | 0,73 | 0,94 | 3,29 | 2,56 | 3,90 | 3,46 |     | 20R  | 0,53 | 0,35 | 0,33 | 1,08 | 3,05 | 1,89 | 0,31 | 0,55 | 0,98         | lb    | 7,68            |
| GV3 SAE20  | 32 | MPa 35   | mm 80     | 33,5 | 133,5 | 105  | 18,5 | 30   | 98,5 | 80   | 118  | 104  | SAE | 13,5 | 9    | 10   | 24,5 | 80,5 | 60   | 8    | 17   | 32   | kg           | 5,32  | GV3EEE53011B000 |
|            |    | Psi 5075 | inch 3,15 | 1,32 | 5,26  | 4,13 | 0,73 | 1,18 | 3,88 | 3,15 | 4,65 | 4,09 |     | 20   | 0,53 | 0,35 | 0,39 | 0,96 | 3,17 | 2,36 | 0,31 | 0,67 | 1,26         | lb    | 11,73           |



# G3K


## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2

### Carbon Steel

- Type: ball valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

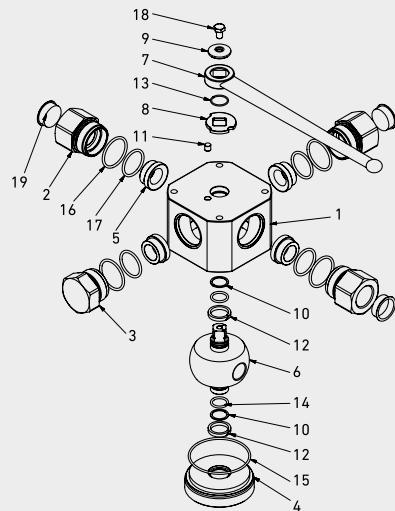

|     |                  |      | CS<br>Carbon Steel |  |     |                 |      | CS<br>Carbon Steel |  |
|-----|------------------|------|--------------------|--|-----|-----------------|------|--------------------|--|
| POS | DESCRIPTION      | Q.TY | MATERIAL           |  | POS | DESCRIPTION     | Q.TY | MATERIAL           |  |
| 1   | Body             | 1    | 1,0737             |  | 11  | Pin             | 1    | 1,0737             |  |
| 2   | Adapter          | 3    | 1,0737             |  | 12  | Body ring       | 2    | PTFE               |  |
| 3   | Close adapter    | 1    | 1,0737             |  | 13  | Seeger          | 1    | 1,4301             |  |
| 4   | Stemball adapter | 1    | 1,0737             |  | 14  | Stemball o-ring | 2    | NBR                |  |
| 5   | Ball seat        | 4    | POM                |  | 15  | Body o-ring     | 1    | NBR                |  |
| 6   | Ball stem        | 1    | 1,0737             |  | 16  | Adapter o-ring  | 4    | NBR                |  |
| 7   | Handle           | 1    | ZINC               |  | 17  | Seal o-ring     | 4    | NBR                |  |
| 8   | Washer           | 1    | 1,0116             |  | 18  | Screw           | 1    | DIN 6921 8.8       |  |
| 9   | Washer           | 1    | 1,0116             |  | 19  | Caps            | 4    | PVC                |  |
| 10  | Stemball ring    | 2    | PTFE               |  |     |                 |      |                    |  |



## CODE DESCRIPTION STRUCTURE

| G3K | K01 | G1/4 | DN6 | 1 | 1 | 1 | 1 | A | B |
|-----|-----|------|-----|---|---|---|---|---|---|
|-----|-----|------|-----|---|---|---|---|---|---|

Type and way of valve \_\_\_\_\_

G3K 3-way

Type of way \_\_\_\_\_

L K01

T K02

X K14

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G 1/4 N 1/4

G 3/8 N 3/8

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1

G 1 1/4 R N 1 1/4 R

G 1 1/2 R N 1 1/2 R

Size \_\_\_\_\_

from DN6 to DN25

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM


Seal material \_\_\_\_\_

B = NBR

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN35 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

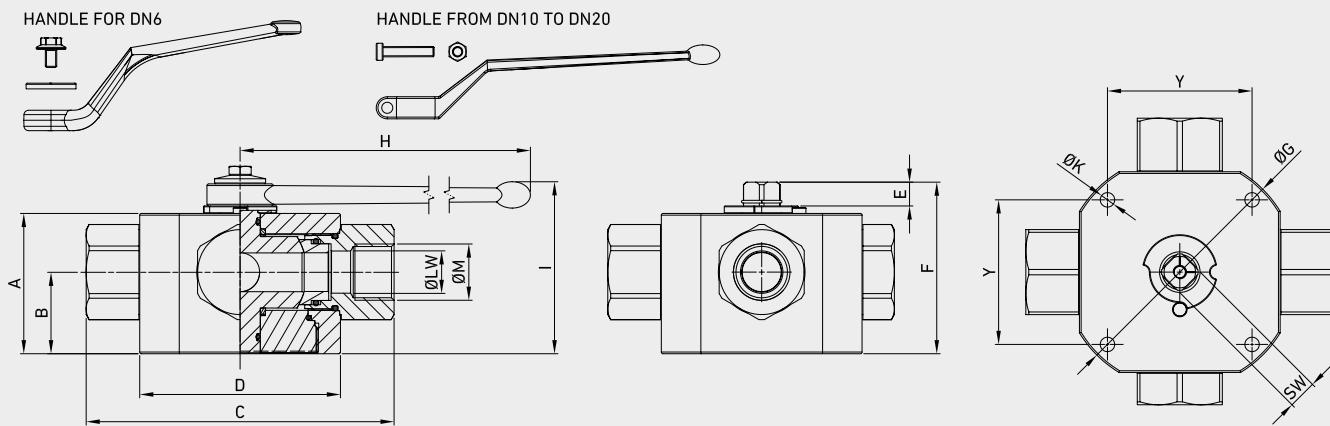

## G3K DIN ISO 228 BSP




| TYPE          | DN | PN       | A         | B    | C    | D    | E    | F     | ØG   | H     | I     | ØK   | ØM      | Y    | SW   | ØLW  | WEIGHT   |
|---------------|----|----------|-----------|------|------|------|------|-------|------|-------|-------|------|---------|------|------|------|----------|
| G3K G 1/4     | 6  | MPa 50   | mm 42     | 21,5 | 100  | 70   | 11   | 56,5  | -    | 110   | 97,5  | 6,5  | G 1/4   | 55   | 9    | 6    | kg 1,767 |
|               |    | Psi 7250 | inch 1,65 | 0,85 | 3,94 | 2,76 | 0,43 | 2,22  | -    | 4,33  | 3,84  | 0,26 |         | 2,17 | 0,35 | 0,24 | lb 3,90  |
| G3K G 3/8     | 10 | MPa 50   | mm 53     | 28,5 | 115  | 80   | 14   | 71,5  | -    | 180   | 101   | 6,5  | G 3/8   | 65   | 14   | 10   | kg 3,018 |
|               |    | Psi 7250 | inch 2,09 | 1,12 | 4,53 | 3,15 | 0,55 | 2,81  | -    | 7,09  | 3,98  | 0,26 |         | 2,56 | 0,55 | 0,39 | lb 6,65  |
| G3K G 1/2     | 13 | MPa 40   | mm 62     | 33   | 136  | 100  | 14   | 80,5  | -    | 180   | 110   | 8,5  | G 1/2   | 80   | 14   | 13   | kg 5,247 |
|               |    | Psi 5800 | inch 2,44 | 1,30 | 5,35 | 3,94 | 0,55 | 3,17  | -    | 7,09  | 4,33  | 0,33 |         | 3,15 | 0,55 | 0,51 | lb 11,57 |
| G3K G 3/4     | 20 | MPa 35   | mm 68     | 36   | 156  | 113  | 14   | 86,5  | -    | 300   | 116,5 | 8,5  | G 3/4   | 85   | 14   | 20   | kg 6,898 |
|               |    | Psi 5075 | inch 2,68 | 1,42 | 6,14 | 4,45 | 0,55 | 3,41  | -    | 11,81 | 4,59  | 0,33 |         | 3,35 | 0,55 | 0,79 | lb 15,21 |
| G3K G 1       | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | G 1     | 85   | 14   | 25   | kg 9,005 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 19,85 |
| G3K G 1 1/4 R | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | G 1 1/4 | 85   | 14   | 25   | kg 8,989 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 19,82 |
| G3K G 1 1/2 R | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | G 1 1/2 | 85   | 14   | 25   | kg 9,213 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 20,31 |

## G3K ANSI/ASME B1.20.1 NPT

| TYPE          | DN | PN       | A         | B    | C    | D    | E    | F     | ØG   | H     | I     | ØK   | ØM      | Y    | SW   | ØLW  | WEIGHT   |
|---------------|----|----------|-----------|------|------|------|------|-------|------|-------|-------|------|---------|------|------|------|----------|
| G3K N 1/4     | 6  | MPa 50   | mm 42     | 21,5 | 100  | 70   | 11   | 56,5  | -    | 110   | 97,5  | 6,5  | N 1/4   | 55   | 9    | 6    | kg 1,767 |
|               |    | Psi 7250 | inch 1,65 | 0,85 | 3,94 | 2,76 | 0,43 | 2,22  | -    | 4,33  | 3,84  | 0,26 |         | 2,17 | 0,35 | 0,24 | lb 3,90  |
| G3K N 3/8     | 10 | MPa 50   | mm 53     | 28,5 | 115  | 80   | 14   | 71,5  | -    | 180   | 101   | 6,5  | N 3/8   | 65   | 14   | 10   | kg 3,018 |
|               |    | Psi 7250 | inch 2,09 | 1,12 | 4,53 | 3,15 | 0,55 | 2,81  | -    | 7,09  | 3,98  | 0,26 |         | 2,56 | 0,55 | 0,39 | lb 6,65  |
| G3K N 1/2     | 13 | MPa 40   | mm 62     | 33   | 136  | 100  | 14   | 80,5  | -    | 180   | 110   | 8,5  | N 1/2   | 80   | 14   | 13   | kg 5,247 |
|               |    | Psi 5800 | inch 2,44 | 1,30 | 5,35 | 3,94 | 0,55 | 3,17  | -    | 7,09  | 4,33  | 0,33 |         | 3,15 | 0,55 | 0,51 | lb 11,57 |
| G3K N 3/4     | 20 | MPa 35   | mm 68     | 36   | 156  | 113  | 14   | 86,5  | -    | 300   | 116,5 | 8,5  | N 3/4   | 85   | 14   | 20   | kg 6,898 |
|               |    | Psi 5075 | inch 2,68 | 1,42 | 6,14 | 4,45 | 0,55 | 3,41  | -    | 11,81 | 4,59  | 0,33 |         | 3,35 | 0,55 | 0,79 | lb 15,21 |
| G3K N 1       | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | N 1     | 85   | 14   | 25   | kg 9,005 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 19,85 |
| G3K N 1 1/4 R | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | N 1 1/4 | 85   | 14   | 25   | kg 8,989 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 19,82 |
| G3K N 1 1/2 R | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | N 1 1/2 | 85   | 14   | 25   | kg 9,213 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 20,31 |

## ■ G3K DIN ISO 228 BSP

## ■ G3K ANSL/ASME B1.20.1 NPT

L scheme  
G3 K01T scheme  
G3 K02X scheme  
G3 K14


|    |  | CS<br>Carbon Steel |                 | CS<br>Carbon Steel |                 |
|----|--|--------------------|-----------------|--------------------|-----------------|
|    |  | ØLW-K01            | ITEM CODE G3K01 | ØLW-K01            | ITEM CODE G3K01 |
| 6  |  | G23GGT15011A000    |                 | 6                  | G23NNT15011A000 |
| 10 |  | G23GGT25011A000    |                 | 10                 | G23NNT25011A000 |
| 13 |  | G23GGT34011A000    |                 | 13                 | G23NNT34011A000 |
| 19 |  | G23GGT43011A000    |                 | 19                 | G23NNT43011A000 |
| 23 |  | G23GGT53011A000    |                 | 23                 | G23NNT53011A000 |
| 23 |  | G23GGR63011A000    |                 | 23                 | G23NNR63011A000 |
| 23 |  | G23GGR73011A000    |                 | 23                 | G23NNR73011A000 |

| ØLW-K02 | ITEM CODE G3K02 | ØLW-K02 | ITEM CODE G3K02 |
|---------|-----------------|---------|-----------------|
| 6       | G2AGGT15011A000 | 6       | G2ANNT15011A000 |
| 10      | G2AGGT25011A000 | 10      | G2ANNT25011A000 |
| 13      | G2AGGT34011A000 | 13      | G2ANNT34011A000 |
| 19      | G2AGGT43011A000 | 19      | G2ANNT43011A000 |
| 23      | G2AGGR53011A000 | 23      | G2ANNT53011A000 |
| 23      | G2AGGR63011A000 | 23      | G2ANNR63011A000 |
| 23      | G2AGGR73011A000 | 23      | G2ANNR73011A000 |


| ØLW-K14 | ITEM CODE G3K14 | ØLW-K14 | ITEM CODE G3K14 |
|---------|-----------------|---------|-----------------|
| 5       | G2BGGT15011A000 | 5       | G2BNNT15011A000 |
| 7       | G2BGGT25011A000 | 7       | G2BNNT25011A000 |
| 10      | G2BGGT34011A000 | 10      | G2BNNT34011A000 |
| 15      | G2BGGT43011A000 | 15      | G2BNNT43011A000 |
| 17      | G2BGGT53011A000 | 17      | G2BNNT53011A000 |
| 17      | G2BGGR63011A000 | 17      | G2BNNR63011A000 |
| 17      | G2BGGR73011A000 | 17      | G2BNNR73011A000 |

## ■ Special schemes on request


G3 K03




G3 K04




G3 K05




G3 K06




G3 K07




G3 K08




G3 K09




G3 K10



G3 K11



G3 K12





# G4K


## 4-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1

### CS Carbon Steel

- Type: ball valve 4 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

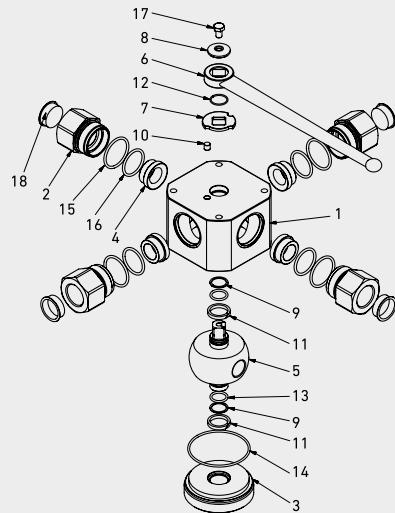

|     |                  |      | CS<br>Carbon Steel |  |     |                 |      | CS<br>Carbon Steel |  |
|-----|------------------|------|--------------------|--|-----|-----------------|------|--------------------|--|
| POS | DESCRIPTION      | Q.TY | MATERIAL           |  | POS | DESCRIPTION     | Q.TY | MATERIAL           |  |
| 1   | Body             | 1    | 1,0737             |  | 11  | Body ring       | 2    | PTFE               |  |
| 2   | Adapter          | 4    | 1,0737             |  | 12  | Seeger          | 1    | 1,4301             |  |
| 3   | Stemball adapter | 1    | 1,0737             |  | 13  | Stemball o-ring | 2    | NBR                |  |
| 4   | Ball seat        | 4    | POM                |  | 14  | Body o-ring     | 1    | NBR                |  |
| 5   | Ball stem        | 1    | 1,0737             |  | 15  | Adapter o-ring  | 4    | NBR                |  |
| 6   | Handle           | 1    | ZINC               |  | 16  | Seal o-ring     | 4    | NBR                |  |
| 7   | Washer           | 1    | 1,0116             |  | 17  | Screw           | 1    | DIN 6921 8.8       |  |
| 8   | Washer           | 1    | 1,0116             |  | 18  | Caps            | 4    | PVC                |  |
| 9   | Stemball ring    | 2    | PTFE               |  |     |                 |      |                    |  |
| 10  | Pin              | 1    | 1,0737             |  |     |                 |      |                    |  |



## CODE DESCRIPTION STRUCTURE

|            |            |             |            |          |          |          |          |          |          |
|------------|------------|-------------|------------|----------|----------|----------|----------|----------|----------|
| <b>G4K</b> | <b>K01</b> | <b>G1/4</b> | <b>DN6</b> | <b>1</b> | <b>1</b> | <b>1</b> | <b>1</b> | <b>A</b> | <b>B</b> |
|------------|------------|-------------|------------|----------|----------|----------|----------|----------|----------|

Type and way of valve \_\_\_\_\_

G4K 4-way

Type of way \_\_\_\_\_

L K01

T K02

X K14

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G 1/4 N 1/4

G 3/8 N 3/8

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1

G 1 1/4 R N 1 1/4 R

G 1 1/2 R N 1 1/2 R

Size \_\_\_\_\_

from DN6 to DN25

Body Material \_\_\_\_\_

● 1 = 1,0737

Adapter material \_\_\_\_\_

● 1 = 1,0737

Stem material \_\_\_\_\_

● 1 = 1,0737

Ball Material \_\_\_\_\_

● 1 = 1,0737

Seat material \_\_\_\_\_

A = POM


Seal material \_\_\_\_\_

B = NBR

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

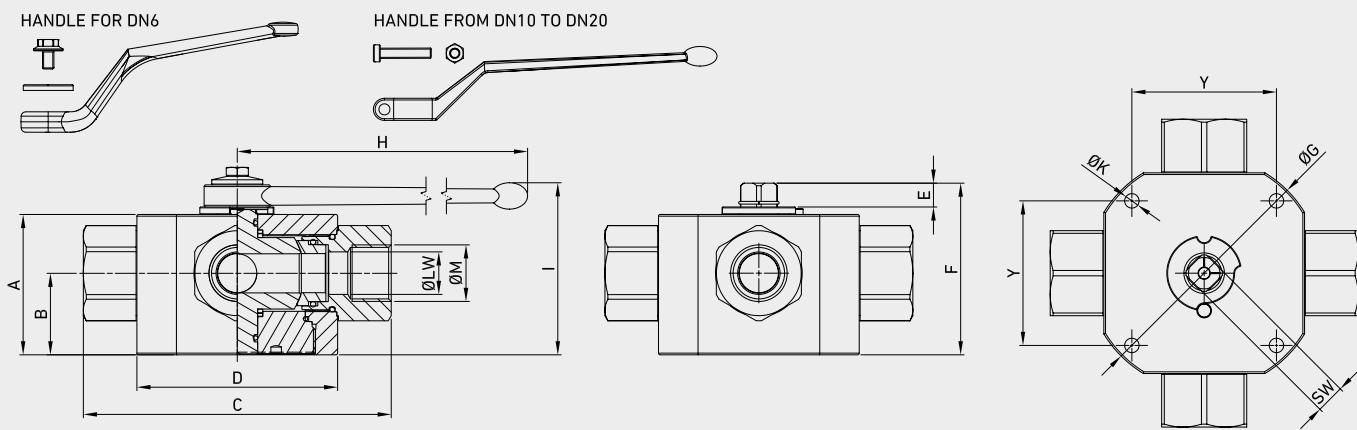

## G4K DIN ISO 228 BSP




| TYPE          | DN | PN       | A         | B    | C    | D    | E    | F     | ØG   | H     | I     | ØK   | ØM      | Y    | SW   | ØLW  | WEIGHT   |
|---------------|----|----------|-----------|------|------|------|------|-------|------|-------|-------|------|---------|------|------|------|----------|
| G4K G 1/4     | 6  | MPa 50   | mm 42     | 21,5 | 100  | 70   | 11   | 56,5  | -    | 110   | 97,5  | 6,5  | G 1/4   | 55   | 9    | 6    | kg 1,767 |
|               |    | Psi 7250 | inch 1,65 | 0,85 | 3,94 | 2,76 | 0,43 | 2,22  | -    | 4,33  | 3,84  | 0,26 |         | 2,17 | 0,35 | 0,24 | lb 3,90  |
| G4K G 3/8     | 10 | MPa 50   | mm 53     | 28,5 | 115  | 80   | 14   | 71,5  | -    | 180   | 101   | 6,5  | G 3/8   | 65   | 14   | 10   | kg 3,018 |
|               |    | Psi 7250 | inch 2,09 | 1,12 | 4,53 | 3,15 | 0,55 | 2,81  | -    | 7,09  | 3,98  | 0,26 |         | 2,56 | 0,55 | 0,39 | lb 6,65  |
| G4K G 1/2     | 13 | MPa 40   | mm 62     | 33   | 136  | 100  | 14   | 80,5  | -    | 180   | 110   | 8,5  | G 1/2   | 80   | 14   | 13   | kg 5,247 |
|               |    | Psi 5800 | inch 2,44 | 1,30 | 5,35 | 3,94 | 0,55 | 3,17  | -    | 7,09  | 4,33  | 0,33 |         | 3,15 | 0,55 | 0,51 | lb 11,57 |
| G4K G 3/4     | 20 | MPa 35   | mm 68     | 36   | 156  | 113  | 14   | 86,5  | -    | 300   | 116,5 | 8,5  | G 3/4   | 85   | 14   | 20   | kg 6,898 |
|               |    | Psi 5075 | inch 2,68 | 1,42 | 6,14 | 4,45 | 0,55 | 3,41  | -    | 11,81 | 4,59  | 0,33 |         | 3,35 | 0,55 | 0,79 | lb 15,21 |
| G4K G 1       | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | G 1     | 85   | 14   | 25   | kg 9,005 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 19,85 |
| G4K G 1 1/4 R | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | G 1 1/4 | 85   | 14   | 25   | kg 8,989 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 19,82 |
| G4K G 1 1/2 R | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | G 1 1/2 | 85   | 14   | 25   | kg 9,213 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 20,31 |

## G4K ANSI/ASME B1.20.1 NPT

| TYPE          | DN | PN       | A         | B    | C    | D    | E    | F     | ØG   | H     | I     | ØK   | ØM      | Y    | SW   | ØLW  | WEIGHT   |
|---------------|----|----------|-----------|------|------|------|------|-------|------|-------|-------|------|---------|------|------|------|----------|
| G4K N 1/4     | 6  | MPa 50   | mm 42     | 21,5 | 100  | 70   | 11   | 56,5  | -    | 110   | 97,5  | 6,5  | N 1/4   | 55   | 9    | 6    | kg 1,767 |
|               |    | Psi 7250 | inch 1,65 | 0,85 | 3,94 | 2,76 | 0,43 | 2,22  | -    | 4,33  | 3,84  | 0,26 |         | 2,17 | 0,35 | 0,24 | lb 3,90  |
| G4K N 3/8     | 10 | MPa 50   | mm 53     | 28,5 | 115  | 80   | 14   | 71,5  | -    | 180   | 101   | 6,5  | N 3/8   | 65   | 14   | 10   | kg 3,018 |
|               |    | Psi 7250 | inch 2,09 | 1,12 | 4,53 | 3,15 | 0,55 | 2,81  | -    | 7,09  | 3,98  | 0,26 |         | 2,56 | 0,55 | 0,39 | lb 6,65  |
| G4K N 1/2     | 13 | MPa 40   | mm 62     | 33   | 136  | 100  | 14   | 80,5  | -    | 180   | 110   | 8,5  | N 1/2   | 80   | 14   | 13   | kg 5,247 |
|               |    | Psi 5800 | inch 2,44 | 1,30 | 5,35 | 3,94 | 0,55 | 3,17  | -    | 7,09  | 4,33  | 0,33 |         | 3,15 | 0,55 | 0,51 | lb 11,57 |
| G4K N 3/4     | 20 | MPa 35   | mm 68     | 36   | 156  | 113  | 14   | 86,5  | -    | 300   | 116,5 | 8,5  | N 3/4   | 85   | 14   | 20   | kg 6,898 |
|               |    | Psi 5075 | inch 2,68 | 1,42 | 6,14 | 4,45 | 0,55 | 3,41  | -    | 11,81 | 4,59  | 0,33 |         | 3,35 | 0,55 | 0,79 | lb 15,21 |
| G4K N 1       | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | N 1     | 85   | 14   | 25   | kg 9,005 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 19,85 |
| G4K N 1 1/4 R | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | N 1 1/4 | 85   | 14   | 25   | kg 8,989 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 19,82 |
| G4K N 1 1/2 R | 25 | MPa 35   | mm 82     | 47,5 | 181  | 118  | 14   | 100,5 | 138  | 300   | 130,5 | 8,5  | N 1 1/2 | 85   | 14   | 25   | kg 9,213 |
|               |    | Psi 5075 | inch 3,23 | 1,87 | 7,13 | 4,65 | 0,55 | 3,96  | 5,43 | 11,81 | 5,14  | 0,33 |         | 3,35 | 0,55 | 0,98 | lb 20,31 |

## ■ G4K DIN ISO 228 BSP

## ■ G4K ANSL/ASME B1.20.1 NPT

L scheme  
G4 K01T scheme  
G4 K13X scheme  
G4 K14


|    |  | CS<br>Carbon Steel |                 | CS<br>Carbon Steel |                 |
|----|--|--------------------|-----------------|--------------------|-----------------|
|    |  | ØLW-K01            | ITEM CODE G4K01 | ØLW-K01            | ITEM CODE G4K01 |
| 6  |  | G24GGT15011A000    |                 | 6                  | G24NNT15011A000 |
| 10 |  | G24GGT25011A000    |                 | 10                 | G24NNT25011A000 |
| 13 |  | G24GGT34011A000    |                 | 13                 | G24NNT34011A000 |
| 19 |  | G24GGT43011A000    |                 | 19                 | G24NNT43011A000 |
| 23 |  | G24GGT53011A000    |                 | 23                 | G24NNT53011A000 |
| 23 |  | G24GGR63011A000    |                 | 23                 | G24NNR63011A000 |
| 23 |  | G24GGR73011A000    |                 | 23                 | G24NNR73011A000 |

|    |  | ØLW-K13         | ITEM CODE G4K13 | ØLW-K13 | ITEM CODE G4K13 |
|----|--|-----------------|-----------------|---------|-----------------|
| 6  |  | G2DGGT15011A000 |                 | 6       | G2DNNT15011A000 |
| 10 |  | G2DGGT25011A000 |                 | 10      | G2DNNT25011A000 |
| 13 |  | G2DGGT34011A000 |                 | 13      | G2DNNT34011A000 |
| 19 |  | G2DGGT43011A000 |                 | 19      | G2DNNT43011A000 |
| 23 |  | G2DGGT53011A000 |                 | 23      | G2DNNT53011A000 |
| 23 |  | G2DGGR63011A000 |                 | 23      | G2DNNR63011A000 |
| 23 |  | G2DGGR73011A000 |                 | 23      | G2DNNR73011A000 |


|    |  | ØLW-K14         | ITEM CODE G4K14 | ØLW-K14 | ITEM CODE G3K14 |
|----|--|-----------------|-----------------|---------|-----------------|
| 5  |  | G2EGGT15011A000 |                 | 5       | G2ENNT15011A000 |
| 7  |  | G2EGGT25011A000 |                 | 7       | G2ENNT25011A000 |
| 10 |  | G2EGGT34011A000 |                 | 10      | G2ENNT34011A000 |
| 15 |  | G2EGGT43011A000 |                 | 15      | G2ENNT43011A000 |
| 17 |  | G2EGGT53011A000 |                 | 17      | G2ENNT53011A000 |
| 17 |  | G2EGGR63011A000 |                 | 17      | G2ENNR63011A000 |
| 17 |  | G2EGGR73011A000 |                 | 17      | G2ENNR73011A000 |

## ■ Special schemes on request


G4 K15




G4 K19




G4 K23




G4 K27




G4 K16




G4 K20




G4 K24




G4 K17




G4 K21




G4 K25




G4 K18



G4 K22



G4 K26





# GPK2


## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1

### Carbon Steel

- Type: manifold
- Sizes: from DN6 up to DN50
- Ends: Drilling pattern Gemels
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

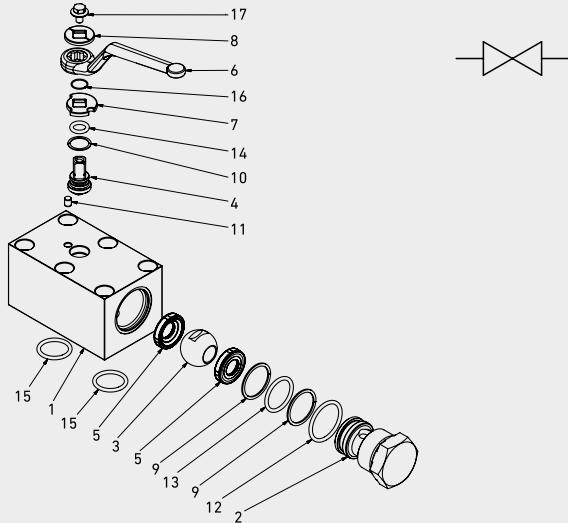

|     |             |      | CS           |  |     |                |      | CS           |  |
|-----|-------------|------|--------------|--|-----|----------------|------|--------------|--|
|     |             |      | Carbon Steel |  |     |                |      | Carbon Steel |  |
| POS | DESCRIPTION | Q.TY | MATERIAL     |  | POS | DESCRIPTION    | Q.TY | MATERIAL     |  |
| 1   | Body        | 1    | 1,0737       |  | 11  | Seeger         | 1    | 1,4301       |  |
| 2   | Adapter     | 1    | 1,0737       |  | 12  | Adapter o-ring | 1    | NBR          |  |
| 3   | Ball        | 1    | 1,0737       |  | 13  | Adapter o-ring | 1    | NBR          |  |
| 4   | Stem        | 1    | 1,0737       |  | 14  | Body o-ring    | 2    | NBR          |  |
| 5   | Ball seat   | 2    | POM          |  | 15  | Stem o-ring    | 1    | NBR          |  |
| 6   | Handle      | 1    | ZINC         |  | 16  | Screw          | 1    | Din 6921 8.8 |  |
| 7   | Washer      | 1    | 1,0116       |  | 17  | Back-Up        | 2    | PTFE         |  |
| 8   | Washer      | 1    | 1,0116       |  |     |                |      |              |  |
| 9   | Stem ring   | 1    | POM          |  |     |                |      |              |  |
| 10  | Pin         | 1    | 1,0737       |  |     |                |      |              |  |



## CODE DESCRIPTION STRUCTURE

|             |             |          |          |          |          |          |          |
|-------------|-------------|----------|----------|----------|----------|----------|----------|
| <b>GPK2</b> | <b>DN13</b> | <b>1</b> | <b>1</b> | <b>1</b> | <b>1</b> | <b>A</b> | <b>B</b> |
|-------------|-------------|----------|----------|----------|----------|----------|----------|

Type and way of valve \_\_\_\_\_

GPK2 2-way

Size \_\_\_\_\_

from DN6 to DN50

Body Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Adapter material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Stem material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Ball Material \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\*


\*On request

- Reduced bore
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

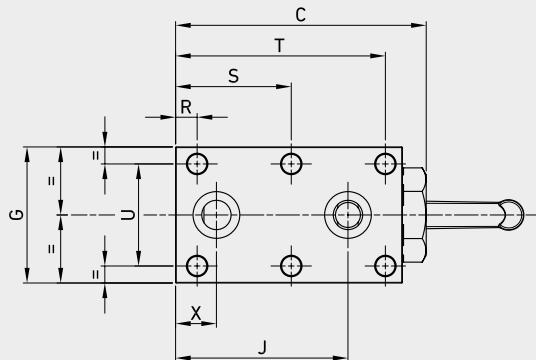




HANDLE FOR DN6



HANDLE FROM DN20 TO DN25




HANDLE FROM DN32 TO DN50

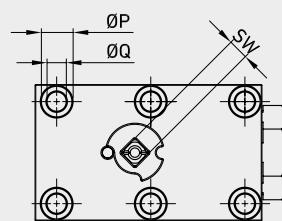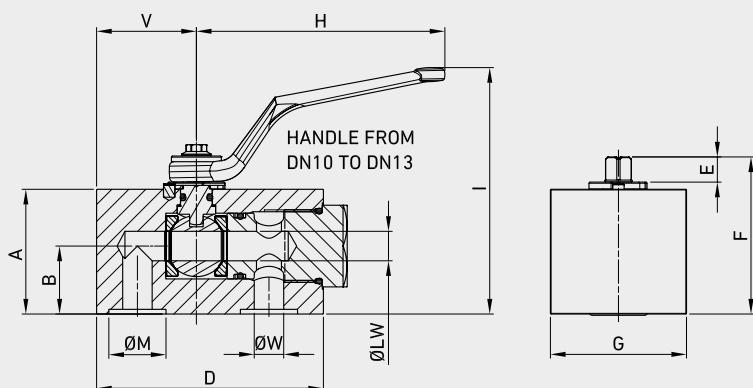

## GPK2


**CS**  
Carbon Steel

| TYPE | DN | PN       | A                  | B    | C     | D     | E    | F    | G    | H     | I     | J    | ØM   | ØP   | ØQ   | R    | S    | T     | U    | V     | ØW   | X    | SW        | ØLW             | WEIGHT          | ITEM CODE       |
|------|----|----------|--------------------|------|-------|-------|------|------|------|-------|-------|------|------|------|------|------|------|-------|------|-------|------|------|-----------|-----------------|-----------------|-----------------|
| GPK2 | 6  | MPa 50   | mm 35              | 22,5 | 64,5  | 58    | 7,5  | 42,5 | 40   | 60    | 61    | 44,5 | 11,8 | 10,5 | 6,5  | 9    | -    | 44    | 27   | 26,5  | 6    | 9,5  | 6         | kg 0,593        | GP200T15011A000 |                 |
|      |    | Psi 7250 | inch 1,38          | 0,89 | 2,54  | 2,28  | 0,30 | 1,67 | 1,57 | 2,36  | 2,40  | 1,75 | 0,46 | 0,41 | 0,26 | 0,35 | -    | 1,73  | 1,06 | 1,04  | 0,24 | 0,37 | 0,24      | 0,24            | lb 1,31         |                 |
| GPK2 | 10 | MPa 50   | mm 45              | 22,5 | 79,5  | 70    | 11   | 59   | 55   | 110   | 101   | 54   | 14,9 | 13,5 | 8,5  | 7,5  | -    | 62,5  | 40   | 28,75 | 9,8  | 10   | 9         | 10              | kg 1,304        | GP200T25011A000 |
|      |    | Psi 7250 | inch 1,77          | 0,89 | 3,13  | 2,76  | 0,43 | 2,32 | 2,17 | 4,33  | 3,98  | 2,13 | 0,59 | 0,53 | 0,33 | 0,30 | -    | 2,46  | 1,57 | 1,13  | 0,39 | 0,39 | 0,35      | 0,39            | lb 2,87         |                 |
| GPK2 | 13 | MPa 40   | mm 55              | 30   | 110,5 | 100   | 11   | 69   | 60   | 110   | 111   | 76   | 24,9 | 13,5 | 8,5  | 9,5  | 51   | 92,5  | 45   | 44    | 13   | 18   | 9         | 13              | kg 2,387        | GP200T34011A000 |
|      |    | Psi 5800 | inch 2,17          | 1,18 | 4,35  | 3,94  | 0,43 | 2,72 | 2,36 | 4,33  | 4,37  | 2,99 | 0,98 | 0,53 | 0,33 | 0,37 | 2,01 | 3,64  | 1,77 | 1,73  | 0,51 | 0,71 | 0,35      | 0,51            | lb 5,26         |                 |
| GPK2 | 20 | MPa 35   | mm 70              | 38,5 | 129   | 118   | 14   | 88,5 | 70   | 180   | 121,5 | 90   | 29   | 16,5 | 10,5 | 11,5 | 60   | 108,5 | 51   | 52    | 20   | 21   | 14        | 20              | kg 4,079        | GP200T43011A000 |
|      |    | Psi 5075 | inch 2,76          | 1,52 | 5,08  | 4,65  | 0,55 | 3,48 | 2,76 | 7,09  | 4,78  | 3,54 | 1,14 | 0,65 | 0,41 | 0,45 | 2,36 | 4,27  | 2,01 | 2,05  | 0,79 | 0,83 | 0,55      | 0,79            | lb 8,99         |                 |
| GPK2 | 25 | MPa 35   | mm 79,5            | 44   | 146   | 135   | 14   | 98   | 80   | 180   | 131   | 105  | 34,9 | 16,5 | 10,5 | 9    | 66,5 | 124   | 60   | 61,25 | 25   | 24   | 14        | 25              | kg 5,883        | GP200T53011A000 |
|      |    | Psi 5075 | inch 3,13          | 1,73 | 5,75  | 5,31  | 0,55 | 3,86 | 3,15 | 7,09  | 5,16  | 4,13 | 1,37 | 0,65 | 0,41 | 0,35 | 2,62 | 4,88  | 2,36 | 2,41  | 0,98 | 0,94 | 0,55      | 0,98            | lb 12,97        |                 |
| GPK2 | 32 | MPa 35   | mm 105,558,75183,5 | 165  | 14    | 124   | 100  | 300  | 124  | 124   | 39,7  | 19   | 13   | 11   | 79   | 147  | 78   | 74    | 32   | 28    | 17   | 32   | kg 12,169 | GP200T63011A000 |                 |                 |
|      |    | Psi 5075 | inch 4,15          | 2,31 | 7,22  | 6,50  | 0,55 | 4,88 | 3,94 | 11,81 | 4,88  | 4,88 | 1,56 | 0,75 | 0,51 | 0,43 | 3,11 | 5,79  | 3,07 | 2,91  | 1,26 | 1,10 | 0,67      | 1,26            | lb 26,83        |                 |
| GPK2 | 40 | MPa 35   | mm 115,61,25201,5  | 185  | 14    | 133,5 | 130  | 300  | 134  | 141   | 47,7  | 25   | 16,5 | 29   | 85   | 141  | 95   | 85    | 37   | 29    | 17   | 40   | kg 18,624 | GP200T73011A000 |                 |                 |
|      |    | Psi 5075 | inch 4,53          | 2,41 | 7,93  | 7,28  | 0,55 | 5,26 | 5,12 | 11,81 | 5,28  | 5,55 | 1,88 | 0,98 | 0,65 | 1,14 | 3,35 | 5,55  | 3,74 | 3,35  | 1,46 | 1,14 | 0,67      | 1,57            | lb 41,06        |                 |
| GPK2 | 50 | MPa 35   | mm 129             | 72   | 256,5 | 240   | 14   | 147  | 150  | 300   | 147,5 | 174  | 59,8 | 31   | 21   | 38   | 106  | 174   | 112  | 106   | 48   | 38   | 17        | 48              | kg 30,644       | GP200T83011A000 |
|      |    | Psi 5075 | inch 5,08          | 2,83 | 10,10 | 9,45  | 0,55 | 5,79 | 5,91 | 11,81 | 5,81  | 6,85 | 2,35 | 1,22 | 0,83 | 1,50 | 4,17 | 6,85  | 4,41 | 4,17  | 1,89 | 1,50 | 0,67      | 1,89            | lb 67,56        |                 |

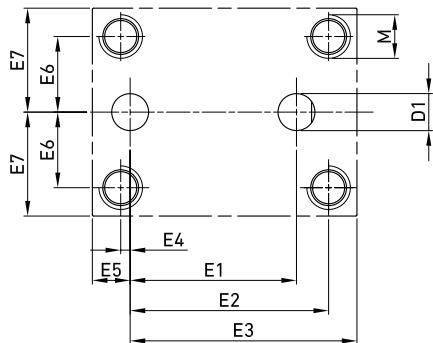

## DRILLING PATTERN FOR DN6 TO DN10

| DN | D1                  | E1         | E2           | E3           | E4          | E5          | E6           | E7           | M  | O-RING      |
|----|---------------------|------------|--------------|--------------|-------------|-------------|--------------|--------------|----|-------------|
| 6  | mm 6<br>inch 0,24   | 35<br>1,38 | 34,5<br>1,36 | 48,5<br>1,91 | 0,5<br>0,02 | 9,5<br>0,37 | 13,5<br>0,53 | 20<br>0,79   | M6 | 7,30 X 2,40 |
| 10 | mm 9,5<br>inch 0,37 | 44<br>1,73 | 52,5<br>2,07 | 60<br>2,36   | 2,5<br>0,10 | 10<br>0,39  | 20<br>0,79   | 27,5<br>1,08 | M8 | 9,92 X 2,62 |

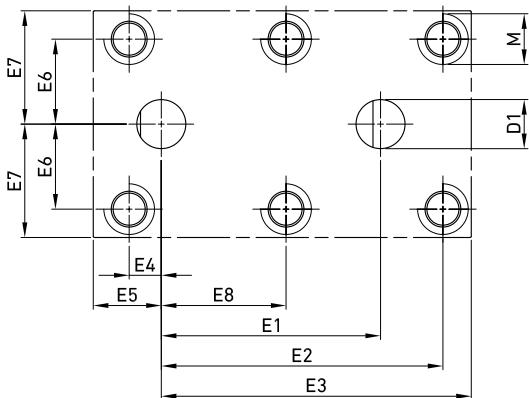

## DRILLING PATTERN FOR DN13 TO DN50

| DN | D1                 | E1         | E2           | E3          | E4          | E5         | E6           | E7         | E8         | M   | O-RING       |
|----|--------------------|------------|--------------|-------------|-------------|------------|--------------|------------|------------|-----|--------------|
| 13 | mm 13<br>inch 0,51 | 58<br>2,28 | 74,5<br>2,93 | 82<br>3,23  | 8,5<br>0,33 | 18<br>0,71 | 22,5<br>0,89 | 30<br>1,18 | 33<br>1,30 | M8  | 20,64 X 2,62 |
| 20 | mm 20<br>inch 0,79 | 69<br>2,72 | 87,5<br>3,44 | 97<br>3,82  | 9,5<br>0,37 | 21<br>0,83 | 25,5<br>1,00 | 35<br>1,38 | 39<br>1,54 | M10 | 23,81 X 2,62 |
| 25 | mm 25<br>inch 0,98 | 81<br>3,19 | 100<br>3,94  | 111<br>4,37 | 15<br>0,59  | 24<br>0,94 | 30<br>1,18   | 40<br>1,57 | 43<br>1,69 | M10 | 31,42 X 2,62 |
| 32 | mm 32<br>inch 1,26 | 96<br>3,78 | 119<br>4,69  | 137<br>5,39 | 17<br>0,67  | 28<br>1,10 | 39<br>3,07   | 50<br>1,97 | 51<br>2,01 | M12 | 34,59 X 2,62 |
| 40 | mm 37<br>inch 1,46 | -<br>-     | 112<br>4,41  | 156<br>6,14 | -<br>-      | 29<br>1,14 | 47,5<br>1,87 | 65<br>2,56 | 56<br>2,20 | M16 | 42,52 X 2,62 |
| 50 | mm 48<br>inch 1,89 | -<br>-     | 136<br>5,35  | 202<br>7,95 | -<br>-      | 38<br>1,50 | 56<br>2,20   | 75<br>2,95 | 68<br>2,68 | M20 | 53,64 X 2,62 |



# GPK3


## 3-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1

### Carbon Steel

- Type: manifold
- Sizes: from DN6 up to DN50
- Ends: Drilling pattern Gemels
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### STANDARD COMPOSITION OF VALVE

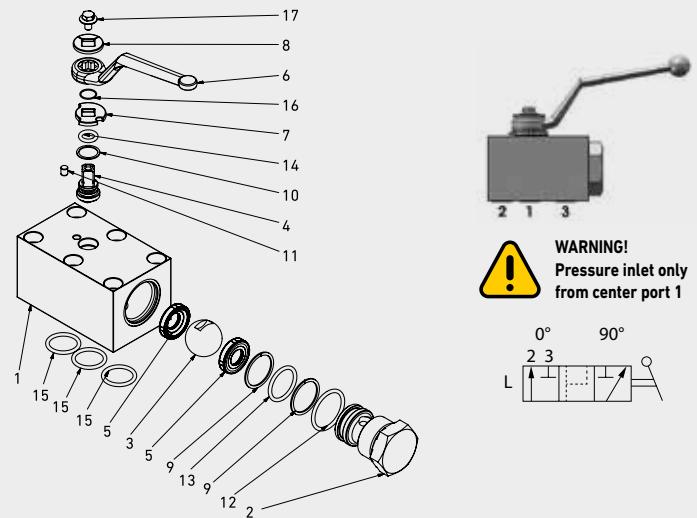

|     |             |      | CS<br>Carbon Steel |  |     |                |      | CS<br>Carbon Steel |  |
|-----|-------------|------|--------------------|--|-----|----------------|------|--------------------|--|
| POS | DESCRIPTION | Q.TY | MATERIAL           |  | POS | DESCRIPTION    | Q.TY | MATERIAL           |  |
| 1   | Body        | 1    | 1,0737             |  | 11  | Seeger         | 1    | 1,4301             |  |
| 2   | Adapter     | 1    | 1,0737             |  | 12  | Adapter o-ring | 1    | NBR                |  |
| 3   | Ball        | 1    | 1,0737             |  | 13  | Adapter o-ring | 1    | NBR                |  |
| 4   | Stem        | 1    | 1,0737             |  | 14  | Body o-ring    | 3    | NBR                |  |
| 5   | Ball seat   | 2    | POM                |  | 15  | Stem o-ring    | 1    | NBR                |  |
| 6   | Handle      | 1    | ZINC               |  | 16  | Screw          | 1    | Din 6921 8.8       |  |
| 7   | Washer      | 1    | 1,0116             |  | 17  | Back-Up        | 2    | PTFE               |  |
| 8   | Washer      | 1    | 1,0116             |  |     |                |      |                    |  |
| 9   | Stem ring   | 1    | POM                |  |     |                |      |                    |  |
| 10  | Pin         | 1    | 1,0737             |  |     |                |      |                    |  |



## CODE DESCRIPTION STRUCTURE

|      |      |   |   |   |   |   |   |
|------|------|---|---|---|---|---|---|
| GPK3 | DN13 | 1 | 1 | 1 | 1 | A | B |
|------|------|---|---|---|---|---|---|

**Type and way of valve** \_\_\_\_\_

GPK3 3-way

**Size** \_\_\_\_\_

from DN6 to DN50

**Body Material** \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

**Adapter material** \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

**Stem material** \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

**Ball Material** \_\_\_\_\_

● 1 = 1,0737 4 = 1,4404\*

**Seat material** \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


**Seal material** \_\_\_\_\_

B = NBR E = FKM\*

\*On request

- Reduced bore
- Pressure class up to PN50 MPa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

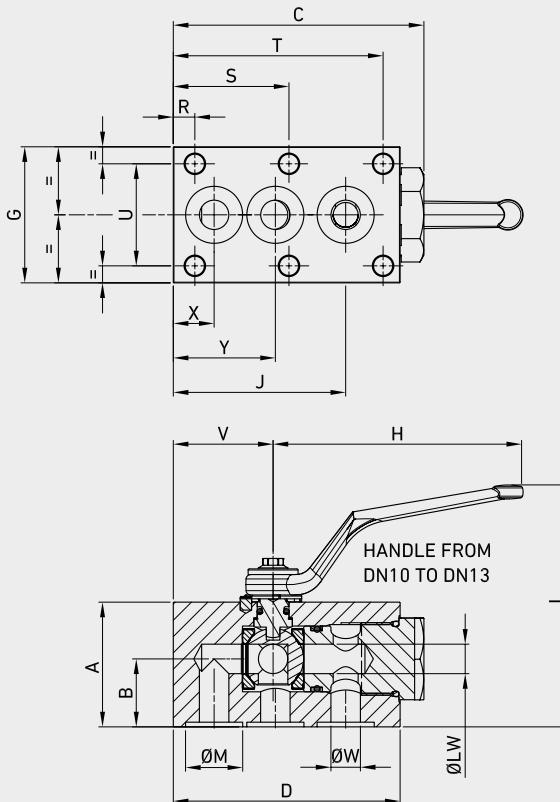


HANDLE FOR DN6



HANDLE FROM DN20 TO DN25




HANDLE FROM DN32 TO DN50

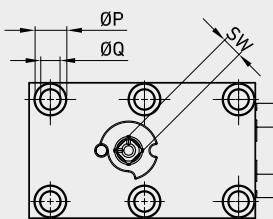

## GPK3

**CS**  
Carbon Steel  
ITEM CODE

| TYPE | DN | PN                 | A   | B  | C               | D | E | F | G | H | I | J | ØM | ØP | ØQ | R | S | T | U | V | ØW | X | Y | SW | ØLW | WEIGHT |  |
|------|----|--------------------|---|--|-----------------|---|---|---|---|---|---|---|----|----|----|---|---|---|---|---|----|---|---|----|-----|--------|--|
| GPK3 | 6  | MPa 50<br>Psi 7250 | mm 35 22,5 65 58 7,5 42,5 40 110 61 44,5 11,8 10,5 6,5 9 - 44 27 26,5 6 9,5 27 6 6 kg 0,593         | inch 1,38 0,89 2,56 2,28 0,30 1,67 1,57 4,33 2,40 1,75 0,46 0,41 0,26 0,35 - 1,73 1,06 1,04 0,24 0,37 1,06 0,24 0,24 lb 1,31       | GP300T15011A000 |   |   |   |   |   |   |   |    |    |    |   |   |   |   |   |    |   |   |    |     |        |  |
| GPK3 | 10 | MPa 50<br>Psi 7250 | mm 45 22,5 80 70 11 59 55 110 101 54 14,9 13,5 8,5 7,5 - 62,5 40 28,75 9,8 10 29 9 10 kg 1,304      | inch 1,77 0,89 3,15 2,76 0,43 2,32 2,17 4,33 3,98 2,13 0,59 0,53 0,33 0,30 - 2,46 1,57 1,13 0,39 0,39 1,14 0,35 0,39 lb 2,87       | GP300T25011A000 |   |   |   |   |   |   |   |    |    |    |   |   |   |   |   |    |   |   |    |     |        |  |
| GPK3 | 13 | MPa 40<br>Psi 5800 | mm 55 30 111 100 11 69 60 110 111 76 24,9 13,5 8,5 9,5 51 92,5 45 44 13 18 44,5 9 13 kg 2,387       | inch 2,17 1,18 4,37 3,94 0,43 2,72 2,36 4,33 4,37 2,99 0,98 0,53 0,33 0,37 2,01 3,64 1,77 1,73 0,51 0,71 1,75 0,35 0,51 lb 5,26    | GP300T34011A000 |   |   |   |   |   |   |   |    |    |    |   |   |   |   |   |    |   |   |    |     |        |  |
| GPK3 | 20 | MPa 35<br>Psi 5075 | mm 70 38,5 129 118 14 88,5 70 180 121,5 90 29 16,5 10,5 11,5 60 108,5 51 52 20 21 52 14 20 kg 4,079 | inch 2,76 1,52 5,08 4,65 0,55 3,48 2,76 7,09 4,78 3,54 1,14 0,65 0,41 0,45 2,36 4,27 2,01 2,05 0,79 0,83 2,05 0,55 0,79 lb 8,99    | GP300T43011A000 |   |   |   |   |   |   |   |    |    |    |   |   |   |   |   |    |   |   |    |     |        |  |
| GPK3 | 25 | MPa 35<br>Psi 5075 | mm 80 44 146 135 14 98 80 180 131 105 34,9 16,5 10,5 9 66,5 124 60 61,25 25 24 62 14 25 kg 5,883    | inch 3,15 1,73 5,75 5,31 0,55 3,86 3,15 7,09 5,16 4,13 1,37 0,65 0,41 0,35 2,62 4,88 2,36 2,41 0,98 0,94 2,44 0,55 0,98 lb 12,97   | GP300T53011A000 |   |   |   |   |   |   |   |    |    |    |   |   |   |   |   |    |   |   |    |     |        |  |
| GPK3 | 32 | MPa 35<br>Psi 5075 | mm 106 58,8 184 165 14 124 100 300 124 124 39,7 19 13 11 79 147 78 74 32 28 74 17 32 kg 12,169      | inch 4,17 2,31 7,24 6,50 0,55 4,88 3,94 11,81 4,88 4,88 1,56 0,75 0,51 0,43 3,11 5,79 3,07 2,91 1,26 1,10 2,91 0,67 1,26 lb 26,83  | GP300T63011A000 |   |   |   |   |   |   |   |    |    |    |   |   |   |   |   |    |   |   |    |     |        |  |
| GPK3 | 40 | MPa 35<br>Psi 5075 | mm 115 61,3 202 185 14 133,5 130 300 134 141 47,7 25 16,5 29 85 141 95 85 37 29 85 17 40 kg 18,624  | inch 4,53 2,41 7,95 7,28 0,55 5,26 5,12 11,81 5,28 5,55 1,88 0,98 0,65 1,14 3,35 5,55 3,74 3,35 1,46 1,14 3,35 0,67 1,57 lb 41,06  | GP300T73011A000 |   |   |   |   |   |   |   |    |    |    |   |   |   |   |   |    |   |   |    |     |        |  |
| GPK3 | 50 | MPa 35<br>Psi 5075 | mm 129 72 257 240 14 147 150 300 147,5 174 59,8 31 21 38 106 174 112 106 48 38 106 17 48 kg 30,644  | inch 5,08 2,83 10,12 9,45 0,55 5,79 5,91 11,81 5,81 6,85 2,35 1,22 0,83 1,50 4,17 6,85 4,41 4,17 1,89 1,50 4,17 0,67 1,89 lb 67,56 | GP300T83011A000 |   |   |   |   |   |   |   |    |    |    |   |   |   |   |   |    |   |   |    |     |        |  |

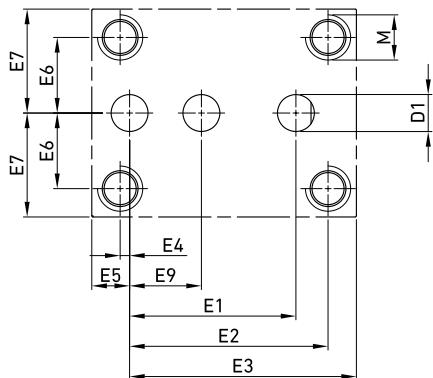


## DRILLING PATTERN FOR DN6 TO DN10

| DN |      | D1   | E1   | E2   | E3   | E4   | E5   | E6   | E7   | E9   | M  | O-RING      |
|----|------|------|------|------|------|------|------|------|------|------|----|-------------|
| 6  | mm   | 6    | 35   | 34,5 | 48,5 | 0,5  | 9,5  | 13,5 | 20   | 20   | M6 | 7,30 X 2,40 |
|    | inch | 0,24 | 1,38 | 1,36 | 1,91 | 0,02 | 0,37 | 0,53 | 0,79 | 0,79 |    |             |

| DN |      | D1   | E1   | E2   | E3   | E4   | E5   | E6   | E7   | E9   | M  | O-RING      |
|----|------|------|------|------|------|------|------|------|------|------|----|-------------|
| 10 | mm   | 9,5  | 44   | 52,5 | 60   | 2,5  | 10   | 20   | 27,5 | 27,5 | M8 | 9,92 X 2,62 |
|    | inch | 0,37 | 1,73 | 2,07 | 2,36 | 0,10 | 0,39 | 0,79 | 1,08 | 1,08 |    |             |

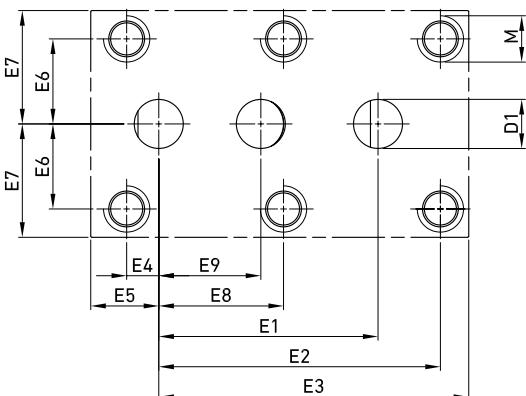

## DRILLING PATTERN FOR DN13 TO DN50

| DN |      | D1   | E1   | E2   | E3   | E4   | E5   | E6   | E7   | E8   | E9   | M   | O-RING       |
|----|------|------|------|------|------|------|------|------|------|------|------|-----|--------------|
| 13 | mm   | 13   | 58   | 74,5 | 82   | 8,5  | 18   | 22,5 | 30   | 33   | 27   | M8  | 20,64 X 2,62 |
|    | inch | 0,51 | 2,28 | 2,93 | 3,23 | 0,33 | 0,71 | 0,89 | 1,18 | 1,30 | 1,06 |     |              |
| 20 | mm   | 20   | 69   | 87,5 | 97   | 9,5  | 21   | 25,5 | 35   | 39   | 31   | M10 | 23,81 X 2,62 |
|    | inch | 0,79 | 2,72 | 3,44 | 3,82 | 0,37 | 0,83 | 1,00 | 1,38 | 1,54 | 1,22 |     |              |
| 25 | mm   | 25   | 81   | 100  | 111  | 15   | 24   | 30   | 40   | 43   | 38   | M10 | 31,42 X 2,62 |
|    | inch | 0,98 | 3,19 | 3,94 | 4,37 | 0,59 | 0,94 | 1,18 | 1,57 | 1,69 | 1,50 |     |              |
| 32 | mm   | 32   | 96   | 119  | 137  | 17   | 28   | 39   | 50   | 51   | 46   | M12 | 34,59 X 2,62 |
|    | inch | 1,26 | 3,78 | 4,69 | 5,39 | 0,67 | 1,10 | 1,54 | 1,97 | 2,01 | 1,81 |     |              |
| 40 | mm   | 37   | 112  | 112  | 156  | -    | 29   | 47,5 | 65   | 56   | 56   | M16 | 42,52 X 2,62 |
|    | inch | 1,46 | 4,41 | 4,41 | 6,14 | -    | 1,14 | 1,87 | 2,56 | 2,20 | 2,20 |     |              |
| 50 | mm   | 48   | 136  | 136  | 202  | -    | 38   | 56   | 75   | 68   | 68   | M20 | 53,64 X 2,62 |
|    | inch | 1,89 | 5,35 | 5,35 | 7,95 | -    | 1,50 | 2,20 | 2,95 | 2,68 | 2,68 |     |              |



# GRC

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.1


### **CS** Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN25 up to DN125
- Ends: ISO6164 (CETOP)
- Pressure: up to PN420 / S6000
- Temp range: -20°C to +100°C

### **SS** Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN25 up to DN125
- Ends: ISO6164 (CETOP)
- Pressure: up to PN420 / S6000
- Temp range: -30°C to +100°C

### **I** STANDARD COMPOSITION OF VALVE

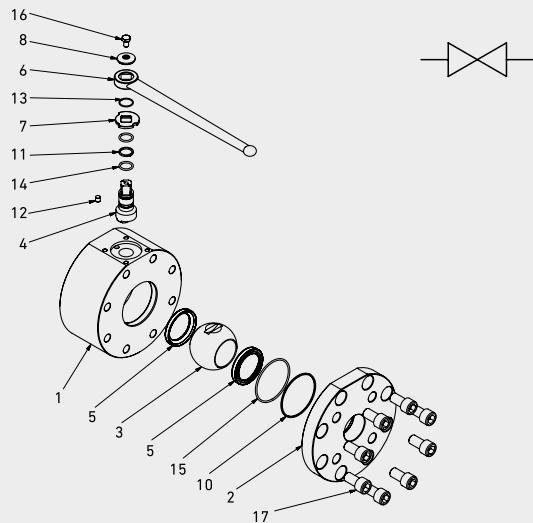

| POS | DESCRIPTION    | Q.TY | <b>CS</b>    | <b>SS</b>       |
|-----|----------------|------|--------------|-----------------|
|     |                |      | Carbon Steel | Stainless Steel |
| 1   | Body           | 1    | 1,0570       | 1,4404          |
| 2   | Flange         | 1    | 1,0570       | 1,4404          |
| 3   | Ball           | 1    | 1,0570       | 1,4404          |
| 4   | Stem           | 1    | 1,4542       | 1,4542          |
| 5   | Seat           | 2    | POM          | POM             |
| 6   | Handle         | 1    | 1,0116       | 1,0116          |
| 7   | Washer         | 1    | 1,0116       | 1,0116          |
| 8   | Washer         | 1    | 1,0116       | 1,0116          |
| 9   | Flange Back-Up | 1    | PTFE         | PTFE            |
| 10  | Stem Back-Up   | 1    | PTFE         | PTFE            |
| 11  | Stem Ring      | 1    | PTFE         | PTFE            |
| 12  | Pin            | 1    | 1,0737       | 1,4404          |
| 13  | Flange o-ring  | 1    | NBR          | NBR             |
| 14  | Stem o-ring    | 2    | NBR          | NBR             |
| 15  | Seeger         | 1    | 1,4301       | 1,4301          |
| 16  | T.C.E.I. Screw | 8    | DIN6921 8.8  | ISO4762 A2      |
| 17  | T.E. Screw     | 1    | DIN6921 8.8  | ISO4762 A2      |



## CODE DESCRIPTION STRUCTURE

|            |            |             |          |          |          |          |          |          |
|------------|------------|-------------|----------|----------|----------|----------|----------|----------|
| <b>GRC</b> | <b>250</b> | <b>DN50</b> | <b>2</b> | <b>2</b> | <b>M</b> | <b>2</b> | <b>A</b> | <b>B</b> |
|------------|------------|-------------|----------|----------|----------|----------|----------|----------|

Type and way of valve \_\_\_\_\_

GRC 2-way

Ends \_\_\_\_\_

VALVE DIMENSION  
OF PRESSURE (PSI)

PN250

PN350

PN400

Size \_\_\_\_\_

from DN25 to DN125

Body Material \_\_\_\_\_

- 2** = 1,0570
- 4** = 1,4404

Adapter material \_\_\_\_\_

- 2** = 1,0570
- 4** = 1,4404

Stem material \_\_\_\_\_

- M** = 1,4542
- M** = 1,4542

Ball Material \_\_\_\_\_

- 2** = 1,0570 **4** = 1,4404\*
- 4** = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN40 Mpa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

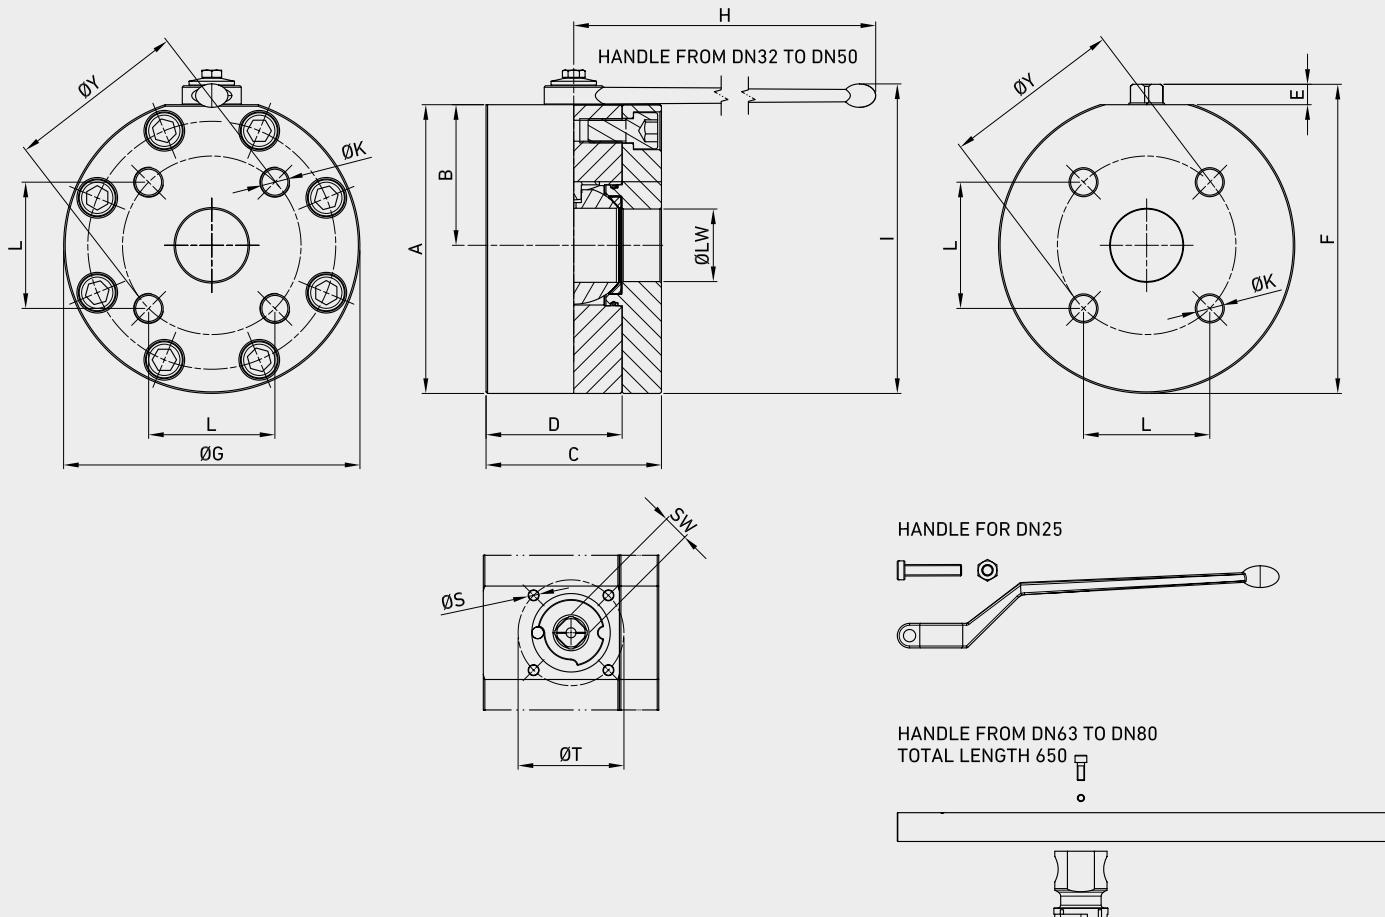

## GRC CETOP250 ISO6164

**CS** Carbon Steel    **SS** Stainless Steel

| TYPE   | DN | PN       | A         | B    | C    | D    | E    | F     | ØG   | H     | I     | L     | ØK  | ØT   | ØS | ØY   | ISO5211 | SW   | ØLW  | WEIGHT    | ITEM CODE       |
|--------|----|----------|-----------|------|------|------|------|-------|------|-------|-------|-------|-----|------|----|------|---------|------|------|-----------|-----------------|
| GRC250 | 25 | MPa 25   | mm 98,5   | 39,5 | 88   | 69   | 14   | 113   | 118  | 180   | 143   | 43,8  | 4x  | 50   | M6 | 62   | F05     | 14   | 25   | kg 6,317  | GR2CTT52022A000 |
|        |    | Psi 3625 | inch 3,88 | 1,56 | 3,46 | 2,72 | 0,55 | 4,45  | 4,65 | 7,09  | 5,63  | 1,72  | M10 | 1,97 |    | 2,44 |         | 0,55 | 0,98 | lb 13,93  | GR2CTT52044A000 |
| GRC250 | 32 | MPa 25   | mm 143,5  | 71   | 100  | 73   | 14   | 162   | 145  | 300   | 162   | 51,6  | 4x  | 50   | M6 | 73   | F05     | 17   | 32   | kg 12,228 | GR2CTT6202PA000 |
|        |    | Psi 3625 | inch 5,65 | 2,80 | 3,94 | 2,87 | 0,55 | 6,38  | 5,71 | 11,81 | 6,38  | 2,03  | M12 | 1,97 |    | 2,87 |         | 0,67 | 1,26 | lb 26,96  | GR2CTT6204NA000 |
| GRC250 | 38 | MPa 25   | mm 160    | 78   | 110  | 80   | 14   | 178,5 | 165  | 300   | 180   | 60,1  | 4x  | 50   | M6 | 85   | F05     | 17   | 38   | kg 16,867 | GR2CTT7202PA000 |
|        |    | Psi 3625 | inch 6,30 | 3,07 | 4,33 | 3,15 | 0,55 | 7,03  | 6,50 | 11,81 | 7,09  | 2,37  | M16 | 1,97 |    | 3,35 |         | 0,67 | 1,50 | lb 37,19  | GR2CTT7204NA000 |
| GRC250 | 51 | MPa 25   | mm 192    | 93   | 116  | 90   | 14   | 206   | 196  | 300   | 205   | 69,3  | 4x  | 70   | M8 | 98   | F07     | 17   | 47   | kg 32,855 | GR2CTT8202PA000 |
|        |    | Psi 3625 | inch 7,56 | 3,66 | 4,57 | 3,54 | 0,55 | 8,11  | 7,72 | 11,81 | 8,07  | 2,73  | M16 | 2,76 |    | 3,86 |         | 0,67 | 1,85 | lb 72,43  | GR2CTT8204NA000 |
| GRC250 | 56 | MPa 25   | mm 192    | 93   | 150  | 107  | 14   | 206   | 203  | 300   | 206   | 83,4  | 4x  | 70   | M8 | 118  | F07     | 17   | 58   | kg 32,855 | GR2CTT9202PA000 |
|        |    | Psi 3625 | inch 7,56 | 3,66 | 5,91 | 4,21 | 0,55 | 8,11  | 7,99 | 11,81 | 8,11  | 3,28  | M20 | 2,76 |    | 4,65 |         | 0,67 | 2,28 | lb 72,43  | GR2CTT9204NA000 |
| GRC250 | 63 | MPa 25   | mm 205    | 100  | 150  | 107  | 18   | 223   | 210  | 600   | 272   | 102,5 | 4x  | 70   | M8 | 145  | F07     | 19   | 70   | kg 36,569 | GR2CTTA202PA000 |
|        |    | Psi 3625 | inch 8,07 | 3,94 | 5,91 | 4,21 | 0,71 | 8,78  | 8,27 | 23,62 | 10,71 | 4,04  | M20 | 2,76 |    | 5,71 |         | 0,75 | 2,76 | lb 80,62  | GR2CTTA204NA000 |

**GRC CETOP350 ISO6164**

| TYPE   | DN  | PN                 | A                     | B            | C           | D            | E            | F             | ØG           | H            | I            | L             | ØK        | ØT          | ØS         | ØY          | ISO5211    | SW          | ØLW                 | WEIGHT          | ITEM CODE       | CS<br>Carbon Steel | SS<br>Stainless Steel |
|--------|-----|--------------------|-----------------------|--------------|-------------|--------------|--------------|---------------|--------------|--------------|--------------|---------------|-----------|-------------|------------|-------------|------------|-------------|---------------------|-----------------|-----------------|--------------------|-----------------------|
| GRC350 | 25  | MPa 35<br>Psi 5075 | mm 102,5<br>inch 4,04 | 39,5<br>1,56 | 88<br>3,46  | 69<br>2,72   | 14<br>0,55   | 117<br>4,61   | 118<br>4,65  | 180<br>7,09  | 143<br>5,63  | 50,9<br>2,00  | 4x<br>M12 | 50<br>1,97  | M6<br>F05  | 72<br>2,83  | 14<br>0,55 | 25<br>0,98  | kg 7,2<br>lb 15,87  | GR2CTT53022A000 | GR2CTT53044A000 |                    |                       |
| GRC350 | 32  | MPa 35<br>Psi 5075 | mm 141<br>inch 5,55   | 68<br>2,68   | 105<br>4,13 | 75,5<br>2,97 | 14<br>0,55   | 158<br>6,22   | 145<br>5,71  | 300<br>11,81 | 162<br>6,38  | 56,6<br>2,23  | 4x<br>M16 | 50<br>1,97  | M6<br>F05  | 80<br>3,15  | 17<br>0,67 | 32<br>1,26  | kg 12,5<br>lb 27,56 | GR2CTT6302PA000 | GR2CTT6304NA000 |                    |                       |
| GRC350 | 40  | MPa 35<br>Psi 5075 | mm 161<br>inch 6,34   | 78<br>3,07   | 110<br>4,33 | 80<br>3,15   | 14<br>0,55   | 178<br>7,01   | 165<br>6,50  | 300<br>11,81 | 180<br>7,09  | 69,5<br>2,74  | 4x<br>M16 | 50<br>1,97  | M6<br>F05  | 98<br>3,86  | 17<br>0,67 | 38<br>1,50  | kg 16,6<br>lb 36,60 | GR2CTT7302PA000 | GR2CTT7304NA000 |                    |                       |
| GRC350 | 50  | MPa 35<br>Psi 5075 | mm 193<br>inch 7,60   | 94<br>3,70   | 116<br>4,57 | 90<br>3,54   | 14<br>0,55   | 210<br>8,27   | 196<br>7,72  | 300<br>11,81 | 205<br>8,07  | 83,5<br>3,29  | 4x<br>M20 | 70<br>2,76  | M8<br>F07  | 118<br>4,65 | 17<br>0,67 | 48<br>1,89  | kg 25<br>lb 55,12   | GR2CTT8302PA000 | GR2CTT8304NA000 |                    |                       |
| GRC350 | 65  | MPa 35<br>Psi 5075 | mm 204<br>inch 8,03   | 100<br>3,94  | 150<br>5,91 | 107<br>4,21  | 21<br>0,83   | 224<br>8,82   | 208<br>8,19  | 600<br>23,62 | 272<br>10,71 | 102,5<br>4,04 | 4x<br>M24 | 70<br>2,76  | M8<br>F07  | 145<br>5,71 | 19<br>0,75 | 63<br>2,48  | kg 44<br>lb 97,00   | GR2CTT9302PA000 | GR2CTT9304NA000 |                    |                       |
| GRC350 | 80  | MPa 35<br>Psi 5075 | mm 208<br>inch 8,19   | 100<br>3,94  | 150<br>5,91 | 107<br>4,21  | 22<br>0,87   | 233,5<br>9,19 | 215<br>8,46  | 600<br>23,62 | 280<br>11,02 | 123,7<br>4,87 | 4x<br>M30 | 70<br>2,76  | M8<br>F07  | 175<br>6,89 | 19<br>0,75 | 75<br>2,95  | kg 45<br>lb 99,21   | GR2CTTA302PA000 | GR2CTTA304NA000 |                    |                       |
| GRC350 | 100 | MPa 35<br>Psi 5075 | mm 251<br>inch 9,88   | 122<br>4,80  | 200<br>7,87 | 147<br>5,79  | 26,5<br>1,04 | 277<br>10,91  | 258<br>10,16 | 600<br>23,62 | 326<br>12,83 | 141,5<br>5,57 | 8x<br>M24 | 102<br>4,02 | M10<br>F10 | 200<br>7,87 | 24<br>0,94 | 95<br>3,74  | kg 70<br>lb 154,32  | GR2CTTB302PA000 | GR2CTTB304NA000 |                    |                       |
| GRC350 | 125 | MPa 35<br>Psi 5075 | mm 303<br>inch 11,93  | 148<br>5,83  | 220<br>8,66 | 170<br>6,69  | 32<br>1,26   | 330<br>12,99  | 310<br>12,20 | 900<br>35,43 | 389<br>15,31 | -<br>-        | 8x<br>M30 | 125<br>4,92 | M12<br>F12 | 245<br>9,65 | 36<br>1,42 | 118<br>4,65 | kg 109<br>lb 240,30 | GR2CTTC302PA000 | GR2CTTC304NA000 |                    |                       |

**GRC CETOP400 ISO6164**

| TYPE   | DN | PN                 | A                     | B            | C           | D           | E             | F             | ØG           | H            | I            | L             | ØK        | ØT          | ØS         | ØY          | ISO5211    | SW         | ØLW                    | WEIGHT          | ITEM CODE       | CS<br>Carbon Steel | SS<br>Stainless Steel |
|--------|----|--------------------|-----------------------|--------------|-------------|-------------|---------------|---------------|--------------|--------------|--------------|---------------|-----------|-------------|------------|-------------|------------|------------|------------------------|-----------------|-----------------|--------------------|-----------------------|
| GRC400 | 25 | MPa 40<br>Psi 5800 | mm 98,5<br>inch 3,88  | 39,5<br>1,56 | 88<br>3,46  | 69<br>2,72  | 14<br>0,55    | 113<br>4,45   | 118<br>4,65  | 180<br>7,09  | 143<br>5,63  | 43,8<br>1,72  | 4x<br>M10 | 50<br>1,97  | M6<br>F05  | 62<br>2,44  | 14<br>0,55 | 25<br>0,98 | kg 6,317<br>lb 13,93   | GR2CTT54022A000 | GR2CTT54044A000 |                    |                       |
| GRC400 | 32 | MPa 40<br>Psi 5800 | mm 143,5<br>inch 5,65 | 71<br>2,80   | 100<br>3,94 | 73<br>2,87  | 14<br>0,55    | 162<br>6,38   | 145<br>5,71  | 300<br>11,81 | 162<br>6,38  | 51,6<br>2,03  | 4x<br>M12 | 50<br>1,97  | M6<br>F05  | 73<br>2,87  | 17<br>0,67 | 32<br>1,26 | kg 12,228<br>lb 26,96  | GR2CTT6402PA000 | GR2CTT6404NA000 |                    |                       |
| GRC400 | 38 | MPa 40<br>Psi 5800 | mm 160<br>inch 6,30   | 78<br>3,07   | 110<br>4,33 | 80<br>3,15  | 14<br>0,55    | 178,5<br>7,03 | 165<br>6,50  | 300<br>11,81 | 180<br>7,09  | 60,1<br>2,37  | 4x<br>M16 | 50<br>1,97  | M6<br>F05  | 85<br>3,35  | 17<br>0,67 | 38<br>1,50 | kg 16,867<br>lb 37,19  | GR2CTT7402PA000 | GR2CTT7404NA000 |                    |                       |
| GRC400 | 51 | MPa 40<br>Psi 5800 | mm 192<br>inch 7,56   | 93<br>3,66   | 116<br>4,57 | 90<br>3,54  | 14<br>0,55    | 206<br>8,11   | 196<br>7,72  | 300<br>11,81 | 205<br>8,07  | 69,3<br>2,73  | 4x<br>M16 | 70<br>2,76  | M8<br>F07  | 98<br>3,86  | 17<br>0,67 | 47<br>1,85 | kg 32,855<br>lb 72,43  | GR2CTT8402PA000 | GR2CTT8404NA000 |                    |                       |
| GRC400 | 56 | MPa 40<br>Psi 5800 | mm 192<br>inch 7,56   | 93<br>3,66   | 150<br>5,91 | 107<br>4,21 | 14<br>0,55    | 206<br>8,11   | 203<br>7,99  | 300<br>11,81 | 208<br>8,19  | 83,4<br>3,28  | 4x<br>M20 | 70<br>2,76  | M8<br>F07  | 118<br>4,65 | 17<br>0,67 | 58<br>2,28 | kg 32,855<br>lb 72,43  | GR2CTT9402PA000 | GR2CTT9404NA000 |                    |                       |
| GRC400 | 63 | MPa 40<br>Psi 5800 | mm 205<br>inch 8,07   | 100<br>3,94  | 150<br>5,91 | 107<br>4,21 | 18<br>0,71    | 223<br>8,78   | 210<br>8,27  | 600<br>23,62 | 272<br>10,71 | 102,5<br>4,04 | 4x<br>M24 | 70<br>2,76  | M8<br>F07  | 145<br>5,71 | 19<br>0,75 | 70<br>2,76 | kg 36,569<br>lb 80,62  | GR2CTTA402PA000 | GR2CTTA404NA000 |                    |                       |
| GRC400 | 80 | MPa 40<br>Psi 5800 | mm 251<br>inch 9,88   | 122<br>4,80  | 170<br>5,20 | 132<br>1,04 | 26,5<br>10,94 | 278<br>10,16  | 258<br>23,62 | 600<br>12,83 | 326<br>4,87  | 123,7<br>4,02 | 4x<br>M30 | 102<br>4,02 | M10<br>F10 | 175<br>6,89 | 24<br>0,94 | 74<br>2,91 | kg 65,411<br>lb 144,21 | GR2CTTB402PA000 | GR2CTTB404NA000 |                    |                       |



# GRS

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2


### Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518)
- Pressure: up to PN420 / S6000
- Temp range: -20°C to +100°C

### Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN125
- Ends: ISO6162-1 / ISO6162 (SAE J518)
- Pressure: up to PN420 / S6000
- Temp range: -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

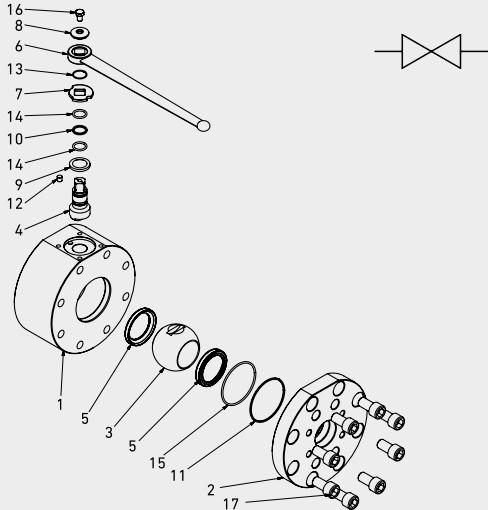

| POS | DESCRIPTION    | Q.TY | CS           | SS              |
|-----|----------------|------|--------------|-----------------|
|     |                |      | Carbon Steel | Stainless Steel |
| 1   | Body           | 1    | 1,0570       | 1,4404          |
| 2   | Flange         | 1    | 1,0570       | 1,4404          |
| 3   | Ball           | 1    | 1,0570       | 1,4404          |
| 4   | Stem           | 1    | 1,4542       | 1,4542          |
| 5   | Seat           | 2    | POM          | POM             |
| 6   | Handle         | 1    | 1,0116       | 1,0116          |
| 7   | Washer         | 1    | 1,0116       | 1,0116          |
| 8   | Washer         | 1    | 1,0116       | 1,0116          |
| 9   | Flange Back-Up | 1    | PTFE         | PTFE            |
| 10  | Stem Back-Up   | 1    | PTFE         | PTFE            |
| 11  | Stem Ring      | 1    | PTFE         | PTFE            |
| 12  | Pin            | 1    | 1,0737       | 1,4404          |
| 13  | Flange o-ring  | 1    | NBR          | NBR             |
| 14  | Stem o-ring    | 2    | NBR          | NBR             |
| 15  | Seeger         | 1    | 1,4301       | 1,4301          |
| 16  | T.C.E.I. Screw | 8    | DIN6921 8.8  | ISO4762 A2      |
| 17  | T.E. Screw     | 1    | DIN6921 8.8  | ISO4762 A2      |



## CODE DESCRIPTION STRUCTURE



Type and way of valve \_\_\_\_\_

GRS 2-way

Ends \_\_\_\_\_

VALVE DIMENSION  
OF PRESSURE (PSI)

S3 S6  
S3000 S6000

Size \_\_\_\_\_

from DN13 to DN125

Body Material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Adapter material \_\_\_\_\_

- 2 = 1,0570
- 4 = 1,4404

Stem material \_\_\_\_\_

- M = 1,4542
- M = 1,4542

Ball Material \_\_\_\_\_

- 2 = 1,0570 4 = 1,4404\*
- 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*


Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN40 Mpa
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

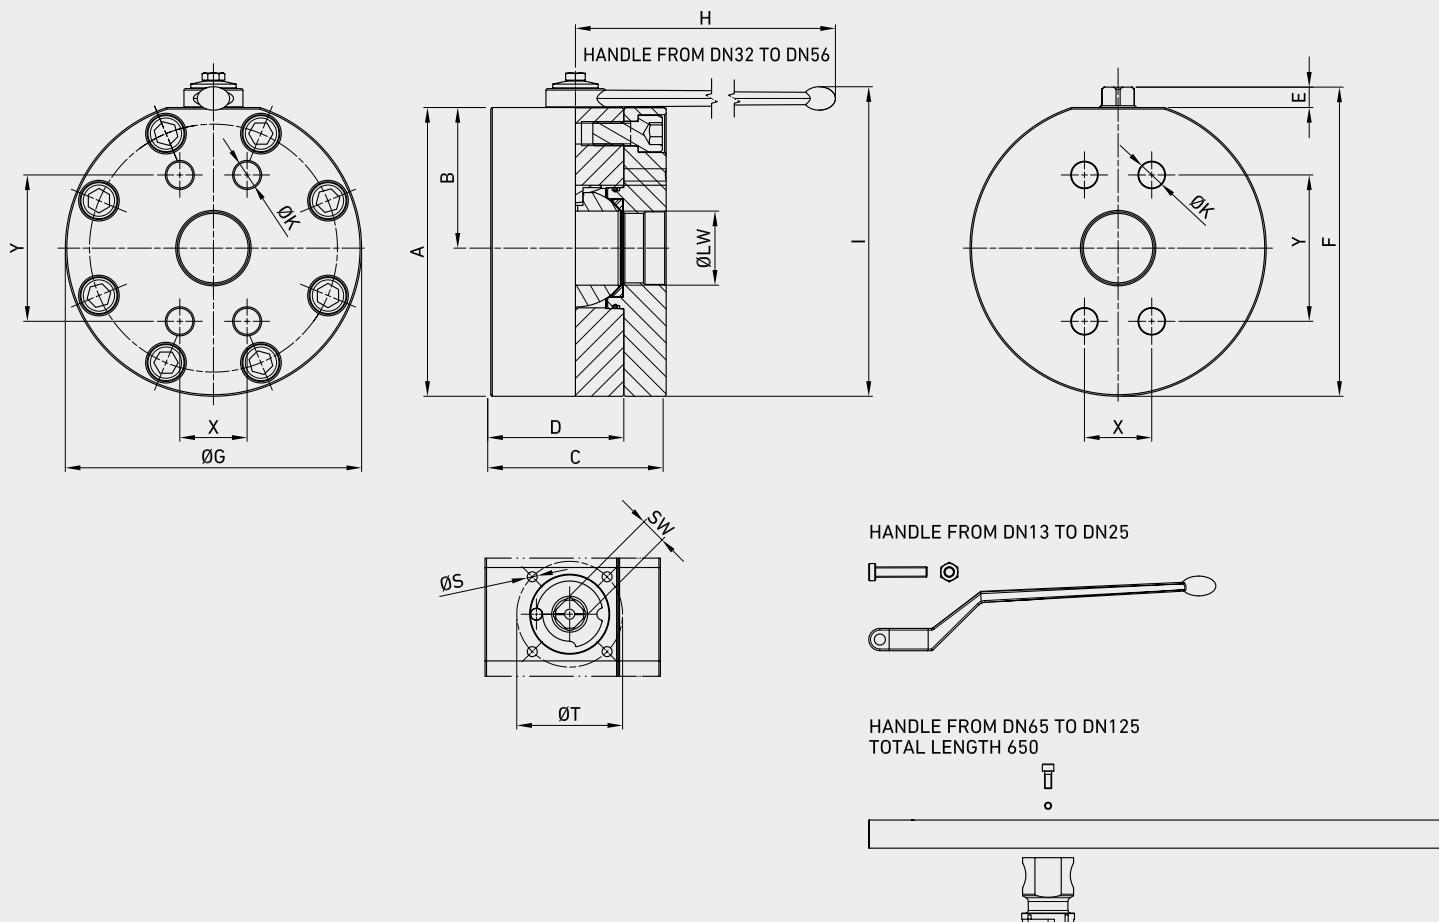


## GRS SAE J518 S3000

| TYPE | DN  | PN                     | A                     | B            | C           | D           | E            | F             | ØG          | H            | I            | ØK          | ØT         | ØS           | X             | Y          | ISO5211    | SW          | ØLW                    | WEIGHT          | ITEM CODE       |    |
|------|-----|------------------------|-----------------------|--------------|-------------|-------------|--------------|---------------|-------------|--------------|--------------|-------------|------------|--------------|---------------|------------|------------|-------------|------------------------|-----------------|-----------------|----|
|      |     |                        |                       |              |             |             |              |               |             |              |              |             |            |              |               |            |            |             |                        |                 | CS              | SS |
| GRS3 | 13  | MPa 21<br>Psi 3045     | mm 67<br>inch 2,64    | 28<br>1,10   | 75<br>2,95  | 58<br>2,28  | 11<br>0,43   | 78,3<br>3,08  | 78<br>3,07  | 110<br>4,33  | 121<br>4,76  | M8<br>1,42  | 36<br>M5   | 17,5<br>0,69 | 38,1<br>1,50  | F03<br>M5  | 9<br>0,35  | 13<br>0,51  | kg 2,405<br>lb 5,30    | GR2FFT3F022A000 | GR2FFT3F044A000 |    |
| GRS3 | 20  | MPa 21<br>Psi 3045     | mm 85,5<br>inch 3,37  | 36,5<br>1,44 | 80<br>3,15  | 60<br>2,36  | 14<br>0,55   | 100<br>3,94   | 103<br>4,06 | 180<br>7,09  | 132<br>5,20  | M10<br>1,97 | 50<br>M6   | 22,2<br>0,87 | 47,6<br>1,87  | F05<br>M6  | 14<br>0,55 | 20<br>0,79  | kg 3,902<br>lb 8,60    | GR2FFT4F022A000 | GR2FFT4F044A000 |    |
| GRS3 | 25  | MPa 21<br>Psi 3045     | mm 98,5<br>inch 3,88  | 39,5<br>1,56 | 88<br>3,46  | 69<br>2,72  | 14<br>0,55   | 113<br>4,45   | 118<br>4,65 | 180<br>7,09  | 142<br>5,59  | M10<br>1,97 | 50<br>M6   | 26,2<br>1,03 | 52,4<br>2,06  | F05<br>M6  | 14<br>0,55 | 25<br>0,98  | kg 6,317<br>lb 13,93   | GR2FFT5F022A000 | GR2FFT5F044A000 |    |
| GRS3 | 32  | MPa 21<br>Psi 3045     | mm 143,5<br>inch 5,65 | 70,9<br>2,79 | 100<br>3,94 | 73<br>2,87  | 14<br>0,55   | 162<br>6,38   | 145<br>5,71 | 300<br>11,81 | 163<br>6,42  | M10<br>1,97 | 50<br>M6   | 30,2<br>1,19 | 58,7<br>2,31  | F05<br>M6  | 17<br>0,67 | 32<br>1,26  | kg 12,228<br>lb 26,96  | GR2FFT6F02PA000 | GR2FFT6F04NA000 |    |
| GRS3 | 40  | MPa 21<br>Psi 3045     | mm 160<br>inch 6,30   | 78<br>3,07   | 110<br>4,33 | 80<br>3,15  | 14<br>0,55   | 178,5<br>7,03 | 165<br>6,50 | 300<br>11,81 | 180<br>7,09  | M12<br>1,97 | 50<br>M6   | 35,7<br>1,41 | 69,8<br>2,75  | F05<br>M6  | 17<br>0,67 | 38<br>1,50  | kg 16,867<br>lb 37,19  | GR2FFT7F02PA000 | GR2FFT7F04NA000 |    |
| GRS3 | 50  | MPa 21<br>Psi 3045     | mm 192<br>inch 7,56   | 93<br>3,66   | 116<br>4,57 | 90<br>3,54  | 14<br>0,55   | 205,5<br>8,09 | 196<br>7,72 | 300<br>11,81 | 205<br>8,07  | M12<br>2,76 | 70<br>M8   | 42,9<br>1,69 | 77,8<br>3,06  | F07<br>M8  | 17<br>0,67 | 48<br>1,89  | kg 25,606<br>lb 56,45  | GR2FFT8F02PA000 | GR2FFT8F04NA000 |    |
| GRS3 | 65  | MPa 17,5<br>Psi 2537,5 | mm 198<br>inch 7,80   | 93<br>3,66   | 150<br>5,91 | 107<br>4,21 | 20,5<br>0,81 | 212<br>8,35   | 203<br>7,99 | 600<br>23,6  | 266<br>10,47 | M12<br>2,76 | 70<br>M8   | 50,8<br>2,00 | 88,9<br>3,50  | F07<br>M8  | 19<br>0,75 | 63<br>2,48  | kg 32,717<br>lb 72,13  | GR2FFT9F02PA000 | GR2FFT9F04NA000 |    |
| GRS3 | 80  | MPa 16<br>Psi 2320     | mm 205<br>inch 8,07   | 100<br>3,94  | 150<br>5,91 | 107<br>4,21 | 22<br>0,87   | 227,5<br>8,96 | 210<br>8,27 | 600<br>23,6  | 277<br>10,91 | M16<br>2,76 | 70<br>M8   | 61,9<br>2,44 | 106,4<br>4,19 | F07<br>M8  | 19<br>0,75 | 73<br>2,87  | kg 36,413<br>lb 80,28  | GR2FTTAFO2PA000 | GR2FTTAFO4NA000 |    |
| GRS3 | 100 | MPa 3,5<br>Psi 507,5   | mm 251<br>inch 9,88   | 122<br>4,80  | 170<br>6,69 | 132<br>5,20 | 27<br>1,06   | 278<br>10,9   | 258<br>10,2 | 600<br>23,6  | 326<br>12,83 | M16<br>4,02 | 102<br>M10 | 77,9<br>3,07 | 130,2<br>5,13 | F10<br>M10 | 24<br>0,94 | 95<br>3,74  | kg 61,273<br>lb 135,08 | GR2FFTBF02PA000 | GR2FFTBF04NA000 |    |
| GRS3 | 125 | MPa 3,5<br>Psi 507,5   | mm 288<br>inch 11,3   | 140<br>5,51  | 210<br>8,27 | 160<br>6,30 | 35<br>1,38   | 322<br>12,7   | 310<br>12,2 | 600<br>23,6  | 389<br>15,31 | M16<br>4,92 | 125<br>M12 | 92,1<br>3,63 | 152,4<br>6,00 | F12<br>M12 | 36<br>1,42 | 115<br>4,53 | kg 98,048<br>lb 216,16 | GR2FFTCF02PA000 | GR2FFTCF04NA000 |    |

## GRS SAE J518 S3000 UNC

| TYPE | DN  | PN         | A        | B         | C    | D    | E   | F    | ØG  | H    | I    | ØK   | ØT    | ØS   | X   | Y    | ISO5211 | SW           | ØLW          | WEIGHT    | ITEM CODE  |          |              |                 |                 |            |             |           |           |                 |                 |
|------|-----|------------|----------|-----------|------|------|-----|------|-----|------|------|------|-------|------|-----|------|---------|--------------|--------------|-----------|------------|----------|--------------|-----------------|-----------------|------------|-------------|-----------|-----------|-----------------|-----------------|
|      |     |            | mm       | inch      | mm   | inch | mm  | inch | mm  | inch | mm   | inch | mm    | inch | mm  | inch | kg      | lb           | kg           | lb        | CS         | SS       |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 13  | MPa 21     | mm 67    | inch 2,64 | 28   | 1,10 | 75  | 2,95 | 58  | 2,28 | 11   | 0,43 | 78,3  | 3,08 | 78  | 3,07 | 110     | 4,33         | 121          | 4,76      | 5/16       | 1,42     | Carbon Steel | Stainless Steel |                 |            |             |           |           |                 |                 |
|      |     | Psi 3045   |          |           |      |      |     |      |     |      |      |      |       |      |     |      | M5      | 17,5<br>0,69 | 38,1<br>1,50 | 9<br>0,35 | 13<br>0,51 | kg 2,405 | lb 5,30      | GR2FUT3F022A000 | GR2FUT3F044A000 |            |             |           |           |                 |                 |
| GRS3 | 20  | MPa 21     | mm 85,5  | inch 3,37 | 36,5 | 1,44 | 80  | 3,15 | 60  | 2,36 | 14   | 0,55 | 100   | 3,94 | 103 | 4,06 | 180     | 5,20         | 132          | 5,59      | 3/8        | 1,97     | M6           | 22,2<br>0,87    | 47,6<br>1,87    | 14<br>0,55 | 20<br>0,79  | kg 3,902  | lb 8,60   | GR2FUT4F022A000 | GR2FUT4F044A000 |
|      |     | Psi 3045   |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 25  | MPa 21     | mm 98,5  | inch 3,88 | 39,5 | 1,56 | 88  | 3,46 | 69  | 2,72 | 14   | 0,55 | 113   | 4,45 | 118 | 4,65 | 180     | 5,59         | 142          | 5,97      | 3/8        | 1,97     | M6           | 26,2<br>1,03    | 52,4<br>2,06    | 14<br>0,55 | 25<br>0,98  | kg 6,317  | lb 13,93  | GR2FUT5F022A000 | GR2FUT5F044A000 |
|      |     | Psi 3045   |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 32  | MPa 21     | mm 143,5 | inch 5,65 | 70,9 | 2,79 | 100 | 3,94 | 73  | 2,87 | 14   | 0,55 | 162   | 6,38 | 145 | 5,71 | 300     | 11,8         | 163          | 6,42      | 7/16       | 1,97     | M6           | 30,2<br>1,19    | 58,7<br>2,31    | 17<br>0,67 | 32<br>1,26  | kg 12,228 | lb 26,96  | GR2FUT6F02PA000 | GR2FUT6F04NA000 |
|      |     | Psi 3045   |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 40  | MPa 21     | mm 160   | inch 6,30 | 78   | 3,07 | 110 | 4,33 | 80  | 3,15 | 14   | 0,55 | 178,5 | 7,03 | 165 | 6,50 | 300     | 11,8         | 180          | 7,09      | 1/2        | 1,97     | M6           | 35,7<br>1,41    | 69,8<br>2,75    | 17<br>0,67 | 38<br>1,50  | kg 16,867 | lb 37,19  | GR2FUT7F02PA000 | GR2FUT7F04NA000 |
|      |     | Psi 3045   |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 50  | MPa 21     | mm 192   | inch 7,56 | 93   | 3,66 | 116 | 4,57 | 90  | 3,54 | 14   | 0,55 | 205,5 | 8,09 | 196 | 7,72 | 300     | 11,8         | 205          | 8,07      | 1/2        | 2,76     | M8           | 42,9<br>1,69    | 77,8<br>3,06    | 17<br>0,67 | 48<br>1,89  | kg 25,606 | lb 56,45  | GR2FUT8F02PA000 | GR2FUT8F04NA000 |
|      |     | Psi 3045   |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 65  | MPa 17,5   | mm 198   | inch 7,80 | 93   | 3,66 | 150 | 5,91 | 107 | 4,21 | 20,5 | 0,81 | 212   | 8,35 | 203 | 7,99 | 600     | 23,2         | 266          | 10,47     | 1/2        | 2,76     | M8           | 50,8<br>2,00    | 88,9<br>3,50    | 19<br>0,75 | 63<br>2,48  | kg 32,717 | lb 72,13  | GR2FUT9F02PA000 | GR2FUT9F04NA000 |
|      |     | Psi 2537,5 |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 80  | MPa 16     | mm 205   | inch 8,07 | 100  | 3,94 | 150 | 5,91 | 107 | 4,21 | 22   | 0,87 | 227,5 | 8,96 | 210 | 8,27 | 600     | 23,6         | 277          | 10,91     | 5/8        | 2,76     | M8           | 61,9<br>2,44    | 106,4<br>4,19   | 19<br>0,75 | 73<br>2,87  | kg 36,413 | lb 80,28  | GR2FUTAF02PA000 | GR2FUTAF04NA000 |
|      |     | Psi 2320   |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 100 | MPa 3,5    | mm 251   | inch 9,88 | 122  | 4,80 | 170 | 6,69 | 132 | 5,20 | 27   | 1,06 | 278   | 10,9 | 258 | 10,2 | 600     | 23,6         | 326          | 12,83     | 5/8        | 4,02     | M10          | 77,9<br>3,07    | 130,2<br>5,13   | 24<br>0,94 | 95<br>3,74  | kg 61,273 | lb 135,08 | GR2FUTBF02PA000 | GR2FUTBF04NA000 |
|      |     | Psi 507,5  |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |
| GRS3 | 125 | MPa 3,5    | mm 288   | inch 11,4 | 140  | 5,51 | 210 | 6,30 | 160 | 5,82 | 35   | 1,38 | 322   | 12,6 | 310 | 12,2 | 600     | 23,6         | 389          | 15,31     | 5/8        | 4,92     | M12          | 92,1<br>3,63    | 152,4<br>6,00   | 36<br>1,42 | 115<br>4,53 | kg 98,048 | lb 216,16 | GR2FUTCFO2PA000 | GR2FUTCFO4NA000 |
|      |     | Psi 507,5  |          |           |      |      |     |      |     |      |      |      |       |      |     |      |         |              |              |           |            |          |              |                 |                 |            |             |           |           |                 |                 |

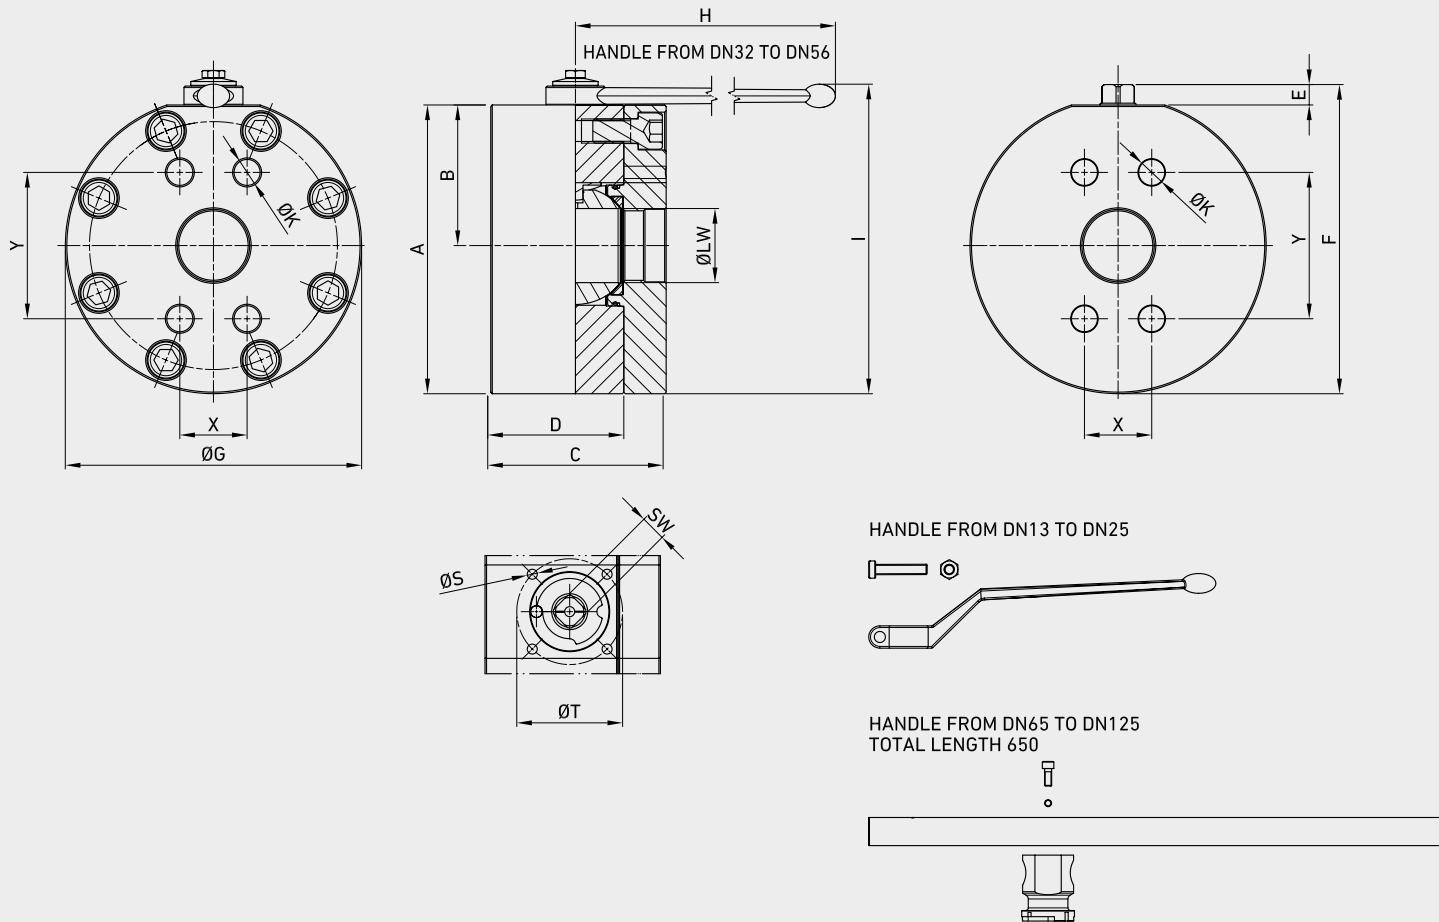

## ■ GRS SAE J518 S6000

**CS** Carbon Steel    **SS** Stainless Steel

| TYPE | DN | PN                 | A                     | B            | C           | D          | E          | F             | ØG          | H           | I           | ØK          | ØT       | ØS           | X            | Y          | ISO5211    | SW         | ØLW                   | WEIGHT                             | ITEM CODE |  |
|------|----|--------------------|-----------------------|--------------|-------------|------------|------------|---------------|-------------|-------------|-------------|-------------|----------|--------------|--------------|------------|------------|------------|-----------------------|------------------------------------|-----------|--|
|      |    |                    |                       |              |             |            |            |               |             |             |             |             |          |              |              |            |            |            |                       |                                    | ITEM CODE |  |
| GRS6 | 13 | MPa 42<br>Psi 6090 | mm 67<br>inch 2,64    | 28<br>1,10   | 75<br>2,95  | 58<br>2,28 | 11<br>0,43 | 78,3<br>3,08  | 78<br>3,07  | 110<br>4,33 | 121<br>4,76 | M8<br>1,42  | 36<br>M5 | 18,2<br>0,72 | 40,5<br>1,59 | F03<br>F05 | 9<br>14    | 13<br>20   | kg 2,405<br>lb 5,30   | GR2FFT3G022A000<br>GR2FFT3G044A000 |           |  |
| GRS6 | 20 | MPa 42<br>Psi 6090 | mm 85,5<br>inch 3,37  | 36,5<br>1,44 | 80<br>3,15  | 60<br>2,36 | 14<br>0,55 | 100<br>3,94   | 103<br>4,06 | 180<br>7,09 | 132<br>5,20 | M10<br>1,97 | 50<br>M6 | 23,8<br>0,94 | 50,8<br>2,00 | F05<br>F05 | 14<br>0,55 | 20<br>0,79 | kg 3,902<br>lb 8,60   | GR2FFT4G022A000<br>GR2FFT4G044A000 |           |  |
| GRS6 | 25 | MPa 42<br>Psi 6090 | mm 98,5<br>inch 3,88  | 39,5<br>1,56 | 88<br>3,46  | 69<br>2,72 | 14<br>0,55 | 113<br>4,45   | 118<br>4,65 | 180<br>7,09 | 142<br>5,59 | M12<br>1,97 | 50<br>M6 | 27,8<br>1,09 | 57,2<br>2,25 | F05<br>F05 | 14<br>0,55 | 25<br>0,98 | kg 6,317<br>lb 13,93  | GR2FFT5G022A000<br>GR2FFT5G044A000 |           |  |
| GRS6 | 32 | MPa 42<br>Psi 6090 | mm 143,5<br>inch 5,65 | 70,9<br>2,79 | 100<br>3,94 | 73<br>2,87 | 14<br>0,55 | 162<br>6,38   | 145<br>5,71 | 300<br>11,8 | 163<br>6,42 | M12<br>1,97 | 50<br>M6 | 31,8<br>1,25 | 66,7<br>2,63 | F05<br>F05 | 17<br>0,67 | 32<br>1,26 | kg 12,228<br>lb 26,96 | GR2FFT6G02PA000<br>GR2FFT6G04NA000 |           |  |
| GRS6 | 40 | MPa 42<br>Psi 6090 | mm 160<br>inch 6,30   | 78<br>3,07   | 110<br>4,33 | 80<br>3,15 | 14<br>0,55 | 178,5<br>7,03 | 165<br>6,50 | 300<br>11,8 | 180<br>7,09 | M16<br>1,97 | 50<br>M6 | 36,5<br>1,44 | 79,4<br>3,13 | F05<br>F05 | 17<br>0,67 | 38<br>1,50 | kg 16,867<br>lb 37,19 | GR2FFT7G02PA000<br>GR2FFT7G04NA000 |           |  |
| GRS6 | 50 | MPa 42<br>Psi 6090 | mm 192<br>inch 7,56   | 93<br>3,66   | 116<br>4,57 | 90<br>3,54 | 14<br>0,55 | 205,5<br>8,09 | 196<br>7,72 | 300<br>11,8 | 205<br>8,07 | M20<br>2,76 | 70<br>M8 | 44,5<br>1,75 | 96,8<br>3,81 | F07<br>F07 | 17<br>0,67 | 48<br>1,89 | kg 25,606<br>lb 56,45 | GR2FFT8G02PA000<br>GR2FFT8G04NA000 |           |  |

## GRS SAE J518 S6000 UNC

| TYPE | DN | PN       | A        | B         | C    | D    | E   | F    | ØG | H    | I  | ØK   | ØT    | ØS   | X   | Y    | ISO5211 | SW    | ØLW  | WEIGHT | ITEM CODE |            |                       |                 |                 |                 |            |            |                       |                 |                 |
|------|----|----------|----------|-----------|------|------|-----|------|----|------|----|------|-------|------|-----|------|---------|-------|------|--------|-----------|------------|-----------------------|-----------------|-----------------|-----------------|------------|------------|-----------------------|-----------------|-----------------|
|      |    |          | mm       | inch      | mm   | inch | mm  | inch | mm | inch | mm | inch | mm    | inch | mm  | inch | kg      | lb    | kg   | lb     | CS        | SS         |                       |                 |                 |                 |            |            |                       |                 |                 |
| GRS6 | 13 | MPa 42   | mm 67    | inch 2,64 | 28   | 1,10 | 75  | 2,95 | 58 | 2,28 | 11 | 0,43 | 78,3  | 3,08 | 78  | 3,07 | 110     | 4,33  | 121  | 4,76   | 5/16      | 1,42       | Carbon Steel          | Stainless Steel |                 |                 |            |            |                       |                 |                 |
|      |    | Psi 6090 |          |           |      |      |     |      |    |      |    |      |       |      |     |      | M5      | 18,2  | 40,5 | F03    | 9<br>0,72 | 13<br>1,59 | kg 2,405<br>0,35 0,51 | lb 5,30         | GR2FUT3G022A000 | GR2FUT3G044A000 |            |            |                       |                 |                 |
| GRS6 | 20 | MPa 42   | mm 85,5  | inch 3,37 | 36,5 | 1,44 | 80  | 3,15 | 60 | 2,36 | 14 | 0,55 | 100   | 3,94 | 103 | 4,06 | 180     | 5,20  | 132  | 5,50   | 3/8       | 1,97       | M6                    | 23,8<br>0,94    | 50,8<br>2,00    | F05             | 14<br>0,55 | 20<br>0,79 | kg 3,902<br>lb 8,60   | GR2FUT4G022A000 | GR2FUT4G044A000 |
|      |    | Psi 6090 |          |           |      |      |     |      |    |      |    |      |       |      |     |      |         |       |      |        |           |            |                       |                 |                 |                 |            |            |                       |                 |                 |
| GRS6 | 25 | MPa 42   | mm 98,5  | inch 3,88 | 39,5 | 1,56 | 88  | 3,46 | 69 | 2,72 | 14 | 0,55 | 113   | 4,45 | 118 | 4,65 | 180     | 5,09  | 152  | 5,98   | 7/16      | 1,97       | M6                    | 27,8<br>1,09    | 57,2<br>2,25    | F05             | 14<br>0,55 | 25<br>0,98 | kg 6,317<br>lb 13,93  | GR2FUT5G022A000 | GR2FUT5G044A000 |
|      |    | Psi 6090 |          |           |      |      |     |      |    |      |    |      |       |      |     |      |         |       |      |        |           |            |                       |                 |                 |                 |            |            |                       |                 |                 |
| GRS6 | 32 | MPa 42   | mm 143,5 | inch 5,65 | 70,9 | 2,79 | 100 | 3,94 | 73 | 2,87 | 14 | 0,55 | 162   | 6,38 | 145 | 5,71 | 300     | 11,81 | 163  | 6,42   | 1/2       | 1,97       | M6                    | 31,8<br>1,25    | 66,7<br>2,63    | F05             | 17<br>0,67 | 32<br>1,26 | kg 12,228<br>lb 26,96 | GR2FUT6G02PA000 | GR2FUT6G04NA000 |
|      |    | Psi 6090 |          |           |      |      |     |      |    |      |    |      |       |      |     |      |         |       |      |        |           |            |                       |                 |                 |                 |            |            |                       |                 |                 |
| GRS6 | 40 | MPa 42   | mm 160   | inch 6,30 | 78   | 3,07 | 110 | 4,33 | 80 | 3,15 | 14 | 0,55 | 178,5 | 7,03 | 165 | 6,50 | 300     | 11,81 | 180  | 7,09   | 5/8       | 1,97       | M6                    | 36,5<br>1,44    | 79,4<br>3,13    | F05             | 17<br>0,67 | 38<br>1,50 | kg 16,867<br>lb 37,19 | GR2FUT7G02PA000 | GR2FUT7G04NA000 |
|      |    | Psi 6090 |          |           |      |      |     |      |    |      |    |      |       |      |     |      |         |       |      |        |           |            |                       |                 |                 |                 |            |            |                       |                 |                 |
| GRS6 | 50 | MPa 42   | mm 192   | inch 7,56 | 93   | 3,66 | 116 | 4,57 | 90 | 3,54 | 14 | 0,55 | 205,5 | 8,09 | 196 | 7,72 | 300     | 11,81 | 205  | 8,07   | 3/4       | 2,76       | M8                    | 44,5<br>1,75    | 96,8<br>3,81    | F07             | 17<br>0,67 | 48<br>1,89 | kg 25,606<br>lb 56,45 | GR2FUT8G02PA000 | GR2FUT8G04NA000 |
|      |    | Psi 6090 |          |           |      |      |     |      |    |      |    |      |       |      |     |      |         |       |      |        |           |            |                       |                 |                 |                 |            |            |                       |                 |                 |



# GHP

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.0


### CS Carbon Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN100
- Ends: BSP-NPT
- Pressure: up to PN370
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: ball valve 2 way
- Sizes: from DN13 up to DN100
- Ends: BSP-NPT
- Pressure: up to PN370
- Temp range: from -30°C to +100°C

### STANDARD COMPOSITION OF VALVE

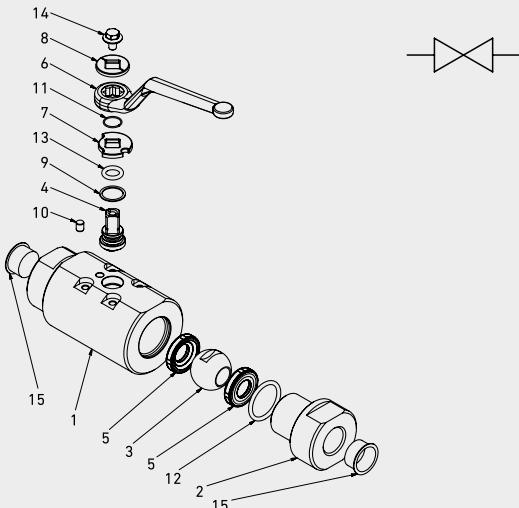

| POS | DESCRIPTION    | Q.TY | CS           | SS       |                 |
|-----|----------------|------|--------------|----------|-----------------|
|     |                |      | Carbon Steel | MATERIAL | Stainless Steel |
| 1   | Body           | 1    |              | 1,0570   | 1,4404          |
| 2   | Adapter        | 1    |              | 1,0570   | 1,4404          |
| 3   | Ball           | 1    |              | 1,4404   | 1,4404          |
| 4   | Stem           | 1    |              | 1,4404   | 1,4404          |
| 5   | Ball seat      | 2    |              | POM      | POM             |
| 6   | Handle         | 1    |              | ZINC     | ZINC            |
| 7   | Washer         | 1    |              | 1,0116   | 1,4301          |
| 8   | Washer         | 1    |              | 1,0116   | 1,4301          |
| 9   | Stem ring      | 1    |              | POM      | POM             |
| 10  | Pin            | 1    |              | 1,0737   | 1,4301          |
| 11  | Seeger         | 1    |              | 1,4301   | 1,4301          |
| 12  | Adapter o-ring | 1    |              | NBR      | NBR             |
| 13  | Stem o-ring    | 1    |              | NBR      | NBR             |
| 14  | Screw          | 1    | Din 6921 8.8 |          | Din 6921 A2     |
| 15  | Caps           | 2    |              | PVC      | PVC             |



## CODE DESCRIPTION STRUCTURE

| GHP | G 1 1/2 | DN13 | 2 | 2 | 4 | 4 | A | B |
|-----|---------|------|---|---|---|---|---|---|
|-----|---------|------|---|---|---|---|---|---|

Type and way of valve \_\_\_\_\_

GHP 2-way

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1

G 1 1/4 N 1 1/4

G 1 1/2 N 1 1/2

G 2 N 2

G 2 1/2 N 2 1/2

G 3 N 3

G 4 N 4

Size \_\_\_\_\_

from DN13 to DN100

Body Material \_\_\_\_\_

● 2 = 1,0570

● 4 = 1,4404

Adapter material \_\_\_\_\_

● 2 = 1,0570

● 4 = 1,4404

Stem material \_\_\_\_\_

● 4 = 1,4404 M = 1,4542

● 4 = 1,4404 M = 1,4542

Ball Material \_\_\_\_\_

● 4 = 1,4404

● 4 = 1,4404

Seat material \_\_\_\_\_

A = POM D = PEEK\* G = PA612\* K = GEMPTFE\* C = PTFE\*



Seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*


\*On request

- Reduced bore
- Special threads
- Pressure class up to PN42 MPa
- Pneumatic and electrical actuator
- Security block
- Locking device



For further special requests please consult our technical/commercial service.

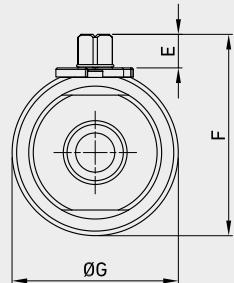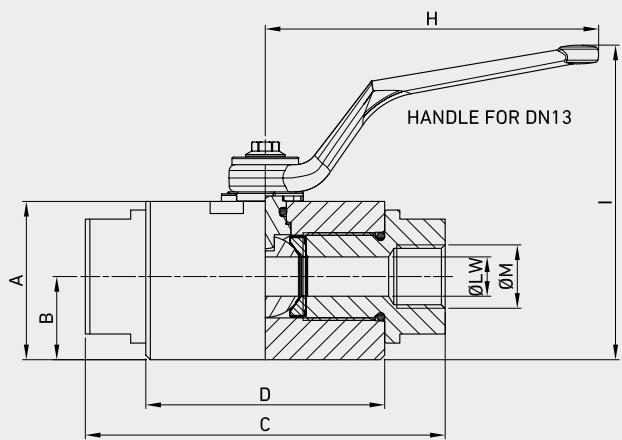

HANDLE FROM DN20 TO DN25



HANDLE FROM DN32 TO DN50

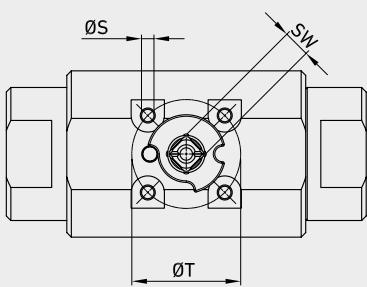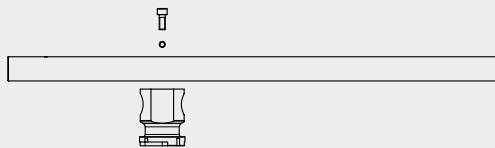HANDLE FROM DN65 TO DN100  
TOTAL LENGTH 650**GHP DIN/ISO 228 BSP**

| TYPE        | DN  | PN                 |   | A | B | C | D | E | F | ØG | H | I | ØM | ØS | ØT | ISO5211 | SW | ØLW | WEIGHT | ITEM CODE       |                 |
|-------------|-----|--------------------|---|---|---|---|---|---|---|----|---|---|----|----|----|---------|----|-----|--------|-----------------|-----------------|
|             |     |                    |   |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | CS              | SS              |
|             |     |                    |   |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        |                 |                 |
| GHP G 1/2   | 13  | MPa 37<br>Psi 5365 | mm 53 27,5 119 79 11 66,5 55 110 102,5 G 36<br>inch 2,09 1,08 4,69 3,11 0,43 2,62 2,17 4,33 4,04 1/2 M5 1,42 F03 9 13 kg 1,81<br>lb 3,99              |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGT3H024A000 | GH2GGT3H044A000 |
| GHP G 3/4   | 20  | MPa 37<br>Psi 5365 | mm 70 38,5 149 99 14 88,6 77 180 118 G 50<br>inch 2,76 1,52 5,87 3,90 0,55 3,49 3,03 7,09 4,65 3/4 M6 1,97 F05 14 20 kg 4,378<br>lb 9,65              |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGT4H024A000 | GH2GGT4H044A000 |
| GHP G 1 25  |     | MPa 37<br>Psi 5365 | mm 80,5 45 168 105 14 99 90 180 129 G 1 M6 50<br>inch 3,17 1,77 6,61 4,13 0,55 3,90 3,54 7,09 5,08 1,97 F05 14 25 kg 6,219<br>lb 13,71                |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGT5H024A000 | GH2GGT5H044A000 |
| GHP G 1 1/4 | 32  | MPa 37<br>Psi 5365 | mm 95 48,5 156 106 14 113 97 300 112 G 1 M6 50<br>inch 3,74 1,91 6,14 4,17 0,55 4,45 3,82 11,81 4,41 1/4 F05 17 32 kg 6,74<br>lb 14,86                |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGT6H024A000 | GH2GGT6H044A000 |
| GHP G 1 1/2 | 40  | MPa 37<br>Psi 5365 | mm 111,5 58 166,5 110,5 14 130 116 300 128 G 1 M6 50<br>inch 4,39 2,28 6,56 4,35 0,55 5,12 4,57 11,81 5,04 1/2 F05 17 40 kg 10<br>lb 22,05            |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGT7H024A000 | GH2GGT7H044A000 |
| GHP G 2     | 50  | MPa 37<br>Psi 5365 | mm 118,5 61,5 175 115 14 137 123 300 137 G 2 M6 50<br>inch 4,67 2,42 6,89 4,53 0,55 5,39 4,84 11,81 5,39 1,97 F05 17 49 kg 11,169<br>lb 24,62         |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGT8H024A000 | GH2GGT8H044A000 |
| GHP G 2 1/2 | 65  | MPa 37<br>Psi 5365 | mm 184,5 93,5 211,5 131,5 30,5 223,5 187 600 280 G 2 M10 102<br>inch 7,26 3,68 8,33 5,18 1,20 8,80 7,36 23,62 11,02 1/2 F10 24 63 kg 36,5<br>lb 80,47 |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGT9H02NA000 | GH2GGT9H04NA000 |
| GHP G 3     | 80  | MPa 37<br>Psi 5365 | mm 200 102 239 162,5 30,5 239 204 600 294 G 3 M10 102<br>inch 7,87 4,02 9,41 6,40 1,20 9,41 8,03 23,62 11,57 4,02 F10 24 74 kg 46,5<br>lb 102,51      |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGTAH02NA000 | GH2GGTAH04NA000 |
| GHP G 4     | 100 | MPa 37<br>Psi 5365 | mm 236 120 295,5 218 31 268,5 240 450 316,5 G 4 M10 102<br>inch 9,29 4,72 11,63 8,58 1,22 10,57 9,45 17,72 12,46 4,02 F10 24 95 kg 77<br>lb 169,76    |   |   |   |   |   |   |    |   |   |    |    |    |         |    |     |        | GH2GGTBH02NA000 | GH2GGTBH04NA000 |

**GHP ANSI-ASME B1.20.1 NPT**

| TYPE        | DN  | PN       | A         | B    | C     | D     | E    | F     | ØG   | H     | I     | ØM  | ØS   | ØT   | ISO5211 | SW | ØLW    | WEIGHT    | ITEM CODE       |                 |
|-------------|-----|----------|-----------|------|-------|-------|------|-------|------|-------|-------|-----|------|------|---------|----|--------|-----------|-----------------|-----------------|
|             |     |          | mm        | mm   | mm    | mm    | mm   | mm    | mm   | mm    | mm    | mm  | mm   | mm   | kg      | lb | kg     | lb        | kg              | lb              |
| GHP N 1/2   | 13  | MPa 37   | 53        | 27,5 | 119   | 79    | 11   | 66,5  | 55   | 110   | 102,5 | N   | M5   | 36   | F03     | 9  | 13     | 1,81      | GH2NNT3H024A000 | GH2NNT3H044A000 |
|             |     | Psi 5365 | inch 2,09 | 1,08 | 4,69  | 3,11  | 0,43 | 2,62  | 2,17 | 4,33  | 4,04  | 1/2 | 1,42 | 0,35 | 0,51    | lb | 3,99   |           |                 |                 |
| GHP N 3/4   | 20  | MPa 37   | 70        | 38,5 | 149   | 99    | 14   | 88,6  | 77   | 180   | 118   | N   | M6   | 50   | F05     | 14 | 20     | kg 4,378  | GH2NNT4H024A000 | GH2NNT4H044A000 |
|             |     | Psi 5365 | inch 2,76 | 1,52 | 5,87  | 3,90  | 0,55 | 3,49  | 3,03 | 7,09  | 4,65  | 3/4 | 1,97 | 0,55 | 0,79    | lb | 9,65   |           |                 |                 |
| GHP N 1     | 25  | MPa 37   | 80,5      | 45   | 168   | 105   | 14   | 99    | 90   | 180   | 129   | N 1 | M6   | 50   | F05     | 14 | 25     | kg 6,219  | GH2NNT5H024A000 | GH2NNT5H044A000 |
|             |     | Psi 5365 | inch 3,17 | 1,77 | 6,61  | 4,13  | 0,55 | 3,90  | 3,54 | 7,09  | 5,08  | 1/2 | 1,97 | 0,55 | 0,98    | lb | 13,71  |           |                 |                 |
| GHP N 1 1/4 | 32  | MPa 37   | 95        | 48,5 | 156   | 106   | 14   | 113   | 97   | 300   | 112   | N 1 | M6   | 50   | F05     | 17 | 32     | kg 6,74   | GH2NNT6H024A000 | GH2NNT6H044A000 |
|             |     | Psi 5365 | inch 3,74 | 1,91 | 6,14  | 4,17  | 0,55 | 4,45  | 3,82 | 11,81 | 4,41  | 1/4 | 1,97 | 0,67 | 1,26    | lb | 14,86  |           |                 |                 |
| GHP N 1 1/2 | 40  | MPa 37   | 111,5     | 58   | 166,5 | 110,5 | 14   | 130   | 116  | 300   | 128   | N 1 | M6   | 50   | F05     | 17 | 40     | kg 10     | GH2NNT7H024A000 | GH2NNT7H044A000 |
|             |     | Psi 5365 | inch 4,39 | 2,28 | 6,56  | 4,35  | 0,55 | 5,12  | 4,57 | 11,81 | 5,04  | 1/2 | 1,97 | 0,67 | 1,57    | lb | 22,05  |           |                 |                 |
| GHP N 2     | 50  | MPa 37   | 118,5     | 61,5 | 175   | 115   | 14   | 137   | 123  | 300   | 137   | N 2 | M6   | 50   | F05     | 17 | 49     | kg 11,169 | GH2NNT8H024A000 | GH2NNT8H044A000 |
|             |     | Psi 5365 | inch 4,67 | 2,42 | 6,89  | 4,53  | 0,55 | 5,39  | 4,84 | 11,81 | 5,39  | 1/2 | 1,97 | 0,67 | 1,93    | lb | 24,62  |           |                 |                 |
| GHP N 2 1/2 | 65  | MPa 37   | 184,5     | 93,5 | 211,5 | 131,5 | 30,5 | 223,5 | 187  | 600   | 280   | N 2 | M10  | 102  | F10     | 24 | 63     | kg 36,5   | GH2NNT9H02NA000 | GH2NNT9H04NA000 |
|             |     | Psi 5365 | inch 7,26 | 3,68 | 8,33  | 5,18  | 1,20 | 8,80  | 7,36 | 23,62 | 11,02 | 1/2 | 4,02 | 0,94 | 2,48    | lb | 80,47  |           |                 |                 |
| GHP N 3     | 80  | MPa 37   | 200       | 102  | 239   | 162,5 | 30,5 | 239   | 204  | 600   | 294   | N 3 | M10  | 102  | F10     | 24 | 74     | kg 46,5   | GH2NNTAH02NA000 | GH2NNTAH04NA000 |
|             |     | Psi 5365 | inch 7,87 | 4,02 | 9,41  | 6,40  | 1,20 | 9,41  | 8,03 | 23,62 | 11,57 | 1/2 | 4,02 | 0,94 | 2,91    | lb | 102,51 |           |                 |                 |
| GHP N 4     | 100 | MPa 37   | 236       | 120  | 295,5 | 218   | 31   | 268,5 | 240  | 450   | 316,5 | N 4 | M10  | 102  | F10     | 24 | 95     | kg 77     | GH2NNTBH02NA000 | GH2NNTBH04NA000 |
|             |     | Psi 5365 | inch 9,29 | 4,72 | 11,63 | 8,58  | 1,22 | 10,57 | 9,45 | 17,72 | 12,46 | 1/2 | 4,02 | 0,94 | 3,74    | lb | 169,76 |           |                 |                 |





## HYDRAULIC VALVES

Beside our ball valves, **GEMELS** includes in the range a wide variety of models, customized solutions and hydraulic valves such as overcenter, manifold, swivel joints, flow dividers, check valves, pressure relief valves. This allow **GEMELS** to guarantee to our customers and distributors a full package for different application like: agriculture, automotive, naval, firefighting, CNG, steel plant, aerospace and many others.

# VALVES






# VOSE

## SINGLE EFFECT OVERCENTER VALVE

Edition. 21.0

### Carbon Steel

- Type: Single Effect
- Overcenter Valve
- Sizes: DN6-DN20
- Ends: BSP-NPT-SAE
- Pressure: up to PN350
- Temp range: from -20°C to +90°C



## STRUCTURE

| Type and way of valve | Ends                       |                           | Material        |
|-----------------------|----------------------------|---------------------------|-----------------|
| VOSE                  | GAS DIN/<br>ISO 228<br>BSP | NPT ANSI /ASME<br>B1.20.1 | SAE J1926-1     |
|                       | G 1/4                      | N 1/4                     | SAE4            |
|                       | G 3/8                      | N 3/8                     | SAE6            |
|                       | G 1/2                      | N 1/2                     | SAE8            |
|                       | G 3/4                      | N 3/4                     | SAE12           |
|                       |                            |                           | CS CARBON STEEL |




## FEATURES




| PILOT RATIO | FLUID VISCOSITY | FILTRATION | FLUID TEMPERATURE | AMBIENT TEMPERATURE | STANDARD SEALS | ADJUSTMENT |
|-------------|-----------------|------------|-------------------|---------------------|----------------|------------|
| 4.25:1      | ISO 3448        | ISO4406    | -20°C +90°C       | -20°C +50°C         | NBR            | Steel cap  |
| 6.25:1      |                 |            |                   |                     |                |            |

\*On request

- Pilot ratio 8:1 and 11:1
- Bigger sizes
- Tamper proof cap

## PERFORMANCES V to C

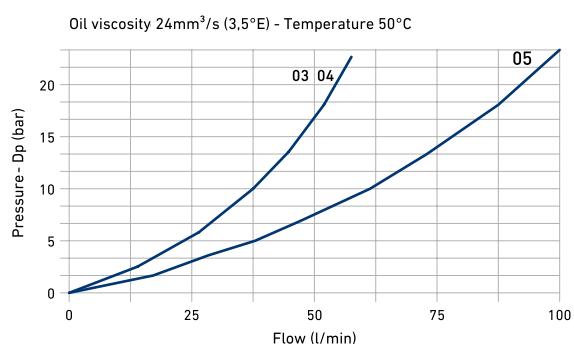


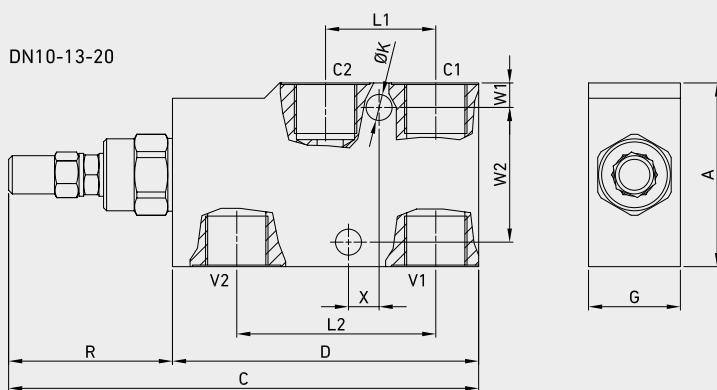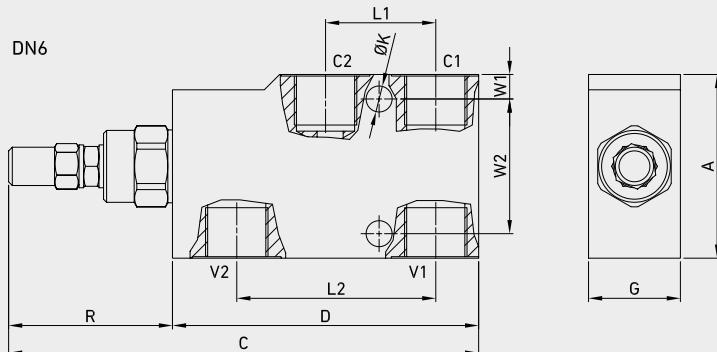

## ■ VOSE DIN/ISO 228 BSP


**CS**  
Carbon Steel

| TYPE       | DN | PN       | STANDARD<br>SETTING<br>RANGE | A        | C         | D     | G    | L1   | L2   | R    | ØM   | ØK    | W1   | W2   | X    | PILOT<br>RATIO | MAX FLOW<br>(l/min) | WEIGHT | ITEM CODE |             |
|------------|----|----------|------------------------------|----------|-----------|-------|------|------|------|------|------|-------|------|------|------|----------------|---------------------|--------|-----------|-------------|
| VOSE G 1/4 | 6  | MPa 35   | 30                           | 6-35     | mm 50     | 149   | 95   | 25   | 30   | 58   | 54   | G 1/4 | 6,5  | 7    | 36   | -              | 4.25:1              | 30     | kg 0,9    | NVO2G010000 |
|            |    | Psi 5075 | 4350                         | 870-5075 | inch 1,97 | 5,87  | 3,74 | 0,98 | 1,18 | 2,28 | 2,13 |       | 0,26 | 0,28 | 1,42 | -              | 4.25:1              |        | lb 1,98   |             |
| VOSE G 3/8 | 10 | MPa 35   | 30                           | 6-35     | mm 60     | 153,5 | 100  | 30   | 30   | 60   | 53,5 | G 3/8 | 8,5  | 8    | 44   | 10             | 4.25:1              | 40     | kg 1,25   | NVO2G020000 |
|            |    | Psi 5075 | 4350                         | 870-5075 | inch 2,36 | 6,04  | 3,94 | 1,18 | 1,18 | 2,36 | 2,11 |       | 0,33 | 0,31 | 1,73 | 0,39           | 4.25:1              |        | lb 2,76   |             |
| VOSE G 1/2 | 13 | MPa 35   | 30                           | 6-35     | mm 60     | 153,5 | 100  | 30   | 36   | 65   | 53,5 | G 1/2 | 8,5  | 8    | 44   | 10             | 4.25:1              | 60     | kg 1,2    | NVO2G030000 |
|            |    | Psi 5075 | 30                           | 870-5075 | inch 2,36 | 6,04  | 3,94 | 1,18 | 1,42 | 2,56 | 2,11 |       | 0,33 | 0,31 | 1,73 | 0,39           | 4.25:1              |        | lb 2,65   |             |
| VOSE G 3/4 | 20 | MPa 35   | 30                           | 6-35     | mm 80     | 183   | 127  | 35   | 46   | 85   | 56   | G 3/4 | 8,5  | 18   | 44   | 10             | 6.25:1              | 90     | kg 2,3    | NVO2G040000 |
|            |    | Psi 5075 | 4350                         | 870-5075 | inch 3,15 | 7,20  | 5,00 | 1,38 | 1,81 | 3,35 | 2,20 |       | 0,33 | 0,71 | 1,73 | 0,39           | 6.25:1              |        | lb 5,07   |             |



## VOSE ANSI/ASME B1.20.1 NPT

| TYPE       | DN | PN                 | STANDARD<br>SETTING | SETTING<br>RANGE | A                  | C             | D           | G          | L1         | L2         | R            | ØM    | ØK          | W1         | W2         | X          | PILOT<br>RATIO | MAX FLOW<br>(l/min) | WEIGHT             | ITEM CODE   |
|------------|----|--------------------|---------------------|------------------|--------------------|---------------|-------------|------------|------------|------------|--------------|-------|-------------|------------|------------|------------|----------------|---------------------|--------------------|-------------|
|            |    |                    |                     |                  | mm                 | inch          | mm          | inch       | mm         | inch       | mm           | inch  | mm          | inch       | mm         | inch       | kg             | lb                  |                    |             |
| VOSE N 1/4 | 6  | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 50<br>inch 1,97 | 149<br>5,87   | 95<br>3,74  | 25<br>0,98 | 30<br>1,18 | 58<br>2,28 | 54<br>2,13   | N 1/4 | 6,5<br>0,26 | 7<br>0,28  | 36<br>1,42 | -<br>-     | 4.25:1         | 30                  | kg 0,9<br>lb 1,98  | NV02N010000 |
| VOSE N 3/8 | 10 | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 60<br>inch 2,36 | 153,5<br>6,04 | 100<br>3,94 | 30<br>1,18 | 30<br>1,18 | 60<br>2,36 | 53,5<br>2,11 | N 3/8 | 8,5<br>0,33 | 8<br>0,31  | 44<br>1,73 | 10<br>0,39 | 4.25:1         | 40                  | kg 1,25<br>lb 2,76 | NV02N020000 |
| VOSE N 1/2 | 13 | MPa 35<br>Psi 5075 | 30<br>870-5075      | 6-35<br>870-5075 | mm 60<br>inch 2,36 | 153,5<br>6,04 | 100<br>3,94 | 30<br>1,18 | 36<br>1,42 | 65<br>2,56 | 53,5<br>2,11 | N 1/2 | 8,5<br>0,33 | 8<br>0,31  | 44<br>1,73 | 10<br>0,39 | 4.25:1         | 60                  | kg 1,2<br>lb 2,65  | NV02N030000 |
| VOSE N 3/4 | 20 | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 80<br>inch 3,15 | 183<br>7,20   | 127<br>5,00 | 35<br>1,38 | 46<br>1,81 | 85<br>3,35 | 56<br>2,20   | N 3/4 | 8,5<br>0,33 | 18<br>0,71 | 44<br>1,73 | 10<br>0,39 | 6.25:1         | 90                  | kg 2,3<br>lb 5,07  | NV02N040000 |



## VOSE SAE J1926-1

| TYPE        | DN | PN                 | STANDARD<br>SETTING | SETTING<br>RANGE | A                  | C             | D           | G          | L1         | L2         | R            | ØM                | ØK          | W1         | W2         | X          | PILOT<br>RATIO | MAX FLOW<br>(l/min) | WEIGHT             | ITEM CODE   |
|-------------|----|--------------------|---------------------|------------------|--------------------|---------------|-------------|------------|------------|------------|--------------|-------------------|-------------|------------|------------|------------|----------------|---------------------|--------------------|-------------|
|             |    |                    |                     |                  | mm                 | inch          | mm          | inch       | mm         | inch       | mm           | inch              | mm          | inch       | mm         | inch       | kg             | lb                  |                    |             |
| VOSE SAE 4  | 6  | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 50<br>inch 1,97 | 149<br>5,87   | 95<br>3,74  | 25<br>0,98 | 30<br>1,18 | 58<br>2,28 | 54<br>2,13   | 7/16<br>UNF       | 6,5<br>0,26 | 7<br>0,28  | 36<br>1,42 | -<br>-     | 4.25:1         | 30                  | kg 0,9<br>lb 1,98  | NV02S010000 |
| VOSE SAE 6  | 10 | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 60<br>inch 2,36 | 153,5<br>6,04 | 100<br>3,94 | 30<br>1,18 | 30<br>1,18 | 60<br>2,36 | 53,5<br>2,11 | 9/16<br>UNF       | 8,5<br>0,33 | 8<br>0,31  | 44<br>1,73 | 10<br>0,39 | 4.25:1         | 40                  | kg 1,25<br>lb 2,76 | NV02S020000 |
| VOSE SAE 8  | 13 | MPa 35<br>Psi 5075 | 30<br>870-5075      | 6-35<br>870-5075 | mm 60<br>inch 2,36 | 153,5<br>6,04 | 100<br>3,94 | 30<br>1,18 | 36<br>1,42 | 65<br>2,56 | 53,5<br>2,11 | 3/4 - 16<br>UNF   | 8,5<br>0,33 | 8<br>0,31  | 44<br>1,73 | 10<br>0,39 | 4.25:1         | 60                  | kg 1,2<br>lb 2,65  | NV02S030000 |
| VOSE SAE 12 | 20 | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 80<br>inch 3,15 | 183<br>7,20   | 127<br>5,00 | 35<br>1,38 | 46<br>1,81 | 85<br>3,35 | 56<br>2,20   | 1 1/16<br>- 12 UN | 8,5<br>0,33 | 18<br>0,71 | 44<br>1,73 | 10<br>0,39 | 6.25:1         | 90                  | kg 2,3<br>lb 5,07  | NV02S040000 |




# VODE

## DOUBLE EFFECT OVERCENTER VALVE

Edition. 21.0

### CS Carbon Steel

- Type: Double Effect Overcenter Valve
- Sizes: DN6-DN20
- Ends: BSP-NPT-SAE
- Pressure: up to PN350
- Temp range: from -20°C to +90°C



## STRUCTURE

| Type and way of valve | Ends                       |                           | Material        |
|-----------------------|----------------------------|---------------------------|-----------------|
| VODE                  | GAS DIN/<br>ISO 228<br>BSP | NPT ANSI /ASME<br>B1.20.1 | SAE J1926-1     |
|                       | G 1/4                      | N 1/4                     | SAE4            |
|                       | G 3/8                      | N 3/8                     | SAE6            |
|                       | G 1/2                      | N 1/2                     | SAE8            |
|                       | G 3/4                      | N 3/4                     | SAE12           |
|                       |                            |                           | CS CARBON STEEL |




## FEATURES




| PILOT RATIO | FLUID VISCOSITY | FILTRATION | FLUID TEMPERATURE | AMBIENT TEMPERATURE | STANDARD SEALS | ADJUSTMENT       |
|-------------|-----------------|------------|-------------------|---------------------|----------------|------------------|
| 4.25:1      | ISO 3448        | ISO4406    | -20°C +90°C       | -20°C +50°C         | NBR            | Steel cap Std.   |
| 6.25:1      |                 |            |                   |                     |                | Tamper proof cap |

\*On request

- Pilot ratio 8:1 and 11:1
- Bigger sizes
- Tamper proof cap

## PERFORMANCES V to C

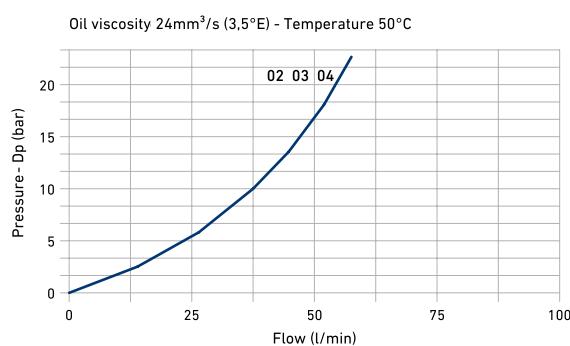


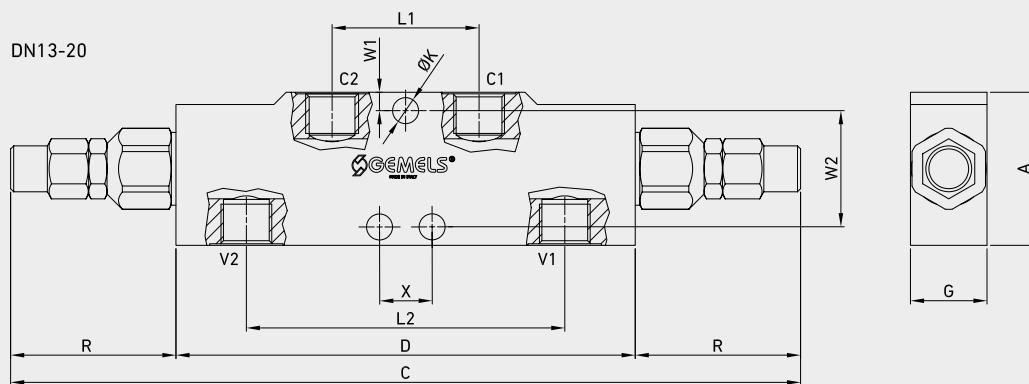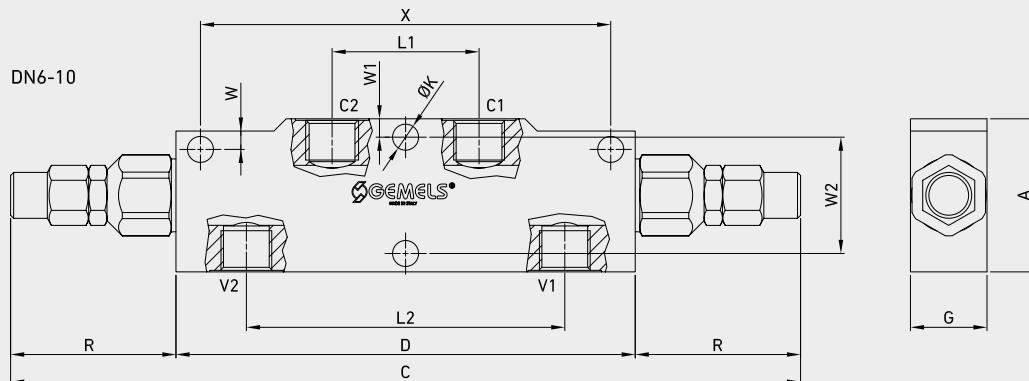

## VODE DIN/ISO 228 BSP


**CS**  
Carbon Steel

| TYPE       | DN | PN       | STANDARD<br>SETTING | SETTING<br>RANGE | A         | C     | D    | G    | L1   | L2   | R    | ØM    | ØK   | W    | W1   | W2   | X    | PILOT<br>RATIO | MAX FLOW<br>(l/min) | WEIGHT  | ITEM CODE   |
|------------|----|----------|---------------------|------------------|-----------|-------|------|------|------|------|------|-------|------|------|------|------|------|----------------|---------------------|---------|-------------|
| VODE G 1/4 | 6  | MPa 35   | 30                  | 6-35             | mm 50     | 258   | 150  | 25   | 48   | 104  | 54   | G 1/4 | 8,5  | 10   | 6    | 38   | 134  | 4.25:1         | 30                  | kg 1,42 | NVO1G010000 |
|            |    | Psi 5075 | 4350                | 870-5075         | inch 1,97 | 10,16 | 5,91 | 0,98 | 1,89 | 4,09 | 2,13 |       | 0,33 | 0,39 | 0,24 | 1,50 | 5,28 | lb 3,13        |                     |         |             |
| VODE G 3/8 | 10 | MPa 35   | 30                  | 3-35             | mm 50     | 258   | 150  | 25   | 48   | 104  | 54   | G 3/8 | 8,5  | 10   | 6    | 38   | 134  | 4.25:1         | 40                  | kg 1,39 | NVO1G020000 |
|            |    | Psi 5075 | 4350                | 435-5075         | inch 1,97 | 10,16 | 5,91 | 0,98 | 1,89 | 4,09 | 2,13 |       | 0,33 | 0,39 | 0,24 | 1,50 | 5,28 | lb 3,06        |                     |         |             |
| VODE G 1/2 | 13 | MPa 35   | 30                  | 6-35             | mm 60     | 258   | 150  | 30   | 50   | 110  | 54   | G 1/2 | 8,5  | -    | 8    | 44   | 30   | 4.25:1         | 60                  | kg 2    | NVO1G030000 |
|            |    | Psi 5075 | 4350                | 870-5075         | inch 2,36 | 10,16 | 5,91 | 1,18 | 1,97 | 4,33 | 2,13 |       | 0,33 | -    | 0,31 | 1,73 | 1,18 | lb 4,41        |                     |         |             |
| VODE G 3/4 | 20 | MPa 35   | 30                  | 6-35             | mm 80     | 304   | 190  | 35   | 65   | 143  | 57   | G 3/4 | 8,5  | -    | 8    | 64   | 44   | 6.25:1         | 90                  | kg 3,8  | NVO1G040000 |
|            |    | Psi 5075 | 4350                | 435-5075         | inch 3,15 | 11,97 | 7,48 | 1,38 | 2,56 | 5,63 | 2,24 |       | 0,33 | -    | 0,31 | 2,52 | 1,73 | lb 8,38        |                     |         |             |



## VODE ANSI/ASME B1.20.1 NPT

| TYPE       | DN | PN                 | STANDARD<br>SETTING | SETTING<br>RANGE | A                  | C            | D           | G          | L1         | L2          | R          | ØM    | ØK          | W          | W1        | W2         | X           | PILOT<br>RATIO | MAX FLOW<br>(l/min) | WEIGHT             | CS<br>Carbon Steel | ITEM CODE |
|------------|----|--------------------|---------------------|------------------|--------------------|--------------|-------------|------------|------------|-------------|------------|-------|-------------|------------|-----------|------------|-------------|----------------|---------------------|--------------------|--------------------|-----------|
|            |    |                    |                     |                  |                    |              |             |            |            |             |            |       |             |            |           |            |             |                |                     |                    |                    |           |
| VODE N 1/4 | 6  | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 50<br>inch 1,97 | 258<br>10,16 | 150<br>5,91 | 25<br>0,98 | 48<br>1,89 | 104<br>4,09 | 54<br>2,13 | N 1/4 | 8,5<br>0,33 | 10<br>0,39 | 6<br>0,24 | 38<br>1,50 | 134<br>5,28 | 4.25:1         | 30                  | kg 1,42<br>lb 3,13 | NV01N010000        |           |
| VODE N 3/8 | 10 | MPa 35<br>Psi 5075 | 30<br>4350          | 3-35<br>435-5075 | mm 50<br>inch 1,97 | 258<br>10,16 | 150<br>5,91 | 25<br>0,98 | 48<br>1,89 | 104<br>4,09 | 54<br>2,13 | N 3/8 | 8,5<br>0,33 | 10<br>0,39 | 6<br>0,24 | 38<br>1,50 | 134<br>5,28 | 4.25:1         | 40                  | kg 1,39<br>lb 3,06 | NV01N020000        |           |
| VODE N 1/2 | 13 | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 60<br>inch 2,36 | 258<br>10,16 | 150<br>5,91 | 30<br>1,18 | 50<br>1,97 | 110<br>4,33 | 54<br>2,13 | N 1/2 | 8,5<br>0,33 | -<br>-     | 8<br>0,31 | 44<br>1,73 | 30<br>1,18  | 4.25:1         | 60                  | kg 2<br>lb 4,41    | NV01N030000        |           |
| VODE N 3/4 | 20 | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>435-5075 | mm 80<br>inch 3,15 | 304<br>11,97 | 190<br>7,48 | 35<br>1,38 | 65<br>2,56 | 143<br>5,63 | 57<br>2,24 | N 3/4 | 8,5<br>0,33 | -<br>-     | 8<br>0,31 | 64<br>2,52 | 44<br>1,73  | 6.25:1         | 90                  | kg 3,8<br>lb 8,38  | NV01N040000        |           |



## VODE SAE J1926-1

| TYPE        | DN | PN                 | STANDARD<br>SETTING | SETTING<br>RANGE | A                  | C            | D           | G          | L1         | L2          | R          | ØM              | ØK          | W          | W1        | W2         | X           | PILOT<br>RATIO | MAX FLOW<br>(l/min) | WEIGHT             | CS<br>Carbon Steel | ITEM CODE |
|-------------|----|--------------------|---------------------|------------------|--------------------|--------------|-------------|------------|------------|-------------|------------|-----------------|-------------|------------|-----------|------------|-------------|----------------|---------------------|--------------------|--------------------|-----------|
|             |    |                    |                     |                  |                    |              |             |            |            |             |            |                 |             |            |           |            |             |                |                     |                    |                    |           |
| VODE SAE 4  | 6  | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 50<br>inch 1,97 | 258<br>10,16 | 150<br>5,91 | 25<br>0,98 | 48<br>1,89 | 104<br>4,09 | 54<br>2,13 | 7/16<br>UNF     | 8,5<br>0,33 | 10<br>0,39 | 6<br>0,24 | 38<br>1,50 | 134<br>5,28 | 4.25:1         | 30                  | kg 1,42<br>lb 3,13 | NV01S010000        |           |
| VODE SAE 6  | 10 | MPa 35<br>Psi 5075 | 30<br>4350          | 3-35<br>435-5075 | mm 50<br>inch 1,97 | 258<br>10,16 | 150<br>5,91 | 25<br>0,98 | 48<br>1,89 | 104<br>4,09 | 54<br>2,13 | 9/16<br>UNF     | 8,5<br>0,33 | 10<br>0,39 | 6<br>0,24 | 38<br>1,50 | 134<br>5,28 | 4.25:1         | 40                  | kg 1,39<br>lb 3,06 | NV01S020000        |           |
| VODE SAE 8  | 13 | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>870-5075 | mm 60<br>inch 2,36 | 258<br>10,16 | 150<br>5,91 | 30<br>1,18 | 50<br>1,97 | 110<br>4,33 | 54<br>2,13 | 3/4 -16<br>UNF  | 8,5<br>0,33 | -<br>-     | 8<br>0,31 | 44<br>1,73 | 30<br>1,18  | 4.25:1         | 60                  | kg 2<br>lb 4,41    | NV01S030000        |           |
| VODE SAE 12 | 20 | MPa 35<br>Psi 5075 | 30<br>4350          | 6-35<br>435-5075 | mm 80<br>inch 3,15 | 304<br>11,97 | 190<br>7,48 | 35<br>1,38 | 65<br>2,56 | 143<br>5,63 | 57<br>2,24 | 11/16<br>-12 UN | 8,5<br>0,33 | -<br>-     | 8<br>0,31 | 64<br>2,52 | 44<br>1,73  | 6.25:1         | 90                  | kg 3,8<br>lb 8,38  | NV01S040000        |           |




# VRC

## DIRECT ACTING RELIEF VALVE WITH MANIFOLD

Edition. 21.1

### CS Carbon Steel

- Type: Direct Acting Relief Valve with Manifold
- Sizes: DN6-DN10
- Ends: BSP-NPT-SAE
- Pressure: up to PN350
- Temp range: from -20°C to +80°C



## STRUCTURE

| Type and way of valve | Ends                       |                           | Material                        |
|-----------------------|----------------------------|---------------------------|---------------------------------|
|                       | GAS DIN/<br>ISO 228<br>BSP | NPT ANSI /ASME<br>B1.20.1 | SAE J1926-1                     |
| VRC                   | G 1/4<br>G 3/8             | N 1/4<br>N 3/8            | SAE4<br>SAE6<br>CS CARBON STEEL |






## FEATURES

| MAX. FLOW (L/MIN) | FLUID VISCOSITY | FILTRATION | FLUID TEMPERATURE | AMBIENT TEMPERATURE | STANDARD SEALS | SEALS MATERIAL | SETTING RANGE | STANDARD SETTING AT 5l/min (BAR) | ADJUSTMENT           |
|-------------------|-----------------|------------|-------------------|---------------------|----------------|----------------|---------------|----------------------------------|----------------------|
| 40                | ISO 3448        | ISO4406    | -20°C/80°C        | -20°C/50°C          | NBR 70 Shore A | NBR 70 Shore A | 10-180        | 90                               | Screw with steel cap |

\*On request


## PERFORMANCES

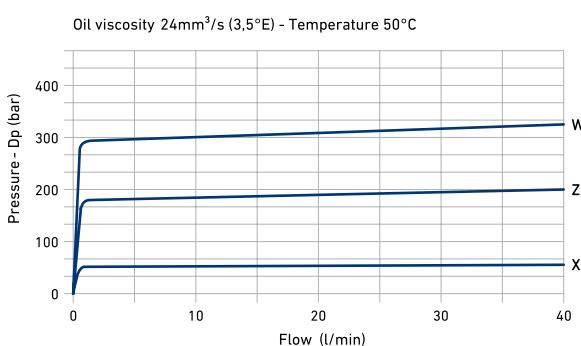

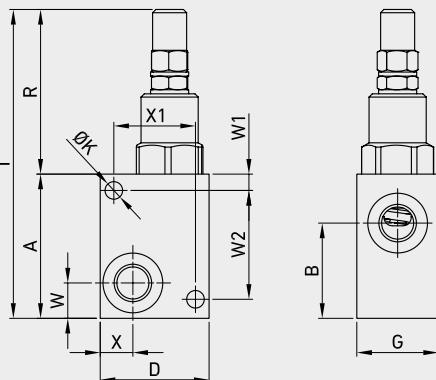


### VRC DIN/ISO 228 BSP

| TYPE      | DN | PN       |  | A    | B    | D    | G    | I    | R    | ØM    | ØK   | W    | W1   | W2   | X    | X1   | WEIGHT  | ITEM CODE   | CS<br>Carbon Steel |
|-----------|----|----------|--|------|------|------|------|------|------|-------|------|------|------|------|------|------|---------|-------------|--------------------|
|           |    |          |  | mm   | inch | mm   | inch | mm   | inch | mm    | inch | kg   | lb   |      |      |      |         |             |                    |
| VRC G 1/4 | 6  | MPa 35   |  | 52   | 35   | 40   | 30   | 114  | 62   | G 1/4 | 6,5  | 13   | 5    | 40   | 12   | 30   | kg 0,45 | NVR1G010000 |                    |
|           |    | Psi 5075 |  | 2,05 | 1,38 | 1,57 | 1,18 | 4,49 | 2,44 |       | 0,26 | 0,51 | 0,20 | 1,57 | 0,47 | 1,18 | lb 0,99 |             |                    |
| VRC G 3/8 | 10 | MPa 35   |  | 55   | 35,5 | 40   | 30   | 117  | 62   | G 3/8 | 6,5  | 15   | 5    | 43   | 12   | 30   | kg 0,45 | NVR1G020000 |                    |
|           |    | Psi 5075 |  | 2,17 | 1,40 | 1,57 | 1,18 | 4,61 | 2,44 |       | 0,26 | 0,59 | 0,20 | 1,69 | 0,47 | 1,18 | lb 0,99 |             |                    |



### VRC ANSI/ASME B1.20.1 NPT

| TYPE      | DN | PN       |  | A    | B    | D    | G    | I    | R    | ØM    | ØK   | W    | W1   | W2   | X    | X1   | WEIGHT  | ITEM CODE   | CS<br>Carbon Steel |
|-----------|----|----------|--|------|------|------|------|------|------|-------|------|------|------|------|------|------|---------|-------------|--------------------|
|           |    |          |  | mm   | inch | mm   | inch | mm   | inch | mm    | inch | kg   | lb   |      |      |      |         |             |                    |
| VRC N 1/4 | 6  | MPa 35   |  | 52   | 35   | 40   | 30   | 114  | 62   | N 1/4 | 6,5  | 13   | 5    | 40   | 12   | 30   | kg 0,45 | NVR1N010000 |                    |
|           |    | Psi 5075 |  | 2,05 | 1,38 | 1,57 | 1,18 | 4,49 | 2,44 |       | 0,26 | 0,51 | 0,20 | 1,57 | 0,47 | 1,18 | lb 0,99 |             |                    |
| VRC N 3/8 | 10 | MPa 35   |  | 55   | 35,5 | 40   | 30   | 117  | 62   | N 3/8 | 6,5  | 15   | 5    | 43   | 12   | 30   | kg 0,45 | NVR1N020000 |                    |
|           |    | Psi 5075 |  | 2,17 | 1,40 | 1,57 | 1,18 | 4,61 | 2,44 |       | 0,26 | 0,59 | 0,20 | 1,69 | 0,47 | 1,18 | lb 0,99 |             |                    |



## VRC SAE J1926-1

| TYPE      | DN | PN       | A    | B    | D    | G    | I    | R    | ØM   | ØK   | W    | W1   | W2   | X    | X1   | WEIGHT  | ITEM CODE   | CS<br>Carbon Steel |
|-----------|----|----------|------|------|------|------|------|------|------|------|------|------|------|------|------|---------|-------------|--------------------|
|           |    |          | mm   | inch | mm   | inch | mm   | inch | mm   | inch | mm   | inch | mm   | inch | kg   | lb      |             |                    |
| VRC SAE 4 | 6  | MPa 35   | 52   | 35   | 40   | 30   | 114  | 62   | 7/16 | 6,5  | 13   | 5    | 40   | 12   | 30   | kg 0,45 | NVR1S010000 |                    |
|           |    | Psi 5075 | 2,05 | 1,38 | 1,57 | 1,18 | 4,49 | 2,44 | UNF  | 0,26 | 0,51 | 0,20 | 1,57 | 0,47 | 1,18 | lb 0,99 |             |                    |
| VRC SAE 6 | 10 | MPa 35   | 55   | 35,5 | 40   | 30   | 117  | 62   | 9/16 | 6,5  | 15   | 5    | 43   | 12   | 30   | kg 0,45 | NVR1S020000 |                    |
|           |    | Psi 5075 | 2,17 | 1,40 | 1,57 | 1,18 | 4,61 | 2,44 | UNF  | 0,26 | 0,59 | 0,20 | 1,69 | 0,47 | 1,18 | lb 0,99 |             |                    |




# VRM

## RELIEF VALVE IN MANIFOLD WITH MANOMETER PORT

Edition. 21.2

### CS Carbon Steel

- Type: Relief Valve in Manifold with Manometer Port
- Sizes: DN10-DN13-DN20
- Ends: BSP-NPT-SAE
- Pressure: up to PN350
- Temp range: from -20°C to +80°C



## STRUCTURE

| Type and way of valve | Ends                       |                              | Material        |
|-----------------------|----------------------------|------------------------------|-----------------|
| VRM                   | GAS DIN/<br>ISO 228<br>BSP | NPT ANSI<br>/ASME<br>B1.20.1 | SAE<br>J1926-1  |
|                       | G 3/8                      | N 3/8                        | SAE6            |
|                       | G 1/2                      | N 1/2                        | SAE8            |
|                       | G 3/4                      | N 3/4                        | SAE12           |
|                       |                            |                              | CS CARBON STEEL |






## FEATURES

| MAX. FLOW (L/MIN) | FLUID VISCOSITY | FILTRATION | FLUID TEMPERATURE | AMBIENT TEMPERATURE | STANDARD SEALS | SEALS MATERIAL | SETTING RANGE | STANDARD SETTING | ADJUSTMENT            |
|-------------------|-----------------|------------|-------------------|---------------------|----------------|----------------|---------------|------------------|-----------------------|
| 45 (DN10)         | ISO 3448        | ISO4406    | -20°C/80°C        | -20°C/50°C          | NBR 70 Shore A | NBR 70 Shore A | 10-180        | 90               | Screw with steel cap  |
| 70 (DN13)         |                 |            |                   |                     | Viton*         | Viton*         | 10-50*        | 30*              | Tamper resistant cap* |
| 90 (DN20)         |                 |            |                   |                     |                |                | 20-100*       | 70*              | Handknob and locknut* |
|                   |                 |            |                   |                     |                |                | 50-250*       | 130*             |                       |
|                   |                 |            |                   |                     |                |                | 80-300*       | 150*             |                       |

\*On request


## PERFORMANCES

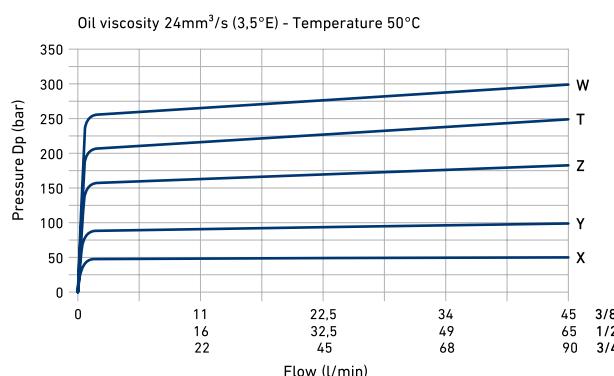

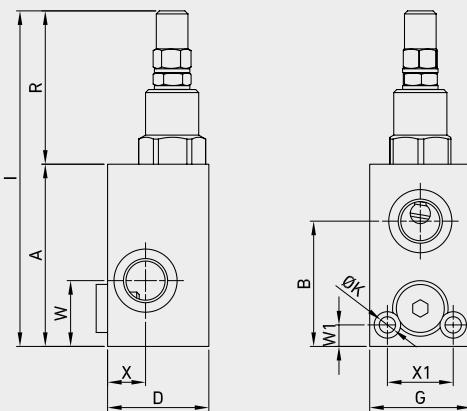


### ■ VRM DIN/ISO 228 BSP

| TYPE      | DN | PN       | A         | B    | D    | G    | I    | R    | ØM    | ØK   | W    | W1   | X    | X1   | WEIGHT  | ITEM CODE   |
|-----------|----|----------|-----------|------|------|------|------|------|-------|------|------|------|------|------|---------|-------------|
| VRM G 3/8 | 10 | MPa 35   | mm 72     | 49,5 | 40   | 40   | 134  | 62   | G 1/4 | 6,5  | 26   | 8,5  | 15   | 26   | kg 0,8  | NVR2G020000 |
|           |    | Psi 5075 | inch 2,83 | 1,95 | 1,57 | 1,57 | 5,28 | 2,44 |       | 0,26 | 1,02 | 0,33 | 0,59 | 1,02 | lb 1,76 |             |
| VRM G 1/2 | 13 | MPa 35   | mm 77     | 54   | 45   | 45   | 139  | 62   | G 3/8 | 6,5  | 29,5 | 8,5  | 17,5 | 30   | kg 1    | NVR2G030000 |
|           |    | Psi 5075 | inch 3,03 | 2,13 | 1,77 | 1,77 | 5,47 | 2,44 |       | 0,26 | 1,16 | 0,33 | 0,69 | 1,18 | lb 2,20 |             |
| VRM G 3/4 | 20 | MPa 35   | mm 92     | 68   | 50   | 50   | 154  | 62   | G 1/2 | 6,5  | 35   | 10   | 20   | 32   | kg 1,5  | NVR2G040000 |
|           |    | Psi 5075 | inch 3,62 | 2,68 | 1,97 | 1,97 | 6,06 | 2,44 |       | 0,26 | 1,38 | 0,39 | 0,79 | 1,26 | lb 3,31 |             |



### ■ VRM ANSI/ASME B1.20.1 NPT

| TYPE      | DN | PN       | A         | B    | D    | G    | I    | R    | ØM    | ØK   | W    | W1   | X    | X1   | WEIGHT  | ITEM CODE   |
|-----------|----|----------|-----------|------|------|------|------|------|-------|------|------|------|------|------|---------|-------------|
| VRM N 3/8 | 10 | MPa 35   | mm 72     | 49,5 | 40   | 40   | 134  | 62   | N 1/4 | 6,5  | 26   | 8,5  | 15   | 26   | kg 0,8  | NVR2N020000 |
|           |    | Psi 5075 | inch 2,83 | 1,95 | 1,57 | 1,57 | 5,28 | 2,44 |       | 0,26 | 1,02 | 0,33 | 0,59 | 1,02 | lb 1,76 |             |
| VRM N 1/2 | 13 | MPa 35   | mm 77     | 54   | 45   | 45   | 139  | 62   | N 3/8 | 6,5  | 29,5 | 8,5  | 17,5 | 30   | kg 1    | NVR2N030000 |
|           |    | Psi 5075 | inch 3,03 | 2,13 | 1,77 | 1,77 | 5,47 | 2,44 |       | 0,26 | 1,16 | 0,33 | 0,69 | 1,18 | lb 2,20 |             |
| VRM N 3/4 | 20 | MPa 35   | mm 92     | 68   | 50   | 50   | 154  | 62   | N 1/2 | 6,5  | 35   | 10   | 20   | 32   | kg 1,5  | NVR2N040000 |
|           |    | Psi 5075 | inch 3,62 | 2,68 | 1,97 | 1,97 | 6,06 | 2,44 |       | 0,26 | 1,38 | 0,39 | 0,79 | 1,26 | lb 3,31 |             |



## VRM SAE J1926-1

| TYPE       | DN | PN  |      | A  | B    | D  | G    | I   | R    | ØM       | ØK   | W    | W1   | X    | X1   | WEIGHT  | ITEM CODE   | Carbon Steel |
|------------|----|-----|------|----|------|----|------|-----|------|----------|------|------|------|------|------|---------|-------------|--------------|
|            |    |     |      | mm | inch | mm | inch | mm  | inch | mm       | inch | kg   | lb   |      |      | kg      | lb          |              |
| VRM SAE 6  | 10 | MPa | 35   | 72 | 49,5 | 40 | 40   | 134 | 62   | 7/16 UNF | 6,5  | 26   | 8,5  | 15   | 26   | kg 0,8  | NVR2S020000 |              |
|            |    | Psi | 5075 |    |      |    |      |     |      |          | 0,26 | 1,02 | 0,33 | 0,59 | 1,02 | lb 1,76 |             |              |
| VRM SAE 8  | 13 | MPa | 35   | 77 | 54   | 45 | 45   | 139 | 62   | 9/16 UNF | 6,5  | 29,5 | 8,5  | 17,5 | 30   | kg 1    | NVR2S030000 |              |
|            |    | Psi | 5075 |    |      |    |      |     |      |          | 0,26 | 1,16 | 0,33 | 0,69 | 1,18 | lb 2,20 |             |              |
| VRM SAE 12 | 20 | MPa | 35   | 92 | 68   | 50 | 50   | 154 | 62   | 3/4 UNF  | 6,5  | 35   | 10   | 20   | 32   | kg 1,5  | NVR2S040000 |              |
|            |    | Psi | 5075 |    |      |    |      |     |      |          | 0,26 | 1,38 | 0,39 | 0,79 | 1,26 | lb 3,31 |             |              |



# VBP

Edition. 21.1

## CS Carbon Steel

### • VBPSE

- Type: single pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350
- Temp range: from -20°C to +100°C

### • VBPDE

- Type: double pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350
- Temp range: from -20°C to +100°C

### • VBPDE CEXC

- Type: double pilot operated check valves
- Sizes: from DN6 up to DN50
- Ends: BSP
- Pressure: up to PN350
- Temp range: from -20°C to +100°C



## CODE DESCRIPTION STRUCTURE

**VBPSE | G1/2 | CS**

**Type and way of valve**

VBPSE single pilot operated check valves

**Ends**

GAS DIN/

ISO 228

BSP

G 1/4


G 3/8

G 1/2

G 3/4

**Material**

● CS carbon steel

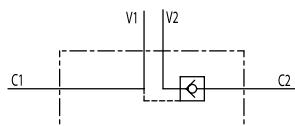

**VBPDE | G1/2 | CS**

**Type and way of valve**

VBPDE double pilot operated check valves

**Ends**

GAS DIN/

ISO 228

BSP

G 1/4


G 3/8

G 1/2

G 3/4

**Material**

● CS carbon steel

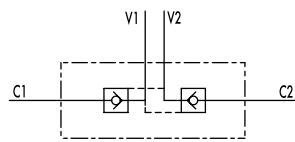

**VBPDE  
CEXC | G1/2 | CS**

**Type and way of valve**

VBPDE CEXC double pilot operated check valves

**Ends**

GAS DIN/

ISO 228

BSP

G 1/4


G 3/8


G 1/2

G 3/4

**Material**

● CS carbon steel

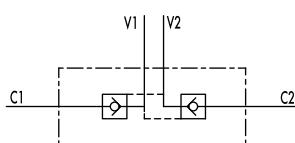

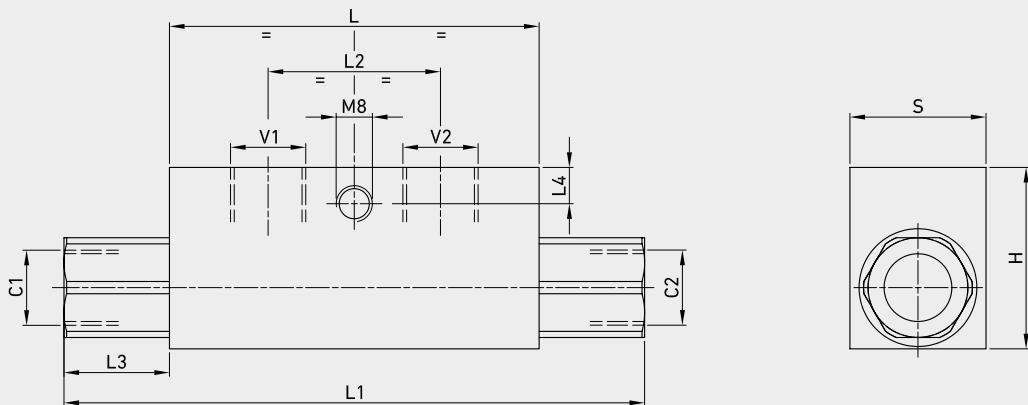



### VBPSE Single pilot operated check valves

**CS**  
Carbon Steel

| TYPE         | V1 - V2 C1 - C2<br>GAS - MET | MAX<br>PRESSURE | CRACKING<br>PRESSURE | L    | L1   | L2   | L3    | L4   | H    | S    | WEIGHT | ITEM CODE |          |
|--------------|------------------------------|-----------------|----------------------|------|------|------|-------|------|------|------|--------|-----------|----------|
| VBPSE 1/4" L | G 1/4"                       | MPa             | 35                   | 0,4  | mm   | 64   | 106,5 | 36   | 18,5 | 8    | 40     | 30        | kg 0,612 |
|              |                              | Psi             | 5075                 | 58   | inch | 2,52 | 4,19  | 1,42 | 0,73 | 0,31 | 1,57   | 1,18      | lb 1,35  |
| VBPSE 3/8" L | G 3/8"                       | MPa             | 35                   | 0,3  | mm   | 80   | 120   | 38   | 16   | 8    | 40     | 30        | kg 0,706 |
|              |                              | Psi             | 5075                 | 43,5 | inch | 3,15 | 4,72  | 1,50 | 0,63 | 0,31 | 1,57   | 1,18      | lb 1,56  |
| VBPSE 1/2" L | G 1/2"                       | MPa             | 35                   | 0,6  | mm   | 90   | 133   | 45   | 17   | 12,5 | 45     | 35        | kg 0,994 |
|              |                              | Psi             | 5075                 | 87   | inch | 3,54 | 5,24  | 1,77 | 0,67 | 0,49 | 1,77   | 1,38      | lb 2,19  |
| VBPSE 3/4" L | G 3/4"                       | MPa             | 35                   | 0,2  | mm   | 100  | 182   | 46   | 36   | 12   | 60     | 40        | kg 1,792 |
|              |                              | Psi             | 5075                 | 29   | inch | 3,94 | 7,17  | 1,81 | 1,42 | 0,47 | 2,36   | 1,57      | lb 3,95  |

### PRESSURE DROP CURVES

Temperature : 50°C / Oil viscosity: 30cSt

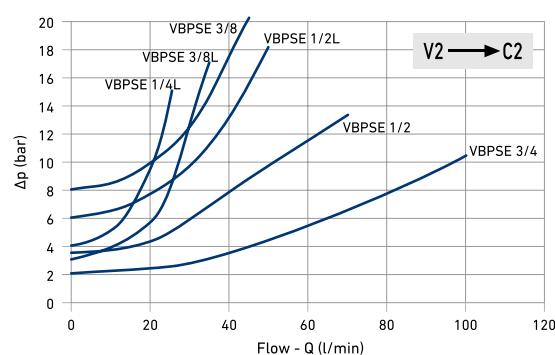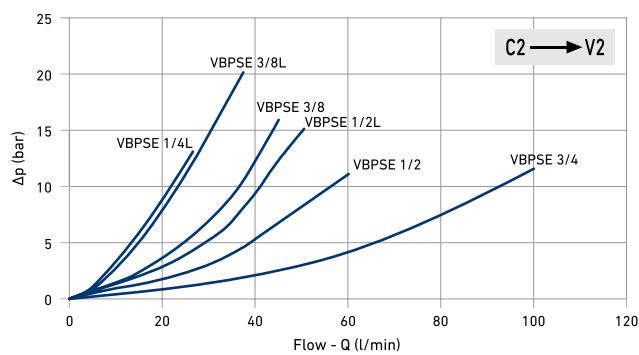



## VBPDE Double pilot operated check valves

**CS**  
Carbon Steel

| TYPE         | V1 - V2 C1 - C2<br>GAS - MET | MAX<br>PRESSURE |      | CRACKING<br>PRESSURE |  | L    | L1   | L2   | L3   | L4   | H    | S    | WEIGHT | ITEM CODE |
|--------------|------------------------------|-----------------|------|----------------------|--|------|------|------|------|------|------|------|--------|-----------|
| VBPDE 1/4" L | G 1/4"                       | MPa             | 35   | 0,4                  |  | mm   | 64   | 113  | 36   | 24,5 | 8    | 40   | 30     | kg 0,636  |
|              |                              | Psi             | 5075 | 58                   |  | inch | 2,52 | 4,45 | 1,42 | 0,96 | 0,31 | 1,57 | 1,18   | lb 1,40   |
| VBPDE 3/8" L | G 3/8"                       | MPa             | 35   | 0,3                  |  | mm   | 80   | 128  | 38   | 24   | 8    | 40   | 30     | kg 0,736  |
|              |                              | Psi             | 5075 | 43,5                 |  | inch | 3,15 | 5,04 | 1,50 | 0,94 | 0,31 | 1,57 | 1,18   | lb 1,62   |
| VBPDE 1/2" L | G 1/2"                       | MPa             | 35   | 0,6                  |  | mm   | 90   | 142  | 45   | 26   | 12,5 | 45   | 35     | kg 1,042  |
|              |                              | Psi             | 5075 | 87                   |  | inch | 3,54 | 5,59 | 1,77 | 1,02 | 0,49 | 1,77 | 1,38   | lb 2,30   |
| VBPDE 3/4" L | G 3/4"                       | MPa             | 30   | 0,2                  |  | mm   | 100  | 192  | 46   | 46   | 12   | 60   | 40     | kg 1,916  |
|              |                              | Psi             | 4350 | 29                   |  | inch | 3,94 | 7,56 | 1,81 | 1,81 | 0,47 | 2,36 | 1,57   | lb 4,22   |

## PRESSURE DROP CURVES

Temperature : 50°C / Oil viscosity: 30cSt

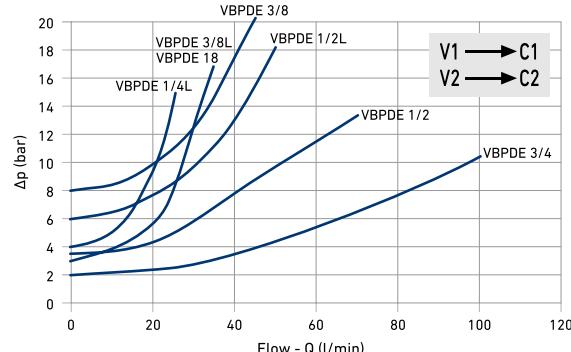
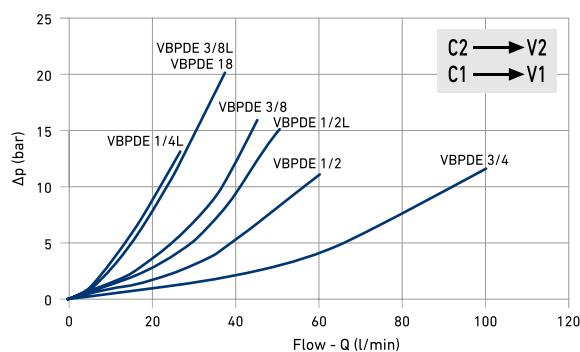


## VBPDE CEXC Double pilot operated check valves for 12mm pipe mounting din (2353)

| TYPE                       | V1 - V2 C1 - C2<br>GAS - MET | MAX<br>PRESSURE |      | CRACKING<br>PRESSURE |  | L    | L1   | L2   | L3   | H    | S    | WEIGHT |          |
|----------------------------|------------------------------|-----------------|------|----------------------|--|------|------|------|------|------|------|--------|----------|
| VBPDE 1/4" L 2<br>CEXC-10L | G 1/4"                       | MPa             | 35   | 0,7                  |  | mm   | 64   | 125  | 36   | 160  | 40   | 30     | kg 0,644 |
|                            |                              | Psi             | 5075 | 101,5                |  | inch | 2,52 | 4,92 | 1,42 | 6,30 | 1,57 | 1,18   | lb 1,42  |
| VBPDE 1/4" L 2<br>CEXC     | G 1/4"                       | MPa             | 35   | 0,4                  |  | mm   | 64   | 130  | 36   | 160  | 40   | 30     | kg 0,648 |
|                            |                              | Psi             | 5075 | 58                   |  | inch | 2,52 | 5,12 | 1,42 | 6,30 | 1,57 | 1,18   | lb 1,43  |
| VBPDE 3/8" L 2<br>CEXC     | G 3/8"                       | MPa             | 35   | 0,4                  |  | mm   | 64   | 130  | 36   | 166  | 40   | 30     | kg 0,630 |
|                            |                              | Psi             | 5075 | 58                   |  | inch | 2,52 | 5,12 | 1,42 | 6,54 | 1,57 | 1,18   | lb 1,39  |

## PRESSURE DROP CURVES

Temperature : 50°C / Oil viscosity: 30cSt

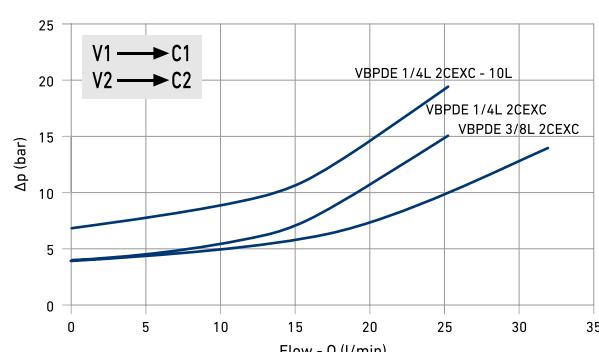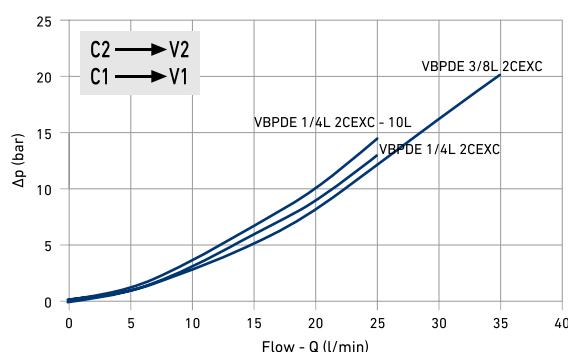




RF

## FLOW CONTROL


Edition. 21.0

## CS Carbon Steel

- Type: check valve flow control
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400
- Temp range: from -20°C to +100°C



## STANDARD COMPOSITION OF VALVE

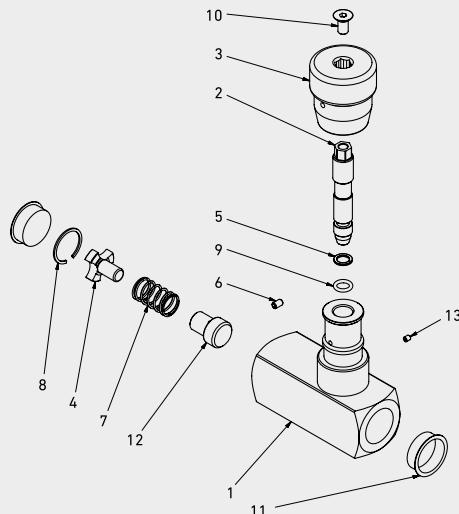

**CS**  
Carbon Steel

| POS | DESCRIPTION | Q.TY | MATERIAL      |
|-----|-------------|------|---------------|
| 1   | Body        | 1    | 1,0737        |
| 2   | Stem        | 1    | 1,0503        |
| 3   | Handle      | 1    | ALLUMINUM     |
| 4   | Spring ring | 1    | X 35 Cr Mo 17 |
| 5   | Stem ring   | 1    | PTFE          |
| 6   | Pin         | 1    | 1,0737        |
| 7   | Spring      | 1    | 1,0116        |
| 8   | Seeger      | 1    | X 35 Cr Mo 17 |
| 9   | Stem o-ring | 1    | NBR           |
| 10  | Screw       | 1    | DIN 7991 8.8  |
| 11  | Caps        | 2    | PVC           |
| 12  | Poppet      | 1    | 1,0737        |
| 13  | Screw       | 1    | DIN 7991 8.8  |



**CRACKING PRESSURE  
0,50 bar**

## CODE DESCRIPTION STRUCTURE

**RF      G1/2      CS**

Type and way of valve \_\_\_\_\_

RF flow control

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G 1/4 N 1/4

G 3/8 N 3/8

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1


Material \_\_\_\_\_

CS carbon steel

\*On request

- Special threads
- Pressure class PN 350

For further special requests please consult our technical/commercial service.

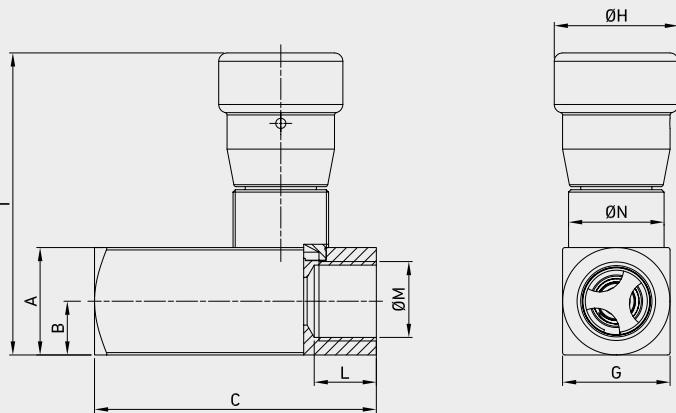

## ■ RF DIN/ISO 228 BSP

CS

Carbon Steel



| TYPE     | DN | PN       | MAX FLOW L/m | CRACKING PRESSURE | A         | B    | C     | G    | ØH   | I    | ØM    | ØN      | WEIGHT  | ITEM CODE       |
|----------|----|----------|--------------|-------------------|-----------|------|-------|------|------|------|-------|---------|---------|-----------------|
| RF G 1/4 | 6  | MPa 40   | 15           | MPa 0,05          | mm 25     | 12,5 | 66    | 25   | 33   | 75   | G 1/4 | M20X1   | kg 0,41 | GF2GGT130110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 0,98 | 0,49 | 2,60  | 0,98 | 1,30 | 2,95 |       |         | lb 0,90 |                 |
| RF G 3/8 | 10 | MPa 40   | 30           | MPa 0,05          | mm 25     | 12,5 | 77    | 25   | 33   | 75   | G 3/8 | M20X1   | kg 0,42 | GF2GGT230110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 0,98 | 0,49 | 3,03  | 0,98 | 1,30 | 2,95 |       |         | lb 0,93 |                 |
| RF G 1/2 | 13 | MPa 40   | 50           | MPa 0,05          | mm 30     | 15   | 91    | 30   | 33   | 81   | G 1/2 | M25X1,5 | kg 0,63 | GF2GGT330110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,18 | 0,59 | 3,58  | 1,18 | 1,30 | 3,19 |       |         | lb 1,39 |                 |
| RF G 3/4 | 20 | MPa 40   | 80           | MPa 0,05          | mm 40     | 20   | 112,5 | 40   | 42   | 110  | G 3/4 | M25X1,5 | kg 1,52 | GF2GGT430110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,57 | 0,79 | 4,43  | 1,57 | 1,65 | 4,33 |       |         | lb 3,35 |                 |
| RF G 1   | 25 | MPa 40   | 150          | MPa 0,05          | mm 45     | 22,5 | 141   | 45   | 42   | 115  | G 1   | M35X1,5 | kg 2,1  | GF2GGT530110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,77 | 0,89 | 5,55  | 1,77 | 1,65 | 4,53 |       |         | lb 4,63 |                 |

## RF ANSI/ASME B1.20.1 NPT

**CS**  
Carbon Steel

| TYPE     | DN | PN       | MAX FLOW L/m | CRACKING PRESSURE | A         | B    | C     | G    | ØH   | I    | ØM    | ØN      | WEIGHT  | ITEM CODE       |
|----------|----|----------|--------------|-------------------|-----------|------|-------|------|------|------|-------|---------|---------|-----------------|
| RF N 1/4 | 6  | MPa 40   | 15           | MPa 0,05          | mm 25     | 12,5 | 66    | 25   | 33   | 75   | N 1/4 | M20X1   | kg 0,41 | GF2NNT130110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 0,98 | 0,49 | 2,60  | 0,98 | 1,30 | 2,95 |       |         | lb 0,90 |                 |
| RF N 3/8 | 10 | MPa 40   | 30           | MPa 0,05          | mm 25     | 12,5 | 77    | 25   | 33   | 75   | N 3/8 | M20X1   | kg 0,42 | GF2NNT230110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 0,98 | 0,49 | 3,03  | 0,98 | 1,30 | 2,95 |       |         | lb 0,93 |                 |
| RF N 1/2 | 13 | MPa 40   | 50           | MPa 0,05          | mm 30     | 15   | 91    | 30   | 33   | 81   | N 1/2 | M25X1.5 | kg 0,63 | GF2NNT330110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,18 | 0,59 | 3,58  | 1,18 | 1,30 | 3,19 |       |         | lb 1,39 |                 |
| RF N 3/4 | 20 | MPa 40   | 80           | MPa 0,05          | mm 40     | 20   | 112,5 | 40   | 42   | 110  | N 3/4 | M25X1.5 | kg 1,52 | GF2NNT430110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,57 | 0,79 | 4,43  | 1,57 | 1,65 | 4,33 |       |         | lb 3,35 |                 |
| RF N 1   | 25 | MPa 40   | 150          | MPa 0,05          | mm 45     | 22,5 | 141   | 45   | 42   | 115  | N 1   | M35X1.5 | kg 2,1  | GF2NNT530110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,77 | 0,89 | 5,55  | 1,77 | 1,65 | 4,53 |       |         | lb 4,63 |                 |

## PRESSURE DROP CURVES

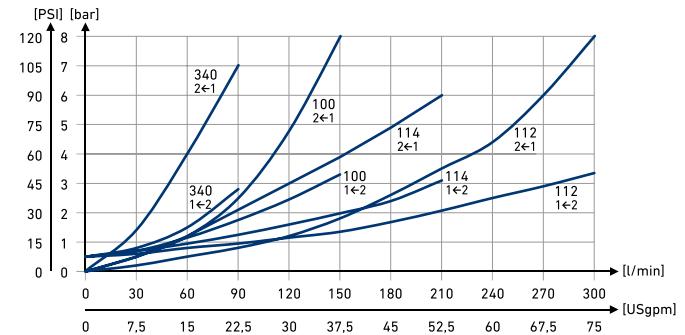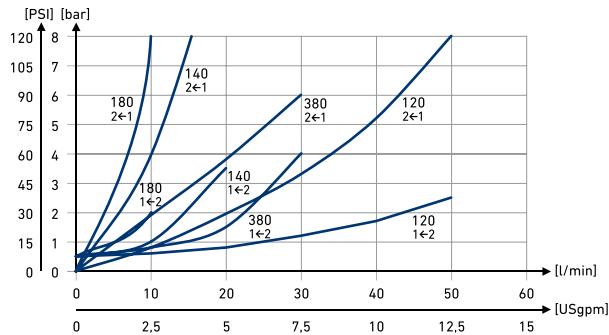




# BD

## FLOW CONTROL B-DIRECTIONAL


Edition. 21.0

### CS Carbon Steel

- Type: reduce flow control B-directional
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT
- Pressure: up to PN400
- Temp range: from -20°C to +100°C



### STANDARD COMPOSITION OF VALVE

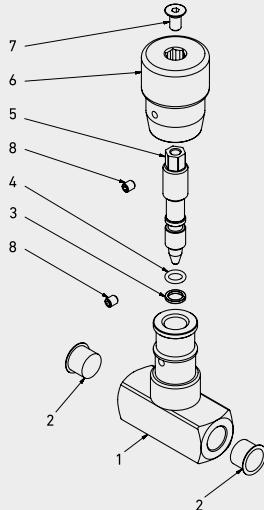

**CS**  
Carbon Steel

| POS | DESCRIPTION | Q.TY | MATERIAL     |
|-----|-------------|------|--------------|
| 1   | Body        | 1    | 1,0737       |
| 2   | Caps        | 2    | PVC          |
| 3   | Stem        | 1    | 1,05         |
| 4   | Stem o-ring | 1    | NBR          |
| 5   | Stem ring   | 1    | PTFE         |
| 6   | Handle      | 1    | ALLUMINIUM   |
| 7   | Screw       | 1    | DIN 7991 8.8 |
| 8   | Screw       | 1    | DIN 7991 8.8 |



**CRACKING PRESSURE  
0,50 bar**

## CODE DESCRIPTION STRUCTURE

**BD    G1/2    CS**

Type and way of valve \_\_\_\_\_

BD flow control

Ends \_\_\_\_\_

GAS DIN/ NPT ANSI

ISO 228 /ASME

BSP B1.20.1

G 1/4 N 1/4

G 3/8 N 3/8

G 1/2 N 1/2

G 3/4 N 3/4

G 1 N 1


Material \_\_\_\_\_

CS carbon steel

\*On request

- Special threads
- Pressure class PN 350

For further special requests please consult our technical/commercial service.

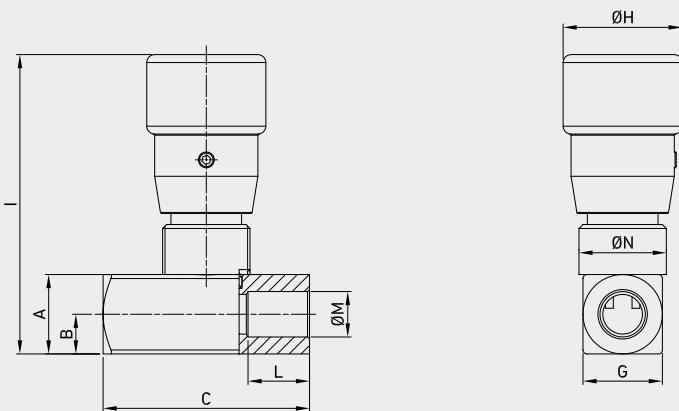

## ■ BD DIN/ISO 228 BSP

CS

Carbon Steel



ITEM CODE

| TYPE     | DN | PN       | MAX FLOW L/m | CRACKING PRESSURE | A         | B    | C    | G    | ØH   | I    | ØM    | ØN      | WEIGHT  | ITEM CODE       |
|----------|----|----------|--------------|-------------------|-----------|------|------|------|------|------|-------|---------|---------|-----------------|
| BD G 1/4 | 6  | MPa 40   | 15           | MPa 0,05          | mm 25     | 12,5 | 54   | 25   | 30   | 75   | G 1/4 | M20X1   | kg 0,33 | GG2GGT130110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 0,98 | 0,49 | 2,13 | 0,98 | 1,18 | 2,95 |       |         | lb 0,73 |                 |
| BD G 3/8 | 10 | MPa 40   | 30           | MPa 0,05          | mm 25     | 12,5 | 54   | 25   | 30   | 75   | G 3/8 | M20X1   | kg 0,31 | GG2GGT230110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 0,98 | 0,49 | 2,13 | 0,98 | 1,18 | 2,95 |       |         | lb 0,68 |                 |
| BD G 1/2 | 13 | MPa 40   | 50           | MPa 0,05          | mm 30     | 15   | 64   | 30   | 33   | 81   | G 1/2 | M25X1,5 | kg 0,48 | GG2GGT330110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,18 | 0,59 | 2,52 | 1,18 | 1,30 | 3,19 |       |         | lb 1,06 |                 |
| BD G 3/4 | 20 | MPa 40   | 80           | MPa 0,05          | mm 40     | 20   | 81   | 40   | 42   | 110  | G 3/4 | M35X1,5 | kg 1,13 | GG2GGT430110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,57 | 0,79 | 3,19 | 1,57 | 1,65 | 4,33 |       |         | lb 2,49 |                 |
| BD G 1   | 25 | MPa 40   | 150          | MPa 0,05          | mm 45     | 22,5 | 102  | 45   | 42   | 115  | G 1   | M35X1,5 | kg 1,5  | GG2GGT530110000 |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,77 | 0,89 | 4,02 | 1,77 | 1,65 | 4,53 |       |         | lb 3,31 |                 |

## ■ BD ANSI/ASME B1.20.1 NPT

| TYPE     | DN | PN       | MAX FLOW L/m | CRACKING PRESSURE | A         |      | B    | C    | G    | ØH   | I     | ØM      | ØN      | WEIGHT          | ITEM CODE | CS<br>Carbon Steel |
|----------|----|----------|--------------|-------------------|-----------|------|------|------|------|------|-------|---------|---------|-----------------|-----------|--------------------|
|          |    |          |              |                   | MPa       | 0,05 | mm   | 25   | 12,5 | 54   | 25    | 30      | 75      | N 1/4           | M20X1     |                    |
| BD N 1/4 | 6  | MPa 40   | 15           | MPa 0,05          | mm 25     | 12,5 | 54   | 25   | 30   | 75   | N 1/4 | M20X1   | kg 0,33 | GG2NNT130110000 |           |                    |
|          |    | Psi 5800 |              | Psi 7,25          | inch 0,98 | 0,49 | 2,13 | 0,98 | 1,18 | 2,95 |       |         | lb 0,73 |                 |           |                    |
| BD N 3/8 | 10 | MPa 40   | 30           | MPa 0,05          | mm 25     | 12,5 | 54   | 25   | 30   | 75   | N 3/8 | M20X1   | kg 0,31 | GG2NNT230110000 |           |                    |
|          |    | Psi 5800 |              | Psi 7,25          | inch 0,98 | 0,49 | 2,13 | 0,98 | 1,18 | 2,95 |       |         | lb 0,68 |                 |           |                    |
| BD N 1/2 | 13 | MPa 40   | 50           | MPa 0,05          | mm 30     | 15   | 64   | 30   | 33   | 81   | N 1/2 | M25X1.5 | kg 0,48 | GG2NNT330110000 |           |                    |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,18 | 0,59 | 2,52 | 1,18 | 1,30 | 3,19 |       |         | lb 1,06 |                 |           |                    |
| BD N 3/4 | 20 | MPa 40   | 80           | MPa 0,05          | mm 40     | 20   | 81   | 40   | 42   | 110  | N 3/4 | M35X1.5 | kg 1,13 | GG2NNT430110000 |           |                    |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,57 | 0,79 | 3,19 | 1,57 | 1,65 | 4,33 |       |         | lb 2,49 |                 |           |                    |
| BD N 1   | 25 | MPa 40   | 150          | MPa 0,05          | mm 45     | 22,5 | 102  | 45   | 42   | 115  | N 1   | M35X1.5 | kg 1,5  | GG2NNT530110000 |           |                    |
|          |    | Psi 5800 |              | Psi 7,25          | inch 1,77 | 0,89 | 4,02 | 1,77 | 1,65 | 4,53 |       |         | lb 3,31 |                 |           |                    |

## ■ PRESSURE DROP CURVES

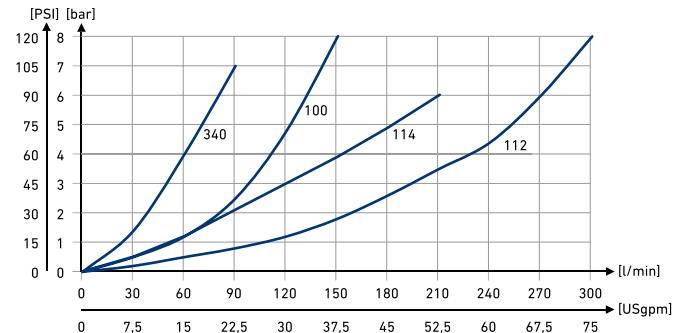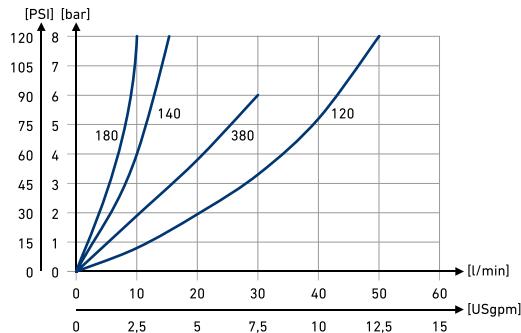



# VU

## CHECK VALVES


Edition. 21.1

### CS Carbon Steel


- Type: check valve
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C

### SS Stainless Steel

- Type: check valve
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -30°C to +100°C



### STANDARD COMPOSITION OF VALVE

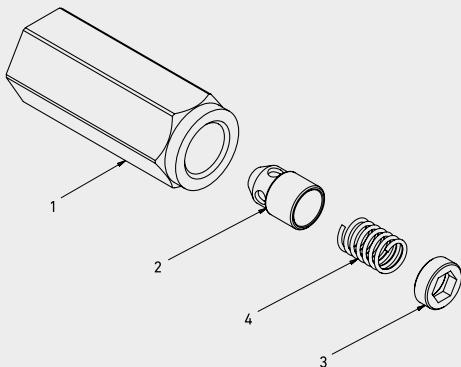

| POS | DESCRIPTION | Q.TY | CS           | SS       |
|-----|-------------|------|--------------|----------|
|     |             |      | Carbon Steel | MATERIAL |
| 1   | Body        | 1    | 1,0737       | 1,4404   |
| 2   | Poppet      | 1    | 1,4749       | 1,4305   |
| 3   | Ring        | 1    | 1,0737       | 1,4305   |
| 4   | Spring      | 1    | 1,0116       | 1,4310   |



## CODE DESCRIPTION STRUCTURE

**VU**    **G1/2**    **SS**

Type and way of valve \_\_\_\_\_

VU check valves

Ends \_\_\_\_\_

| GAS DIN/ | NPT ANSI | SAE     |
|----------|----------|---------|
| ISO 228  | /ASME    | J1926-1 |
| BSP      | B1.20.1  |         |
| G 1/4    | N 1/4    | SAE4    |
| G 3/8    | N 3/8    | SAE6    |
| G 1/2    | N 1/2    | SAE8    |
| G 3/4    | N 3/4    | SAE12   |
| G 1      | N 1      | SAE16   |
| G 1 1/4  | N 1 1/4  |         |
| G 1 1/2  | N 1 1/2  |         |
| G 2      | N 2      |         |


Material \_\_\_\_\_

- CS carbon steel
- SS stainless steel

\*On request

- Special threads
- Pressure class up to PN500
- Spring closed: from 1BAR up to 8BAR




For further special requests please consult our technical/commercial service.

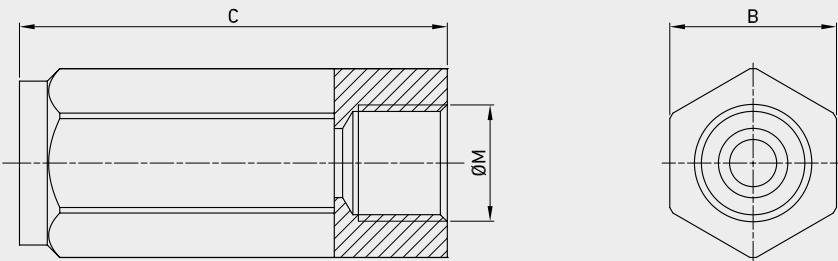

## VU DIN ISO 228 BSP GAS

| TYPE       | DN | PN       | MAX FLOW L/m | CRACKING PRESSURE |      |       | B    | C  | ØM   | WEIGHT  | ITEM CODE |      |
|------------|----|----------|--------------|-------------------|------|-------|------|----|------|---------|-----------|------|
|            |    |          |              | MPa               | 0,04 | 0,07  |      |    |      |         | kg        | 0,11 |
| VU G 1/4   | 6  | MPa 50   | 15           | MPa               | 0,04 | 0,07  | mm   | 19 | 62   | G 1/4   | kg        | 0,11 |
|            |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch |    | 2,44 |         | lb        | 0,24 |
| VU G 3/8   | 10 | MPa 50   | 30           | MPa               | 0,04 | 0,07  | mm   | 24 | 68   | G 3/8   | kg        | 0,2  |
|            |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch |    | 2,68 |         | lb        | 0,44 |
| VU G 1/2   | 13 | MPa 50   | 50           | MPa               | 0,04 | 0,07  | mm   | 30 | 77   | G 1/2   | kg        | 0,35 |
|            |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch |    | 3,03 |         | lb        | 0,77 |
| VU G 3/4   | 20 | MPa 42   | 90           | MPa               | 0,04 | 0,07  | mm   | 36 | 88   | G 3/4   | kg        | 0,53 |
|            |    | Psi 6090 |              | Psi               | 5,8  | 10,15 | inch |    | 3,46 |         | lb        | 1,17 |
| VU G 1     | 25 | MPa 42   | 150          | MPa               | 0,04 | 0,07  | mm   | 41 | 105  | G 1     | kg        | 0,75 |
|            |    | Psi 6090 |              | Psi               | 5,8  | 10,15 | inch |    | 4,13 |         | lb        | 1,65 |
| VU G 1 1/4 | 32 | MPa 35   | 200          | MPa               | 0,04 | 0,07  | mm   | 55 | 135  | G 1 1/4 | kg        | 1,81 |
|            |    | Psi 5075 |              | Psi               | 5,8  | 10,15 | inch |    | 5,31 |         | lb        | 3,99 |
| VU G 1 1/2 | 40 | MPa 35   | 300          | MPa               | 0,04 | 0,07  | mm   | 60 | 145  | G 1 1/2 | kg        | 2,2  |
|            |    | Psi 5075 |              | Psi               | 5,8  | 10,15 | inch |    | 5,71 |         | lb        | 4,85 |
| VU G 2     | 50 | MPa 35   | 430          | MPa               | 0,04 | 0,07  | mm   | 75 | 175  | G 2     | kg        | 4,17 |
|            |    | Psi 5075 |              | Psi               | 5,8  | 10,15 | inch |    | 6,89 |         | lb        | 9,19 |

## PRESSURE DROP CURVES

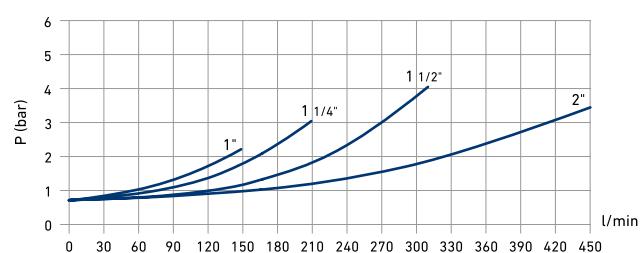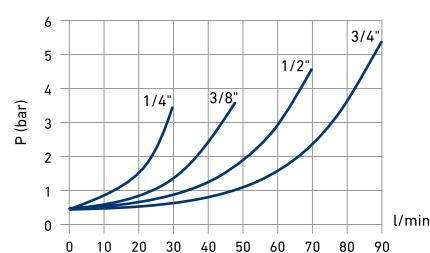

**VU ANSI/ASME B1.20.1 NPT**

| TYPE      | DN | PN       | MAX FLOW L/m | CRACKING PRESSURE |      |       | B    | C    | ØM   | WEIGHT  | ITEM CODE |      |
|-----------|----|----------|--------------|-------------------|------|-------|------|------|------|---------|-----------|------|
|           |    |          |              | MPa               | 0,04 | 0,07  |      |      |      |         | kg        | 0,11 |
| VUN 1/4   | 6  | MPa 50   | 15           | MPa               | 0,04 | 0,07  | mm   | 19   | 62   | N 1/4   | kg        | 0,11 |
|           |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch | 2,44 | 2,44 |         | lb        | 0,24 |
| VUN 3/8   | 10 | MPa 50   | 30           | MPa               | 0,04 | 0,07  | mm   | 24   | 68   | N 3/8   | kg        | 0,2  |
|           |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch | 2,68 | 2,68 |         | lb        | 0,44 |
| VUN 1/2   | 13 | MPa 50   | 50           | MPa               | 0,04 | 0,07  | mm   | 30   | 77   | N 1/2   | kg        | 0,35 |
|           |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch | 3,03 | 3,03 |         | lb        | 0,77 |
| VUN 3/4   | 20 | MPa 42   | 90           | MPa               | 0,04 | 0,07  | mm   | 36   | 88   | N 3/4   | kg        | 0,53 |
|           |    | Psi 6090 |              | Psi               | 5,8  | 10,15 | inch | 3,46 | 3,46 |         | lb        | 1,17 |
| VUN 1     | 25 | MPa 42   | 150          | MPa               | 0,04 | 0,07  | mm   | 41   | 105  | N 1     | kg        | 0,75 |
|           |    | Psi 6090 |              | Psi               | 5,8  | 10,15 | inch | 4,13 | 4,13 |         | lb        | 1,65 |
| VUN 1 1/4 | 32 | MPa 35   | 200          | MPa               | 0,04 | 0,07  | mm   | 55   | 135  | N 1 1/4 | kg        | 1,81 |
|           |    | Psi 5075 |              | Psi               | 5,8  | 10,15 | inch | 5,31 | 5,31 |         | lb        | 3,99 |
| VUN 1 1/2 | 40 | MPa 35   | 300          | MPa               | 0,04 | 0,07  | mm   | 60   | 145  | N 1 1/2 | kg        | 2,2  |
|           |    | Psi 5075 |              | Psi               | 5,8  | 10,15 | inch | 5,71 | 5,71 |         | lb        | 4,85 |
| VUN 2     | 50 | MPa 35   | 430          | MPa               | 0,04 | 0,07  | mm   | 75   | 175  | N 2     | kg        | 4,17 |
|           |    | Psi 5075 |              | Psi               | 5,8  | 10,15 | inch | 6,89 | 6,89 |         | lb        | 9,19 |

**VU SAE J1926-1**

| TYPE     | DN | PN       | MAX FLOW L/m | CRACKING PRESSURE |      |       | B    | C    | ØM   | WEIGHT | ITEM CODE |      |
|----------|----|----------|--------------|-------------------|------|-------|------|------|------|--------|-----------|------|
|          |    |          |              | MPa               | 0,04 | 0,07  |      |      |      |        | kg        | 0,11 |
| VU SAE4  | 6  | MPa 50   | 15           | MPa               | 0,04 | 0,07  | mm   | 19   | 62   | N 1/4  | kg        | 0,11 |
|          |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch | 2,44 | 2,44 |        | lb        | 0,24 |
| VU SAE6  | 10 | MPa 50   | 30           | MPa               | 0,04 | 0,07  | mm   | 24   | 68   | N 3/8  | kg        | 0,2  |
|          |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch | 2,68 | 2,68 |        | lb        | 0,44 |
| VU SAE8  | 13 | MPa 50   | 50           | MPa               | 0,04 | 0,07  | mm   | 30   | 77   | N 1/2  | kg        | 0,35 |
|          |    | Psi 7250 |              | Psi               | 5,8  | 10,15 | inch | 3,03 | 3,03 |        | lb        | 0,77 |
| VU SAE12 | 20 | MPa 42   | 90           | MPa               | 0,04 | 0,07  | mm   | 36   | 88   | N 3/4  | kg        | 0,53 |
|          |    | Psi 6090 |              | Psi               | 5,8  | 10,15 | inch | 3,46 | 3,46 |        | lb        | 1,17 |
| VU SAE16 | 25 | MPa 42   | 150          | MPa               | 0,04 | 0,07  | mm   | 41   | 105  | N 1    | kg        | 0,75 |
|          |    | Psi 6090 |              | Psi               | 5,8  | 10,15 | inch | 4,13 | 4,13 |        | lb        | 1,65 |




# GEV

## SHUTTLE VALVES


Edition. 21.1

### Carbon Steel

- Type: shuttle valve 3 way
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN500
- Temp range: from -20°C to +100°C



### STANDARD COMPOSITION OF VALVE

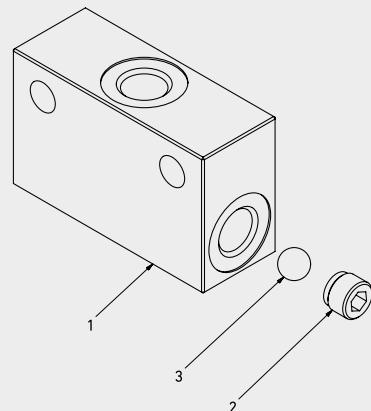

| POS | DESCRIPTION | Q.TY | CS | Carbon Steel | MATERIAL |
|-----|-------------|------|----|--------------|----------|
|     |             |      |    |              |          |
| 1   | Body        | 1    |    |              | 1,0737   |
| 2   | Adapter     | 1    |    |              | 1,0737   |
| 3   | Ball        | 1    |    |              | UNI3545  |



## CODE DESCRIPTION STRUCTURE

**GEV | G1/2 | DN13 | 1**

Type and way of valve \_\_\_\_\_

GEV 2-way

Ends \_\_\_\_\_

|          |          |
|----------|----------|
| GAS DIN/ | NPT ANSI |
| ISO 228  | /ASME    |
| BSP      | B1.20.1  |
| G 1/4    | N 1/4    |
| G 3/8    | N 3/8    |
| G 1/2    | N 1/2    |
| G 3/4    | N 3/4    |
| G 1      | N 1      |

Nominal dimension \_\_\_\_\_

DN6  
DN10  
DN13  
DN20  
DN25



Body Material \_\_\_\_\_

● 1 = 1.0737

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN25 Mpa


For further special requests please consult our technical/commercial service.

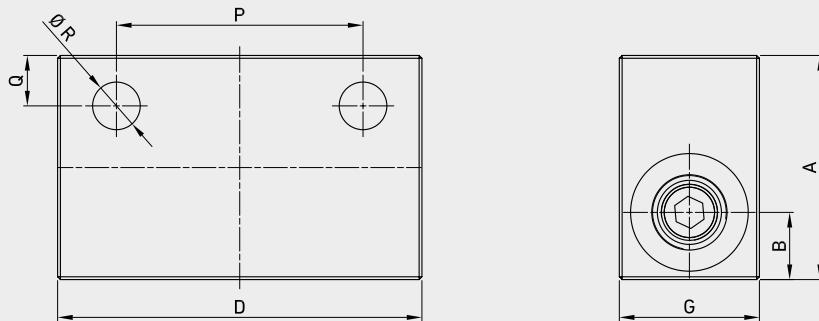

### ■ GEV DIN/ISO 228 BSP

**CS**  
Carbon Steel




| TYPE      | DN | PN       |      | A    | B    | D    | G    | ØM    | P    | Q    | ØR   | ØLW  | WEIGHT  | ITEM CODE       |
|-----------|----|----------|------|------|------|------|------|-------|------|------|------|------|---------|-----------------|
| GEV G 1/4 | 6  | MPa 50   | mm   | 40   | 12   | 65   | 25   | G 1/4 | 44   | 9    | 8,5  | 5    | kg 0,43 | GEVGGT120110000 |
|           |    | Psi 7250 | inch | 1,57 | 0,47 | 2,56 | 0,98 |       | 1,73 | 0,35 | 0,33 | 0,20 | lb 0,95 |                 |
| GEV G 3/8 | 10 | MPa 50   | mm   | 40   | 12   | 65   | 25   | G 3/8 | 44   | 9    | 8,5  | 7,5  | kg 0,40 | GEVGGT220110000 |
|           |    | Psi 7250 | inch | 1,57 | 0,47 | 2,56 | 0,98 |       | 1,73 | 0,35 | 0,33 | 0,30 | lb 0,88 |                 |
| GEV G 1/2 | 13 | MPa 50   | mm   | 57   | 18   | 76   | 30   | G 1/2 | 44   | 12   | 8,5  | 11   | kg 0,82 | GEVGGT320110000 |
|           |    | Psi 7250 | inch | 2,24 | 0,71 | 2,99 | 1,18 |       | 1,73 | 0,47 | 0,33 | 0,43 | lb 1,81 |                 |
| GEV G 3/4 | 20 | MPa 50   | mm   | 65   | 22   | 85   | 40   | G 3/4 | 44   | 12   | 8,5  | 15   | kg 1,38 | GEVGGT420110000 |
|           |    | Psi 7250 | inch | 2,56 | 0,87 | 3,35 | 1,57 |       | 1,73 | 0,47 | 0,33 | 0,59 | lb 3,04 |                 |
| GEV G 1   | 25 | MPa 50   | mm   | 65   | 22   | 95   | 40   | G1    | 60   | 11   | 10,5 | 21   | kg 1,30 | GEVGGT520110000 |
|           |    | Psi 7250 | inch | 2,56 | 0,87 | 3,74 | 1,57 |       | 2,36 | 0,43 | 0,41 | 0,83 | lb 2,87 |                 |



## GEV ANSI/ASME B1.20.1 NPT

| TYPE      | DN | PN       | A         | B    | D    | G    | ØM    | P    | Q    | ØR   | ØLW  | WEIGHT  | CS<br>Carbon Steel | ITEM CODE |
|-----------|----|----------|-----------|------|------|------|-------|------|------|------|------|---------|--------------------|-----------|
|           |    |          |           |      |      |      |       |      |      |      |      |         |                    |           |
| GEV N 1/4 | 6  | MPa 50   | mm 40     | 12   | 65   | 25   | N 1/4 | 44   | 9    | 8,5  | 5    | kg 0,43 | GEVNNT120110000    |           |
|           |    | Psi 7250 | inch 1,57 | 0,47 | 2,56 | 0,98 |       | 1,73 | 0,35 | 0,33 | 0,20 | lb 0,95 |                    |           |
| GEV N 3/8 | 10 | MPa 50   | mm 40     | 12   | 65   | 25   | N 3/8 | 44   | 9    | 8,5  | 7,5  | kg 0,40 | GEVNNT220110000    |           |
|           |    | Psi 7250 | inch 1,57 | 0,47 | 2,56 | 0,98 |       | 1,73 | 0,35 | 0,33 | 0,30 | lb 0,88 |                    |           |
| GEV N 1/2 | 13 | MPa 50   | mm 57     | 18   | 76   | 30   | N 1/2 | 44   | 12   | 8,5  | 11   | kg 0,82 | GEVNNT320110000    |           |
|           |    | Psi 7250 | inch 2,24 | 0,71 | 2,99 | 1,18 |       | 1,73 | 0,47 | 0,33 | 0,43 | lb 1,81 |                    |           |
| GEV N 3/4 | 20 | MPa 50   | mm 65     | 22   | 85   | 40   | N 3/4 | 44   | 12   | 8,5  | 15   | kg 1,38 | GEVNNT420110000    |           |
|           |    | Psi 7250 | inch 2,56 | 0,87 | 3,35 | 1,57 |       | 1,73 | 0,47 | 0,33 | 0,59 | lb 3,04 |                    |           |
| GEV N 1   | 25 | MPa 50   | mm 65     | 22   | 95   | 40   | N 1   | 60   | 11   | 10,5 | 21   | kg 1,30 | GEVNNT520110000    |           |
|           |    | Psi 7250 | inch 2,56 | 0,87 | 3,74 | 1,57 |       | 2,36 | 0,43 | 0,41 | 0,83 | lb 2,87 |                    |           |

## PRESSURE DROP CURVES

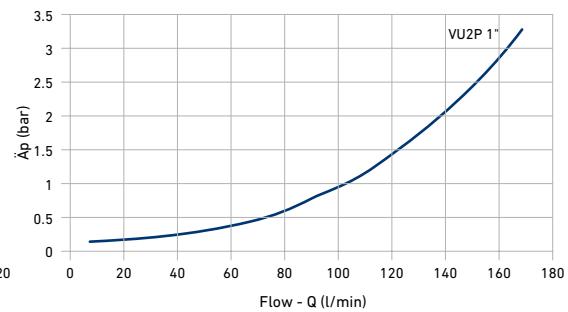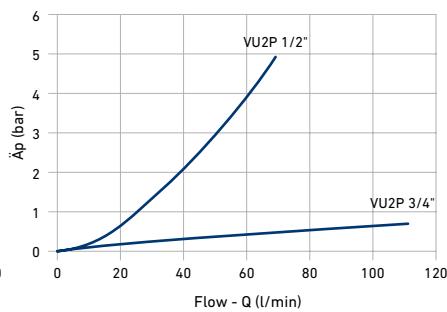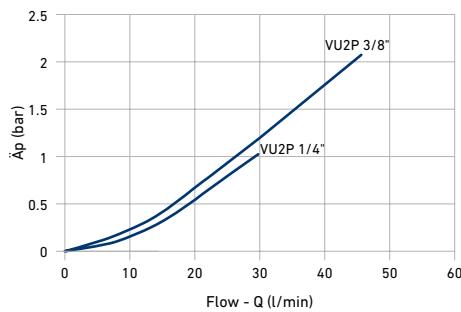



# GPS



## 3 WAYS SINGLE PILOT OPERATED CHECK VALVES

Edition. 21.0

### cs Carbon Steel

- Type: 3-ways single pilot operated check valves with zincplasted steel body
- Sizes: from DN6 up to DN25
- Ends: BSP
- O-Rings: NBR
- Pressure: up to PN400
- Temp range: from -20°C to +100°C



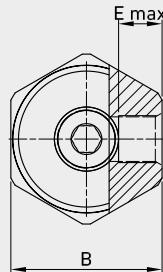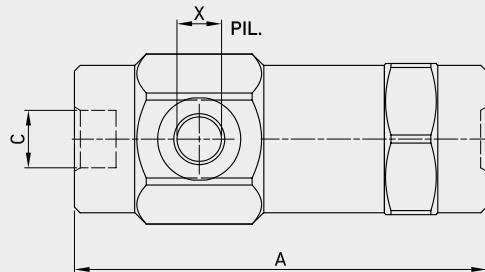

## CODE DESCRIPTION STRUCTURE

**GPS G1/4 2,5 V**

Type and way of valve

GPS

Port size

G 1/4  
G 3/8  
G 1/2  
G 3/4  
G 1

Cracking pressure

2,5  
5  
3  
0,5  
1

Seals hole



NBR

\*On request

• 8 Bar spring

## PRESSURE DROP CURVES

Oil viscosity 24 mm/sec. (3,5°E)  
Temperature 50 °C

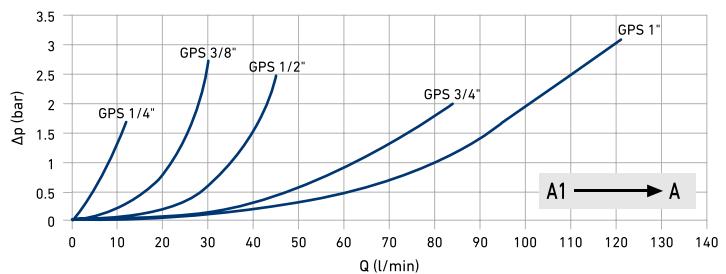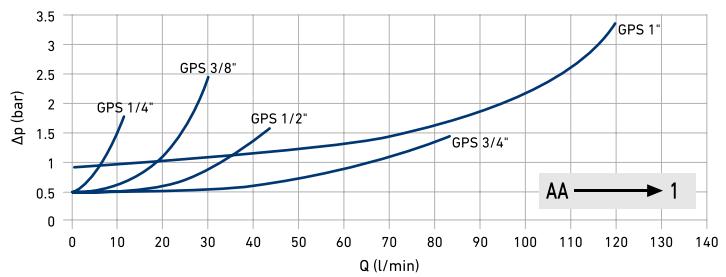

## GPS

| TYPE      | MAX FLOW<br>l/min | MAX<br>PRESSURE |      | CRACKING<br>PRESSURE | A           | B           | E    | C<br>BSPP | X<br>BSPP | PILOT<br>RATIO | WEIGHT   | ITEM CODE     | CS<br>Carbon Steel |
|-----------|-------------------|-----------------|------|----------------------|-------------|-------------|------|-----------|-----------|----------------|----------|---------------|--------------------|
|           |                   | MPa             | Psi  |                      |             |             |      |           |           |                |          |               |                    |
| GPS G 1/4 | 12                | 40              | 0,25 | mm<br>Psi            | 103<br>5800 | 36<br>36,25 | 11   | 1/4       | 1/4       | 1:9            | kg<br>lb | 0,650<br>1,43 | G550202A01AARAA    |
| GPS G 3/8 | 30                | 40              | 0,5  | mm<br>Psi            | 109<br>5800 | 40<br>72,5  | 11,5 | 3/8       | 1/4       | 1:6            | kg<br>lb | 0,820<br>1,81 | G550203A01AARAA    |
| GPS G 1/2 | 45                | 35              | 0,3  | mm<br>Psi            | 120<br>5075 | 42<br>43,5  | 11   | 1/2       | 1/4       | 1:4,5          | kg<br>lb | 0,960<br>2,12 | G550204A01AAPAA    |
| GPS G 3/4 | 85                | 35              | 0,05 | mm<br>Psi            | 131<br>5075 | 55<br>7,25  | 14   | 3/4       | 1/4       | 1:3,7          | kg<br>lb | 1,950<br>4,30 | G550205A01AAPAA    |
| GPS G 1   | 120               | 35              | 0,1  | mm<br>Psi            | 165<br>5075 | 55<br>14,5  | 14   | 1         | 1/4       | 1:3,5          | kg<br>lb | 2,350<br>5,18 | G550206A01AAPAA    |



# VB VUBA


## HOSE BREAK VALVE


Edition. 21.0

### cs Carbon Steel

- Type: hose break valve
- Sizes: from DN6 up to DN25
- Ends: BSP-NPT-SAE
- Pressure: up to PN350
- Temp range: from -20°C to +100°C

VBF Female insert  
VBF Male insert



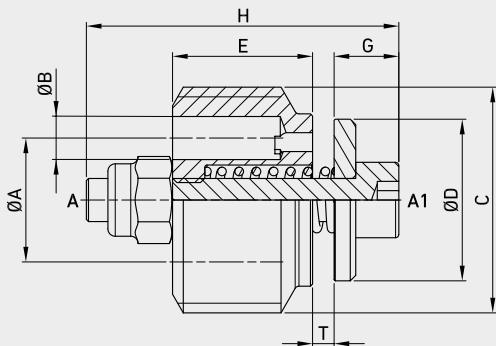

## CODE DESCRIPTION STRUCTURE



|                       | <b>VB</b>                               | <b>G3/8</b> | <b>T0,5</b> | <b>F0,5</b>     |  |
|-----------------------|---|-------------|-------------|-----------------|--|
| Type and way of valve | VB                                      |             |             |                 |  |
| Ends                  | GAS DIN/<br>ISO 228<br>BSP              |             |             |                 |  |
|                       | G 1/4<br>G 3/8<br>G 1/2<br>G 3/4<br>G 1 |             |             |                 |  |
| Setting               | 0,25 > 4,25                             |             |             |                 |  |
|                       |   |             |             |                 | <b>F (throttling hole*)</b>                      |
|                       |   |             |             |                 | Ø min      Ø max                                 |
|                       |   |             |             | <b>VB G 1/4</b> | mm      0,50      1,00<br>inch    0,02      0,04 |
|                       |   |             |             | <b>VB G 3/8</b> | mm      0,50      1,25<br>inch    0,02      0,05 |
|                       |   |             |             | <b>VB G 1/2</b> | mm      0,50      1,50<br>inch    0,02      0,06 |
|                       |   |             |             | <b>VB G 3/4</b> | mm      0,50      2,50<br>inch    0,02      0,10 |
|                       |   |             |             | <b>VB G 1</b>   | mm      0,50      3,00<br>inch    0,02      0,12 |

\* omit if not requested

## VB VALVE

| TYPE     | FLOW min-max<br>l/min |                     |             |             |              |            |             |    | ITEM CODE            |
|----------|-----------------------|---------------------|-------------|-------------|--------------|------------|-------------|----|----------------------|
|          |                       | ØA                  | ØB          | C           | ØD           | E          | G           | H  |                      |
| VB G 1/4 | 8-25                  | mm 8,5<br>inch 0,33 | 2,4<br>0,09 | 1/4<br>0,37 | 9,5<br>0,31  | 8<br>0,20  | 5,0<br>0,91 | 23 | kg 0,0065<br>lb 0,01 |
| VB G 3/8 | 16-50                 | mm 11<br>inch 0,43  | 3,5<br>0,14 | 3/8<br>0,49 | 12,5<br>0,43 | 11<br>0,20 | 5,0<br>0,91 | 23 | kg 0,0125<br>lb 0,03 |
| VB G 1/2 | 25-80                 | mm 13<br>inch 0,51  | 4,5<br>0,18 | 1/2<br>0,59 | 15,0<br>0,51 | 13<br>0,24 | 6,0<br>1,14 | 29 | kg 0,0235<br>lb 0,05 |
| VB G 3/4 | 50-150                | mm 16<br>inch 0,63  | 6<br>0,24   | 3/4<br>0,73 | 18,5<br>0,71 | 18<br>0,24 | 6,0<br>1,34 | 34 | kg 0,0460<br>lb 0,10 |
| VB G 1   | 70-200                | mm 20<br>inch 0,79  | 7<br>0,28   | 1<br>0,91   | 23,0<br>0,83 | 21<br>0,30 | 7,5<br>1,57 | 40 | kg 0,0945<br>lb 0,21 |


**CS**  
Carbon Steel

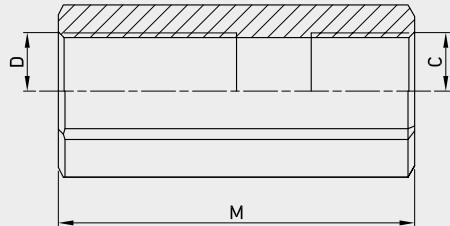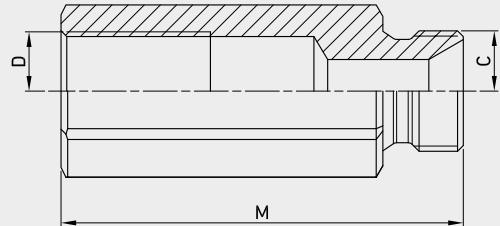**VBF** Female housing**VBM** Male housing**VBF Female housing**


| TYPE      | CS  | C-D   | B         |      | M       | WEIGHT  | Q (L/1') | ITEM CODE       | CS           |
|-----------|-----|-------|-----------|------|---------|---------|----------|-----------------|--------------|
|           |     |       | mm        | inch |         |         |          |                 | Carbon Steel |
| VBF G 1/4 | 1/4 | G 1/4 | mm 19     | 48   | kg 0,01 | lb 0,02 | 28       | C01AA03583A010Z |              |
|           |     |       | inch 0,75 | 1,89 |         |         |          |                 |              |
| VBF G 3/8 | 3/8 | G 3/8 | mm 22     | 52   | kg 0,01 | lb 0,02 | 50       | C01AA03584A010Z |              |
|           |     |       | inch 0,87 | 2,05 |         |         |          |                 |              |
| VBF G 1/2 | 1/2 | G 1/2 | mm 27     | 60   | kg 0,02 | lb 0,04 | 85       | C01AA03585A010Z |              |
|           |     |       | inch 1,06 | 2,36 |         |         |          |                 |              |
| VBF G 3/4 | 3/4 | G 3/4 | mm 36     | 72   | kg 0,05 | lb 0,11 | 150      | C01AA03586A010Z |              |
|           |     |       | inch 1,42 | 2,83 |         |         |          |                 |              |
| VBF G 1   | 1   | G 1   | mm 46     | 85   | kg 0,09 | lb 0,20 | 180      | C01AA03587A010Z |              |
|           |     |       | inch 1,81 | 3,35 |         |         |          |                 |              |

**PRESSURE DROP CURVES**


For actuator moved by directional control valve, the reaction flow has to be calculated multiply the nominal flow by 1.5 and by 2 for actuator moved by solenoid operated directional control valve. It is normal to set the reaction flow 1.5 times the rate flow of the system. If not required, the setting of "T" will be supplied at the maximum value.

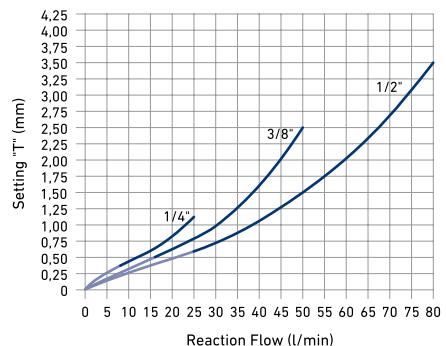**VBM Male housing**

| TYPE      | CS  | C-D   | B         |      | M       | WEIGHT  | Q (L/1') | ITEM CODE       | CS           |
|-----------|-----|-------|-----------|------|---------|---------|----------|-----------------|--------------|
|           |     |       | mm        | inch |         |         |          |                 | Carbon Steel |
| VBM G 1/4 | 1/4 | G 1/4 | mm 19     | 48   | kg 0,01 | lb 0,02 | 28       | C01AA03578A010Z |              |
|           |     |       | inch 0,75 | 1,89 |         |         |          |                 |              |
| VBM G 3/8 | 3/8 | G 3/8 | mm 22     | 58   | kg 0,01 | lb 0,02 | 50       | C01AA03579A010Z |              |
|           |     |       | inch 0,87 | 2,28 |         |         |          |                 |              |
| VBM G 1/2 | 1/2 | G 1/2 | mm 27     | 65   | kg 0,02 | lb 0,04 | 85       | C01AA03580A010Z |              |
|           |     |       | inch 1,06 | 2,56 |         |         |          |                 |              |
| VBM G 3/4 | 3/4 | G 3/4 | mm 36     | 78   | kg 0,05 | lb 0,11 | 150      | C01AA03581A010Z |              |
|           |     |       | inch 1,42 | 3,07 |         |         |          |                 |              |
| VBM G 1   | 1   | G 1   | mm 46     | 85   | kg 0,09 | lb 0,20 | 180      | C01AA03582A010Z |              |
|           |     |       | inch 1,81 | 3,35 |         |         |          |                 |              |

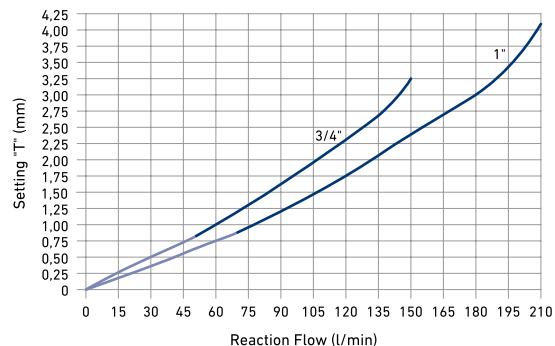**Warning**

The setting values indicated in this diagram are indicative, for any setting value of "T", the reaction flow can change by ±10% and beyond based on the features of the equipment in which they are installed.

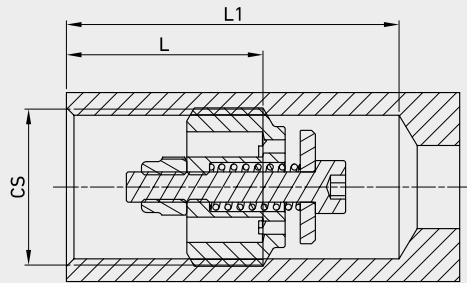**Applications**

Screw in the valve connecting 1 to the pressure flow and 2 to the actuator. The use together with flow control valve is recommended.

**VB + VBF Assembled (Female-Female)**

| TYPE     | FLOW min-max<br>l/min | MAX<br>PRESSURE    | T              | CS  | CAVITY               |              | ITEM CODE       | CS<br>Carbon Steel |
|----------|-----------------------|--------------------|----------------|-----|----------------------|--------------|-----------------|--------------------|
|          |                       |                    |                |     | L                    | L1           |                 |                    |
| VB G 1/4 | 8-25                  | 35 MPa<br>5075 PSI | see<br>diagram | 1/4 | mm 24,2<br>inch 0,95 | 35,2<br>1,39 | G480202A0100PAA |                    |
| VB G 3/8 | 16-50                 |                    |                | 3/8 | mm 26,2<br>inch 1,03 | 37,1<br>1,46 | G480203A0100PAA |                    |
| VB G 1/2 | 25-80                 |                    |                | 1/2 | mm 30,3<br>inch 1,19 | 45,2<br>1,78 | G480204A0100PAA |                    |
| VB G 3/4 | 50-150                |                    |                | 3/4 | mm 38,1<br>inch 1,50 | 54,2<br>2,13 | G480205A0100PAA |                    |
| VB G 1   | 70-200                |                    |                | 1   | mm 46,2<br>inch 1,82 | 66,1<br>2,60 | G480206A0100PAA |                    |

**VB + VBM Assembled (Male-Female)**

| TYPE     | FLOW min-max<br>l/min | MAX<br>PRESSURE    | T              | CS  | CAVITY               |              | ITEM CODE       | CS<br>Carbon Steel |
|----------|-----------------------|--------------------|----------------|-----|----------------------|--------------|-----------------|--------------------|
|          |                       |                    |                |     | L                    | L1           |                 |                    |
| VB G 1/4 | 8-25                  | 35 MPa<br>5075 PSI | see<br>diagram | 1/4 | mm 24,2<br>inch 0,95 | 35,2<br>1,39 | G580302A0100PAA |                    |
| VB G 3/8 | 16-50                 |                    |                | 3/8 | mm 26,2<br>inch 1,03 | 37,1<br>1,46 | G580303A0100PAA |                    |
| VB G 1/2 | 25-80                 |                    |                | 1/2 | mm 30,3<br>inch 1,19 | 45,2<br>1,78 | G580304A0100PAA |                    |
| VB G 3/4 | 50-150                |                    |                | 3/4 | mm 38,1<br>inch 1,50 | 54,2<br>2,13 | G580305A0100PAA |                    |
| VB G 1   | 70-200                |                    |                | 1   | mm 46,2<br>inch 1,82 | 66,1<br>2,60 | G580306A0100PAA |                    |



# SJ

## SWIVEL JOINTS


Edition. 21.0


### Carbon Steel

- Type: swivel joint / at 90°
- Sizes: from DN6 up to DN50
- Ends: BSP- NPT (on request)
- Pressure: up to PN400
- Temp range: from -20°C to +80°C




## CODE DESCRIPTION STRUCTURE

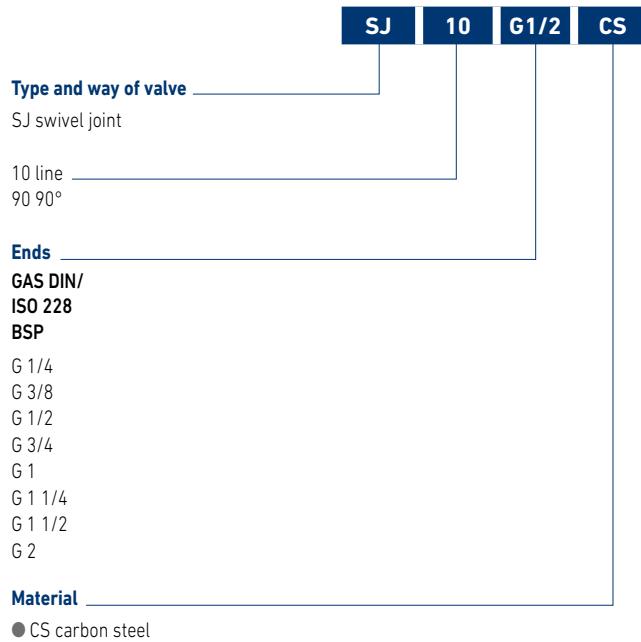

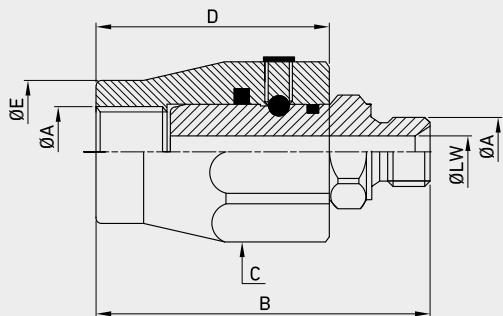

SJ - IN LINE FROM 1/4" TO 1/2"

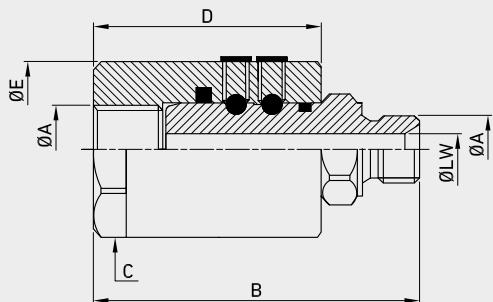


SJ - IN LINE FROM 3/4" TO 2"

### SJ - IN LINE FROM 1/4" TO 1/2"


| TYPE                 | ØA    | C                  | B          | D          | ØE         | ØLW  | MAX ROTATING PRESSURE |            | MAX STATIC PRESSURE | MAX FLOW L/min | ITEM CODE   | CS<br>Carbon Steel |
|----------------------|-------|--------------------|------------|------------|------------|------|-----------------------|------------|---------------------|----------------|-------------|--------------------|
|                      |       |                    |            |            |            |      | MPa                   | Psi        |                     |                |             |                    |
| SJ10 IN LINE 1/4 BSP | G 1/4 | mm 30<br>inch 2,40 | 61<br>1,65 | 42<br>0,94 | 24<br>0,24 | 6    | MPa 20<br>Psi 2900    | 40<br>5800 |                     | 25             | NSJ2G010000 |                    |
| SJ10 IN LINE 3/8 BSP | G 3/8 | mm 34<br>inch 2,60 | 66<br>1,73 | 44<br>0,98 | 25<br>0,33 | 8,5  | MPa 20<br>Psi 2900    | 40<br>5800 |                     | 35             | NSJ2G020000 |                    |
| SJ10 IN LINE 1/2 BSP | G 1/2 | mm 36<br>inch 2,80 | 71<br>1,85 | 47<br>1,26 | 32<br>0,45 | 11,5 | MPa 15<br>Psi 2175    | 30<br>4350 |                     | 60             | NSJ2G030000 |                    |

### SJ - IN LINE FROM 3/4" TO 2"

| TYPE                   | ØA      | C                  | B            | D            | ØE           | ØLW        | MAX ROTATING PRESSURE |            | MAX STATIC PRESSURE | MAX FLOW L/min | ITEM CODE   | CS<br>Carbon Steel |
|------------------------|---------|--------------------|--------------|--------------|--------------|------------|-----------------------|------------|---------------------|----------------|-------------|--------------------|
|                        |         |                    |              |              |              |            | MPa                   | Psi        |                     |                |             |                    |
| SJ10 IN LINE 3/4 BSP   | G 3/4   | mm 45<br>inch 1,77 | 87,5<br>3,44 | 56,5<br>2,22 | 49,5<br>1,95 | 15<br>0,59 | MPa 15<br>Psi 2175    | 30<br>4350 |                     | 100            | NSJ2G040000 |                    |
| SJ10 IN LINE 1" BSP    | G 1     | mm 50<br>inch 1,97 | 93,7<br>3,69 | 61,5<br>2,42 | 54,5<br>2,15 | 20<br>0,79 | MPa 10<br>Psi 1450    | 25<br>3625 |                     | 180            | NSJ2G050000 |                    |
| SJ10 IN LINE 1"1/4 BSP | G 1 1/4 | mm 55<br>inch 2,17 | 101<br>3,98  | 63<br>2,48   | 60<br>2,36   | 28<br>1,10 | MPa 10<br>Psi 1450    | 30<br>4350 |                     | 270            | NSJ2G060000 |                    |
| SJ10 IN LINE 1"1/2 BSP | G 1 1/2 | mm 65<br>inch 2,56 | 110<br>4,33  | 70<br>2,76   | 69,5<br>2,74 | 35<br>1,38 | MPa 8<br>Psi 1160     | 30<br>4350 |                     | 350            | NSJ2G070000 |                    |
| SJ10 IN LINE 2" BSP    | G 2     | mm 75<br>inch 2,95 | 119<br>4,69  | 75<br>2,95   | 84,5<br>3,33 | 44<br>1,73 | MPa 5<br>Psi 725      | 30<br>4350 |                     | 700            | NSJ2G080000 |                    |

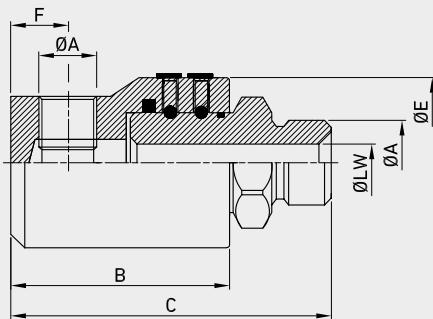

SJ - AT 90° FROM 1/4" TO 1"

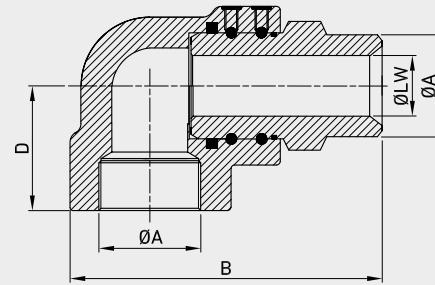

SJ - AT 90° FROM 1 1/4" TO 2"

### SJ - AT 90° FROM 1/4" TO 1"

| TYPE               | ØA    |      |      |      | ØE   | F    | MAX ROTATING PRESSURE | MAX STATIC PRESSURE | MAX FLOW L/min | ITEM CODE | CS           |
|--------------------|-------|------|------|------|------|------|-----------------------|---------------------|----------------|-----------|--------------|
|                    |       | B    | C    | ØLW  |      |      |                       |                     |                |           | Carbon Steel |
| SJ90 AT 90 1/4 BSP | G 1/4 | mm   | 50   | 70   | 6    | 33,5 | 11                    | MPa                 | 20             | 40        | NSJ1G010000  |
|                    |       | inch | 1,97 | 2,76 | 0,24 | 1,32 | 0,43                  | Psi                 | 2900           | 5800      |              |
| SJ90 AT 90 3/8 BSP | G 3/8 | mm   | 54   | 77   | 8,5  | 37,5 | 13                    | MPa                 | 20             | 40        | NSJ1G020000  |
|                    |       | inch | 2,13 | 3,03 | 0,33 | 1,48 | 0,51                  | Psi                 | 2900           | 5800      |              |
| SJ90 AT 90 1/2 BSP | G 1/2 | mm   | 63   | 87   | 11,5 | 39,5 | 14                    | MPa                 | 15             | 30        | NSJ1G030000  |
|                    |       | inch | 2,48 | 3,43 | 0,45 | 1,56 | 0,55                  | Psi                 | 2175           | 4350      |              |
| SJ90 AT 90 3/4 BSP | G 3/4 | mm   | 74   | 104  | 15   | 54,5 | 19,5                  | MPa                 | 15             | 30        | NSJ1G040000  |
|                    |       | inch | 2,91 | 4,09 | 0,59 | 2,15 | 0,77                  | Psi                 | 2175           | 4350      |              |
| SJ90 AT 90 1" BSP  | G 1   | mm   | 87   | 119  | 21   | 55   | 60                    | MPa                 | 10             | 30        | NSJ1G050000  |
|                    |       | inch | 3,43 | 4,69 | 0,83 | 2,17 | 2,36                  | Psi                 | 1450           | 4350      |              |

### SJ - AT 90° FROM 1 1/4" TO 2"

| TYPE                 | ØA      |      |       |      | ØLW  | MAX ROTATING PRESSURE | MAX STATIC PRESSURE | MAX FLOW L/min | ITEM CODE | CS           |
|----------------------|---------|------|-------|------|------|-----------------------|---------------------|----------------|-----------|--------------|
|                      |         | B    | D     | ØE   |      |                       |                     |                |           | Carbon Steel |
| SJ90 AT 90 1"1/4 BSP | G 1 1/4 | mm   | 119,5 | 52   | 28   | MPa                   | 10                  | 30             | 270       | NSJ1G060000  |
|                      |         | inch | 4,70  | 2,05 | 1,10 | Psi                   | 1450                | 4350           |           |              |
| SJ90 AT 90 1"1/2 BSP | G 1 1/2 | mm   | 140   | 62   | 35   | MPa                   | 8                   | 30             | 350       | NSJ1G070000  |
|                      |         | inch | 5,51  | 2,44 | 1,38 | Psi                   | 1160                | 4350           |           |              |
| SJ90 AT 90 2" BSP    | G 2     | mm   | 151   | 64   | 44   | MPa                   | 5                   | 25             | 700       | NSJ1G080000  |
|                      |         | inch | 5,94  | 2,52 | 1,73 | Psi                   | 725                 | 3625           |           |              |



# SJ HD

## SWIVEL JOINTS

Edition. 21.0


### Carbon Steel

- Type: swivel joint HD / in line
- Sizes: from DN13 up to DN32
- Ends: BSP - UNF/SAE (on request)
- Pressure: up to PN400
- Temp range: -20°C to +80°C



## CODE DESCRIPTION STRUCTURE

|                       | SJ | 10 | G1/2 | CS |
|-----------------------|----|----|------|----|
| Type and way of valve |    |    |      |    |
| SJ swivel joint       |    |    |      |    |
| 10 line               |    |    |      |    |
| Ends                  |    |    |      |    |
| GAS DIN/ISO           |    |    |      |    |
| 228 BSP"              |    |    |      |    |
| G 1/2                 |    |    |      |    |
| G 3/4                 |    |    |      |    |
| G 1                   |    |    |      |    |
| G 1 1/4               |    |    |      |    |
| Material              |    |    |      |    |
| ● CS carbon steel     |    |    |      |    |

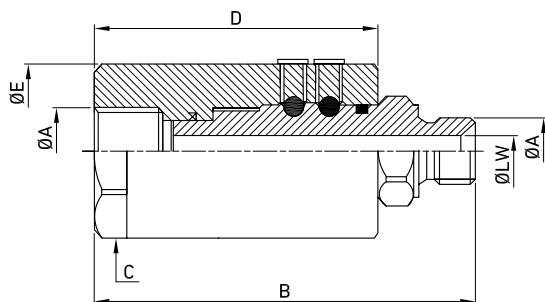

## SJ HD - IN LINE FROM 1/2" TO 1 1/4"

CS  
Carbon Steel

| TYPE                     | ØA      | C          | B  | D           | ØE         | ØLW        | MAX WORKING PRESSURE | MAX PEAK PRESSURE | MAX FLOW L/min | ITEM CODE  |     |             |
|--------------------------|---------|------------|----|-------------|------------|------------|----------------------|-------------------|----------------|------------|-----|-------------|
| SJ10HD IN LINE 1/2 BSP   | G 1/2   | mm<br>inch | 36 | 92<br>3,62  | 68<br>2,68 | 40<br>1,57 | 10<br>0,39           | MPa<br>Psi        | 40<br>5800     | 50<br>7250 | 95  | NSJ2G030001 |
| SJ10HD IN LINE 3/4 BSP   | G 3/4   | mm<br>inch | 45 | 120<br>4,72 | 89<br>3,50 | 50<br>1,97 | 14<br>0,55           | MPa<br>Psi        | 35<br>5075     | 50<br>7250 | 150 | NSJ2G040001 |
| SJ10HD IN LINE 1 BSP     | G 1     | mm<br>inch | 50 | 122<br>4,80 | 90<br>3,54 | 55<br>2,17 | 20<br>0,79           | MPa<br>Psi        | 35<br>5075     | 45<br>6525 | 215 | NSJ2G050001 |
| SJ10HD IN LINE 1 1/4 BSP | G 1 1/4 | mm<br>inch | 55 | 130<br>5,12 | 92<br>3,62 | 60<br>2,36 | 28<br>1,10           | MPa<br>Psi        | 35<br>5075     | 40<br>5800 | 310 | NSJ2G060001 |




# DDF



## 3 WAYS FLOW DIVIDERS

Edition. 21.0

### CS Carbon Steel

- **Cast iron**
- Type: 3 ways flow dividers
- Pressure: up to PN300



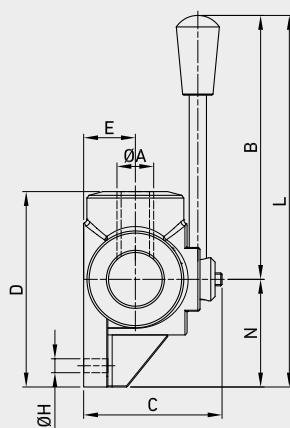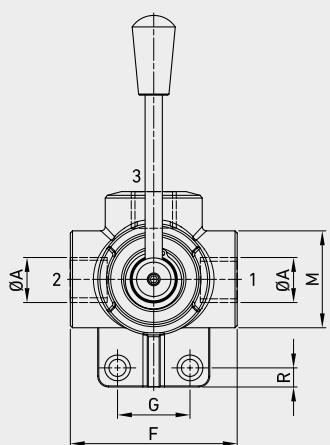

## CODE DESCRIPTION STRUCTURE

|   |            |             |  |
|---|------------|-------------|--|
|   | <b>DDF</b> | <b>G1/2</b> |  |
| Type and way of valve                   |            |             |  |
| DDF 3 ways flow dividers                |            |             |  |
| Ends                                    |            |             |  |
| GAS DIN/<br>ISO 228<br>BSP              |            |             |  |
| G 1/4<br>G 3/8<br>G 1/2<br>G 3/4<br>G 1 |            |             |  |

## ■ DDF - 3 ways flow dividers with open centre

| TYPE               | A     | PORTATA MAX<br>(MAX FLOW) L/min | PRESSIONE MAX<br>(MAX PRESSURE) | B    | C    | D    | E    | F    | G    | H    | L    | M    | N    | R    | WEIGHT | ITEM CODE |      |      |
|--------------------|-------|---------------------------------|---------------------------------|------|------|------|------|------|------|------|------|------|------|------|--------|-----------|------|------|
|                    |       |                                 |                                 | MPa  | 30   | mm   | 128  | 62   | 77   | 21   | 73   | 24   | 8,5  | 169  | 35     | 41        | 14,5 |      |
| DDF3 BSP 1/4 - 140 | G 1/4 | 40                              | MPa                             | 30   | mm   | 128  | 62   | 77   | 21   | 73   | 24   | 8,5  | 169  | 35   | 41     | 14,5      | kg   | 0,95 |
|                    |       |                                 | Psi                             | 4350 | inch | 5,04 | 2,44 | 3,03 | 0,83 | 2,87 | 0,94 | 0,33 | 6,65 | 1,38 | 1,61   | 0,57      | lb   | 2,09 |
| DDF3 BSP 3/8 - 380 | G 3/8 | 60                              | MPa                             | 30   | mm   | 128  | 62   | 77   | 21   | 73   | 24   | 8,5  | 169  | 35   | 41     | 14,5      | kg   | 0,89 |
|                    |       |                                 | Psi                             | 4350 | inch | 5,04 | 2,44 | 3,03 | 0,83 | 2,87 | 0,94 | 0,33 | 6,65 | 1,38 | 1,61   | 0,57      | lb   | 1,96 |
| DDF3 BSP 1/2 - 120 | G 1/2 | 90                              | MPa                             | 25   | mm   | 128  | 70   | 96   | 25   | 85   | 32   | 10,5 | 180  | 40   | 52     | 17        | kg   | 1,45 |
|                    |       |                                 | Psi                             | 3625 | inch | 5,04 | 2,76 | 3,78 | 0,98 | 3,35 | 1,26 | 0,41 | 7,09 | 1,57 | 2,05   | 0,67      | lb   | 3,20 |
| DDF3 BSP 3/4 - 340 | G 3/4 | 120                             | MPa                             | 22   | mm   | 125  | 80   | 100  | 28   | 90   | 32   | 10,5 | 180  | 45   | 55     | 14        | kg   | 1,82 |
|                    |       |                                 | Psi                             | 3190 | inch | 4,92 | 3,15 | 3,94 | 1,10 | 3,54 | 1,26 | 0,41 | 7,09 | 1,77 | 2,17   | 0,55      | lb   | 4,01 |
| DDF3 BSP 1" - 100  | G 1   | 200                             | MPa                             | 22   | mm   | 140  | 90   | 115  | 32,5 | 96   | 32   | 11   | 207  | 56   | 67     | 17        | kg   | 2,5  |
|                    |       |                                 | Psi                             | 3190 | inch | 5,51 | 3,54 | 4,53 | 1,28 | 3,78 | 1,26 | 0,43 | 8,15 | 2,20 | 2,64   | 0,67      | lb   | 5,51 |





## FLOATING & TRUNNION DESIGN

For Oil&Gas fields, **GEMELS** produces ball valves from  $\frac{1}{4}$ " up to 42", ensuring material 100% Made in Italy/EU. **GEMELS** valves are in accordance to the international norms and to the specifications of the biggest global players in downstream, midstream e upstream fields, both for onshore and offshore application. In addition to manual valves, cooperating with the most important manufacturers of actuators, **GEMELS** supplies also the complete package with pneumatic, electric, Gas-Over-Oil, hydraulic actuators and HIPS system.

OIL & GAS





# GN

## 2-WAY HIGH PRESSURE BALL VALVES

Edition. 21.2


### CS Carbon Steel

- Type: ball valve 2way
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SW-SWXT -PE BW
- O-Rings: NBR, FKM, EPDM, MVQ
- Pressure: up to PN500 / S6000
- Temp range: -46°C to +250°C (depending on materials selected)

### SS Stainless Steel

- Type: ball valve 2way
- Sizes: from DN6 up to DN50
- Ends: BSP-NPT-SW-SWXT -PE BW
- O-Rings: NBR, FKM, EPDM, MVQ
- Pressure: up to PN500 / S6000
- Temp range: -46°C to +250°C (depending on materials selected)

### STANDARD COMPOSITION OF VALVE

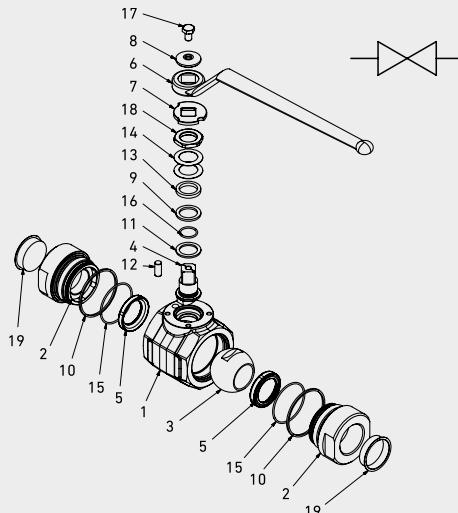

| POS | DESCRIPTION    | Q.TY | CS               | SS               | CS          | SS         |
|-----|----------------|------|------------------|------------------|-------------|------------|
|     |                |      | Carbon Steel     | Stainless Steel  | MATERIAL    | MATERIAL   |
| 1   | Body           | 1    | ASTM A350 LF2    | ASTM A182 F316   |             |            |
| 2   | Adapter        | 2    | ASTM A350 LF2    | ASTM A182 F316   |             |            |
| 3   | Ball           | 1    | ASTM A479 Tp.316 | ASTM A479 Tp.316 |             |            |
| 4   | Stem           | 1    | ASTM A479 Tp.316 | ASTM A479 Tp.316 |             |            |
| 5   | Ball seat      | 2    | POM              | POM              |             |            |
| 6   | Handle         | 1    | Fe37             | Fe37             |             |            |
| 7   | Washer         | 1    | AISI 316         | AISI 316         |             |            |
| 8   | Washer         | 1    | AISI 316         | AISI 316         |             |            |
| 9   | Body ring      | 1    | Graphite         | Graphite         |             |            |
| 10  | Adapter ring   | 2    | Graphite         | Graphite         |             |            |
| 11  | Stem ring      | 2    |                  |                  | PTFE        | PTFE       |
| 12  | Spine          | 1    |                  |                  | AISI 316    | AISI 316   |
| 13  | Press ring     | 1    |                  |                  | AISI 316    | AISI 316   |
| 14  | Spring         | 2    |                  |                  | AISI 316    | AISI 316   |
| 15  | Adapter o-ring | 2    |                  |                  | NBR         | NBR        |
| 16  | Stem o-ring    | 1    |                  |                  | NBR         | NBR        |
| 17  | Screw          | 1    |                  |                  | ISO 4762 A4 | ISO4762 A4 |
| 18  | Nut            | 1    |                  |                  | AISI 316    | AISI 316   |
| 19  | Caps           | 2    |                  |                  | PVC         | PVC        |



## CODE DESCRIPTION STRUCTURE

| GN | G1 1/2 | DN13 | A105 | F316 | POM | B |
|----|--------|------|------|------|-----|---|
|----|--------|------|------|------|-----|---|

Type and way of valve \_\_\_\_\_

GN 2-way

Ends \_\_\_\_\_

| GAS DIN/<br>ISO 228<br>BSP | NPT ANSI<br>/ASME<br>B1.20.1 | SW       | SW<br>EXTRALONG | PE       |
|----------------------------|------------------------------|----------|-----------------|----------|
| G 1/4                      | N 1/4                        | SW 1/4   | SWXT 1/4        | PE 1/4   |
| G 3/8                      | N 3/8                        | SW 3/8   | SWXT 3/8        | PE 3/8   |
| G 1/2                      | N 1/2                        | SW 1/2   | SWXT 1/2        | PE 1/2   |
| G 3/4                      | N 3/4                        | SW 3/4   | SWXT 3/4        | PE 3/4   |
| G 1                        | N 1                          | SW 1     | SWXT 1          | PE 1     |
| G 1 1/4                    | N 1 1/4                      | SW 1 1/4 | SWXT 1 1/4      | PE 1 1/4 |
| G 1 1/2                    | N 1 1/2                      | SW 1 1/2 | SWXT 1 1/2      | PE 1 1/2 |
| G 2                        | N 2                          | SW 2     | SWXT 2          | PE 2     |

Sizes \_\_\_\_\_

DN6  
DN10  
DN13  
DN20  
DN25  
DN32  
DN40  
DN50

Body and adapter material \_\_\_\_\_

LF2  
 F316

Stem and ball material \_\_\_\_\_

F316  
 F316

Ball seat material \_\_\_\_\_

A = POM D = PEEK\*


Adapter and stem seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN500 or 6000 Psi
- Locking device
- Pneumatic and electrical actuator

For further special requests please consult our technical/commercial service.

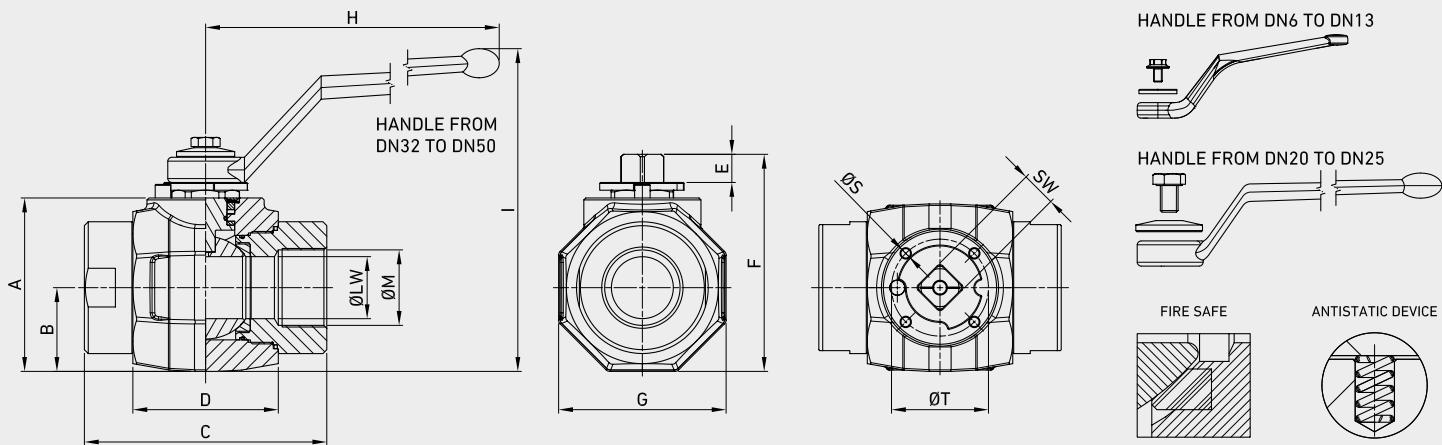

## ■ GN DIN/ISO 228 BSP

| TYPE       | DN | A         | B    | C    | D    | E    | F    | ØG*  | H     | I    | ØLW  | ØM      | ØS | ISO 5211 | ØT   | SW   | WEIGHT   |
|------------|----|-----------|------|------|------|------|------|------|-------|------|------|---------|----|----------|------|------|----------|
| GN G 1/4   | 6  | mm 48,5   | 22   | 72   | 44   | 9,4  | 65   | 45   | 107   | 108  | 6    | G 1/4   | M5 | F03      | 36   | 9    | kg 0,82  |
|            |    | inch 1,91 | 0,87 | 2,83 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,24 |         |    |          | 1,42 | 0,35 | lb 1,81  |
| GN G 3/8   | 10 | mm 48,5   | 22   | 73   | 44   | 9,4  | 65   | 45   | 107   | 108  | 10   | G 3/8   | M5 | F03      | 36   | 9    | kg 0,82  |
|            |    | inch 1,91 | 0,87 | 2,87 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,39 |         |    |          | 1,42 | 0,35 | lb 1,81  |
| GN G 1/2   | 13 | mm 53     | 24   | 81   | 48   | 9,4  | 70   | 49   | 107   | 113  | 13   | G 1/2   | M5 | F03      | 36   | 9    | kg 1,041 |
|            |    | inch 2,09 | 0,94 | 3,19 | 1,89 | 0,37 | 2,76 | 1,93 | 4,21  | 4,45 | 0,51 |         |    |          | 1,42 | 0,35 | lb 2,30  |
| GN G 3/4   | 20 | mm 66     | 30   | 98   | 62   | 13,4 | 88   | 61   | 200   | 123  | 20   | G 3/4   | M6 | F05      | 50   | 14   | kg 2,089 |
|            |    | inch 2,60 | 1,18 | 3,86 | 2,44 | 0,53 | 3,46 | 2,40 | 7,87  | 4,84 | 0,79 |         |    |          | 1,97 | 0,55 | lb 4,61  |
| GN G 1     | 25 | mm 76     | 36   | 106  | 66   | 13,4 | 98   | 73   | 200   | 133  | 25   | G 1     | M6 | F05      | 50   | 14   | kg 2,822 |
|            |    | inch 2,99 | 1,42 | 4,17 | 2,60 | 0,53 | 3,86 | 2,87 | 7,87  | 5,24 | 0,98 |         |    |          | 1,97 | 0,55 | lb 6,22  |
| GN G 1 1/4 | 32 | mm 89,5   | 43   | 126  | 75   | 14,5 | 112  | 86   | 310   | 166  | 32   | G 1 1/4 | M6 | F05      | 50   | 17   | kg 4,508 |
|            |    | inch 3,52 | 1,69 | 4,96 | 2,95 | 0,57 | 4,41 | 3,39 | 12,20 | 6,54 | 1,26 |         |    |          | 1,97 | 0,67 | lb 9,94  |
| GN G 1 1/2 | 40 | mm 106    | 53   | 135  | 85   | 14   | 129  | 106  | 310   | 184  | 40   | G 1 1/2 | M6 | F05      | 50   | 17   | kg 6,89  |
|            |    | inch 4,17 | 2,09 | 5,31 | 3,35 | 0,55 | 5,08 | 4,17 | 12,20 | 7,24 | 1,57 |         |    |          | 1,97 | 0,67 | lb 15,19 |
| GN G 2     | 50 | mm 116    | 59   | 160  | 98   | 13,5 | 138  | 118  | 310   | 194  | 50   | G 2     | M6 | F05      | 50   | 17   | kg 9,628 |
|            |    | inch 4,57 | 2,32 | 6,30 | 3,86 | 0,53 | 5,43 | 4,65 | 12,20 | 7,64 | 1,97 |         |    |          | 1,97 | 0,67 | lb 21,23 |

**(POM SEAL)**

GN DIN/ISO 228 PN

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 50<br>Psi 7250 | GN2GGT15024A000    | GN2GGT15044A000       |
| 10 | MPa 50<br>Psi 7250 | GN2GGT25024A000    | GN2GGT25044A000       |
| 13 | MPa 50<br>Psi 7250 | GN2GGT35024A000    | GN2GGT35044A000       |
| 20 | MPa 42<br>Psi 6090 | GN2GGT44024A000    | GN2GGT44044A000       |
| 25 | MPa 42<br>Psi 6090 | GN2GGT53024A000    | GN2GGT53044A000       |
| 32 | MPa 42<br>Psi 6090 | GN2GGT63024A000    | GN2GGT63044A000       |
| 40 | MPa 42<br>Psi 6090 | GN2GGT73024A000    | GN2GGT73044A000       |
| 50 | MPa 42<br>Psi 6090 | GN2GGT83024A000    | GN2GGT83044A000       |

**(PEEK SEAL)**

GN DIN/ISO 228 PN

|    |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|----------------------|--------------------|-----------------------|
| DN | PN                   | ITEM CODE          |                       |
| 6  | MPa 41,4<br>Psi 6000 | GN2GGT15024P000    | GN2GGT15044P000       |
| 10 | MPa 41,4<br>Psi 6000 | GN2GGT25024P000    | GN2GGT25044P000       |
| 13 | MPa 41,4<br>Psi 6000 | GN2GGT35024P000    | GN2GGT35044P000       |
| 20 | MPa 41,4<br>Psi 6000 | GN2GGT44024P000    | GN2GGT44044P000       |
| 25 | MPa 41,4<br>Psi 6000 | GN2GGT53024P000    | GN2GGT53044P000       |
| 32 | MPa 41,4<br>Psi 6000 | GN2GGT63024P000    | GN2GGT63044P000       |
| 40 | MPa 41,4<br>Psi 6000 | GN2GGT73024P000    | GN2GGT73044P000       |
| 50 | MPa 41,4<br>Psi 6000 | GN2GGT83024P000    | GN2GGT83044P000       |

**(POM SEAL)**


GN DIN/ISO 228 S6000

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 50<br>Psi 7250 | GN2GGT1G024A000    | GN2GGT1G044A000       |
| 10 | MPa 50<br>Psi 7250 | GN2GGT2G024A000    | GN2GGT2G044A000       |
| 13 | MPa 50<br>Psi 7250 | GN2GGT3G024A000    | GN2GGT3G044A000       |
| 20 | MPa 42<br>Psi 6090 | GN2GGT4G024A000    | GN2GGT4G044A000       |
| 25 | MPa 42<br>Psi 6090 | GN2GGT5G024A000    | GN2GGT5G044A000       |
| 32 | MPa 42<br>Psi 6090 | GN2GGT6G024A000    | GN2GGT6G044A000       |
| 40 | MPa 42<br>Psi 6090 | GN2GGT7G024A000    | GN2GGT7G044A000       |
| 50 | MPa 42<br>Psi 6090 | GN2GGT8G024A000    | GN2GGT8G044A000       |

**(PEEK SEAL)**

GN DIN/ISO 228 S6000

|    |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|----------------------|--------------------|-----------------------|
| DN | PN                   | ITEM CODE          |                       |
| 6  | MPa 41,4<br>Psi 6000 | GN2GGT1G024P000    | GN2GGT1G044P000       |
| 10 | MPa 41,4<br>Psi 6000 | GN2GGT2G024P000    | GN2GGT2G044P000       |
| 13 | MPa 41,4<br>Psi 6000 | GN2GGT3G024P000    | GN2GGT3G044P000       |
| 20 | MPa 41,4<br>Psi 6000 | GN2GGT4G024P000    | GN2GGT4G044P000       |
| 25 | MPa 41,4<br>Psi 6000 | GN2GGT5G024P000    | GN2GGT5G044P000       |
| 32 | MPa 41,4<br>Psi 6000 | GN2GGT6G024P000    | GN2GGT6G044P000       |
| 40 | MPa 41,4<br>Psi 6000 | GN2GGT7G024P000    | GN2GGT7G044P000       |
| 50 | MPa 41,4<br>Psi 6000 | GN2GGT8G024P000    | GN2GGT8G044P000       |

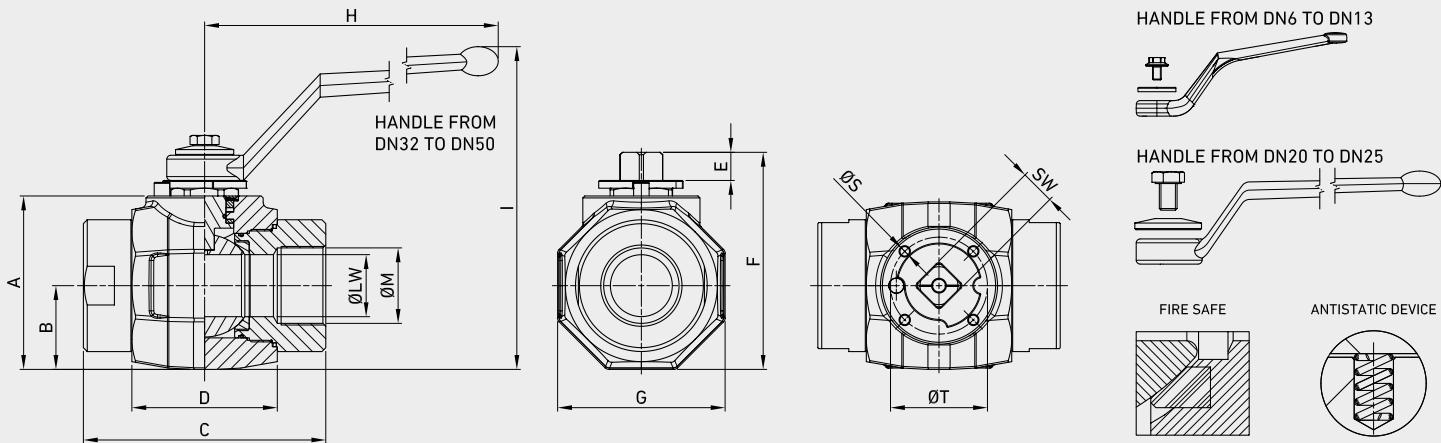

## ■ GN ANSI/ASME B1.20.1 NPT

| TYPE       | DN | A         | B    | C    | D    | E    | F    | ØG*  | H     | I    | ØLW  | ØM      | ØS | ISO 5211 | ØT   | SW   | WEIGHT   |
|------------|----|-----------|------|------|------|------|------|------|-------|------|------|---------|----|----------|------|------|----------|
| GN N 1/4   | 6  | mm 48,5   | 22   | 72   | 44   | 9,4  | 65   | 45   | 107   | 108  | 6    | N 1/4   | M5 | F03      | 36   | 9    | kg 0,82  |
|            |    | inch 1,91 | 0,87 | 2,83 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,24 |         |    |          | 1,42 | 0,35 | lb 1,81  |
| GN N 3/8   | 10 | mm 48,5   | 22   | 73   | 44   | 9,4  | 65   | 45   | 107   | 108  | 10   | N 3/8   | M5 | F03      | 36   | 9    | kg 0,82  |
|            |    | inch 1,91 | 0,87 | 2,87 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,39 |         |    |          | 1,42 | 0,35 | lb 1,81  |
| GN N 1/2   | 13 | mm 53     | 24   | 81   | 48   | 9,4  | 70   | 49   | 107   | 113  | 13   | N 1/2   | M5 | F03      | 36   | 9    | kg 1,041 |
|            |    | inch 2,09 | 0,94 | 3,19 | 1,89 | 0,37 | 2,76 | 1,93 | 4,21  | 4,45 | 0,51 |         |    |          | 1,42 | 0,35 | lb 2,30  |
| GN N 3/4   | 20 | mm 66     | 30   | 98   | 62   | 13,4 | 88   | 61   | 200   | 123  | 20   | N 3/4   | M6 | F05      | 50   | 14   | kg 2,089 |
|            |    | inch 2,60 | 1,18 | 3,86 | 2,44 | 0,53 | 3,46 | 2,40 | 7,87  | 4,84 | 0,79 |         |    |          | 1,97 | 0,55 | lb 4,61  |
| GN N 1     | 25 | mm 76     | 36   | 106  | 66   | 13,4 | 98   | 73   | 200   | 133  | 25   | N 1     | M6 | F05      | 50   | 14   | kg 2,822 |
|            |    | inch 2,99 | 1,42 | 4,17 | 2,60 | 0,53 | 3,86 | 2,87 | 7,87  | 5,24 | 0,98 |         |    |          | 1,97 | 0,55 | lb 6,22  |
| GN N 1 1/4 | 32 | mm 89,5   | 43   | 126  | 75   | 14,5 | 112  | 86   | 310   | 166  | 32   | N 1 1/4 | M6 | F05      | 50   | 17   | kg 4,508 |
|            |    | inch 3,52 | 1,69 | 4,96 | 2,95 | 0,57 | 4,41 | 3,39 | 12,20 | 6,54 | 1,26 |         |    |          | 1,97 | 0,67 | lb 9,94  |
| GN N 1 1/2 | 40 | mm 106    | 53   | 135  | 85   | 14   | 129  | 106  | 310   | 184  | 40   | N 1 1/2 | M6 | F05      | 50   | 17   | kg 6,89  |
|            |    | inch 4,17 | 2,09 | 5,31 | 3,35 | 0,55 | 5,08 | 4,17 | 12,20 | 7,24 | 1,57 |         |    |          | 1,97 | 0,67 | lb 15,19 |
| GN N 2     | 50 | mm 116    | 59   | 160  | 98   | 13,5 | 138  | 118  | 310   | 194  | 50   | N 2     | M6 | F05      | 50   | 17   | kg 9,628 |
|            |    | inch 4,57 | 2,32 | 6,30 | 3,86 | 0,53 | 5,43 | 4,65 | 12,20 | 7,64 | 1,97 |         |    |          | 1,97 | 0,67 | lb 21,23 |

**(POM SEAL)**

GN ANSI/ASME B1.20.1 NPT PN

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 50<br>Psi 7250 | GN2NNT15024A000    | GN2NNT15044A000       |
| 10 | MPa 50<br>Psi 7250 | GN2NNT25024A000    | GN2NNT25044A000       |
| 13 | MPa 50<br>Psi 7250 | GN2NNT35024A000    | GN2NNT35044A000       |
| 20 | MPa 42<br>Psi 6090 | GN2NNT44024A000    | GN2NNT44044A000       |
| 25 | MPa 42<br>Psi 6090 | GN2NNT53024A000    | GN2NNT53044A000       |
| 32 | MPa 42<br>Psi 6090 | GN2NNT63024A000    | GN2NNT63044A000       |
| 40 | MPa 42<br>Psi 6090 | GN2NNT73024A000    | GN2NNT73044A000       |
| 50 | MPa 42<br>Psi 6090 | GN2NNT83024A000    | GN2NNT83044A000       |

**(PEEK SEAL)**

GN ANSI/ASME B1.20.1 NPT PN

|    |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|----------------------|--------------------|-----------------------|
| DN | PN                   | ITEM CODE          |                       |
| 6  | MPa 41,4<br>Psi 6000 | GN2NNT15024P000    | GN2NNT15044P000       |
| 10 | MPa 41,4<br>Psi 6000 | GN2NNT25024P000    | GN2NNT25044P000       |
| 13 | MPa 41,4<br>Psi 6000 | GN2NNT35024P000    | GN2NNT35044P000       |
| 20 | MPa 41,4<br>Psi 6000 | GN2NNT44024P000    | GN2NNT44044P000       |
| 25 | MPa 41,4<br>Psi 6000 | GN2NNT53024P000    | GN2NNT53044P000       |
| 32 | MPa 41,4<br>Psi 6000 | GN2NNT63024P000    | GN2NNT63044P000       |
| 40 | MPa 41,4<br>Psi 6000 | GN2NNT73024P000    | GN2NNT73044P000       |
| 50 | MPa 41,4<br>Psi 6000 | GN2NNT83024P000    | GN2NNT83044P000       |

**(POM SEAL)**


GN ANSI/ASME B1.20.1 NPT S6000

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 50<br>Psi 7250 | GN2NNT1G024A000    | GN2NNT1G044A000       |
| 10 | MPa 50<br>Psi 7250 | GN2NNT2G024A000    | GN2NNT2G044A000       |
| 13 | MPa 50<br>Psi 7250 | GN2NNT3G024A000    | GN2NNT3G044A000       |
| 20 | MPa 42<br>Psi 6090 | GN2NNT4G024A000    | GN2NNT4G044A000       |
| 25 | MPa 42<br>Psi 6090 | GN2NNT5G024A000    | GN2NNT5G044A000       |
| 32 | MPa 42<br>Psi 6090 | GN2NNT6G024A000    | GN2NNT6G044A000       |
| 40 | MPa 42<br>Psi 6090 | GN2NNT7G024A000    | GN2NNT7G044A000       |
| 50 | MPa 42<br>Psi 6090 | GN2NNT8G024A000    | GN2NNT8G044A000       |

**(PEEK SEAL)**

GN ANSI/ASME B1.20.1 NPT S6000

|    |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|----------------------|--------------------|-----------------------|
| DN | PN                   | ITEM CODE          |                       |
| 6  | MPa 41,4<br>Psi 6000 | GN2NNT1G024P000    | GN2NNT1G044P000       |
| 10 | MPa 41,4<br>Psi 6000 | GN2NNT2G024P000    | GN2NNT2G044P000       |
| 13 | MPa 41,4<br>Psi 6000 | GN2NNT3G024P000    | GN2NNT3G044P000       |
| 20 | MPa 41,4<br>Psi 6000 | GN2NNT4G024P000    | GN2NNT4G044P000       |
| 25 | MPa 41,4<br>Psi 6000 | GN2NNT5G024P000    | GN2NNT5G044P000       |
| 32 | MPa 41,4<br>Psi 6000 | GN2NNT6G024P000    | GN2NNT6G044P000       |
| 40 | MPa 41,4<br>Psi 6000 | GN2NNT7G024P000    | GN2NNT7G044P000       |
| 50 | MPa 41,4<br>Psi 6000 | GN2NNT8G024P000    | GN2NNT8G044P000       |

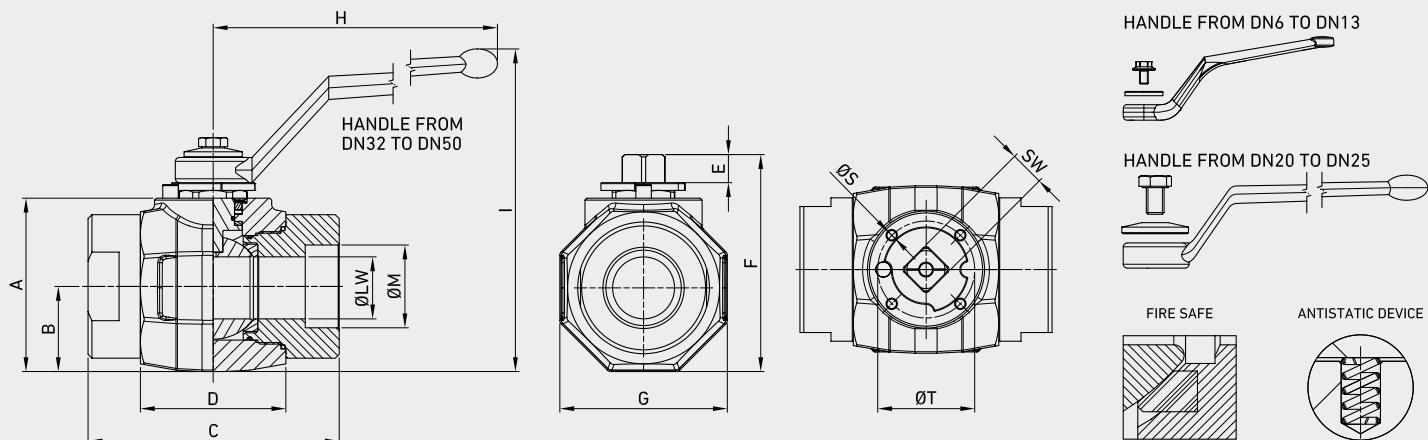

## ■ GN SW

| TYPE        | DN | A         | B    | C    | D    | E    | F    | ØG*  | H     | I    | ØLW  | ØM     | ØS | ISO 5211 | ØT   | SW   | WEIGHT   |
|-------------|----|-----------|------|------|------|------|------|------|-------|------|------|--------|----|----------|------|------|----------|
| GN SW 1/4   | 6  | mm 48,5   | 22   | 72   | 44   | 9,4  | 65   | 45   | 107   | 108  | 6    | SW 1/4 | M5 | F03      | 36   | 9    | kg 0,82  |
|             |    | inch 1,91 | 0,87 | 2,83 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,24 |        |    |          | 1,42 | 0,35 | lb 1,81  |
| GN SW 3/8   | 10 | mm 48,5   | 22   | 73   | 44   | 9,4  | 65   | 45   | 107   | 108  | 10   | SW 3/8 | M5 | F03      | 36   | 9    | kg 0,82  |
|             |    | inch 1,91 | 0,87 | 2,87 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,39 |        |    |          | 1,42 | 0,35 | lb 1,81  |
| GN SW 1/2   | 13 | mm 53     | 24   | 81   | 48   | 9,4  | 70   | 49   | 107   | 113  | 13   | SW 1/2 | M5 | F03      | 36   | 9    | kg 1,041 |
|             |    | inch 2,09 | 0,94 | 3,19 | 1,89 | 0,37 | 2,76 | 1,93 | 4,21  | 4,45 | 0,51 |        |    |          | 1,42 | 0,35 | lb 2,30  |
| GN SW 3/4   | 20 | mm 66     | 30   | 98   | 62   | 13,4 | 88   | 61   | 200   | 123  | 20   | SW 3/4 | M6 | F05      | 50   | 14   | kg 2,089 |
|             |    | inch 2,60 | 1,18 | 3,86 | 2,44 | 0,53 | 3,46 | 2,40 | 7,87  | 4,84 | 0,79 |        |    |          | 1,97 | 0,55 | lb 4,61  |
| GN SW 1     | 25 | mm 76     | 36   | 106  | 66   | 13,4 | 98   | 73   | 200   | 133  | 25   | SW 1   | M6 | F05      | 50   | 14   | kg 2,822 |
|             |    | inch 2,99 | 1,42 | 4,17 | 2,60 | 0,53 | 3,86 | 2,87 | 7,87  | 5,24 | 0,98 |        |    |          | 1,97 | 0,55 | lb 6,22  |
| GN SW 1 1/4 | 32 | mm 89,5   | 43   | 126  | 75   | 14,5 | 112  | 86   | 310   | 166  | 32   | SW 1   | M6 | F05      | 50   | 17   | kg 4,508 |
|             |    | inch 3,52 | 1,69 | 4,96 | 2,95 | 0,57 | 4,41 | 3,39 | 12,20 | 6,54 | 1,26 |        |    |          | 1,97 | 0,67 | lb 9,94  |
| GN SW 1 1/2 | 40 | mm 106    | 53   | 135  | 85   | 14   | 129  | 106  | 310   | 184  | 40   | SW 1   | M6 | F05      | 50   | 17   | kg 6,89  |
|             |    | inch 4,17 | 2,09 | 5,31 | 3,35 | 0,55 | 5,08 | 4,17 | 12,20 | 7,24 | 1,57 |        |    |          | 1,97 | 0,67 | lb 15,19 |
| GN SW 2     | 50 | mm 116    | 59   | 160  | 98   | 13,5 | 138  | 118  | 310   | 194  | 50   | SW 2   | M6 | F05      | 50   | 17   | kg 9,628 |
|             |    | inch 4,57 | 2,32 | 6,30 | 3,86 | 0,53 | 5,43 | 4,65 | 12,20 | 7,64 | 1,97 |        |    |          | 1,97 | 0,67 | lb 21,23 |

**(POM SEAL)**  
GN SW PN

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 50<br>Psi 7250 | GN2TTT15024A000    | GN2TTT15044A000       |
| 10 | MPa 50<br>Psi 7250 | GN2TTT25024A000    | GN2TTT25044A000       |
| 13 | MPa 50<br>Psi 7250 | GN2TTT35024A000    | GN2TTT35044A000       |
| 20 | MPa 42<br>Psi 6090 | GN2TTT44024A000    | GN2TTT44044A000       |
| 25 | MPa 42<br>Psi 6090 | GN2TTT53024A000    | GN2TTT53044A000       |
| 32 | MPa 42<br>Psi 6090 | GN2TTT63024A000    | GN2TTT63044A000       |
| 40 | MPa 42<br>Psi 6090 | GN2TTT73024A000    | GN2TTT73044A000       |
| 50 | MPa 42<br>Psi 6090 | GN2TTT83024A000    | GN2TTT83044A000       |

**(PEEK SEAL)**  
GN SW PN


|    |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|----------------------|--------------------|-----------------------|
| DN | PN                   | ITEM CODE          |                       |
| 6  | MPa 41,4<br>Psi 6000 | GN2TTT15024P000    | GN2TTT15044P000       |
| 10 | MPa 41,4<br>Psi 6000 | GN2TTT25024P000    | GN2TTT25044P000       |
| 13 | MPa 41,4<br>Psi 6000 | GN2TTT35024P000    | GN2TTT35044P000       |
| 20 | MPa 41,4<br>Psi 6000 | GN2TTT44024P000    | GN2TTT44044P000       |
| 25 | MPa 41,4<br>Psi 6000 | GN2TTT53024P000    | GN2TTT53044P000       |
| 32 | MPa 41,4<br>Psi 6000 | GN2TTT63024P000    | GN2TTT63044P000       |
| 40 | MPa 41,4<br>Psi 6000 | GN2TTT73024P000    | GN2TTT73044P000       |
| 50 | MPa 41,4<br>Psi 6000 | GN2TTT83024P000    | GN2TTT83044P000       |

**(POM SEAL)**  
GN SW S6000

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 50<br>Psi 7250 | GN2TTT1G024A000    | GN2TTT1G044A000       |
| 10 | MPa 50<br>Psi 7250 | GN2TTT2G024A000    | GN2TTT2G044A000       |
| 13 | MPa 50<br>Psi 7250 | GN2TTT3G024A000    | GN2TTT3G044A000       |
| 20 | MPa 42<br>Psi 6090 | GN2TTT4G024A000    | GN2TTT4G044A000       |
| 25 | MPa 42<br>Psi 6090 | GN2TTT5G024A000    | GN2TTT5G044A000       |
| 32 | MPa 42<br>Psi 6090 | GN2TTT6G024A000    | GN2TTT6G044A000       |
| 40 | MPa 42<br>Psi 6090 | GN2TTT7G024A000    | GN2TTT7G044A000       |
| 50 | MPa 42<br>Psi 6090 | GN2TTT8G024A000    | GN2TTT8G044A000       |

**(PEEK SEAL)**  
GN SW S6000

|    |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|----------------------|--------------------|-----------------------|
| DN | PN                   | ITEM CODE          |                       |
| 6  | MPa 41,4<br>Psi 6000 | GN2TTT1G024P000    | GN2TTT1G044P000       |
| 10 | MPa 41,4<br>Psi 6000 | GN2TTT2G024P000    | GN2TTT2G044P000       |
| 13 | MPa 41,4<br>Psi 6000 | GN2TTT3G024P000    | GN2TTT3G044P000       |
| 20 | MPa 41,4<br>Psi 6000 | GN2TTT4G024P000    | GN2TTT4G044P000       |
| 25 | MPa 41,4<br>Psi 6000 | GN2TTT5G024P000    | GN2TTT5G044P000       |
| 32 | MPa 41,4<br>Psi 6000 | GN2TTT6G024P000    | GN2TTT6G044P000       |
| 40 | MPa 41,4<br>Psi 6000 | GN2TTT7G024P000    | GN2TTT7G044P000       |
| 50 | MPa 41,4<br>Psi 6000 | GN2TTT8G024P000    | GN2TTT8G044P000       |

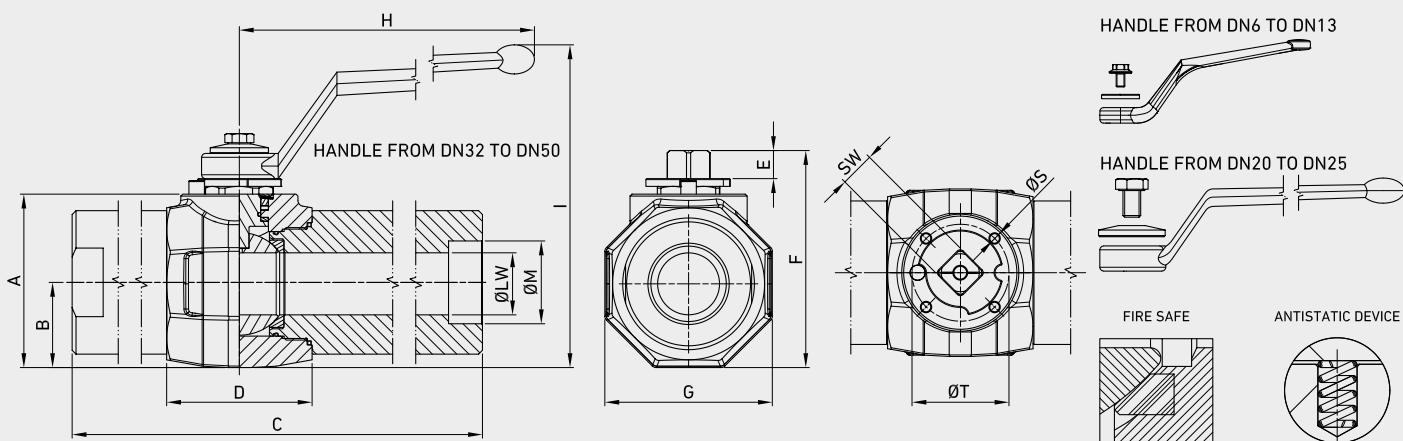

## ■ GN SW EXTRALONG

| TYPE          | DN | A    | B    | C    | D     | E    | F    | ØG*  | H    | I     | ØLW  | ØM   | ØS     | ISO 5211 | ØT  | SW   | WEIGHT |           |
|---------------|----|------|------|------|-------|------|------|------|------|-------|------|------|--------|----------|-----|------|--------|-----------|
| GN SWXT 1/4   | 6  | mm   | 48,5 | 22   | 262   | 44   | 9,4  | 65   | 45   | 107   | 108  | 6    | SW 1/4 | M5       | F03 | 36   | 9      | kg 2,702  |
|               |    | inch | 1,91 | 0,87 | 10,31 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,24 |        |          |     | 1,42 | 0,35   | lb 5,96   |
| GN SWXT 3/8   | 10 | mm   | 48,5 | 22   | 262   | 44   | 9,4  | 65   | 45   | 107   | 108  | 10   | SW 3/8 | M5       | F03 | 36   | 9      | kg 2,599  |
|               |    | inch | 1,91 | 0,87 | 10,31 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,39 |        |          |     | 1,42 | 0,35   | lb 5,73   |
| GN SWXT 1/2   | 13 | mm   | 53   | 24   | 271   | 48   | 9,4  | 70   | 49   | 107   | 113  | 13   | SW 1/2 | M5       | F03 | 36   | 9      | kg 3,303  |
|               |    | inch | 2,09 | 0,94 | 10,67 | 1,89 | 0,37 | 2,76 | 1,93 | 4,21  | 4,45 | 0,51 |        |          |     | 1,42 | 0,35   | lb 7,28   |
| GN SWXT 3/4   | 20 | mm   | 66   | 30   | 288   | 62   | 13,4 | 88   | 61   | 200   | 123  | 20   | SW 3/4 | M6       | F05 | 50   | 14     | kg 5,595  |
|               |    | inch | 2,60 | 1,18 | 11,34 | 2,44 | 0,53 | 3,46 | 2,40 | 7,87  | 4,84 | 0,79 |        |          |     | 1,97 | 0,55   | lb 12,33  |
| GN SWXT 1     | 25 | mm   | 76   | 36   | 296   | 66   | 13,4 | 98   | 73   | 200   | 133  | 25   | SW 1   | M6       | F05 | 50   | 14     | kg 7,534  |
|               |    | inch | 2,99 | 1,42 | 11,65 | 2,60 | 0,53 | 3,86 | 2,87 | 7,87  | 5,24 | 0,98 |        |          |     | 1,97 | 0,55   | lb 16,61  |
| GN SWXT 11,4  | 32 | mm   | 89,5 | 43   | 318   | 75   | 14,5 | 112  | 86   | 310   | 166  | 32   | SW 1   | M6       | F05 | 50   | 17     | kg 8,923  |
|               |    | inch | 3,52 | 1,69 | 12,52 | 2,95 | 0,57 | 4,41 | 3,39 | 12,20 | 6,54 | 1,26 | 1/4    |          |     | 1,97 | 0,67   | lb 19,67  |
| GN SWXT 1 1/2 | 40 | mm   | 106  | 53   | 325   | 85   | 14   | 129  | 106  | 310   | 184  | 40   | SW 1   | M6       | F05 | 50   | 17     | kg 14,49  |
|               |    | inch | 4,17 | 2,09 | 12,80 | 3,35 | 0,55 | 5,08 | 4,17 | 12,20 | 7,24 | 1,57 | 1/2    |          |     | 1,97 | 0,67   | lb 31,94  |
| GN SWXT 2     | 50 | mm   | 116  | 59   | 350   | 98   | 13,5 | 138  | 118  | 310   | 194  | 50   | SW 2   | M6       | F05 | 50   | 17     | kg 18,328 |
|               |    | inch | 4,57 | 2,32 | 13,78 | 3,86 | 0,53 | 5,43 | 4,65 | 12,20 | 7,64 | 1,97 |        |          |     | 1,97 | 0,67   | lb 40,41  |

**(POM SEAL)**

GN SW EXTRALONG PN

|    |                    | <b>CS</b><br>Carbon Steel | <b>SS</b><br>Stainless Steel |
|----|--------------------|---------------------------|------------------------------|
| DN | PN                 | ITEM CODE                 |                              |
| 6  | MPa 50<br>Psi 7250 | GN2TXT15024A000           | GN2TXT15044A000              |
| 10 | MPa 50<br>Psi 7250 | GN2TXT25024A000           | GN2TXT25044A000              |
| 13 | MPa 50<br>Psi 7250 | GN2TXT35024A000           | GN2TXT35044A000              |
| 20 | MPa 40<br>Psi 5800 | GN2TXT44024A000           | GN2TXT44044A000              |
| 25 | MPa 35<br>Psi 5075 | GN2TXT53024A000           | GN2TXT53044A000              |
| 32 | MPa 35<br>Psi 5075 | GN2TXT63024A000           | GN2TXT63044A000              |
| 40 | MPa 35<br>Psi 5075 | GN2TXT73024A000           | GN2TXT73044A000              |
| 50 | MPa 35<br>Psi 5075 | GN2TXT83024A000           | GN2TXT83044A000              |

**(PEEK SEAL)**

GN SW EXTRALONG PN

|    |                    | <b>CS</b><br>Carbon Steel | <b>SS</b><br>Stainless Steel |
|----|--------------------|---------------------------|------------------------------|
| DN | PN                 | ITEM CODE                 |                              |
| 6  | MPa 50<br>Psi 7250 | GN2TXT15024P000           | GN2TXT15044P000              |
| 10 | MPa 50<br>Psi 7250 | GN2TXT25024P000           | GN2TXT25044P000              |
| 13 | MPa 50<br>Psi 7250 | GN2TXT35024P000           | GN2TXT35044P000              |
| 20 | MPa 42<br>Psi 6090 | GN2TXT44024P000           | GN2TXT44044P000              |
| 25 | MPa 42<br>Psi 6090 | GN2TXT53024P000           | GN2TXT53044P000              |
| 32 | MPa 35<br>Psi 5075 | GN2TXT63024P000           | GN2TXT63044P000              |
| 40 | MPa 35<br>Psi 5075 | GN2TXT73024P000           | GN2TXT73044P000              |
| 50 | MPa 35<br>Psi 5075 | GN2TXT83024P000           | GN2TXT83044P000              |

**(POM SEAL)**


GN SW EXTRALONG S6000

|    |                    | <b>CS</b><br>Carbon Steel | <b>SS</b><br>Stainless Steel |
|----|--------------------|---------------------------|------------------------------|
| DN | PN                 | ITEM CODE                 |                              |
| 6  | MPa 50<br>Psi 7250 | GN2TXT1G024A000           | GN2TXT1G044A000              |
| 10 | MPa 50<br>Psi 7250 | GN2TXT2G024A000           | GN2TXT2G044A000              |
| 13 | MPa 50<br>Psi 7250 | GN2TXT3G024A000           | GN2TXT3G044A000              |
| 20 | MPa 42<br>Psi 6090 | GN2TXT4G024A000           | GN2TXT4G044A000              |
| 25 | MPa 42<br>Psi 6090 | GN2TXT5G024A000           | GN2TXT5G044A000              |
| 32 | MPa 42<br>Psi 6090 | GN2TXT6G024A000           | GN2TXT6G044A000              |
| 40 | MPa 42<br>Psi 6090 | GN2TXT7G024A000           | GN2TXT7G044A000              |
| 50 | MPa 42<br>Psi 6090 | GN2TXT8G024A000           | GN2TXT8G044A000              |

**(PEEK SEAL)**

GN SW EXTRALONG S6000

|    |                      | <b>CS</b><br>Carbon Steel | <b>SS</b><br>Stainless Steel |
|----|----------------------|---------------------------|------------------------------|
| DN | PN                   | ITEM CODE                 |                              |
| 6  | MPa 41,4<br>Psi 6000 | GN2TXT1G024P000           | GN2TXT1G044P000              |
| 10 | MPa 41,4<br>Psi 6000 | GN2TXT2G024P000           | GN2TXT2G044P000              |
| 13 | MPa 41,4<br>Psi 6000 | GN2TXT3G024P000           | GN2TXT3G044P000              |
| 20 | MPa 41,4<br>Psi 6000 | GN2TXT4G024P000           | GN2TXT4G044P000              |
| 25 | MPa 41,4<br>Psi 6000 | GN2TXT5G024P000           | GN2TXT5G044P000              |
| 32 | MPa 41,4<br>Psi 6000 | GN2TXT6G024P000           | GN2TXT&G044P000              |
| 40 | MPa 41,4<br>Psi 6000 | GN2TXT7G024P000           | GN2TXT7G044P000              |
| 50 | MPa 41,4<br>Psi 6000 | GN2TXT8G024P000           | GN2TXT&G044P000              |

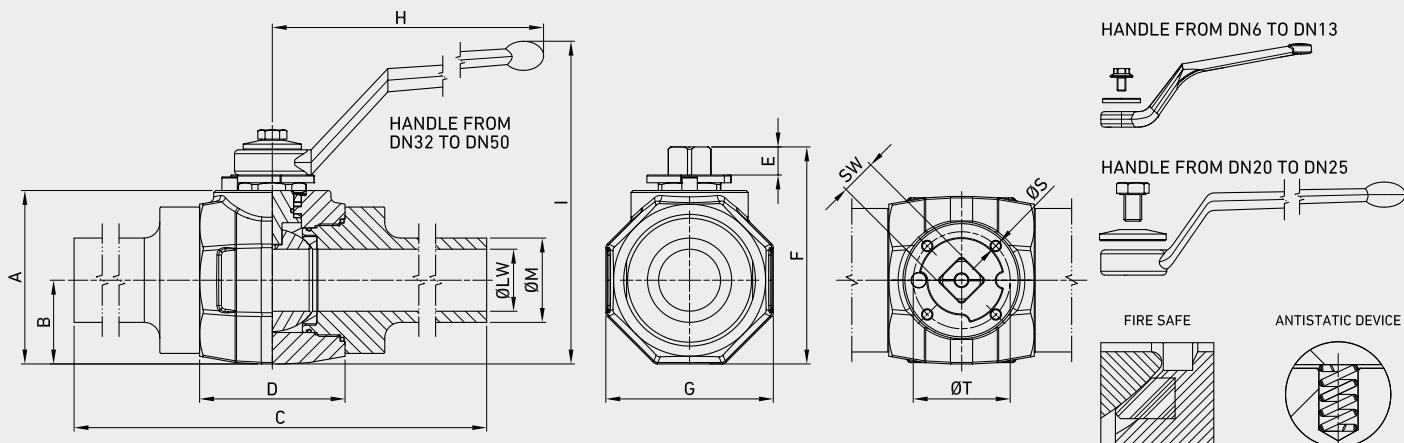

## ■ GN PE

| TYPE        | DN | A         | B    | C     | D    | E    | F    | ØG*  | H     | I    | ØLW  | LSCH80 | ØM       | ØS | ISO 5211 | ØT   | SW   | WEIGHT    |
|-------------|----|-----------|------|-------|------|------|------|------|-------|------|------|--------|----------|----|----------|------|------|-----------|
| GN PE 1/4   | 6  | mm 48,5   | 22   | 272   | 44   | 9,4  | 65   | 45   | 107   | 108  | 6    | 3,02   | PE 1/4   | M5 | F03      | 36   | 9    | kg 1,227  |
|             |    | inch 1,91 | 0,87 | 10,71 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,24 | 0,12   |          |    |          | 1,42 | 0,35 | lb 2,71   |
| GN PE 3/8   | 10 | mm 48,5   | 22   | 272   | 44   | 9,4  | 65   | 45   | 107   | 108  | 10   | 3,2    | PE 3/8   | M5 | F03      | 36   | 9    | kg 1,27   |
|             |    | inch 1,91 | 0,87 | 10,71 | 1,73 | 0,37 | 2,56 | 1,77 | 4,21  | 4,25 | 0,39 | 0,13   |          |    |          | 1,42 | 0,35 | lb 2,80   |
| GN PE 1/2   | 13 | mm 53     | 24   | 281   | 48   | 9,4  | 70   | 49   | 107   | 113  | 13   | 3,73   | PE 1/2   | M5 | F03      | 36   | 9    | kg 1,709  |
|             |    | inch 2,09 | 0,94 | 11,06 | 1,89 | 0,37 | 2,76 | 1,93 | 4,21  | 4,45 | 0,51 | 0,15   |          |    |          | 1,42 | 0,35 | lb 3,77   |
| GN PE 3/4   | 20 | mm 66     | 30   | 298   | 62   | 13,4 | 88   | 61   | 200   | 123  | 20   | 3,91   | PE 3/4   | M6 | F05      | 50   | 14   | kg 3,159  |
|             |    | inch 2,60 | 1,18 | 11,73 | 2,44 | 0,53 | 3,46 | 2,40 | 7,87  | 4,84 | 0,79 | 0,15   |          |    |          | 1,97 | 0,55 | lb 6,96   |
| GN PE 1     | 25 | mm 76     | 36   | 306   | 66   | 13,4 | 98   | 73   | 200   | 133  | 25   | 4,55   | PE 1     | M6 | F05      | 50   | 14   | kg 4,224  |
|             |    | inch 2,99 | 1,42 | 12,05 | 2,60 | 0,53 | 3,86 | 2,87 | 7,87  | 5,24 | 0,98 | 0,18   |          |    |          | 1,97 | 0,55 | lb 9,31   |
| GN PE 1 1/4 | 32 | mm 89,5   | 43   | 327   | 75   | 14,5 | 112  | 86   | 310   | 166  | 32   | 4,85   | PE 1 1/4 | M6 | F05      | 50   | 17   | kg 4,751  |
|             |    | inch 3,52 | 1,69 | 12,87 | 2,95 | 0,57 | 4,41 | 3,39 | 12,20 | 6,54 | 1,26 | 0,19   |          |    |          | 1,97 | 0,67 | lb 10,47  |
| GN PE 1 1/2 | 40 | mm 106    | 53   | 335   | 85   | 14   | 129  | 106  | 310   | 184  | 40   | 5,08   | PE 1 1/2 | M6 | F05      | 50   | 17   | kg 8,306  |
|             |    | inch 4,17 | 2,09 | 13,19 | 3,35 | 0,55 | 5,08 | 4,17 | 12,20 | 7,24 | 1,57 | 0,20   |          |    |          | 1,97 | 0,67 | lb 18,31  |
| GN PE2      | 50 | mm 116    | 59   | 360   | 98   | 13,5 | 138  | 118  | 310   | 194  | 50   | 5,54   | PE 2     | M6 | F05      | 50   | 17   | kg 11,402 |
|             |    | inch 4,57 | 2,32 | 14,17 | 3,86 | 0,53 | 5,43 | 4,65 | 12,20 | 7,64 | 1,97 | 0,22   |          |    |          | 1,97 | 0,67 | lb 25,14  |

**(POM SEAL)**  
GN PE PN

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 50<br>Psi 7250 | GN2BWT15024A000    | GN2BWT15044A000       |
| 10 | MPa 50<br>Psi 7250 | GN2BWT25024A000    | GN2BWT25044A000       |
| 13 | MPa 50<br>Psi 7250 | GN2BWT35024A000    | GN2BWT35044A000       |
| 20 | MPa 42<br>Psi 6090 | GN2BWT44024A000    | GN2BWT44044A000       |
| 25 | MPa 42<br>Psi 6090 | GN2BWT53024A000    | GN2BWT53044A000       |
| 32 | MPa 42<br>Psi 6090 | GN2BWT63024A000    | GN2BWT63044A000       |
| 40 | MPa 42<br>Psi 6090 | GN2BWT73024A000    | GN2BWT73044A000       |
| 50 | MPa 42<br>Psi 6090 | GN2BWT83024A000    | GN2BWT83044A000       |

**(PEEK SEAL)**  
GN PE PN

|    |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|----------------------|--------------------|-----------------------|
| DN | PN                   | ITEM CODE          |                       |
| 6  | MPa 41,4<br>Psi 6000 | GN2BWT15024P000    | GN2BWT15044P000       |
| 10 | MPa 41,4<br>Psi 6000 | GN2BWT25024P000    | GN2BWT25044P000       |
| 13 | MPa 41,4<br>Psi 6000 | GN2BWT35024P000    | GN2BWT35044P000       |
| 20 | MPa 41,4<br>Psi 6000 | GN2BWT44024P000    | GN2BWT44044P000       |
| 25 | MPa 41,4<br>Psi 6000 | GN2BWT53024P000    | GN2BWT53044P000       |
| 32 | MPa 41,4<br>Psi 6000 | GN2BWT63024P000    | GN2BWT63044P000       |
| 40 | MPa 41,4<br>Psi 6000 | GN2BWT73024P000    | GN2BWT73044P000       |
| 50 | MPa 41,4<br>Psi 6000 | GN2BWT83024P000    | GN2BWT83044P000       |

**(POM SEAL)**  
GN PE S6000

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 50<br>Psi 7250 | GN2BWTG1024A000    | GN2BWTG1044A000       |
| 10 | MPa 50<br>Psi 7250 | GN2BWT2G024A000    | GN2BWT2G044A000       |
| 13 | MPa 50<br>Psi 7250 | GN2BWT3G024A000    | GN2BWT3G044A000       |
| 20 | MPa 42<br>Psi 6090 | GN2BWT4G024A000    | GN2BWT4G044A000       |
| 25 | MPa 42<br>Psi 6090 | GN2BWT5G024A000    | GN2BWT5G044A000       |
| 32 | MPa 42<br>Psi 6090 | GN2BWT6G024A000    | GN2BWT6G044A000       |
| 40 | MPa 42<br>Psi 6090 | GN2BWT7G024A000    | GN2BWT7G044A000       |
| 50 | MPa 42<br>Psi 6090 | GN2BWT8G024A000    | GN2BWT8G044A000       |

**(PEEK SEAL)**  
GN PE S6000

|    |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|----------------------|--------------------|-----------------------|
| DN | PN                   | ITEM CODE          |                       |
| 6  | MPa 41,4<br>Psi 6000 | GN2BWT1G024P000    | GN2BWT1G044P000       |
| 10 | MPa 41,4<br>Psi 6000 | GN2BWT2G024P000    | GN2BWT2G044P000       |
| 13 | MPa 41,4<br>Psi 6000 | GN2BWT3G024P000    | GN2BWT3G044P000       |
| 20 | MPa 41,4<br>Psi 6000 | GN2BWT4G024P000    | GN2BWT4G044P000       |
| 25 | MPa 41,4<br>Psi 6000 | GN2BWT5G024P000    | GN2BWT5G044P000       |
| 32 | MPa 41,4<br>Psi 6000 | GN2BWT6G024P000    | GN2BWT6G044P000       |
| 40 | MPa 41,4<br>Psi 6000 | GN2BWT7G024P000    | GN2BWT7G044P000       |
| 50 | MPa 41,4<br>Psi 6000 | GN2BWT8G024P000    | GN2BWT8G044P000       |



# GM

## 2-WAY HIGH PRESSURE BALL VALVES

**PE and SW extralong ends on request**

Edition. 21.2


### CS Carbon Steel

- Type: ball valve 2way
- Sizes: from DN6 up to DN100
- Ends: BSP-NPT-SW-SWXT -PE BW
- O-Rings: NBR, FKM, EPDM, MVQ
- Pressure: up to PN500 / S3000
- Temp range: -46°C to +250°C (depending on materials selected)

### SS Stainless Steel

- Type: ball valve 2way
- Sizes: from DN6 up to DN100
- Ends: BSP-NPT-SW-SWXT -PE BW
- O-Rings: NBR, FKM, EPDM, MVQ
- Pressure: up to PN500 / S3000
- Temp range: -46°C to +250°C (depending on materials selected)

### STANDARD COMPOSITION OF VALVE

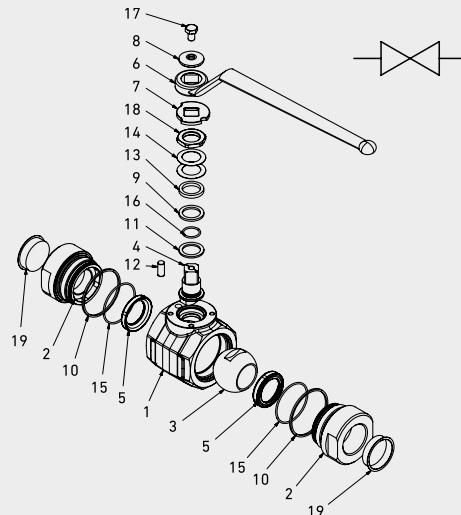

| POS      | DESCRIPTION  | Q.TY | CS               | SS               | CS           | SS              |
|----------|--------------|------|------------------|------------------|--------------|-----------------|
|          |              |      | Carbon Steel     | Stainless Steel  | Carbon Steel | Stainless Steel |
| MATERIAL |              |      |                  |                  |              |                 |
| 1        | Body         | 1    | ASTM A350 LF2*   | ASTM A182 F316   | 11           | PTFE            |
| 2        | Adapter      | 2    | ASTM A350 LF2*   | ASTM A182 F316   | 12           | AISI 316        |
| 3        | Ball         | 1    | ASTM A479 Tp.316 | ASTM A479 Tp.316 | 13           | AISI 316        |
| 4        | Stem         | 1    | ASTM A479 Tp.316 | ASTM A479 Tp.316 | 14           | AISI 316        |
| 5        | Ball Seat    | 2    | POM              | POM              | 15           | NBR             |
| 6        | Handle       | 1    | Fe37             | Fe37             | 16           | NBR             |
| 7        | Washer       | 1    | AISI 316         | AISI 316         | 17           | ISO4762 A4      |
| 8        | Washer       | 1    | AISI 316         | AISI 316         | 18           | AISI 316        |
| 9        | Body ring    | 1    | Graphite         | Graphite         | 19           | PVC             |
| 10       | Adapter ring | 2    | Graphite         | Graphite         |              |                 |



## CODE DESCRIPTION STRUCTURE

**GM G1 1/2 DN13 A105 F316 POM B**

Type and way of valve \_\_\_\_\_

GM 2-way

Ends \_\_\_\_\_

| GAS DIN/<br>ISO 228<br>BSP | NPT ANSI<br>/ASME<br>B1.20.1 | SW       |
|----------------------------|------------------------------|----------|
| G 1/4                      | N 1/4                        | SW 1/4   |
| G 3/8                      | N 3/8                        | SW 3/8   |
| G 1/2                      | N 1/2                        | SW 1/2   |
| G 3/4                      | N 3/4                        | SW 3/4   |
| G 1                        | N 1                          | SW 1     |
| G 1 1/4                    | N 1 1/4                      | SW 1 1/4 |
| G 1 1/2                    | N 1 1/2                      | SW 1 1/2 |
| G 2                        | N 2                          | SW 2     |
| G 2 1/2                    | N 2 1/2                      | SW 2 1/2 |
| G 3                        | N 3                          | SW 3     |
| G 4                        | N 4                          | SW 4     |

Sizes \_\_\_\_\_

|      |       |
|------|-------|
| DN6  | DN40  |
| DN10 | DN50  |
| DN13 | DN65  |
| DN20 | DN80  |
| DN25 | DN100 |
| DN32 |       |

Body and adapter material \_\_\_\_\_

● A105\* LF2

● F316

\*A105 from DN65 up to DN100

Stem and ball material \_\_\_\_\_

● F316

● F316

Ball seat material \_\_\_\_\_

A = POM D = PEEK\* C = PTFE\*


Adapter and stem seal material \_\_\_\_\_

B = NBR E = FKM\* F = EPDM\* L = MVQ\*

\*On request

- Reduced bore
- Special threads
- Pressure class up to PN500 or 3000 Psi
- Locking device
- PE and SW extralong ends

For further special requests please consult our technical/commercial service.

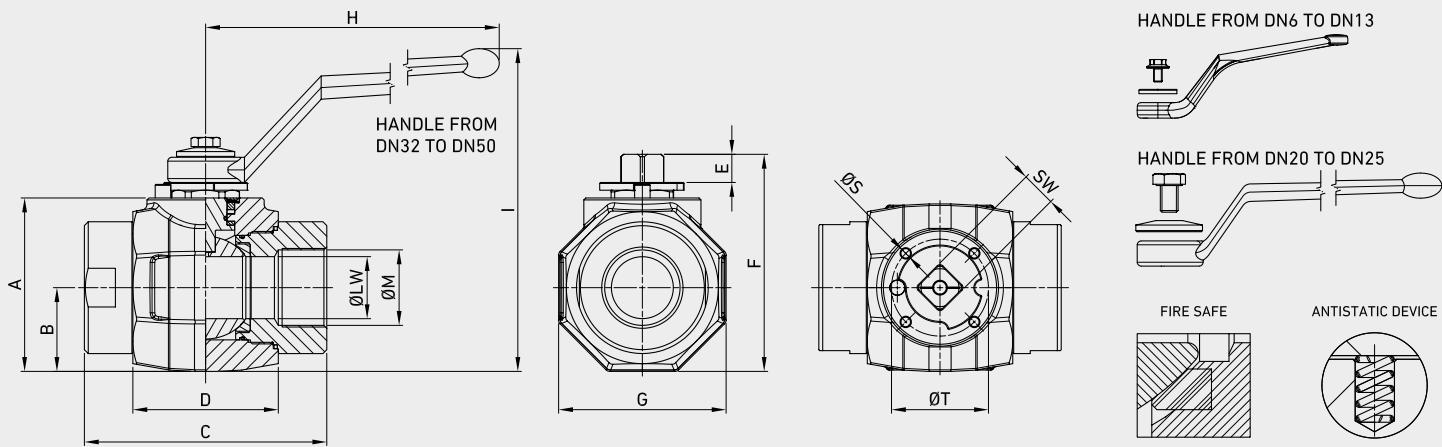

## ■ GM DIN/ISO 228 BSP

| TYPE       | DN  | A         | B    | C     | D    | E    | F     | ØG*  | H     | I     | ØM      | SW   | ØLW  | WEIGHT    |
|------------|-----|-----------|------|-------|------|------|-------|------|-------|-------|---------|------|------|-----------|
| GM G 1/4   | 6   | mm 48,5   | 22   | 72    | 44   | 9,4  | 65    | 45   | 107   | 108   | G 1/4   | 9    | 6    | kg 0,82   |
|            |     | inch 1,91 | 0,87 | 2,83  | 1,73 | 0,37 | 2,56  | 1,77 | 4,21  | 4,25  |         | 0,35 | 0,24 | lb 1,81   |
| GM G 3/8   | 10  | mm 48,5   | 22   | 73    | 44   | 9,4  | 65    | 45   | 107   | 108   | G 3/8   | 9    | 10   | kg 0,82   |
|            |     | inch 1,91 | 0,87 | 2,87  | 1,73 | 0,37 | 2,56  | 1,77 | 4,21  | 4,25  |         | 0,35 | 0,39 | lb 1,81   |
| GM G 1/2   | 13  | mm 53     | 24   | 81    | 48   | 9,4  | 70    | 49   | 107   | 113   | G 1/2   | 9    | 13   | kg 1,041  |
|            |     | inch 2,09 | 0,94 | 3,19  | 1,89 | 0,37 | 2,76  | 1,93 | 4,21  | 4,45  |         | 0,35 | 0,51 | lb 2,30   |
| GM G 3/4   | 20  | mm 66     | 30   | 98    | 62   | 13,4 | 88    | 61   | 200   | 123   | G 3/4   | 14   | 20   | kg 2,089  |
|            |     | inch 2,60 | 1,18 | 3,86  | 2,44 | 0,53 | 3,46  | 2,40 | 7,87  | 4,84  |         | 0,55 | 0,79 | lb 4,61   |
| GM G 1     | 25  | mm 98     | 36   | 106   | 66   | 13,4 | 98    | 73   | 200   | 123   | G 1     | 14   | 25   | kg 2,822  |
|            |     | inch 3,86 | 1,42 | 4,17  | 2,60 | 0,53 | 3,86  | 2,87 | 7,87  | 4,84  |         | 0,55 | 0,98 | lb 6,22   |
| GM G 1 1/4 | 32  | mm 89,5   | 43   | 127   | 75   | 14,5 | 112   | 86   | 310   | 166   | G 1 1/4 | 17   | 32   | kg 4,508  |
|            |     | inch 3,52 | 1,69 | 5,00  | 2,95 | 0,57 | 4,41  | 3,39 | 12,20 | 6,54  |         | 0,67 | 1,26 | lb 9,94   |
| GM G 1 1/2 | 40  | mm 106    | 53   | 135   | 85   | 14   | 129   | 106  | 310   | 184   | G 1 1/2 | 17   | 40   | kg 6,89   |
|            |     | inch 4,17 | 2,09 | 5,31  | 3,35 | 0,55 | 5,08  | 4,17 | 12,20 | 7,24  |         | 0,67 | 1,57 | lb 15,19  |
| GM G 2     | 50  | mm 116    | 59   | 160   | 98   | 13,5 | 138   | 118  | 310   | 194   | G 2     | 17   | 50   | kg 9,628  |
|            |     | inch 4,57 | 2,32 | 6,30  | 3,86 | 0,53 | 5,43  | 4,65 | 12,20 | 7,64  |         | 0,67 | 1,97 | lb 21,23  |
| GM G 2 1/2 | 65  | mm 140    | 70   | 174   | 105  | 23,5 | 176,5 | 150  | 600   | 226   | G 2 1/2 | 19   | 65   | kg 17,506 |
|            |     | inch 5,51 | 2,76 | 6,85  | 4,13 | 0,93 | 6,95  | 5,91 | 23,62 | 8,90  |         | 0,75 | 2,56 | lb 38,59  |
| GM G 3     | 80  | mm 155    | 77,5 | 191,5 | 114  | 23,5 | 191   | 167  | 600   | 241   | G 3     | 19   | 80   | kg 22,896 |
|            |     | inch 6,10 | 3,05 | 7,54  | 4,49 | 0,93 | 7,52  | 6,57 | 23,62 | 9,49  |         | 0,75 | 3,15 | lb 50,48  |
| GM G 4     | 100 | mm 188    | 94   | 230   | 148  | 31   | 231,5 | 200  | 600   | 278,5 | G 4     | 24   | 100  | kg 36,999 |
|            |     | inch 7,40 | 3,70 | 9,06  | 5,83 | 1,22 | 9,11  | 7,87 | 23,62 | 10,96 |         | 0,94 | 3,94 | lb 81,57  |

\* This quote is a diameter for DN65-DN80-DN100. For all other sizes it is a polygon (8 or 12 sides)

**(POM SEAL) GM DIN/ISO 228 PN**

|     |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|--------------------|--------------------|-----------------------|
| DN  | PN                 | ITEM CODE          |                       |
| 6   | MPa 50<br>Psi 7250 | GM2GGT15024A000    | GM2GGT15044A000       |
| 10  | MPa 50<br>Psi 7250 | GM2GGT25024A000    | GM2GGT25044A000       |
| 13  | MPa 50<br>Psi 7250 | GM2GGT35024A000    | GM2GGT35044A000       |
| 20  | MPa 42<br>Psi 6090 | GM2GGT44024A000    | GM2GGT44044A000       |
| 25  | MPa 42<br>Psi 6090 | GM2GGT53024A000    | GM2GGT53044A000       |
| 32  | MPa 42<br>Psi 6090 | GM2GGT63024A000    | GM2GGT63044A000       |
| 40  | MPa 42<br>Psi 6090 | GM2GGT73024A000    | GM2GGT73044A000       |
| 50  | MPa 42<br>Psi 6090 | GM2GGT83024A000    | GM2GGT83044A000       |
| 65  | MPa 15<br>Psi 2175 | GM2GGT9C024A000    | GM2GGT9C044A000       |
| 80  | MPa 10<br>Psi 1450 | GM2GGTA1024A000    | GM2GGTA1044A000       |
| 100 | MPa 5<br>Psi 725   | GM2GGTB1024A000    | GM2GGTB1044A000       |

**(PEEK SEAL) GM DIN/ISO 228 PN**

|     |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|--------------------|--------------------|-----------------------|
| DN  | PN                 | ITEM CODE          |                       |
| 6   | MPa 50<br>Psi 7250 | GM2GGT15024P000    | GM2GGT15044P000       |
| 10  | MPa 50<br>Psi 7250 | GM2GGT25024P000    | GM2GGT25044P000       |
| 13  | MPa 50<br>Psi 7250 | GM2GGT35024P000    | GM2GGT35044P000       |
| 20  | MPa 42<br>Psi 6090 | GM2GGT44024P000    | GM2GGT44044P000       |
| 25  | MPa 42<br>Psi 6090 | GM2GGT53024P000    | GM2GGT53044P000       |
| 32  | MPa 42<br>Psi 6090 | GM2GGT63024P000    | GM2GGT63044P000       |
| 40  | MPa 42<br>Psi 6090 | GM2GGT73024P000    | GM2GGT73044P000       |
| 50  | MPa 42<br>Psi 6090 | GM2GGT83024P000    | GM2GGT83044P000       |
| 65  | MPa 15<br>Psi 2175 | GM2GGT9C024P000    | GM2GGT9C044P000       |
| 80  | MPa 10<br>Psi 1450 | GM2GGTA1024P000    | GM2GGTA1044P000       |
| 100 | MPa 5<br>Psi 725   | GM2GGTB1024P000    | GM2GGTB1044P000       |

**(PTFE SEAL) GM DIN/ISO 228 S800**


|     |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|--------------------|--------------------|-----------------------|
| DN  | PN                 | ITEM CODE          |                       |
| 6   | MPa 13<br>Psi 1885 | GM2GGT1A024F000    | GM2GGT1A044F000       |
| 10  | MPa 13<br>Psi 1885 | GM2GGT2A024F000    | GM2GGT2A044F000       |
| 13  | MPa 13<br>Psi 1885 | GM2GGT3A024F000    | GM2GGT3A044F000       |
| 20  | MPa 13<br>Psi 1885 | GM2GGT4A024F000    | GM2GGT4A044F000       |
| 25  | MPa 13<br>Psi 1885 | GM2GGT5A024F000    | GM2GGT5A044F000       |
| 32  | MPa 10<br>Psi 1450 | GM2GGT6A024F000    | GM2GGT6A044F000       |
| 40  | MPa 10<br>Psi 1450 | GM2GGT17A024F000   | GM2GGT17A044F000      |
| 50  | MPa 10<br>Psi 1450 | GM2GGT8A024F000    | GM2GGT8A044F000       |
| 65  | MPa 10<br>Psi 1450 | GM2GGT9A024F000    | GM2GGT9A044F000       |
| 80  | MPa 10<br>Psi 1450 | GM2GGTAA024F000    | GM2GGTAA044F000       |
| 100 | MPa 5<br>Psi 725   | GM2GGTBA024F000    | GM2GGTBA044F000       |

**(POM SEAL) GM DIN/ISO 228 S3000**

|     |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|----------------------|--------------------|-----------------------|
| DN  | PN                   | ITEM CODE          |                       |
| 6   | MPa 20,7<br>Psi 3000 | GM2GGT1F024A000    | GM2GGT1F044A000       |
| 10  | MPa 20,7<br>Psi 3000 | GM2GGT2F024A000    | GM2GGT2F044A000       |
| 13  | MPa 20,7<br>Psi 3000 | GM2GGT3F024A000    | GM2GGT3F044A000       |
| 20  | MPa 20,7<br>Psi 3000 | GM2GGT4F024A000    | GM2GGT4F044A000       |
| 25  | MPa 20,7<br>Psi 3000 | GM2GGT5F024A000    | GM2GGT5F044A000       |
| 32  | MPa 20,7<br>Psi 3000 | GM2GGT6F024A000    | GM2GGT6F044A000       |
| 40  | MPa 20,7<br>Psi 3000 | GM2GGT17F024A000   | GM2GGT17F044A000      |
| 50  | MPa 20,7<br>Psi 3000 | GM2GGT8F024A000    | GM2GGTBF044A000       |
| 65  | MPa 15<br>Psi 3000   | GM2GGT9F024A000    | GM2GGT9F044A000       |
| 80  | MPa 10<br>Psi 3000   | GM2GGTAF024A000    | GM2GGTAF044A000       |
| 100 | MPa 5<br>Psi 3000    | GM2GGTBF024A000    | GM2GGTBF044A000       |

**(PEEK SEAL) GM DIN/ISO 228 S3000**

|     |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|----------------------|--------------------|-----------------------|
| DN  | PN                   | ITEM CODE          |                       |
| 6   | MPa 20,7<br>Psi 3000 | GM2GGT1F024P000    | GM2GGT1F044P000       |
| 10  | MPa 20,7<br>Psi 3000 | GM2GGT2F024P000    | GM2GGT2F044P000       |
| 13  | MPa 20,7<br>Psi 3000 | GM2GGT3F024P000    | GM2GGT3F044P000       |
| 20  | MPa 20,7<br>Psi 3000 | GM2GGT4F024P000    | GM2GGT4F044P000       |
| 25  | MPa 20,7<br>Psi 3000 | GM2GGT5F024P000    | GM2GGT5F044P000       |
| 32  | MPa 20,7<br>Psi 3000 | GM2GGT6F024P000    | GM2GGT6F044P000       |
| 40  | MPa 20,7<br>Psi 3000 | GM2GGT17F024P000   | GM2GGT7F044P000       |
| 50  | MPa 20,7<br>Psi 3000 | GM2GGT8F024P000    | GM2GGT8F044P000       |
| 65  | MPa 15<br>Psi 3000   | GM2GGT9F024P000    | GM2GGT9F044P000       |
| 80  | MPa 10<br>Psi 3000   | GM2GGTAF024P000    | GM2GGTAF044P000       |
| 100 | MPa 5<br>Psi 3000    | GM2GGTBF024P000    | GM2GGTBF044P000       |

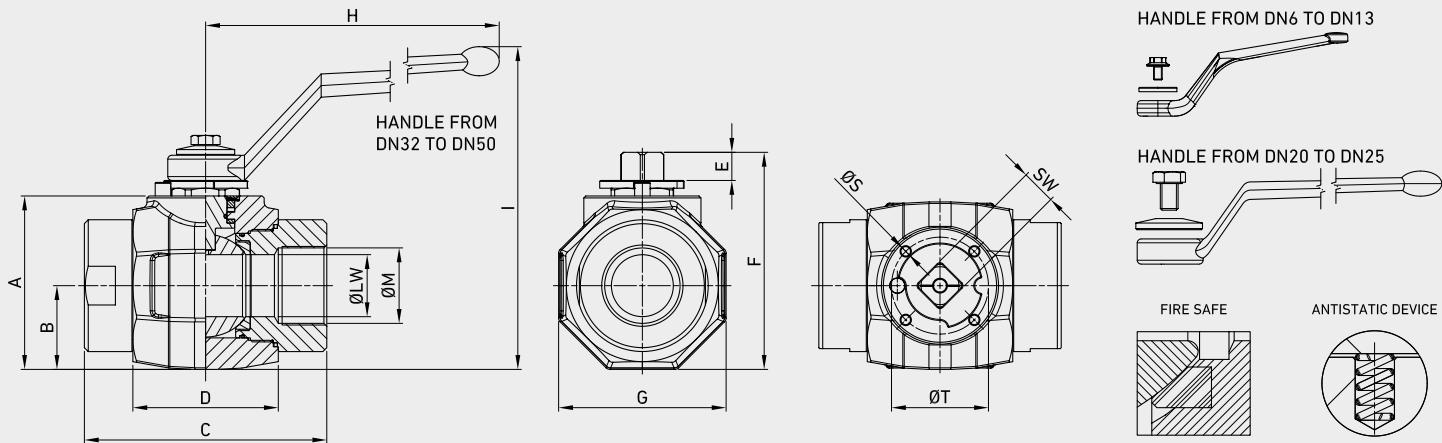

## GM ANSI/ASME B1.20.1 NPT

| TYPE       | DN  | A         | B    | C     | D    | E    | F     | ØG*  | H     | I     | ØM      | SW   | ØLW  | WEIGHT    |
|------------|-----|-----------|------|-------|------|------|-------|------|-------|-------|---------|------|------|-----------|
| GM N 1/4   | 6   | mm 48,5   | 22   | 72    | 44   | 9,4  | 65    | 45   | 107   | 108   | N 1/4   | 9    | 6    | kg 0,82   |
|            |     | inch 1,91 | 0,87 | 2,83  | 1,73 | 0,37 | 2,56  | 1,77 | 4,21  | 4,25  |         | 0,35 | 0,24 | lb 1,81   |
| GM N 3/8   | 10  | mm 48,5   | 22   | 73    | 44   | 9,4  | 65    | 45   | 107   | 105   | N 3/8   | 9    | 10   | kg 0,82   |
|            |     | inch 1,91 | 0,87 | 2,87  | 1,73 | 0,37 | 2,56  | 1,77 | 4,21  | 4,13  |         | 0,35 | 0,39 | lb 1,81   |
| GM N 1/2   | 13  | mm 53     | 24   | 81    | 48   | 9,4  | 70    | 49   | 107   | 113   | N 1/2   | 9    | 13   | kg 1,041  |
|            |     | inch 2,09 | 0,94 | 3,19  | 1,89 | 0,37 | 2,76  | 1,93 | 4,21  | 4,45  |         | 0,35 | 0,51 | lb 2,30   |
| GM N 3/4   | 20  | mm 66     | 30   | 98    | 62   | 13,4 | 88    | 61   | 200   | 123   | N 3/4   | 14   | 20   | kg 2,089  |
|            |     | inch 2,60 | 1,18 | 3,86  | 2,44 | 0,53 | 3,46  | 2,40 | 7,87  | 4,84  |         | 0,55 | 0,79 | lb 4,61   |
| GM N 1     | 25  | mm 98     | 36   | 106   | 66   | 13,4 | 98    | 73   | 200   | 123   | N 1     | 14   | 25   | kg 2,822  |
|            |     | inch 3,86 | 1,42 | 4,17  | 2,60 | 0,53 | 3,86  | 2,87 | 7,87  | 4,84  |         | 0,55 | 0,98 | lb 6,22   |
| GM N 1 1/4 | 32  | mm 89,5   | 43   | 127   | 75   | 14,5 | 112   | 86   | 310   | 166   | N 1 1/4 | 17   | 32   | kg 4,508  |
|            |     | inch 3,52 | 1,69 | 5,00  | 2,95 | 0,57 | 4,41  | 3,39 | 12,20 | 6,54  |         | 0,67 | 1,26 | lb 9,94   |
| GM N 1 1/2 | 40  | mm 106    | 53   | 135   | 85   | 14   | 129   | 106  | 310   | 184   | N 1 1/2 | 17   | 40   | kg 6,89   |
|            |     | inch 4,17 | 2,09 | 5,31  | 3,35 | 0,55 | 5,08  | 4,17 | 12,20 | 7,24  |         | 0,67 | 1,57 | lb 15,19  |
| GM N 2     | 50  | mm 116    | 59   | 160   | 98   | 13,5 | 138   | 118  | 310   | 194   | N 2     | 17   | 50   | kg 9,628  |
|            |     | inch 4,57 | 2,32 | 6,30  | 3,86 | 0,53 | 5,43  | 4,65 | 12,20 | 7,64  |         | 0,67 | 1,97 | lb 21,23  |
| GM N 2 1/2 | 65  | mm 140    | 70   | 174   | 105  | 23,5 | 176,5 | 150  | 600   | 226   | N 2 1/2 | 19   | 65   | kg 17,506 |
|            |     | inch 5,51 | 2,76 | 6,85  | 4,13 | 0,93 | 6,95  | 5,91 | 23,62 | 8,90  |         | 0,75 | 2,56 | lb 38,59  |
| GM N 3     | 80  | mm 155    | 77,5 | 191,5 | 114  | 23,5 | 191   | 167  | 600   | 241   | N 3     | 19   | 80   | kg 22,896 |
|            |     | inch 6,10 | 3,05 | 7,54  | 4,49 | 0,93 | 7,52  | 6,57 | 23,62 | 9,49  |         | 0,75 | 3,15 | lb 50,48  |
| GM N 4     | 100 | mm 188    | 94   | 230   | 148  | 31   | 231,5 | 200  | 600   | 278,5 | N 4     | 24   | 100  | kg 36,999 |
|            |     | inch 7,40 | 3,70 | 9,06  | 5,83 | 1,22 | 9,11  | 7,87 | 23,62 | 10,96 |         | 0,94 | 3,94 | lb 81,57  |

\* This quote is a diameter for DN65-DN80-DN100. For all other sizes it is a polygon (8 or 12 sides)

**(POM SEAL) GM ANSI/ASME B1.20.1 NPT PN**

|     |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|--------------------|--------------------|-----------------------|
| DN  | PN                 | ITEM CODE          |                       |
| 6   | MPa 50<br>Psi 7250 | GM2NNT15024A000    | GM2NNT15044A000       |
| 10  | MPa 50<br>Psi 7250 | GM2NNT25024A000    | GM2NNT25044A000       |
| 13  | MPa 50<br>Psi 7250 | GM2NNT35024A000    | GM2NNT35044A000       |
| 20  | MPa 42<br>Psi 6090 | GM2NNT44024A000    | GM2NNT44044A000       |
| 25  | MPa 42<br>Psi 6090 | GM2NNT53024A000    | GM2NNT53044A000       |
| 32  | MPa 42<br>Psi 6090 | GM2NNT63024A000    | GM2NNT63044A000       |
| 40  | MPa 42<br>Psi 6090 | GM2NN173024A000    | GM2NN173044A000       |
| 50  | MPa 42<br>Psi 6090 | GM2NNT83024A000    | GM2NNT83044A000       |
| 65  | MPa 15<br>Psi 2175 | GM2NNT9C024A000    | GM2NNT9C044A000       |
| 80  | MPa 10<br>Psi 1450 | GM2NNTA1024A000    | GM2NNTA1044A000       |
| 100 | MPa 5<br>Psi 725   | GM2NNTBI024A000    | GM2NNTBI044A000       |

**(PEEK SEAL) GM ANSI/ASME B1.20.1 NPT PN**

|     |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|--------------------|--------------------|-----------------------|
| DN  | PN                 | ITEM CODE          |                       |
| 6   | MPa 50<br>Psi 7250 | GM2NNT15024P000    | GM2NNT15044P000       |
| 10  | MPa 50<br>Psi 7250 | GM2NNT25024P000    | GM2NNT25044P000       |
| 13  | MPa 50<br>Psi 7250 | GM2NNT35024P000    | GM2NNT35044P000       |
| 20  | MPa 42<br>Psi 6090 | GM2NNT44024P000    | GM2NNT44044P000       |
| 25  | MPa 42<br>Psi 6090 | GM2NNT53024P000    | GM2NNT53044P000       |
| 32  | MPa 42<br>Psi 6090 | GM2NNT63024P000    | GM2NNT63044P000       |
| 40  | MPa 42<br>Psi 6090 | GM2NN173024P000    | GM2NN173044P000       |
| 50  | MPa 42<br>Psi 6090 | GM2NNT83024P000    | GM2NNT83044P000       |
| 65  | MPa 15<br>Psi 2175 | GM2NNT9C024P000    | GM2NNT9C044P000       |
| 80  | MPa 10<br>Psi 1450 | GM2NNTA1024P000    | GM2NNTA1044P000       |
| 100 | MPa 5<br>Psi 725   | GM2NNTBI024P000    | GM2NNTBI044P000       |

**(PTFE SEAL) GM ANSI/ASME B1.20.1 NPT S800**


|     |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|--------------------|--------------------|-----------------------|
| DN  | PN                 | ITEM CODE          |                       |
| 6   | MPa 13<br>Psi 1885 | GM2NNT1A024F000    | GM2NNT1A044F000       |
| 10  | MPa 13<br>Psi 1885 | GM2NNT2A024F000    | GM2NNT2A044F000       |
| 13  | MPa 13<br>Psi 1885 | GM2NNT3A024F000    | GM2NNT3A044F000       |
| 20  | MPa 13<br>Psi 1885 | GM2NNT4A024F000    | GM2NNT4A044F000       |
| 25  | MPa 13<br>Psi 1885 | GM2NNT5A024F000    | GM2NNT5A044F000       |
| 32  | MPa 10<br>Psi 1450 | GM2NNT6A024F000    | GM2NNT6A044F000       |
| 40  | MPa 10<br>Psi 1450 | GM2NN17A024F000    | GM2NN17A044F000       |
| 50  | MPa 10<br>Psi 1450 | GM2NNTBA024F000    | GM2NNTBA044F000       |
| 65  | MPa 10<br>Psi 1450 | GM2NNT9A024F000    | GM2NNT9A044F000       |
| 80  | MPa 10<br>Psi 1450 | GM2NNTAA024F000    | GM2NNTAA044F000       |
| 100 | MPa 5<br>Psi 725   | GM2NNTBA024F000    | GM2NNTBA044F000       |

**(POM SEAL) GM ANSI/ASME B1.20.1 NPT S3000**

|     |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|----------------------|--------------------|-----------------------|
| DN  | PN                   | ITEM CODE          |                       |
| 6   | MPa 20,7<br>Psi 3000 | GM2NNT1F024A000    | GM2NNT1F044A000       |
| 10  | MPa 20,7<br>Psi 3000 | GM2NNT2F024A000    | GM2NNT2F044A000       |
| 13  | MPa 20,7<br>Psi 3000 | GM2NNT3F024A000    | GM2NNT3F044A000       |
| 20  | MPa 20,7<br>Psi 3000 | GM2NNT4F024A000    | GM2NNT4F044A000       |
| 25  | MPa 20,7<br>Psi 3000 | GM2NNT5F024A000    | GM2NNT5F044A000       |
| 32  | MPa 20,7<br>Psi 3000 | GM2NNT6F024A000    | GM2NNT6F044A000       |
| 40  | MPa 20,7<br>Psi 3000 | GM2NN17F024A000    | GM2NN17F044A000       |
| 50  | MPa 20,7<br>Psi 3000 | GM2NNT8F024A000    | GM2NNT8F044A000       |
| 65  | MPa 15<br>Psi 2175   | GM2NNT9F024A000    | GM2NNT9F044A000       |
| 80  | MPa 10<br>Psi 1450   | GM2NNTAF024A000    | GM2NNTAF044A000       |
| 100 | MPa 5<br>Psi 725     | GM2NNTBF024A000    | GM2NNTBF044A000       |

**(PEEK SEAL) GM ANSI/ASME B1.20.1 NPT S3000**

|     |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|----------------------|--------------------|-----------------------|
| DN  | PN                   | ITEM CODE          |                       |
| 6   | MPa 20,7<br>Psi 3000 | GM2NNT1F024P000    | GM2NNT1F044P000       |
| 10  | MPa 20,7<br>Psi 3000 | GM2NNT2F024P000    | GM2NNT2F044P000       |
| 13  | MPa 20,7<br>Psi 3000 | GM2NNT3F024P000    | GM2NNT3F044P000       |
| 20  | MPa 20,7<br>Psi 3000 | GM2NNT4F024P000    | GM2NNT4F044P000       |
| 25  | MPa 20,7<br>Psi 3000 | GM2NNT5F024P000    | GM2NNT5F044P000       |
| 32  | MPa 20,7<br>Psi 3000 | GM2NNT6F024P000    | GM2NNT6F044P000       |
| 40  | MPa 20,7<br>Psi 3000 | GM2NN17F024P000    | GM2NN17F044P000       |
| 50  | MPa 20,7<br>Psi 3000 | GM2NNT8F024P000    | GM2NNT8F044P000       |
| 65  | MPa 15<br>Psi 3000   | GM2NNT9F024P000    | GM2NNT9F044P000       |
| 80  | MPa 10<br>Psi 3000   | GM2NNTAF024P000    | GM2NNTAF044P000       |
| 100 | MPa 5<br>Psi 3000    | GM2NNTBF024P000    | GM2NNTBF044P000       |

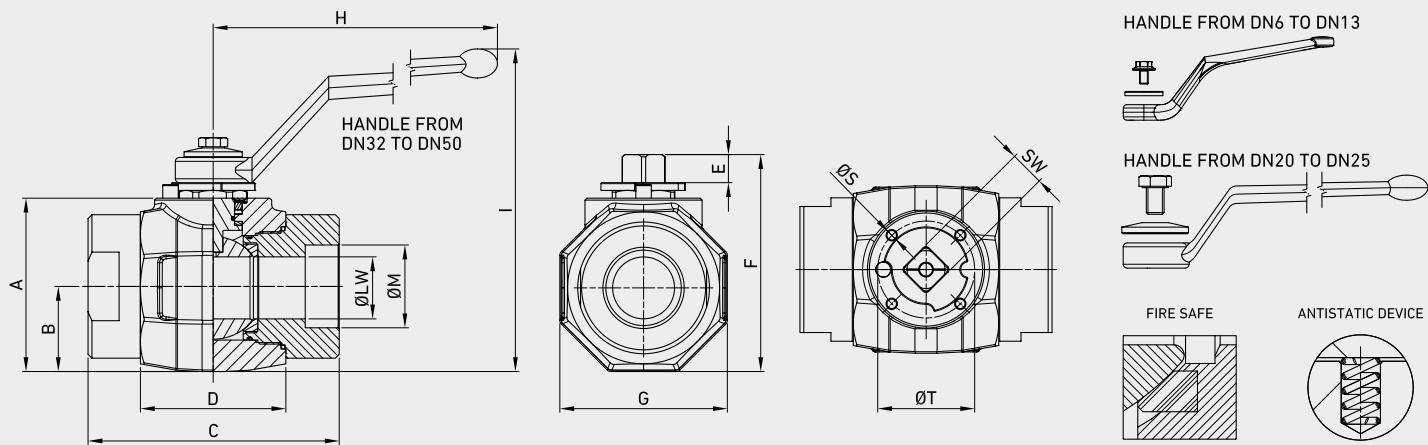

## ■ GM SW

| TYPE        | DN  | A         | B    | C     | D    | E    | F     | ØG*  | H     | I     | ØM       | SW   | ØLW  | WEIGHT    |
|-------------|-----|-----------|------|-------|------|------|-------|------|-------|-------|----------|------|------|-----------|
| GM SW 1/4   | 6   | mm 48,5   | 22   | 72    | 44   | 9,4  | 65    | 45   | 107   | 108   | SW 1/4   | 9    | 6    | kg 0,82   |
|             |     | inch 1,91 | 0,87 | 2,83  | 1,73 | 0,37 | 2,56  | 1,77 | 4,21  | 4,25  |          | 0,35 | 0,24 | lb 1,81   |
| GM SW 3/8   | 10  | mm 48,5   | 22   | 73    | 44   | 9,4  | 65    | 45   | 107   | 105   | SW 3/8   | 9    | 10   | kg 0,82   |
|             |     | inch 1,91 | 0,87 | 2,87  | 1,73 | 0,37 | 2,56  | 1,77 | 4,21  | 4,13  |          | 0,35 | 0,39 | lb 1,81   |
| GM SW 1/2   | 13  | mm 53     | 24   | 81    | 48   | 9,4  | 70    | 49   | 107   | 113   | SW 1/2   | 9    | 13   | kg 1,041  |
|             |     | inch 2,09 | 0,94 | 3,19  | 1,89 | 0,37 | 2,76  | 1,93 | 4,21  | 4,45  |          | 0,35 | 0,51 | lb 2,30   |
| GM SW 3/4   | 20  | mm 66     | 30   | 98    | 62   | 13,4 | 88    | 61   | 200   | 123   | SW 3/4   | 14   | 20   | kg 2,089  |
|             |     | inch 2,60 | 1,18 | 3,86  | 2,44 | 0,53 | 3,46  | 2,40 | 7,87  | 4,84  |          | 0,55 | 0,79 | lb 4,61   |
| GMSW 1      | 25  | mm 98     | 36   | 106   | 66   | 13,4 | 98    | 73   | 200   | 123   | SW 1     | 14   | 25   | kg 2,822  |
|             |     | inch 3,86 | 1,42 | 4,17  | 2,60 | 0,53 | 3,86  | 2,87 | 7,87  | 4,84  |          | 0,55 | 0,98 | lb 6,22   |
| GM SW 1 1/4 | 32  | mm 89,5   | 43   | 127   | 75   | 14,5 | 112   | 86   | 310   | 166   | SW 1 1/4 | 17   | 32   | kg 4,508  |
|             |     | inch 3,52 | 1,69 | 5,00  | 2,95 | 0,57 | 4,41  | 3,39 | 12,20 | 6,54  |          | 0,67 | 1,26 | lb 9,94   |
| GM SW 1 1/2 | 40  | mm 106    | 53   | 135   | 85   | 14   | 129   | 106  | 310   | 184   | SW 1 1/2 | 17   | 40   | kg 6,89   |
|             |     | inch 4,17 | 2,09 | 5,31  | 3,35 | 0,55 | 5,08  | 4,17 | 12,20 | 7,24  |          | 0,67 | 1,57 | lb 15,19  |
| GM SW 2     | 50  | mm 116    | 59   | 160   | 98   | 13,5 | 138   | 118  | 310   | 194   | SW 2     | 17   | 50   | kg 9,628  |
|             |     | inch 4,57 | 2,32 | 6,30  | 3,86 | 0,53 | 5,43  | 4,65 | 12,20 | 7,64  |          | 0,67 | 1,97 | lb 21,23  |
| GM SW 2 1/2 | 65  | mm 140    | 70   | 174   | 105  | 23,5 | 176,5 | 150  | 600   | 226   | SW 2 1/2 | 19   | 65   | kg 17,506 |
|             |     | inch 5,51 | 2,76 | 6,85  | 4,13 | 0,93 | 6,95  | 5,91 | 23,62 | 8,90  |          | 0,75 | 2,56 | lb 38,59  |
| GM SW 3     | 80  | mm 155    | 77,5 | 191,5 | 114  | 23,5 | 191   | 167  | 600   | 241   | SW 3     | 19   | 80   | kg 22,896 |
|             |     | inch 6,10 | 3,05 | 7,54  | 4,49 | 0,93 | 7,52  | 6,57 | 23,62 | 9,49  |          | 0,75 | 3,15 | lb 50,48  |
| GM SW 4     | 100 | mm 188    | 94   | 230   | 148  | 31   | 231,5 | 200  | 600   | 278,5 | SW 4     | 24   | 100  | kg 36,999 |
|             |     | inch 7,40 | 3,70 | 9,06  | 5,83 | 1,22 | 9,11  | 7,87 | 23,62 | 10,96 |          | 0,94 | 3,94 | lb 81,57  |

\* This quote is a diameter for DN65-DN80-DN100. For all other sizes it is a polygon (8 or 12 sides)

**(POM SEAL) GM SW PN**

|     |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|--------------------|--------------------|-----------------------|
| DN  | PN                 | ITEM CODE          |                       |
| 6   | MPa 50<br>Psi 7250 | GM2TTT15024A000    | GM2TTT15044A000       |
| 10  | MPa 50<br>Psi 7250 | GM2TTT25024A000    | GM2TTT25044A000       |
| 13  | MPa 50<br>Psi 7250 | GM2TTT35024A000    | GM2TTT35044A000       |
| 20  | MPa 42<br>Psi 6090 | GM2TTT44024A000    | GM2TTT44044A000       |
| 25  | MPa 42<br>Psi 6090 | GM2TTT53024A000    | GM2TTT53044A000       |
| 32  | MPa 42<br>Psi 6090 | GM2TTT63024A000    | GM2TTT63044A000       |
| 40  | MPa 42<br>Psi 6090 | GM2TTT73024A000    | GM2TTT73044A000       |
| 50  | MPa 42<br>Psi 6090 | GM2TTT83024A000    | GM2TTT83044A000       |
| 65  | MPa 15<br>Psi 2175 | GM2TTT9C024A000    | GM2TTT9C044A000       |
| 80  | MPa 10<br>Psi 1450 | GM2TTTA1024A000    | GM2TTTA1044A000       |
| 100 | MPa 5<br>Psi 725   | GM2TTTB1024A000    | GM2TTTB1044A000       |

**(PEEK SEAL) GM SW PN**

|     |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|--------------------|--------------------|-----------------------|
| DN  | PN                 | ITEM CODE          |                       |
| 6   | MPa 50<br>Psi 7250 | GM2TTT15024P000    | GM2TTT15044P000       |
| 10  | MPa 50<br>Psi 7250 | GM2TTT25024P000    | GM2TTT25044P000       |
| 13  | MPa 50<br>Psi 7250 | GM2TTT35024P000    | GM2TTT35044P000       |
| 20  | MPa 42<br>Psi 6090 | GM2TTT44024P000    | GM2TTT44044P000       |
| 25  | MPa 42<br>Psi 6090 | GM2TTT53024P000    | GM2TTT53044P000       |
| 32  | MPa 42<br>Psi 6090 | GM2TTT63024P000    | GM2TTT63044P000       |
| 40  | MPa 42<br>Psi 6090 | GM2TTT73024P000    | GM2TTT73044P000       |
| 50  | MPa 42<br>Psi 6090 | GM2TTT83024P000    | GM2TTT83044P000       |
| 65  | MPa 15<br>Psi 2175 | GM2TTT9C024P000    | GM2TTT9C044P000       |
| 80  | MPa 10<br>Psi 1450 | GM2TTTA1024P000    | GM2TTTA1044P000       |
| 100 | MPa 5<br>Psi 725   | GM2TTTB1024P000    | GM2TTTB1044P000       |

**(PTFE SEAL) GM SW S800**

|    |                    | CS<br>Carbon Steel | SS<br>Stainless Steel |
|----|--------------------|--------------------|-----------------------|
| DN | PN                 | ITEM CODE          |                       |
| 6  | MPa 13<br>Psi 1885 | GM2TTT1A024F000    | GM2TTT1A044F000       |
| 10 | MPa 13<br>Psi 1885 | GM2TTT2A024F000    | GM2TTT2A044F000       |
| 13 | MPa 13<br>Psi 1885 | GM2TTT3A024F000    | GM2TTT3A044F000       |
| 20 | MPa 13<br>Psi 1885 | GM2TTT4A024F000    | GM2TTT4A044F000       |
| 25 | MPa 13<br>Psi 1885 | GM2TTT5A024F000    | GM2TTT5A044F000       |
| 32 | MPa 13<br>Psi 1885 | GM2TTT6A024F000    | GM2TTT6A044F000       |
| 40 | MPa 13<br>Psi 1885 | GM2TTT7A024F000    | GM2TTT7A044F000       |
| 50 | MPa 13<br>Psi 1885 | GM2TTT8A024F000    | GM2TTT8A044F000       |

**(POM SEAL) GM SW S3000**

|     |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|----------------------|--------------------|-----------------------|
| DN  | PN                   | ITEM CODE          |                       |
| 6   | MPa 20,7<br>Psi 3000 | GM2TTT1F024A000    | GM2TTT1F044A000       |
| 10  | MPa 20,7<br>Psi 3000 | GM2TTT2F024A000    | GM2TTT2F044A000       |
| 13  | MPa 20,7<br>Psi 3000 | GM2TTT3F024A000    | GM2TTT3F044A000       |
| 20  | MPa 20,7<br>Psi 3000 | GM2TTT4F024A000    | GM2TTT4F044A000       |
| 25  | MPa 20,7<br>Psi 3000 | GM2TTT5F024A000    | GM2TTT5F044A000       |
| 32  | MPa 20,7<br>Psi 3000 | GM2TTT6F024A000    | GM2TTT6F044A000       |
| 40  | MPa 20,7<br>Psi 3000 | GM2TTT7F024A000    | GM2TTT7F044A000       |
| 50  | MPa 20,7<br>Psi 3000 | GM2TTT8F024A000    | GM2TTT8F044A000       |
| 65  | MPa 15<br>Psi 3000   | GM2TTT9F024A000    | GM2TTT9F044A000       |
| 80  | MPa 10<br>Psi 3000   | GM2TTTAF024A000    | GM2TTTAF044A000       |
| 100 | MPa 5<br>Psi 3000    | GM2TTTBFI024A000   | GM2TTTBFI044A000      |

**(PEEK SEAL) GM SW S3000**

|     |                      | CS<br>Carbon Steel | SS<br>Stainless Steel |
|-----|----------------------|--------------------|-----------------------|
| DN  | PN                   | ITEM CODE          |                       |
| 6   | MPa 20,7<br>Psi 3000 | GM2TTT1F024P000    | GM2TTT1F044P000       |
| 10  | MPa 20,7<br>Psi 3000 | GM2TTT2F024P000    | GM2TTT2F044P000       |
| 13  | MPa 20,7<br>Psi 3000 | GM2TTT3F024P000    | GM2TTT3F044P000       |
| 20  | MPa 20,7<br>Psi 3000 | GM2TTT4F024P000    | GM2TTT4F044P000       |
| 25  | MPa 20,7<br>Psi 3000 | GM2TTT5F024P000    | GM2TTT5F044P000       |
| 32  | MPa 20,7<br>Psi 3000 | GM2TTT6F024P000    | GM2TTT6F044P000       |
| 40  | MPa 20,7<br>Psi 3000 | GM2TTT7F024P000    | GM2TTT7F044P000       |
| 50  | MPa 20,7<br>Psi 3000 | GM2TTT8F024P000    | GM2TTT8F044P000       |
| 65  | MPa 15<br>Psi 3000   | GM2TTT9F024P000    | GM2TTT9F044P000       |
| 80  | MPa 10<br>Psi 3000   | GM2TTTAF024P000    | GM2TTTAF044P000       |
| 100 | MPa 5<br>Psi 3000    | GM2TTTBFI024P000   | GM2TTTBFI044P000      |



# SBF-W

## WAFER TYPE BALL VALVES

Edition. 21.0


**CS** Carbon Steel

**SS** Stainless Steel

- **CS, SS, DSS, ALLOY (Forged)**

- Type: ball valve Split Body Floating-Wafer type
- Sizes: from DN13 up to DN150
- Pressure: ANSI150-600
- Temperature: from -50° up to +200° (depending on materials selected)'

### STANDARD COMPOSITION OF VALVE

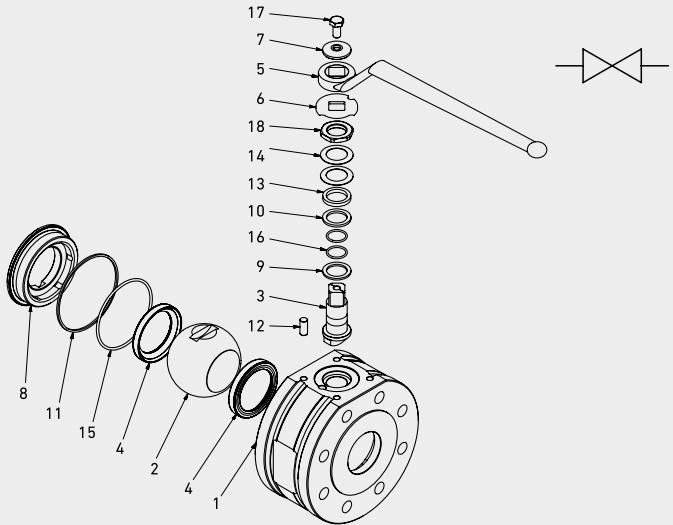

| POS | DESCRIPTION     | Q.TY | CS               | SS               |
|-----|-----------------|------|------------------|------------------|
|     |                 |      | Carbon Steel     | Stainless Steel  |
| 1   | Body            | 1    | ASTM A350 LF2    | ASTM A479 Tp.316 |
| 2   | Ball            | 1    | ASTM A479 Tp.316 | ASTM A479 Tp.316 |
| 3   | Stem            | 1    | ASTM A479 Tp.316 | ASTM A479 Tp.316 |
| 4   | Ball seat       | 2    | RPTFE            | RPTFE            |
| 5   | Handle          | 1    | Fe37             | Fe37             |
| 6   | Washer          | 1    | AISI 316         | AISI 316         |
| 7   | Washer          | 1    | AISI 316         | AISI 316         |
| 8   | Adapter         | 1    | ASTM A350 LF2    | ASTM A479 Tp.316 |
| 9   | Stem ring       | 1    | PTFE             | PTFE             |
| 10  | Up ring         | 1    | Graphite         | Graphite         |
| 11  | Flange ring     | 1    | Graphite         | Graphite         |
| 12  | Pin             | 1    | AISI 316         | AISI 316         |
| 13  | Press ring      | 1    | AISI 316         | AISI 316         |
| 14  | Spring          | 2    | AISI 316         | AISI 316         |
| 15  | Ring nut o-ring | 1    | FKM              | FKM              |
| 16  | Stem o-ring     | 1    | FKM              | FKM              |
| 17  | Screw           | 1    | ISO4017 A4       | ISO4017 A4       |
| 18  | Nut             | 1    | AISI 316         | AISI 316         |



## CODE DESCRIPTION STRUCTURE

**SBF-W A150 DN13 LF2 F316 RPTFE FKM**

Type and way of valve \_\_\_\_\_

SBF-W 2-way

Ends \_\_\_\_\_

ASME

B16.5

ANSI150

ANSI300

ANSI600

Sizes \_\_\_\_\_

from DN13 to DN150

Body and adapter material \_\_\_\_\_

● LF2

● F316

Stem and ball material \_\_\_\_\_

● F316

● F316

Ball seat material \_\_\_\_\_

PTFE PEEK\* POM\* DEVLON\*


Adapter and stem seal material \_\_\_\_\_

FKM NBR\* EPDM\* MVQ\*

\*On request

- Reduced bore
- Pneumatic and electrical actuator
- Locking device

For further special requests please consult our technical/commercial service.

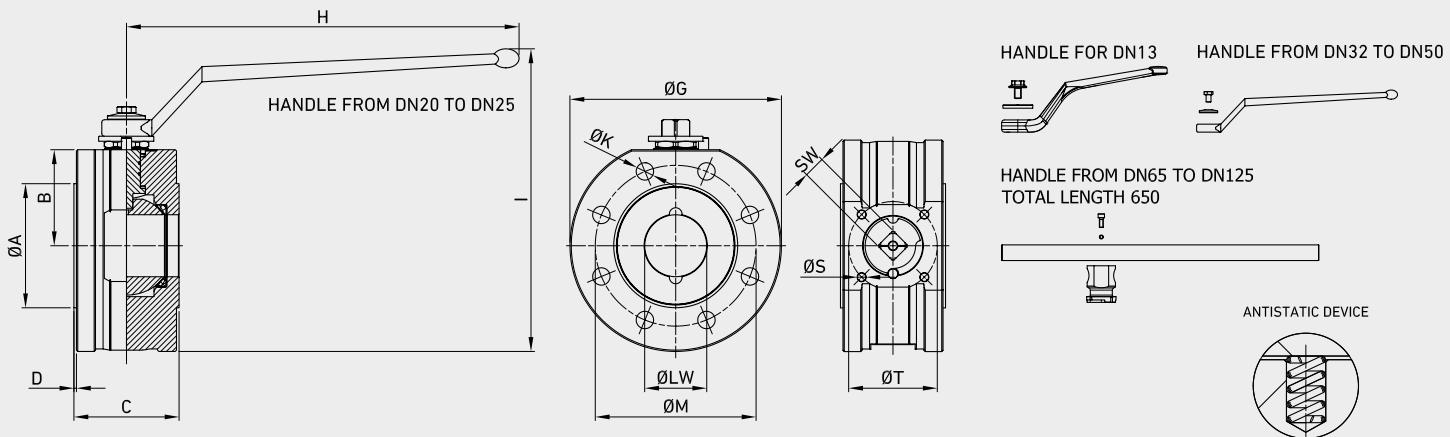

## SBF-W ANSI 150 FB

| TYPE   | PN      | ØE LINEA   | ØA   | B    | C     | D    | H     | I     | ØM    | Ø G   | ØK  | n°ØK | Ø T  | Ø S  | ISO 5211 | SW      | Ø LW | WEIGHT    | ITEM CODE          |                       |
|--------|---------|------------|------|------|-------|------|-------|-------|-------|-------|-----|------|------|------|----------|---------|------|-----------|--------------------|-----------------------|
|        |         |            |      |      |       |      |       |       |       |       |     |      |      |      |          |         |      |           | CS<br>Carbon Steel | SS<br>Stainless Steel |
| 1/2"   | MPa 2   | mm 90      | 46   | 33   | 36    | 1,6  | 110   | 137   | 60,3  | 94    | M12 | 4    | 36   | M5   | F03      | 9       | 13   | kg 1,5    | G514404A1505BAA    | G514404A2305BAA       |
|        | Psi 290 | inch 3,54  | 1,81 | 1,30 | 1,42  | 0,06 | 4,33  | 5,39  | 2,37  | 3,70  |     | 0,16 | 1,42 |      |          | 0,35    | 0,51 | lb 3,31   |                    |                       |
| 3/4"   | MPa 2   | mm 100     | 57   | 39   | 48    | 1,6  | 200   | 143   | 69,9  | 98    | M12 | 4    | 36   | M5   | F03      | 14      | 20   | kg 2,5    | G514405A1505BAA    | G514405A2305BAA       |
|        | Psi 290 | inch 3,94  | 2,24 | 1,54 | 1,89  | 0,06 | 7,87  | 5,63  | 2,75  | 3,86  |     | 0,16 | 1,42 |      |          | 0,55    | 0,79 | lb 5,51   |                    |                       |
| 1"     | MPa 2   | mm 110     | 64   | 41,5 | 48    | 1,6  | 200   | 149   | 79,4  | 104   | M12 | 4    | 50   | M6   | F05      | 14      | 25   | kg 4      | G514406A1505BAA    | G514406A2305BAA       |
|        | Psi 290 | inch 4,33  | 2,52 | 1,63 | 1,89  | 0,06 | 7,87  | 5,87  | 3,13  | 4,09  |     | 0,16 | 1,97 |      |          | 0,55    | 0,98 | lb 8,82   |                    |                       |
| 1-1/4" | MPa 2   | mm 115     | 69   | 48   | 53    | 2    | 310   | 183   | 88,9  | 118   | M12 | 4    | 50   | M6   | F05      | 17      | 32   | kg 5,2    | G514407A1505BAA    | G514407A2305BAA       |
|        | Psi 290 | inch 4,53  | 2,72 | 1,89 | 2,09  | 0,08 | 12,20 | 7,20  | 3,50  | 4,65  |     | 0,16 | 1,97 |      |          | 0,67    | 1,26 | lb 11,46  |                    |                       |
| 1-1/2" | MPa 2   | mm 125     | 85   | 52,5 | 63    | 2    | 310   | 200   | 98,4  | 135   | M12 | 4    | 70   | M8   | F07      | 17      | 40   | kg 7,3    | G514408A1505BAA    | G514408A2305BAA       |
|        | Psi 290 | inch 4,92  | 3,35 | 2,07 | 2,48  | 0,08 | 12,20 | 7,87  | 3,87  | 5,31  |     | 0,16 | 2,76 |      |          | 0,67    | 1,57 | lb 16,09  |                    |                       |
| 2"     | MPa 2   | mm 150     | 98   | 56   | 83    | 2    | 310   | 209   | 120,7 | 147   | M16 | 4    | 70   | M8   | F07      | 17      | 49   | kg 11,8   | G514410A1505BAA    | G514410A2305BAA       |
|        | Psi 290 | inch 5,91  | 3,86 | 2,20 | 3,27  | 0,08 | 12,20 | 8,23  | 4,75  | 5,79  |     | 0,16 | 2,76 |      |          | 0,67    | 1,93 | lb 26,01  |                    |                       |
| 2-1/2" | MPa 2   | mm 180     | 122  | 80   | 107   | 2    | 450   | 176   | 139,7 | 185   | M16 | 4    | 70   | M8   | F07      | 19      | 63   | kg 17,6   | G514412A1505BAA    | G514412A2305BAA       |
|        | Psi 290 | inch 7,09  | 4,80 | 3,15 | 4,21  | 0,08 | 17,72 | 6,93  | 5,50  | 7,28  |     | 0,16 | 2,76 |      |          | 0,75    | 2,48 | lb 38,80  |                    |                       |
| 3"     | MPa 2   | mm 190     | 135  | 82,5 | 120   | 2    | 450   | 245   | 152,4 | 187   | M16 | 4    | 70   | M8   | F07      | 19      | 74   | kg 25     | G514414A1505BAA    | G514414A2305BAA       |
|        | Psi 290 | inch 7,48  | 5,31 | 3,25 | 4,72  | 0,08 | 17,72 | 9,65  | 6,00  | 7,36  |     | 0,16 | 2,76 |      |          | 0,75    | 2,91 | lb 55,12  |                    |                       |
| 4"     | MPa 2   | mm 230     | 173  | 113  | 152   | 2    | 450   | 327   | 190,5 | 246   | M16 | 8    | 102  | M10  | F10      | 24      | 95   | kg 38     | G514418A1505BAA    | G514418A2305BAA       |
|        | Psi 290 | inch 9,06  | 6,81 | 4,45 | 5,98  | 0,08 | 17,72 | 12,87 | 7,50  | 9,69  |     | 0,31 | 4,02 |      |          | 0,94    | 3,74 | lb 83,78  |                    |                       |
| 6"     | MPa 2   | mm 280     | 216  | 156  | 255   | 2    | -     | 234,5 | 241,3 | 330   | M20 | 8    | 165  | 22   | F10      | Ø 50*   | 150  | kg 132    | G514422A1505BAA    | G514422A2305BAA       |
|        | Psi 290 | inch 11,02 | 8,50 | 6,14 | 10,04 | 0,08 | -     | 9,23  | 9,50  | 12,99 |     | 0,31 | 6,50 | 0,87 |          | Ø 1,97* | 5,91 | lb 291,01 |                    |                       |

\*stem with key

**SBF-W ANSI 300 FB**

| TYPE   | PN      | Technical Data |      |      |       |      |       |       |       |       |     |      |      |      | ITEM CODE |         |      |           |                 |                 |
|--------|---------|----------------|------|------|-------|------|-------|-------|-------|-------|-----|------|------|------|-----------|---------|------|-----------|-----------------|-----------------|
|        |         | ØE LINEA       | ØA   | B    | C     | D    | H     | I     | ØM    | ØG    | ØK  | n°ØK | ØT   | ØS   | ISO 5211  | SW      | Ø LW | WEIGHT    |                 |                 |
| 1/2"   | MPa 5   | mm 95          | 46   | 33   | 36    | 1,6  | 110   | 137   | 66,7  | 94    | M12 | 4    | 36   | M5   | F03       | 9       | 13   | kg 1,5    | G514404A1505DAA | G514404A2305DAA |
|        | Psi 725 | inch 3,74      | 1,81 | 1,30 | 1,42  | 0,06 | 4,33  | 5,39  | 2,63  | 3,70  |     | 0,16 | 1,42 |      |           | 0,35    | 0,51 | lb 3,31   |                 |                 |
| 3/4"   | MPa 5   | mm 115         | 57   | 39   | 48    | 1,6  | 200   | 150   | 82,6  | 112   | M16 | 4    | 50   | M6   | F05       | 14      | 20   | kg 2,5    | G514405A1505DAA | G514405A2305DAA |
|        | Psi 725 | inch 4,53      | 2,24 | 1,54 | 1,89  | 0,06 | 7,87  | 5,91  | 3,25  | 4,41  |     | 0,16 | 1,97 |      |           | 0,55    | 0,79 | lb 5,51   |                 |                 |
| 1"     | MPa 5   | mm 125         | 64   | 41,5 | 48    | 1,6  | 200   | 154   | 88,9  | 114   | M16 | 4    | 50   | M6   | F05       | 14      | 25   | kg 4,6    | G514406A1505DAA | G514406A2305DAA |
|        | Psi 725 | inch 4,92      | 2,52 | 1,63 | 1,89  | 0,06 | 7,87  | 6,06  | 3,50  | 4,49  |     | 0,16 | 1,97 |      |           | 0,55    | 0,98 | lb 10,14  |                 |                 |
| 1-1/4" | MPa 5   | mm 135         | 69   | 49   | 53    | 2    | 310   | 186   | 98,4  | 123   | M16 | 4    | 50   | M6   | F05       | 17      | 32   | kg 5,2    | G514407A1505DAA | G514407A2305DAA |
|        | Psi 725 | inch 5,31      | 2,72 | 1,93 | 2,09  | 0,08 | 12,20 | 7,32  | 3,87  | 4,84  |     | 0,16 | 1,97 |      |           | 0,67    | 1,26 | lb 11,46  |                 |                 |
| 1-1/2" | MPa 5   | mm 155         | 85   | 55   | 63    | 2    | 310   | 206   | 114,3 | 146   | M20 | 4    | 70   | M8   | F07       | 17      | 40   | kg 7,3    | G514408A1505DAA | G514408A2305DAA |
|        | Psi 725 | inch 6,10      | 3,35 | 2,17 | 2,48  | 0,08 | 12,20 | 8,11  | 4,50  | 5,75  |     | 0,16 | 2,76 |      |           | 0,67    | 1,57 | lb 16,09  |                 |                 |
| 2"     | MPa 5   | mm 165         | 98   | 75,8 | 83    | 2    | 310   | 239   | 127   | 167   | M16 | 8    | 70   | M8   | F07       | 17      | 49   | kg 15     | G514410A1505DAA | G514410A2305DAA |
|        | Psi 725 | inch 6,50      | 3,86 | 2,98 | 3,27  | 0,08 | 12,20 | 9,41  | 5,00  | 6,57  |     | 0,31 | 2,76 |      |           | 0,67    | 1,93 | lb 33,07  |                 |                 |
| 2-1/2" | MPa 5   | mm 190         | 122  | 85   | 125   | 2    | 450   | 176   | 149,2 | 190   | M20 | 8    | 70   | M8   | F07       | 19      | 63   | kg 21     | G514412A1505DAA | G514412A2305DAA |
|        | Psi 725 | inch 7,48      | 4,80 | 3,35 | 4,92  | 0,08 | 17,72 | 6,93  | 5,87  | 7,48  |     | 0,31 | 2,76 |      |           | 0,75    | 2,48 | lb 46,30  |                 |                 |
| 3"     | MPa 5   | mm 210         | 142  | 94   | 120   | 2    | 450   | 268   | 168,3 | 207   | M20 | 8    | 70   | M8   | F07       | 19      | 74   | kg 35     | G514414A1505DAA | G514414A2305DAA |
|        | Psi 725 | inch 8,27      | 5,59 | 3,70 | 4,72  | 0,08 | 17,72 | 10,55 | 6,63  | 8,15  |     | 0,31 | 2,76 |      |           | 0,75    | 2,91 | lb 77,16  |                 |                 |
| 4"     | MPa 5   | mm 255         | 173  | 113  | 152   | 2    | 450   | 327   | 200   | 246   | M20 | 8    | 102  | M10  | F10       | 24      | 95   | kg 58     | G514418A1505DAA | G514418A2305DAA |
|        | Psi 725 | inch 10,04     | 6,81 | 4,45 | 5,98  | 0,08 | 17,72 | 12,87 | 7,87  | 9,69  |     | 0,31 | 4,02 |      |           | 0,94    | 3,74 | lb 127,87 |                 |                 |
| 6"     | MPa 5   | mm 320         | 216  | 156  | 255   | 2    | -     | 234,5 | 269,9 | 330   | M20 | 12   | 165  | 22   | F10       | 0 50*   | 150  | kg 132    | G514422A1505DAA | G514422A2305DAA |
|        | Psi 725 | inch 12,60     | 8,50 | 6,14 | 10,04 | 0,08 | -     | 9,23  | 10,63 | 12,99 |     | 0,47 | 6,50 | 0,87 |           | 0 1,97* | 5,91 | lb 291,01 |                 |                 |

\*stem with key

**SBF-W ANSI 600 FB**

| TYPE   | PN       | Technical Data |      |      |       |      |       |       |       |       |     |      |      |      | ITEM CODE |         |      |           |                 |                 |
|--------|----------|----------------|------|------|-------|------|-------|-------|-------|-------|-----|------|------|------|-----------|---------|------|-----------|-----------------|-----------------|
|        |          | ØE LINEA       | ØA   | B    | C     | D    | H     | I     | ØM    | ØG    | ØK  | n°ØK | ØT   | ØS   | ISO 5211  | SW      | Ø LW | WEIGHT    |                 |                 |
| 1/2"   | MPa 10   | mm 95          | 46   | 33   | 55    | 1,6  | 110   | 137   | 66,7  | 94    | M12 | 4    | 36   | M5   | F03       | 9       | 13   | kg 3      | G514404A1505FAA | G514404A2305FAA |
|        | Psi 1450 | inch 3,74      | 1,81 | 1,30 | 2,17  | 0,06 | 4,33  | 5,39  | 2,63  | 3,70  |     | 0,16 | 1,42 |      |           | 0,35    | 0,51 | lb 6,61   |                 |                 |
| 3/4"   | MPa 10   | mm 115         | 57   | 39   | 60    | 1,6  | 200   | 150   | 82,6  | 114   | M16 | 4    | 50   | M6   | F05       | 14      | 20   | kg 5      | G514405A1505FAA | G514405A2305FAA |
|        | Psi 1450 | inch 4,53      | 2,24 | 1,54 | 2,36  | 0,06 | 7,87  | 5,91  | 3,25  | 4,49  |     | 0,16 | 1,97 |      |           | 0,55    | 0,79 | lb 11,02  |                 |                 |
| 1"     | MPa 10   | mm 125         | 64   | 42   | 65    | 1,6  | 200   | 160   | 88,9  | 124   | M16 | 4    | 50   | M6   | F05       | 14      | 25   | kg 6,5    | G514406A1505FAA | G514406A2305FAA |
|        | Psi 1450 | inch 4,92      | 2,52 | 1,65 | 2,56  | 0,06 | 7,87  | 6,30  | 3,50  | 4,88  |     | 0,16 | 1,97 |      |           | 0,55    | 0,98 | lb 14,33  |                 |                 |
| 1-1/4" | MPa 10   | mm 135         | 69   | 49   | 75    | 2    | 310   | 186   | 98,4  | 123   | M16 | 4    | 70   | M8   | F07       | 17      | 32   | kg 9      | G514407A1505FAA | G514407A2305FAA |
|        | Psi 1450 | inch 5,31      | 2,72 | 1,93 | 2,95  | 0,08 | 12,20 | 7,32  | 3,87  | 4,84  |     | 0,16 | 2,76 |      |           | 0,67    | 1,26 | lb 19,84  |                 |                 |
| 1-1/2" | MPa 10   | mm 155         | 85   | 53   | 85    | 2    | 310   | 206   | 114,3 | 146   | M20 | 4    | 70   | M8   | F07       | 17      | 40   | kg 12,4   | G514408A1505FAA | G514408A2305FAA |
|        | Psi 1450 | inch 6,10      | 3,35 | 2,09 | 3,35  | 0,08 | 12,20 | 8,11  | 4,50  | 5,75  |     | 0,16 | 2,76 |      |           | 0,67    | 1,57 | lb 27,34  |                 |                 |
| 2"     | MPa 10   | mm 165         | 98   | 75,8 | 100   | 2    | 310   | 239   | 127   | 167   | M16 | 8    | 70   | M8   | F07       | 17      | 49   | kg 15     | G514410A1505FAA | G514410A2305FAA |
|        | Psi 1450 | inch 6,50      | 3,86 | 2,98 | 3,94  | 0,08 | 12,20 | 9,41  | 5,00  | 6,57  |     | 0,31 | 2,76 |      |           | 0,67    | 1,93 | lb 33,07  |                 |                 |
| 2-1/2" | MPa 10   | mm 190         | 122  | 85   | 125   | 2    | 450   | 176   | 149,2 | 190   | M20 | 8    | 70   | M8   | F07       | 19      | 63   | kg 21     | G514412A1505FAA | G514412A2305FAA |
|        | Psi 1450 | inch 7,48      | 4,80 | 3,35 | 4,92  | 0,08 | 17,72 | 6,93  | 5,87  | 7,48  |     | 0,31 | 2,76 |      |           | 0,75    | 2,48 | lb 46,30  |                 |                 |
| 3"     | MPa 10   | mm 210         | 142  | 94   | 150   | 2    | 450   | 268   | 168,3 | 207   | M20 | 8    | 70   | M8   | F07       | 19      | 74   | kg 35     | G514414A1505FAA | G514414A2305FAA |
|        | Psi 1450 | inch 8,27      | 5,59 | 3,70 | 5,91  | 0,08 | 17,72 | 10,55 | 6,63  | 8,15  |     | 0,31 | 2,76 |      |           | 0,75    | 2,91 | lb 77,16  |                 |                 |
| 4"     | MPa 10   | mm 275         | 173  | 116  | 185   | 2    | 450   | 331   | 215,9 | 253   | M22 | 8    | 102  | M10  | F10       | 24      | 95   | kg 70     | G514418A1505FAA | G514418A2305FAA |
|        | Psi 1450 | inch 10,83     | 6,81 | 4,57 | 7,28  | 0,08 | 17,72 | 13,03 | 8,50  | 9,96  |     | 0,31 | 4,02 |      |           | 0,94    | 3,74 | lb 154,32 |                 |                 |
| 6"     | MPa 10   | mm 355         | 216  | 156  | 280   | 2    | -     | 246,5 | 292,1 | 355   | M24 | 12   | 165  | 22   | F10       | 0 50*   | 150  | kg 174    | G514422A1505FAA | G514422A2305FAA |
|        | Psi 1450 | inch 13,98     | 8,50 | 6,14 | 11,02 | 0,08 | -     | 9,70  | 11,50 | 13,98 |     | 0,47 | 6,50 | 0,87 |           | 0 1,97* | 5,91 | lb 383,60 |                 |                 |

\*stem with key



# SBF

## SPLIT BODY FLOATING

Edition. 21.0


### CS Carbon Steel

### SS Stainless Steel

**• CS, SS, DSS, ALLOY (Forged)**

- Type: ball valve Split Body Floating
- Sizes: from DN13 up to DN150
- Pressure: ANSI 150-2500
- Temperature: from -50° up to +200° (depending on materials selected)'

### I STANDARD COMPOSITION OF VALVE

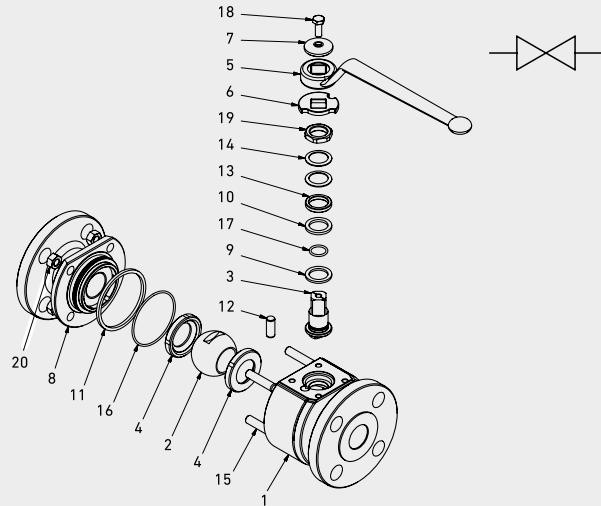

| POS | DESCRIPTION | Q.TY | MATERIAL           |                       | POS | DESCRIPTION   | Q.TY | MATERIAL           |                       |
|-----|-------------|------|--------------------|-----------------------|-----|---------------|------|--------------------|-----------------------|
|     |             |      | CS<br>Carbon Steel | SS<br>Stainless Steel |     |               |      | CS<br>Carbon Steel | SS<br>Stainless Steel |
| 1   | Body        | 1    | ASTM A350 LF2      | ASTM A479 Tp.316      | 11  | Flange ring   | 1    | Graphite           | Graphite              |
| 2   | Ball        | 1    | ASTM A479 Tp.316   | ASTM A479 Tp.316      | 12  | Pin           | 1    | AISI 316           | AISI 316              |
| 3   | Stem        | 1    | ASTM A479 Tp.316   | ASTM A479 Tp.316      | 13  | Press ring    | 1    | AISI 316           | AISI 316              |
| 4   | Ball seat   | 2    | RPTFE              | RPTFE                 | 14  | Spring        | 2    | AISI 316           | AISI 316              |
| 5   | Handle      | 1    | Fe37               | Fe37                  | 15  | Bolts         | 8    | ASTM A320 L7M      | ASTM A193B8MCQ2       |
| 6   | Washer      | 1    | AISI 316           | AISI 316              | 16  | Flange o-ring | 1    | FKM                | FKM                   |
| 7   | Washer      | 1    | AISI 316           | AISI 316              | 17  | Stem o-ring   | 1    | FKM                | FKM                   |
| 8   | Flange      | 1    | ASTM A350 LF2      | ASTM A479 Tp.316      | 18  | Screw         | 1    | ISO 4017 A4        | ISO 4017 A4           |
| 9   | Stem ring   | 1    | PTFE               | PTFE                  | 19  | Nut           | 1    | AISI 316           | AISI 316              |
| 10  | Up ring     | 1    | Graphite           | Graphite              | 20  | Nut           | 8    | ASTM A194 Gr.7M    | ASTM A194 Gr.8M       |



## CODE DESCRIPTION STRUCTURE

|            |                |           |             |           |            |             |              |            |           |
|------------|----------------|-----------|-------------|-----------|------------|-------------|--------------|------------|-----------|
| <b>SBF</b> | <b>ANSI600</b> | <b>2"</b> | <b>DN50</b> | <b>FB</b> | <b>LF2</b> | <b>F316</b> | <b>RPTFE</b> | <b>FKM</b> | <b>RF</b> |
|------------|----------------|-----------|-------------|-----------|------------|-------------|--------------|------------|-----------|

**Type and way of valve** \_\_\_\_\_  
SBF Split body floating bolted body

**Valves dimension of pressure (LBS)** \_\_\_\_\_

ANSI150  
ANSI300  
ANSI600  
ANSI900  
ANSI1500  
ANSI2500

**Sizes** \_\_\_\_\_  
from 1/2 to 6 inch

**Sizes** \_\_\_\_\_  
from DN13 up to DN150

**Bore** \_\_\_\_\_  
FB full bore  
RB reduce bore

**Body material** \_\_\_\_\_  
 A105\*      LF2  
 F316

**Stem material** \_\_\_\_\_  
 F316    A105\*    LF2\*    F51\*    F304\*  
 F316    A105\*    LF2\*    F51\*    F304\*


**Ball seat material** \_\_\_\_\_  
RPTFE PEEK\* POM\* DEVILON\* MET-TO-MET\*

**Adapter and stem seal material** \_\_\_\_\_  
FKM NBR\* EPDM\* MVQ\*

**Flanged** \_\_\_\_\_  
RF RTJ\* BW\* FF\*

- \*On request
- Pneumatic and electrical actuator
- Locking device

For further special requests  
please consult our technical/  
commercial service.

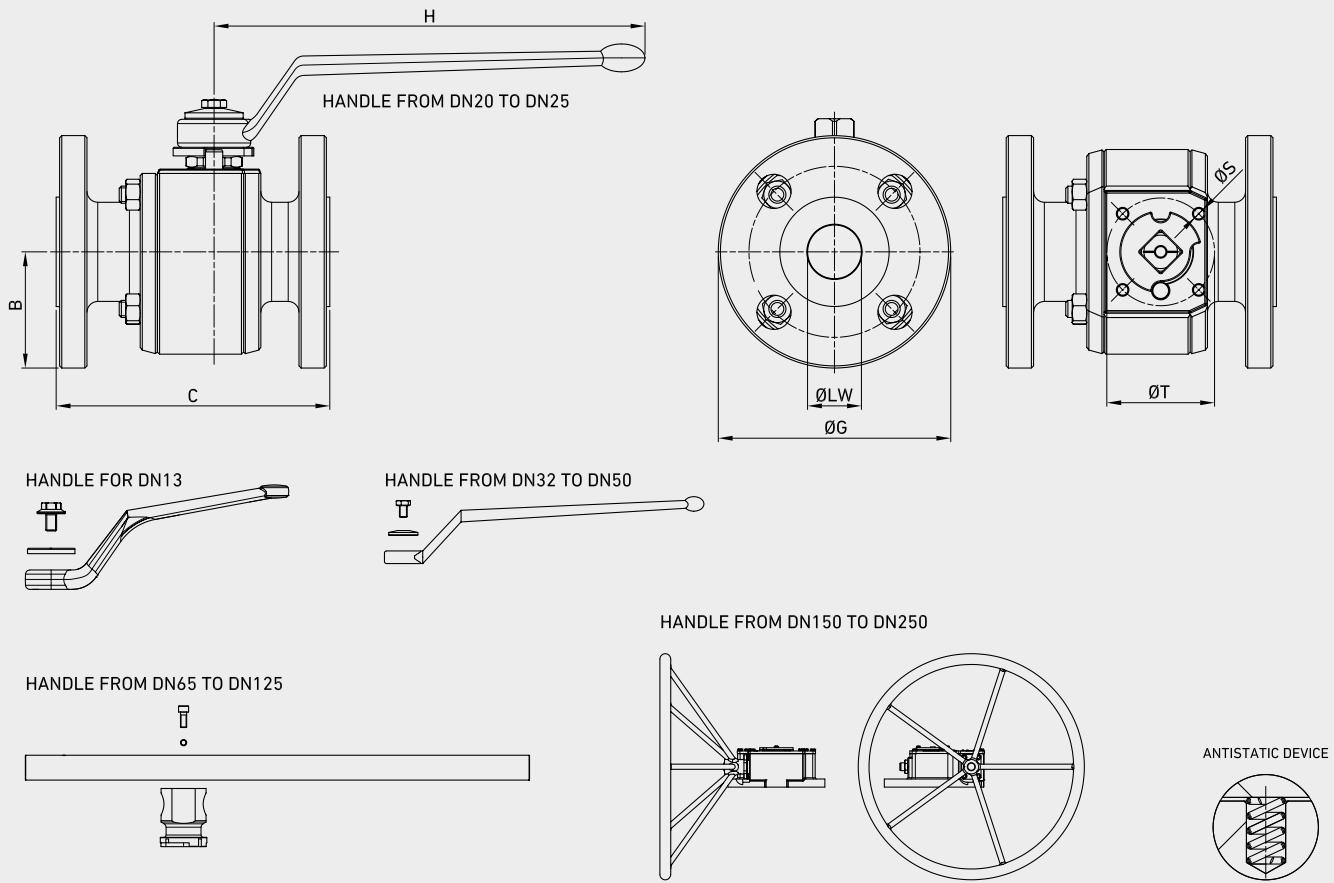

## SPLIT BODY






| COMPONENTS             | MATERIAL            | MIN / MAX TEMP. | PROVISIONS   |
|------------------------|---------------------|-----------------|--|
| <b>BODY AND FLANGE</b> | ASTM A105           | -20°+120°       | • API-6D Specification for pipeline valves   |
|                        | ASTM A105N          | -29°+120°       | • API 598 Valve inspection and test  |
|                        | ASTM A182 F316      | -60°+230°       | • ASME B.16.34 Steel valves Flanged and butt welding ends                                    |
|                        | ASTM A350 LF2       | -40°+100°       | • ASME B16.5 Steel pipe flanges and flanged fittings   |
| <b>STEM</b>            | ASTM A479 TP316     | -60°+230°       | • ASME B16.10 Face to face and end to end dimensions of ferrous valves                       |
| <b>BALL</b>            | ASTM A182 F316      | -60°+230°       | • ASTM American society for testing materials  |
| <b>STEM SEALS</b>      | PTFE                | -196°+230       | • BS 6755 Testing of valves  |
|                        | GRAPHITE            |                 | • NACE MR-01 -75 Sulfide stress cracking resistant metallic materials or oil field equipment |
| <b>BALL SEATS</b>      | RPTFE               | -196°+230°      | • UNI EN ISO 9001 quality system   |
|                        | PEEK                | -50°+250°       | • DIN/ISO 5211 for mounting  |
|                        | NYLON               | -40°+90°        | • BS-5351 steel ball valves for the petroleum, petrochemical and allied industries           |
| <b>O-RING</b>          | DEVLON              | -40°+150°       |  |
|                        | METAL-TO-METAL      | -60°+230°       |  |
|                        | NBR                 | -30°+100°       |  |
|                        | FKM                 | -40°+200°       |  |
| <b>STUD/NUT</b>        | EPDM                | -50°+150°       |  |
|                        | MVQ                 | -50°+150°       |  |
|                        | ASTM A193 B7/Gr. 2H |                 |  |
|                        | ASTM A193 B8/Gr. 8  |                 |  |
|                        | ASTM A320 L7/Gr. 7  |                 |  |

## ■ SBF ANSI 150 FB



| TYPE     | INCH  | PN  |     | B    | C RF  | C RTJ | ØG    | H     | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT      |
|----------|-------|-----|-----|------|-------|-------|-------|-------|-------|------|----------|-----|------|-------------|
| SBF A150 | 1/2   | MPa | 2   | mm   | 44,5  | 108   | 119   | 89    | 110   | 36   | M5       | F03 | 13   | - kg 2,3    |
|          |       | Psi | 290 | inch | 1,75  | 4,25  | 4,69  | 3,50  | 4,33  | 1,42 |          |     | 0,51 | - lb 5,07   |
| SBF A150 | 3/4   | MPa | 2   | mm   | 49,2  | 117   | 130   | 98,5  | 200   | 36   | M5       | F03 | 20   | - kg 3,8    |
|          |       | Psi | 290 | inch | 1,94  | 4,61  | 5,12  | 3,88  | 7,87  | 1,42 |          |     | 0,79 | - lb 8,38   |
| SBF A150 | 1     | MPa | 2   | mm   | 54    | 127   | 140   | 108   | 200   | 50   | M6       | F05 | 25   | - kg 5      |
|          |       | Psi | 290 | inch | 2,13  | 5,00  | 5,51  | 4,25  | 7,87  | 1,97 |          |     | 0,98 | - lb 11,02  |
| SBF A150 | 1 1/4 | MPa | 2   | mm   | 58,75 | 140   | 153   | 117,5 | 200   | 50   | M6       | F05 | 32   | - kg 6,7    |
|          |       | Psi | 290 | inch | 2,31  | 5,51  | 6,02  | 4,63  | 7,87  | 1,97 |          |     | 1,26 | - lb 14,77  |
| SBF A150 | 1 1/2 | MPa | 2   | mm   | 63,5  | 165   | 178   | 127   | 310   | 70   | M8       | F07 | 40   | - kg 10,5   |
|          |       | Psi | 290 | inch | 2,50  | 6,50  | 7,01  | 5,00  | 12,20 | 2,76 |          |     | 1,57 | - lb 23,15  |
| SBF A150 | 2     | MPa | 2   | mm   | 76,2  | 178   | 191   | 152,4 | 310   | 70   | M8       | F07 | 49   | - kg 13,3   |
|          |       | Psi | 290 | inch | 3,00  | 7,01  | 7,52  | 6,00  | 12,20 | 2,76 |          |     | 1,93 | - lb 29,32  |
| SBF A150 | 2 1/2 | MPa | 2   | mm   | 89    | 190   | 203   | 178   | 650   | 70   | M8       | F07 | 63   | - kg 22,7   |
|          |       | Psi | 290 | inch | 3,50  | 7,48  | 7,99  | 7,01  | 25,59 | 2,76 |          |     | 2,48 | - lb 50,04  |
| SBF A150 | 3     | MPa | 2   | mm   | 95    | 203   | 216   | 190   | 650   | 70   | M8       | F07 | 74   | - kg 29,6   |
|          |       | Psi | 290 | inch | 3,74  | 7,99  | 8,50  | 7,48  | 25,59 | 2,76 |          |     | 2,91 | - lb 65,26  |
| SBF A150 | 4     | MPa | 2   | mm   | 115   | 229   | 242   | 230   | 650   | 102  | M10      | F10 | 100  | - kg 49,6   |
|          |       | Psi | 290 | inch | 4,53  | 9,02  | 9,53  | 9,06  | 25,59 | 4,02 |          |     | 3,94 | - lb 109,35 |
| SBF A150 | 6     | MPa | 2   | mm   | 139,8 | 394   | 407   | 279,5 | -     | 125  | M12      | F12 | 150  | - kg 122    |
|          |       | Psi | 290 | inch | 5,50  | 15,51 | 16,02 | 11,00 | -     | 4,92 |          |     | 5,91 | - lb 268,96 |

## ■ SBF ANSI 150 RB

| TYPE     | INCH           | PN  |     | B    | C RF  | C RTJ | ØG    | H     | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT         |
|----------|----------------|-----|-----|------|-------|-------|-------|-------|-------|------|----------|-----|------|----------------|
| SBF A150 | 3/4x1/2        | MPa | 2   | mm   | 49,25 | 117   | 130   | 98,5  | 110   | 36   | M5       | F03 | 13   | 20 kg 3        |
|          |                | Psi | 290 | inch | 1,94  | 4,61  | 5,12  | 3,88  | 4,33  | 1,42 |          |     | 0,51 | 0,79 lb 6,61   |
| SBF A150 | 1x3/4          | MPa | 2   | mm   | 54    | 127   | 140   | 108   | 200   | 36   | M5       | F03 | 20   | 25 kg 4,2      |
|          |                | Psi | 290 | inch | 2,13  | 5,00  | 5,51  | 4,25  | 7,87  | 1,42 |          |     | 0,79 | 0,98 lb 9,26   |
| SBF A150 | 1 1/4x1        | MPa | 2   | mm   | 58,75 | 140   | 153   | 117,5 | 200   | 50   | M6       | F05 | 25   | 32 kg 5,3      |
|          |                | Psi | 290 | inch | 2,31  | 5,51  | 6,02  | 4,63  | 7,87  | 1,97 |          |     | 0,98 | 1,26 lb 11,68  |
| SBF A150 | 1 1/2x1<br>1/4 | MPa | 2   | mm   | 63,5  | 165   | 178   | 127   | 200   | 50   | M6       | F05 | 32   | 40 kg 7,9      |
|          |                | Psi | 290 | inch | 2,50  | 6,50  | 7,01  | 5,00  | 7,87  | 1,97 |          |     | 1,26 | 1,57 lb 17,42  |
| SBF A150 | 2x1 1/2        | MPa | 2   | mm   | 75    | 178   | 191   | 152,4 | 310   | 70   | M8       | F07 | 40   | 49 kg 11,7     |
|          |                | Psi | 290 | inch | 2,95  | 7,01  | 7,52  | 6,00  | 12,20 | 2,76 |          |     | 1,57 | 1,93 lb 25,79  |
| SBF A150 | 2 1/2x2        | MPa | 2   | mm   | 89    | 190   | 203   | 178   | 310   | 70   | M8       | F07 | 49   | 63 kg 17,6     |
|          |                | Psi | 290 | inch | 3,50  | 7,48  | 7,99  | 7,01  | 12,20 | 2,76 |          |     | 1,93 | 2,48 lb 38,80  |
| SBF A150 | 3x2            | MPa | 2   | mm   | 74    | 203   | 216   | 190   | 310   | 70   | M8       | F07 | 49   | 74 kg 18,9     |
|          |                | Psi | 290 | inch | 2,91  | 7,99  | 8,50  | 7,48  | 12,20 | 2,76 |          |     | 1,93 | 2,91 lb 41,67  |
| SBF A150 | 4x3            | MPa | 2   | mm   | 114,5 | 229   | 242   | 230   | 650   | 102  | M10      | F10 | 74   | 100 kg 29,1    |
|          |                | Psi | 290 | inch | 4,51  | 9,02  | 9,53  | 9,06  | 25,59 | 4,02 |          |     | 2,91 | 3,94 lb 64,15  |
| SBF A150 | 6x4            | MPa | 2   | mm   | 139,8 | 394   | 407   | 279,5 | -     | 125  | M12      | F12 | 100  | 150 kg 63      |
|          |                | Psi | 290 | inch | 5,50  | 15,51 | 16,02 | 11,00 | -     | 4,92 |          |     | 3,94 | 5,91 lb 138,89 |
| SBF A150 | 8x6            | MPa | 2   | mm   | 171,5 | 457   | 470   | 343   | -     | 125  | M12      | F12 | 150  | 201 kg 150     |
|          |                | Psi | 290 | inch | 6,75  | 17,99 | 18,50 | 13,50 | -     | 4,92 |          |     | 5,91 | 7,91 lb 330,69 |

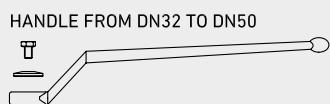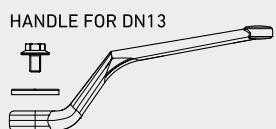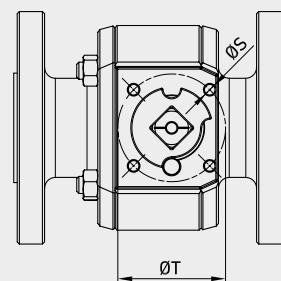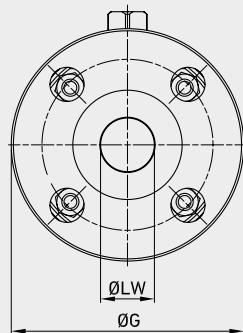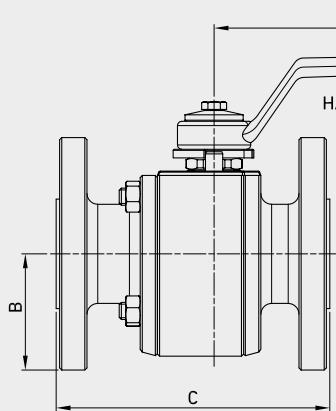

HANDLE FROM DN150 TO DN250

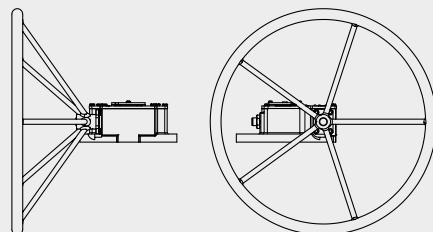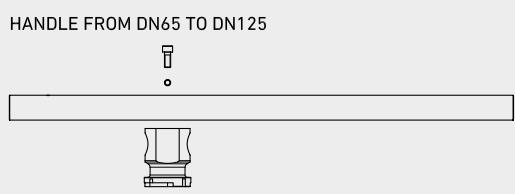


## ■ SBF ANSI 300 FB

| TYPE     | INCH  | PN  |     | B    | C RF  | C RTJ | ØG    | H     | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |           |
|----------|-------|-----|-----|------|-------|-------|-------|-------|-------|------|----------|-----|------|--------|-----------|
| SBF A300 | 1/2   | MPa | 5   | mm   | 47,6  | 140   | 151   | 95,2  | 110   | 36   | M5       | F03 | 13   | -      | kg 3      |
|          |       | Psi | 725 | inch | 1,87  | 5,51  | 5,94  | 3,75  | 4,33  | 1,42 |          |     | 0,51 | -      | lb 6,61   |
| SBF A300 | 3/4   | MPa | 5   | mm   | 58,8  | 152   | 165   | 117,5 | 200   | 50   | M6       | F05 | 20   | -      | kg 5,2    |
|          |       | Psi | 725 | inch | 2,31  | 5,98  | 6,50  | 4,63  | 7,87  | 1,97 |          |     | 0,79 | -      | lb 11,46  |
| SBF A300 | 1     | MPa | 5   | mm   | 62    | 165   | 178   | 123,8 | 200   | 50   | M6       | F05 | 25   | -      | kg 7      |
|          |       | Psi | 725 | inch | 2,44  | 6,50  | 7,01  | 4,87  | 7,87  | 1,97 |          |     | 0,98 | -      | lb 15,43  |
| SBF A300 | 1 1/4 | MPa | 5   | mm   | 66,2  | 178   | 191   | 133,3 | 310   | 50   | M6       | F05 | 32   | -      | kg 9,3    |
|          |       | Psi | 725 | inch | 2,60  | 7,01  | 7,52  | 5,25  | 12,20 | 1,97 |          |     | 1,26 | -      | lb 20,50  |
| SBF A300 | 1 1/2 | MPa | 5   | mm   | 77,8  | 190   | 203   | 155,6 | 310   | 70   | M8       | F07 | 40   | -      | kg 13,9   |
|          |       | Psi | 725 | inch | 3,06  | 7,48  | 7,99  | 6,13  | 12,20 | 2,76 |          |     | 1,57 | -      | lb 30,64  |
| SBF A300 | 2     | MPa | 5   | mm   | 82,5  | 216   | 232   | 165   | 310   | 70   | M8       | F07 | 49   | -      | kg 17,1   |
|          |       | Psi | 725 | inch | 3,25  | 8,50  | 9,13  | 6,50  | 12,20 | 2,76 |          |     | 1,93 | -      | lb 37,70  |
| SBF A300 | 2 1/2 | MPa | 5   | mm   | 95,3  | 241   | 257   | 190,5 | 650   | 70   | M8       | F07 | 63   | -      | kg 28     |
|          |       | Psi | 725 | inch | 3,75  | 9,49  | 10,12 | 7,50  | 25,59 | 2,76 |          |     | 2,48 | -      | lb 61,73  |
| SBF A300 | 3     | MPa | 5   | mm   | 105   | 283   | 299   | 210   | 650   | 70   | M8       | F07 | 74   | -      | kg 39     |
|          |       | Psi | 725 | inch | 4,13  | 11,14 | 11,77 | 8,27  | 25,59 | 2,76 |          |     | 2,91 | -      | lb 85,98  |
| SBF A300 | 4     | MPa | 5   | mm   | 127   | 305   | 321   | 254   | 650   | 102  | M10      | F10 | 100  | -      | kg 73,7   |
|          |       | Psi | 725 | inch | 5,00  | 12,01 | 12,64 | 10,00 | 25,59 | 4,02 |          |     | 3,94 | -      | lb 162,48 |
| SBF A300 | 6     | MPa | 5   | mm   | 158,8 | 403   | 419   | 317,5 | -     | 125  | M12      | F12 | 150  | -      | kg 149    |
|          |       | Psi | 725 | inch | 6,25  | 15,87 | 16,50 | 12,50 | -     | 4,92 |          |     | 5,91 | -      | lb 328,49 |

## ■ SBF ANSI 300 RB

| TYPE     | INCH           | PN  |     | B    | C RF  | C RTJ | ØG    | H     | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |           |
|----------|----------------|-----|-----|------|-------|-------|-------|-------|-------|------|----------|-----|------|--------|-----------|
| SBF A300 | 3/4x1/2        | MPa | 5   | mm   | 58,8  | 152   | 165   | 117,5 | 111   | 36   | M5       | F03 | 13   | 20     | kg 4,4    |
|          |                | Psi | 725 | inch | 2,31  | 5,98  | 6,50  | 4,63  | 4,37  | 1,42 |          |     | 0,51 | 0,79   | lb 9,70   |
| SBF A300 | 1x3/4          | MPa | 5   | mm   | 62    | 165   | 178   | 123,8 | 120   | 50   | M5       | F05 | 20   | 25     | kg 6,3    |
|          |                | Psi | 725 | inch | 2,44  | 6,50  | 7,01  | 4,87  | 4,72  | 1,97 |          |     | 0,79 | 0,98   | lb 13,89  |
| SBF A300 | 1 1/4x1        | MPa | 5   | mm   | 66,2  | 178   | 191   | 133,3 | 310   | 50   | M6       | F05 | 25   | 32     | kg 8,1    |
|          |                | Psi | 725 | inch | 2,60  | 7,01  | 7,52  | 5,25  | 12,20 | 1,97 |          |     | 0,98 | 1,26   | lb 17,86  |
| SBF A300 | 1 1/2x1<br>1/4 | MPa | 5   | mm   | 77,8  | 190   | 203   | 155,6 | 310   | 50   | M6       | F05 | 32   | 40     | kg 10,3   |
|          |                | Psi | 725 | inch | 3,06  | 7,48  | 7,99  | 6,13  | 12,20 | 1,97 |          |     | 1,26 | 1,57   | lb 22,71  |
| SBF A300 | 2x1 1/2        | MPa | 5   | mm   | 82,5  | 216   | 232   | 165   | 310   | 70   | M8       | F07 | 40   | 49     | kg 16,2   |
|          |                | Psi | 725 | inch | 3,25  | 8,50  | 9,13  | 6,50  | 12,20 | 2,76 |          |     | 1,57 | 1,93   | lb 35,71  |
| SBF A300 | 2 1/2x2        | MPa | 5   | mm   | 95,3  | 241   | 257   | 190,5 | 650   | 70   | M8       | F07 | 49   | 63     | kg 20,5   |
|          |                | Psi | 725 | inch | 3,75  | 9,49  | 10,12 | 7,50  | 25,59 | 2,76 |          |     | 1,93 | 2,48   | lb 45,19  |
| SBF A300 | 3x2            | MPa | 5   | mm   | 105   | 283   | 299   | 210   | 650   | 70   | M8       | F07 | 49   | 74     | kg 26,8   |
|          |                | Psi | 725 | inch | 4,13  | 11,14 | 11,77 | 8,27  | 25,59 | 2,76 |          |     | 1,93 | 2,91   | lb 59,08  |
| SBF A300 | 4x3            | MPa | 5   | mm   | 127   | 305   | 321   | 254   | 650   | 70   | M8       | F07 | 74   | 100    | kg 45     |
|          |                | Psi | 725 | inch | 5,00  | 12,01 | 12,64 | 10,00 | 25,59 | 2,76 |          |     | 2,91 | 3,94   | lb 99,21  |
| SBF A300 | 6x4            | MPa | 5   | mm   | 158,8 | 403   | 419   | 317,5 | -     | 102  | M10      | F10 | 100  | 150    | kg 89,5   |
|          |                | Psi | 725 | inch | 6,25  | 15,87 | 16,50 | 12,50 | -     | 4,02 |          |     | 3,94 | 5,91   | lb 197,31 |
| SBF A300 | 8x6            | MPa | 5   | mm   | 190,5 | 502   | 518   | 381   | -     | 125  | M12      | F12 | 150  | 201    | kg 183    |
|          |                | Psi | 725 | inch | 7,50  | 19,76 | 20,39 | 15,00 | -     | 4,92 |          |     | 5,91 | 7,91   | lb 403,45 |

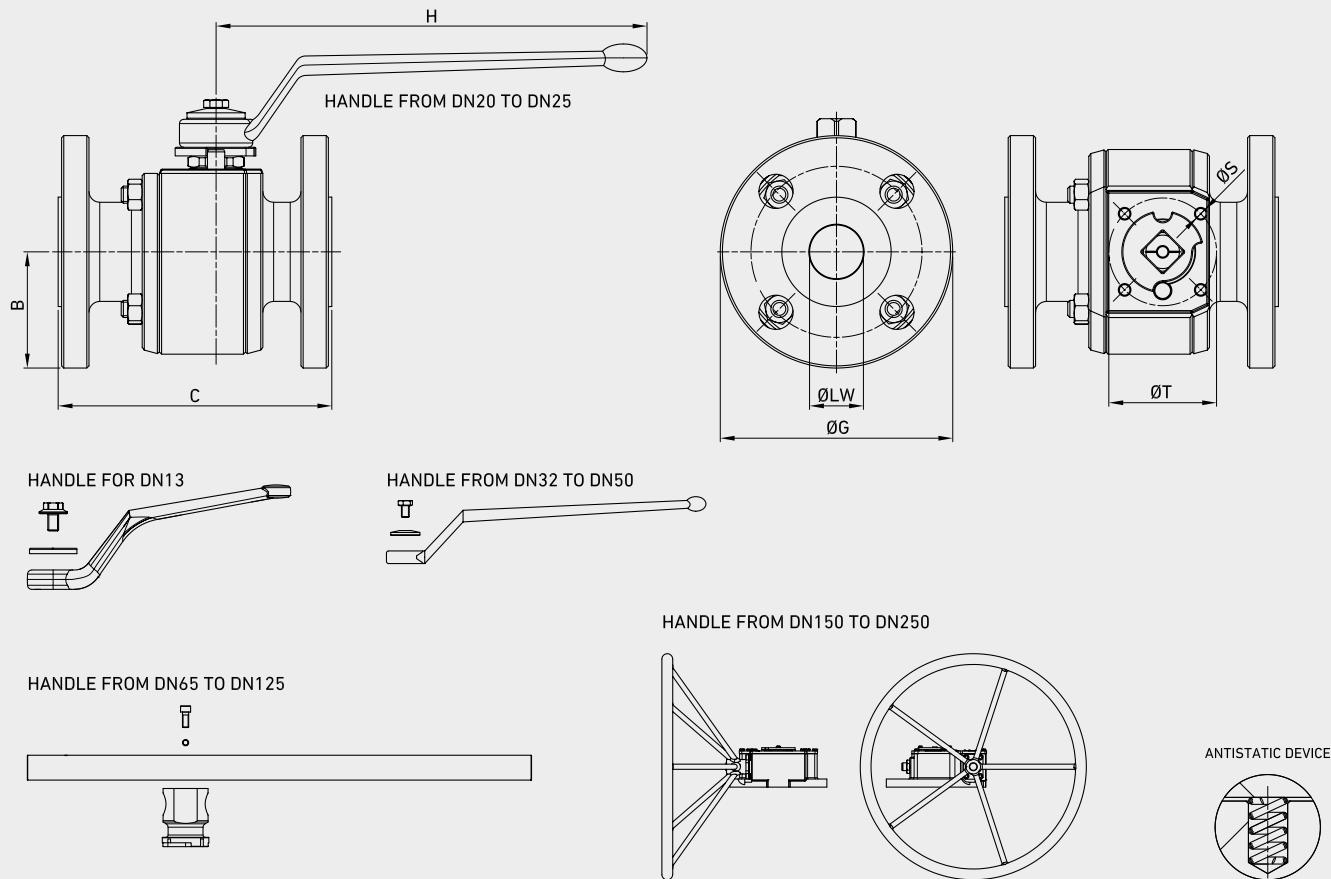

## ■ SBF ANSI 600 FB

| TYPE     | INCH  | PN  |      | B    | C RF  | C RTJ | ØG    | H     | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |           |
|----------|-------|-----|------|------|-------|-------|-------|-------|-------|------|----------|-----|------|--------|-----------|
| SBF A600 | 1/2   | MPa | 10   | mm   | 47,6  | 165   | 163   | 95,2  | 110   | 36   | M5       | F03 | 13   | -      | kg 3,4    |
|          |       | Psi | 1450 | inch | 1,87  | 6,50  | 6,42  | 3,75  | 4,33  | 1,42 |          |     | 0,51 | -      | lb 7,50   |
| SBF A600 | 3/4   | MPa | 10   | mm   | 58,8  | 190   | 190   | 117,5 | 200   | 50   | M5       | F05 | 20   | -      | kg 5,8    |
|          |       | Psi | 1450 | inch | 2,31  | 7,48  | 7,48  | 4,63  | 7,87  | 1,97 |          |     | 0,79 | -      | lb 12,79  |
| SBF A600 | 1     | MPa | 10   | mm   | 62    | 216   | 216   | 124   | 200   | 50   | M6       | F05 | 25   | -      | kg 8      |
|          |       | Psi | 1450 | inch | 2,44  | 8,50  | 8,50  | 4,88  | 7,87  | 1,97 |          |     | 0,98 | -      | lb 17,64  |
| SBF A600 | 1 1/4 | MPa | 10   | mm   | 66,8  | 229   | 229   | 133,5 | 310   | 50   | M6       | F05 | 32   | -      | kg 11,9   |
|          |       | Psi | 1450 | inch | 2,63  | 9,02  | 9,02  | 5,26  | 12,20 | 1,97 |          |     | 1,26 | -      | lb 26,23  |
| SBF A600 | 1 1/2 | MPa | 10   | mm   | 77,8  | 241   | 241   | 155,6 | 310   | 70   | M8       | F07 | 40   | -      | kg 15,7   |
|          |       | Psi | 1450 | inch | 3,06  | 9,49  | 9,49  | 6,13  | 12,20 | 2,76 |          |     | 1,57 | -      | lb 34,61  |
| SBF A600 | 2     | MPa | 10   | mm   | 82,5  | 292   | 295   | 165,1 | 310   | 70   | M8       | F07 | 49   | -      | kg 20,7   |
|          |       | Psi | 1450 | inch | 3,25  | 11,50 | 11,61 | 6,50  | 12,20 | 2,76 |          |     | 1,93 | -      | lb 45,64  |
| SBF A600 | 2 1/2 | MPa | 10   | mm   | 95,3  | 330   | 333   | 190,5 | 650   | 70   | M8       | F07 | 63   | -      | kg 40     |
|          |       | Psi | 1450 | inch | 3,75  | 12,99 | 13,11 | 7,50  | 25,59 | 2,76 |          |     | 2,48 | -      | lb 88,18  |
| SBF A600 | 3     | MPa | 10   | mm   | 105   | 356   | 359   | 210   | 650   | 70   | M8       | F07 | 74   | -      | kg 49,6   |
|          |       | Psi | 1450 | inch | 4,13  | 14,02 | 14,13 | 8,27  | 25,59 | 2,76 |          |     | 2,91 | -      | lb 109,35 |
| SBF A600 | 4     | MPa | 10   | mm   | 136,5 | 432   | 435   | 273   | 650   | 102  | M10      | F10 | 100  | -      | kg 97     |
|          |       | Psi | 1450 | inch | 5,37  | 17,01 | 17,13 | 10,75 | 25,59 | 4,02 |          |     | 3,94 | -      | lb 213,85 |

## ■ SBF ANSI 600 RB


| TYPE     | INCH           | PN  |      | B    | C RF  | C RTJ | ØG    | H     | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |           |
|----------|----------------|-----|------|------|-------|-------|-------|-------|-------|------|----------|-----|------|--------|-----------|
| SBF A600 | 3/4 x 1/2      | MPa | 10   | mm   | 58,8  | 190   | 190   | 117,5 | 110   | 36   | M5       | F03 | 13   | 20     | kg 5,2    |
|          |                | Psi | 1450 | inch | 2,31  | 7,48  | 7,48  | 4,63  | 4,33  | 1,42 |          |     | 0,51 | 0,79   | lb 11,46  |
| SBF A600 | 1x3/4          | MPa | 10   | mm   | 62    | 216   | 216   | 124   | 110   | 50   | M5       | F05 | 20   | 25     | kg 6,9    |
|          |                | Psi | 1450 | inch | 2,44  | 8,50  | 8,50  | 4,88  | 4,33  | 1,97 |          |     | 0,79 | 0,98   | lb 15,21  |
| SBF A600 | 1 1/4x1        | MPa | 10   | mm   | 66,8  | 229   | 229   | 133,5 | 310   | 50   | M6       | F05 | 25   | 32     | kg 9,5    |
|          |                | Psi | 1450 | inch | 2,63  | 9,02  | 9,02  | 5,26  | 12,20 | 1,97 |          |     | 0,98 | 1,26   | lb 20,94  |
| SBF A600 | 1 1/2x1<br>1/4 | MPa | 10   | mm   | 77,8  | 241   | 241   | 155,6 | 310   | 50   | M6       | F05 | 32   | 40     | kg 12,9   |
|          |                | Psi | 1450 | inch | 3,06  | 9,49  | 9,49  | 6,13  | 12,20 | 1,97 |          |     | 1,26 | 1,57   | lb 28,44  |
| SBF A600 | 2x1 1/2        | MPa | 10   | mm   | 82,5  | 292   | 295   | 165,1 | 310   | 70   | M8       | F07 | 40   | 49     | kg 17,3   |
|          |                | Psi | 1450 | inch | 3,25  | 11,50 | 11,61 | 6,50  | 12,20 | 2,76 |          |     | 1,57 | 1,93   | lb 38,14  |
| SBF A600 | 2 1/2x2        | MPa | 10   | mm   | 95,3  | 330   | 333   | 190,5 | 650   | 70   | M8       | F07 | 49   | 63     | kg 25,2   |
|          |                | Psi | 1450 | inch | 3,75  | 12,99 | 13,11 | 7,50  | 25,59 | 2,76 |          |     | 1,93 | 2,48   | lb 55,56  |
| SBF A600 | 3x2            | MPa | 10   | mm   | 74    | 356   | 359   | 210   | 650   | 70   | M8       | F07 | 49   | 74     | kg 36     |
|          |                | Psi | 1450 | inch | 2,91  | 14,02 | 14,13 | 8,27  | 25,59 | 2,76 |          |     | 1,93 | 2,91   | lb 79,37  |
| SBF A600 | 4x3            | MPa | 10   | mm   | 136,5 | 432   | 435   | 273   | 650   | 70   | M8       | F07 | 74   | 100    | kg 65,7   |
|          |                | Psi | 1450 | inch | 5,37  | 17,01 | 17,13 | 10,75 | 25,59 | 2,76 |          |     | 2,91 | 3,94   | lb 144,84 |
| SBF A600 | 6x4            | MPa | 10   | mm   | 177,5 | 559   | 562   | 355,5 | -     | 102  | M10      | F10 | 100  | 150    | kg 157    |
|          |                | Psi | 1450 | inch | 6,99  | 22,01 | 22,13 | 14,00 | -     | 4,02 |          |     | 3,94 | 5,91   | lb 346,13 |

## ■ SBF ANSI 900 FB

| TYPE     | INCH  | PN  |      | B    | C RF  | C RTJ | ØG    | H     | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |           |
|----------|-------|-----|------|------|-------|-------|-------|-------|-------|------|----------|-----|------|--------|-----------|
| SBF A600 | 1/2   | MPa | 10   | mm   | 47,6  | 165   | 163   | 95,2  | 110   | 36   | M5       | F03 | 13   | -      | kg 3,4    |
|          |       | Psi | 1450 | inch | 1,87  | 6,50  | 6,42  | 3,75  | 4,33  | 1,42 |          |     | 0,51 | -      | lb 7,50   |
| SBF A600 | 3/4   | MPa | 10   | mm   | 58,8  | 190   | 190   | 117,5 | 200   | 50   | M5       | F05 | 20   | -      | kg 5,8    |
|          |       | Psi | 1450 | inch | 2,31  | 7,48  | 7,48  | 4,63  | 7,87  | 1,97 |          |     | 0,79 | -      | lb 12,79  |
| SBF A600 | 1     | MPa | 10   | mm   | 62    | 216   | 216   | 124   | 200   | 50   | M6       | F05 | 25   | -      | kg 8      |
|          |       | Psi | 1450 | inch | 2,44  | 8,50  | 8,50  | 4,88  | 7,87  | 1,97 |          |     | 0,98 | -      | lb 17,64  |
| SBF A600 | 1 1/4 | MPa | 10   | mm   | 66,8  | 229   | 229   | 133,5 | 310   | 50   | M6       | F05 | 32   | -      | kg 11,9   |
|          |       | Psi | 1450 | inch | 2,63  | 9,02  | 9,02  | 5,26  | 12,20 | 1,97 |          |     | 1,26 | -      | lb 26,23  |
| SBF A600 | 1 1/2 | MPa | 10   | mm   | 77,8  | 241   | 241   | 155,6 | 310   | 70   | M8       | F07 | 40   | -      | kg 15,7   |
|          |       | Psi | 1450 | inch | 3,06  | 9,49  | 9,49  | 6,13  | 12,20 | 2,76 |          |     | 1,57 | -      | lb 34,61  |
| SBF A600 | 4     | MPa | 10   | mm   | 136,5 | 432   | 435   | 273   | 650   | 102  | M10      | F10 | 100  | -      | kg 97     |
|          |       | Psi | 1450 | inch | 5,37  | 17,01 | 17,13 | 10,75 | 25,59 | 4,02 |          |     | 3,94 | -      | lb 213,85 |

## ■ SBF ANSI 900 RB

| TYPE     | INCH           | PN  |      | B    | C RF | C RTJ | ØG    | H    | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |          |
|----------|----------------|-----|------|------|------|-------|-------|------|-------|------|----------|-----|------|--------|----------|
| SBF A900 | 3/4x1/2        | MPa | 15   | mm   | 65   | 229   | 229   | 130  | 110   | 36   | M5       | F03 | 13   | 20     | kg 7,5   |
|          |                | Psi | 2175 | inch | 2,56 | 9,02  | 9,02  | 5,12 | 4,33  | 1,42 |          |     | 0,51 | 0,79   | lb 16,53 |
| SBF A900 | 1x3/4          | MPa | 15   | mm   | 74,5 | 254   | 254   | 149  | 110   | 50   | M6       | F05 | 19   | 25     | kg 10,3  |
|          |                | Psi | 2175 | inch | 2,93 | 10,00 | 10,00 | 5,87 | 4,33  | 1,97 |          |     | 0,75 | 0,98   | lb 22,71 |
| SBF A900 | 1 1/4x1        | MPa | 15   | mm   | 79,5 | 279   | 279   | 159  | 310   | 50   | M6       | F05 | 25   | 32     | kg 11,8  |
|          |                | Psi | 2175 | inch | 3,13 | 10,98 | 10,98 | 6,26 | 12,20 | 1,97 |          |     | 0,98 | 1,26   | lb 26,01 |
| SBF A900 | 1 1/2x1<br>1/4 | MPa | 15   | mm   | 89   | 305   | 305   | 178  | 310   | 70   | M8       | F07 | 32   | 38     | kg 15,6  |
|          |                | Psi | 2175 | inch | 3,50 | 12,01 | 12,01 | 7,01 | 12,20 | 2,76 |          |     | 1,26 | 1,50   | lb 34,39 |
| SBF A900 | 2x1 1/2        | MPa | 15   | mm   | 108  | 368   | 371   | 216  | 310   | 70   | M8       | F07 | 38   | 49     | kg 35,6  |
|          |                | Psi | 2175 | inch | 4,25 | 14,49 | 14,61 | 8,50 | 12,20 | 2,76 |          |     | 1,50 | 1,93   | lb 78,48 |
| SBF A900 | 2 1/2x2        | MPa | 15   | mm   | 122  | 419   | 422   | 244  | 650   | 102  | M10      | F10 | 49   | 63     | kg 44,5  |
|          |                | Psi | 2175 | inch | 4,80 | 16,50 | 16,61 | 9,61 | 25,59 | 4,02 |          |     | 1,93 | 2,48   | lb 98,11 |

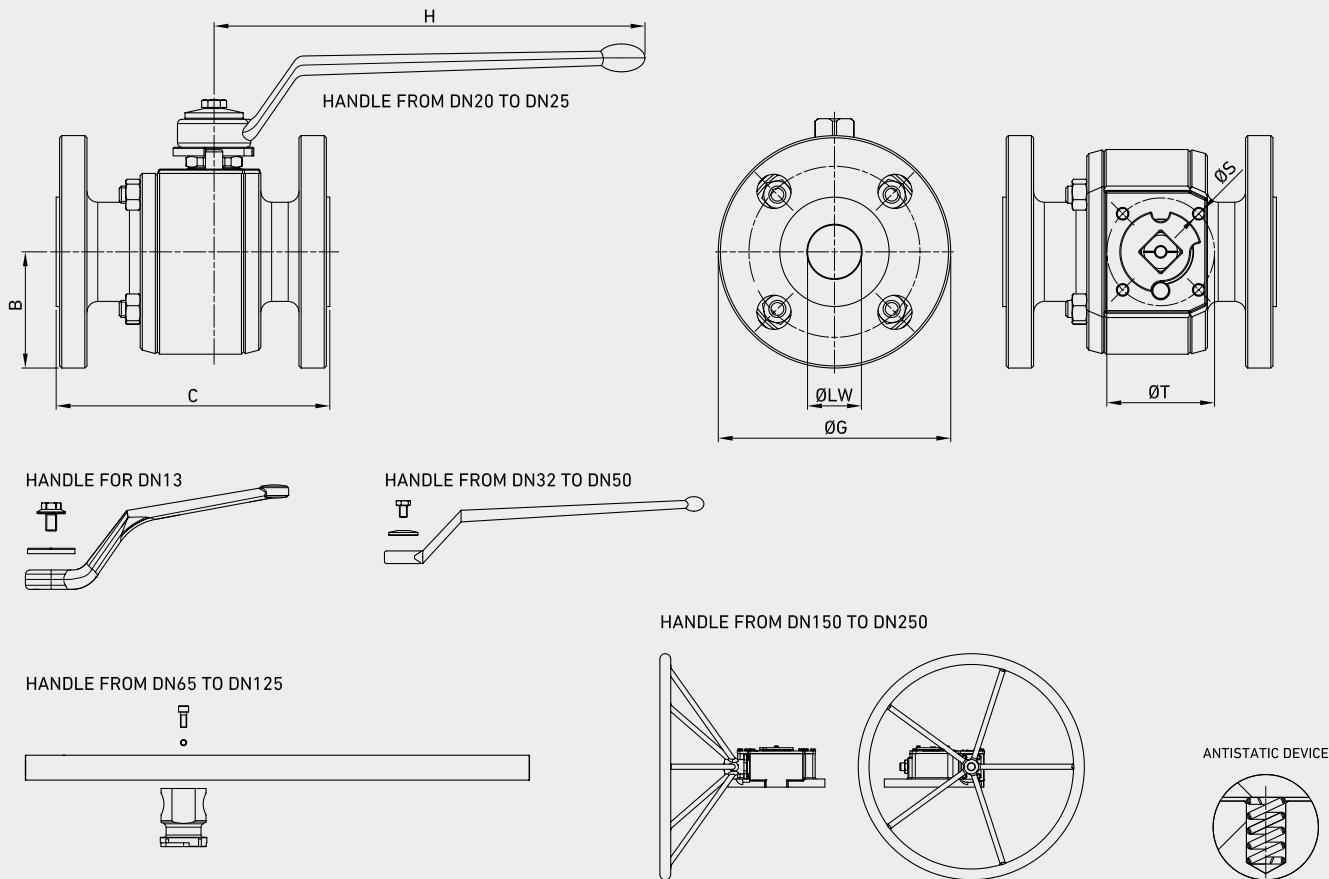

## ■ SBF ANSI 1500 FB

| TYPE      | INCH  | PN  |      | B    | C RF  | C RTJ | ØG    | H    | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |          |
|-----------|-------|-----|------|------|-------|-------|-------|------|-------|------|----------|-----|------|--------|----------|
| SBF A1500 | 1/2   | MPa | 25   | mm   | 60,5  | 216   | 216   | 121  | 110   | 36   | M5       | F03 | 13   | -      | kg 6     |
|           |       | Psi | 3625 | inch | 2,38  | 8,50  | 8,50  | 4,76 | 4,33  | 1,42 |          |     | 0,51 | -      | lb 13,23 |
| SBF A1500 | 3/4   | MPa | 25   | mm   | 65    | 229   | 229   | 130  | 110   | 50   | M6       | F05 | 19   | -      | kg 9,3   |
|           |       | Psi | 3625 | inch | 2,56  | 9,02  | 9,02  | 5,12 | 4,33  | 1,97 |          |     | 0,75 | -      | lb 20,50 |
| SBF A1500 | 1     | MPa | 25   | mm   | 74,5  | 254   | 254   | 149  | 200   | 50   | M6       | F05 | 25   | -      | kg 12,5  |
|           |       | Psi | 3625 | inch | 2,93  | 10,00 | 10,00 | 5,87 | 7,87  | 1,97 |          |     | 0,98 | -      | lb 27,56 |
| SBF A1500 | 1 1/4 | MPa | 25   | mm   | 79,5  | 279   | 279   | 159  | 310   | 70   | M8       | F07 | 32   | -      | kg 14,3  |
|           |       | Psi | 3625 | inch | 3,13  | 10,98 | 10,98 | 6,26 | 12,20 | 2,76 |          |     | 1,26 | -      | lb 31,53 |
| SBF A1500 | 1 1/2 | MPa | 25   | mm   | 89    | 305   | 305   | 178  | 310   | 70   | M8       | F07 | 38   | -      | kg 18,5  |
|           |       | Psi | 3625 | inch | 3,50  | 12,01 | 12,01 | 7,01 | 12,20 | 2,76 |          |     | 1,50 | -      | lb 40,79 |
| SBF A1500 | 2     | MPa | 25   | mm   | 107,5 | 368   | 371   | 215  | 310   | 70   | M8       | F07 | 49   | -      | kg 40    |
|           |       | Psi | 3625 | inch | 4,23  | 14,49 | 14,61 | 8,46 | 12,20 | 2,76 |          |     | 1,93 | -      | lb 88,18 |

## ■ SBF ANSI 1500 RB

| TYPE      | INCH           | PN  |      | B    | C RF | C RTJ | ØG    | H    | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |          |
|-----------|----------------|-----|------|------|------|-------|-------|------|-------|------|----------|-----|------|--------|----------|
| SBF A1500 | 3/4x1/2        | MPa | 25   | mm   | 65   | 229   | 229   | 130  | 110   | 50   | M5       | F03 | 13   | 20     | kg 7,5   |
|           |                | Psi | 3625 | inch | 2,56 | 9,02  | 9,02  | 5,12 | 4,33  | 1,97 |          |     | 0,51 | 0,79   | lb 16,53 |
| SBF A1500 | 1x3/4          | MPa | 25   | mm   | 74,5 | 254   | 254   | 149  | 110   | 50   | M6       | F05 | 19   | 25     | kg 10,3  |
|           |                | Psi | 3625 | inch | 2,93 | 10,00 | 10,00 | 5,87 | 4,33  | 1,97 |          |     | 0,75 | 0,98   | lb 22,71 |
| SBF A1500 | 1 1/4x1        | MPa | 25   | mm   | 79,5 | 279   | 279   | 159  | 310   | 50   | M6       | F05 | 25   | 32     | kg 11,8  |
|           |                | Psi | 3625 | inch | 3,13 | 10,98 | 10,98 | 6,26 | 12,20 | 1,97 |          |     | 0,98 | 1,26   | lb 26,01 |
| SBF A1500 | 1 1/2x1<br>1/4 | MPa | 25   | mm   | 89   | 305   | 305   | 178  | 310   | 70   | M8       | F07 | 32   | 38     | kg 15,6  |
|           |                | Psi | 3625 | inch | 3,50 | 12,01 | 12,01 | 7,01 | 12,20 | 2,76 |          |     | 1,26 | 1,50   | lb 34,39 |
| SBF A1500 | 2x1 1/2        | MPa | 25   | mm   | 108  | 368   | 371   | 216  | 310   | 70   | M8       | F07 | 38   | 49     | kg 35,6  |
|           |                | Psi | 3625 | inch | 4,25 | 14,49 | 14,61 | 8,50 | 12,20 | 2,76 |          |     | 1,50 | 1,93   | lb 78,48 |
| SBF A1500 | 2 1/2x2        | MPa | 25   | mm   | 122  | 419   | 422   | 244  | 650   | 102  | M10      | F10 | 49   | 63     | kg 44,5  |
|           |                | Psi | 3625 | inch | 4,80 | 16,50 | 16,61 | 9,61 | 25,59 | 4,02 |          |     | 1,93 | 2,48   | lb 98,11 |

## ■ SBF ANSI 2500 FB

| TYPE      | INCH  | PN  |      | B    | C RF  | C RTJ | ØG    | H    | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |           |
|-----------|-------|-----|------|------|-------|-------|-------|------|-------|------|----------|-----|------|--------|-----------|
| SBF A2500 | 1/2   | MPa | 42   | mm   | 66,5  | 264   | 264   | 133  | 110   | 50   | M6       | F05 | 13   | -      | kg 12,3   |
|           |       | Psi | 6090 | inch | 2,62  | 10,39 | 10,39 | 5,24 | 4,33  | 1,97 |          |     | 0,51 | -      | lb 27,12  |
| SBF A2500 | 3/4   | MPa | 42   | mm   | 70    | 273   | 273   | 140  | 110   | 50   | M6       | F05 | 19   | -      | kg 15,3   |
|           |       | Psi | 6090 | inch | 2,76  | 10,75 | 10,75 | 5,51 | 4,33  | 1,97 |          |     | 0,75 | -      | lb 33,73  |
| SBF A2500 | 1     | MPa | 42   | mm   | 79,5  | 308   | 308   | 159  | 110   | 70   | M8       | F07 | 25   | -      | kg 22,3   |
|           |       | Psi | 6090 | inch | 3,13  | 12,13 | 12,13 | 6,26 | 4,33  | 2,76 |          |     | 0,98 | -      | lb 49,16  |
| SBF A2500 | 1 1/4 | MPa | 42   | mm   | 92    | 356   | 359   | 184  | 310   | 70   | M8       | F07 | 32   | -      | kg 23,5   |
|           |       | Psi | 6090 | inch | 3,62  | 14,02 | 14,13 | 7,24 | 12,20 | 2,76 |          |     | 1,26 | -      | lb 51,81  |
| SBF A2500 | 1 1/2 | MPa | 42   | mm   | 101,5 | 387   | 390   | 203  | 310   | 70   | M8       | F07 | 38   | -      | kg 29,5   |
|           |       | Psi | 6090 | inch | 4,00  | 15,24 | 15,35 | 7,99 | 12,20 | 2,76 |          |     | 1,50 | -      | lb 65,04  |
| SBF A2500 | 2     | MPa | 42   | mm   | 117,5 | 451   | 454   | 235  | 310   | 102  | M10      | F10 | 42   | -      | kg 55,6   |
|           |       | Psi | 6090 | inch | 4,63  | 17,76 | 17,87 | 9,25 | 12,20 | 4,02 |          |     | 1,65 | -      | lb 122,58 |

## ■ SBF ANSI 2500 RB

| TYPE      | INCH           | PN  |      | B    | C RF  | C RTJ | ØG    | H     | ØT    | ØS   | ISO 5211 | ØLW | ØLW1 | WEIGHT |           |
|-----------|----------------|-----|------|------|-------|-------|-------|-------|-------|------|----------|-----|------|--------|-----------|
| SBF A2500 | 3/4x1/2        | MPa | 42   | mm   | 70    | 273   | 273   | 140   | 110   | 50   | M6       | F05 | 13   | 20     | kg 11,5   |
|           |                | Psi | 6090 | inch | 2,76  | 10,75 | 10,75 | 5,51  | 4,33  | 1,97 |          |     | 0,51 | 0,79   | lb 25,35  |
| SBF A2500 | 1x3/4          | MPa | 42   | mm   | 79,5  | 308   | 308   | 159   | 110   | 50   | M6       | F05 | 19   | 25     | kg 16,5   |
|           |                | Psi | 6090 | inch | 3,13  | 12,13 | 12,13 | 6,26  | 4,33  | 1,97 |          |     | 0,75 | 0,98   | lb 36,38  |
| SBF A2500 | 1 1/4x1        | MPa | 42   | mm   | 92    | 356   | 359   | 184   | 310   | 70   | M8       | F07 | 25   | 32     | kg 18,6   |
|           |                | Psi | 6090 | inch | 3,62  | 14,02 | 14,13 | 7,24  | 12,20 | 2,76 |          |     | 0,98 | 1,26   | lb 41,01  |
| SBF A2500 | 1 1/2x1<br>1/4 | MPa | 42   | mm   | 101,5 | 387   | 390   | 203   | 310   | 70   | M8       | F07 | 32   | 38     | kg 24,2   |
|           |                | Psi | 6090 | inch | 4,00  | 15,24 | 15,35 | 7,99  | 12,20 | 2,76 |          |     | 1,26 | 1,50   | lb 53,35  |
| SBF A2500 | 2x1 1/2        | MPa | 42   | mm   | 117,5 | 451   | 454   | 235   | 310   | 102  | M10      | F10 | 38   | 42     | kg 52,3   |
|           |                | Psi | 6090 | inch | 4,63  | 17,76 | 17,87 | 9,25  | 12,20 | 4,02 |          |     | 1,50 | 1,65   | lb 115,30 |
| SBF A2500 | 2 1/2x2        | MPa | 42   | mm   | 133,5 | 508   | 511   | 267   | 650   | 102  | M10      | F07 | 42   | 52     | kg 58,5   |
|           |                | Psi | 6090 | inch | 5,26  | 20,00 | 20,12 | 10,51 | 25,59 | 4,02 |          |     | 1,65 | 2,05   | lb 128,97 |



## SBT

## SPLIT BODY TRUNNION

Edition. 21.0


## CS Carbon Steel

## SS Stainless Steel

## • CS, SS, DSS, ALLOY (Forged)

- Type: ball valve Split Body Trunnion
- Sizes: from DN20 up to DN900
- Pressure: ANSI 150-2500
- Temperature: from -50° up to +200° (depending on materials selected)

## STANDARD COMPOSITION OF VALVE

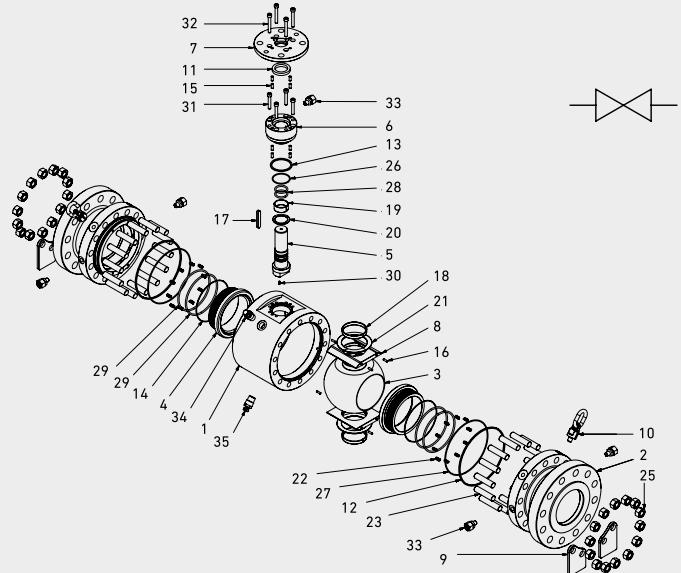

| POS | DESCRIPTION               | CS                     | SS                     |
|-----|---------------------------|------------------------|------------------------|
|     |                           | Carbon Steel           | Stainless Steel        |
| 1   | Body                      | ASTM A350 LF2          | ASTM A182 F316         |
| 2   | Closure                   | ASTM A350 LF2          | ASTM A182 F316         |
| 3   | Ball                      | ASTM A182 F316         | ASTM A182 F316         |
| 4   | Seat                      | ASTM A479 Tp.316/RPTFE | ASTM A479 Tp.316/RPTFE |
| 5   | Stem                      | ASTM A479 Tp.316       | ASTM A479 Tp.316       |
| 6   | Bonnet                    | ASTM A350 LF2          | ASTM A479 Tp.316       |
| 7   | Cover Plate               | ASTM A350 LF2          | ASTM A479 Tp.316       |
| 8   | Spacer                    | ASTM A516 Gr.70        | ASTM A240 Tp.316       |
| 9   | Valve Support             | ASTM A516 Gr.70        | ASTM A516 Gr.70        |
| 10  | Eyebolt                   | Gr.80                  | Gr.80                  |
| 11  | Stem Gasket               | Graphite               | Graphite               |
| 12  | Seat Gasket               | Graphite               | Graphite               |
| 13  | Body/Bonnet Gasket S.W.T. | Graphite+316L          | Graphite+316L          |
| 14  | Body/Flange Gasket S.W.T. | Graphite+316L          | Graphite+316L          |
| 15  | Body/Bonnet/Cover Pin     | 100Cr6                 | 100Cr6                 |
| 16  | Spacer Pin                | 100Cr6                 | 100Cr6                 |
| 17  | Stem Key                  | C70                    | C70                    |
| 18  | Ball Bushing              | AISI 316 + N.F.C.      | AISI 316 + N.F.C.      |

| POS | DESCRIPTION              | CS                | SS                 |
|-----|--------------------------|-------------------|--------------------|
|     |                          | Carbon Steel      | Stainless Steel    |
| 19  | Stem Bushing             | AISI 316 + N.F.C. | AISI 316 + N.F.C.  |
| 20  | Stem Thrust Washer       | AISI 316 + N.F.C. | AISI 316 + N.F.C.  |
| 21  | Ball Thrust Washer       | AISI 316 + N.F.C. | AISI 316 + N.F.C.  |
| 22  | Spring Inconel           | INCONEL X750      | INCONEL X750       |
| 23  | Stud                     | ASTM A320 L7M     | ASTM A193 B8M Cl.2 |
| 24  | Support/Lifting Lug Stud | ASTM A320 L7M     | ASTM A193 B8M Cl.2 |
| 25  | Nut                      | ASTM A194 Gr.7M   | ASTM A194 Gr.8M    |
| 26  | Body/Bonnet o-ring       | FKM               | FKM                |
| 27  | Body/Flange o-ring       | FKM               | FKM                |
| 28  | Stem o-ring              | FKM               | FKM                |
| 29  | Seat o-ring              | FKM               | FKM                |
| 30  | Antistatic Device        | INCONEL X750      | ASTM A479 Tp.316   |
| 31  | Bonnet T.C.E.I.          | ASTM A320 L7M     | ASTM A193 B8M Cl.2 |
| 32  | Cover Plate T.C.E.I.     | ASTM A320 L7M     | ASTM A193 B8M Cl.2 |
| 33  | Stem Injection           | ASTM A479 Tp.316  | ASTM A479 Tp.316   |
| 34  | Drain Plug               | ASTM A479 Tp.316  | ASTM A479 Tp.316   |
| 35  | Vent Bleeder             | ASTM A479 Tp.316  | ASTM A479 Tp.316   |



ALSO AVAILABLE IN FULLY  
WELDED VERSION

## CODE DESCRIPTION STRUCTURE

|            |                |             |             |           |            |             |              |            |           |
|------------|----------------|-------------|-------------|-----------|------------|-------------|--------------|------------|-----------|
| <b>SBT</b> | <b>ANSI600</b> | <b>3/4"</b> | <b>DN50</b> | <b>FB</b> | <b>LF2</b> | <b>F316</b> | <b>RPTFE</b> | <b>FKM</b> | <b>RF</b> |
|------------|----------------|-------------|-------------|-----------|------------|-------------|--------------|------------|-----------|

**Type and way of valve** \_\_\_\_\_  
SBT Split body trunnion bolted body

**Valves dimension of pressure (LBS)** \_\_\_\_\_  
ANSI150  
ANSI300  
ANSI600  
ANSI900  
ANSI1500  
ANSI2500

**Sizes** \_\_\_\_\_  
from 3/4" to 36"

**Sizes** \_\_\_\_\_  
from DN20 to DN900

**Bore** \_\_\_\_\_  
FB full bore  
RB reduce bore

**Body material** \_\_\_\_\_  
● A105\* LF2  
● F316

**Stem material** \_\_\_\_\_  
● F316 F51\*  
● F316 F51\*

**Ball seat material** \_\_\_\_\_  
RPTFE PEEK\* NYLON\* DEVLON\* MET-TO-MET\*


**Adapter and stem seal material** \_\_\_\_\_  
FKM NBR\* EPDM\* MVQ\*

**Flanged** \_\_\_\_\_  
RF RTJ\* BW\* FF\*

\*On request

- Lever
- Gear
- Pneumatic and electrical actuator
- Locking device

For further special requests  
please consult our technical/  
commercial service.

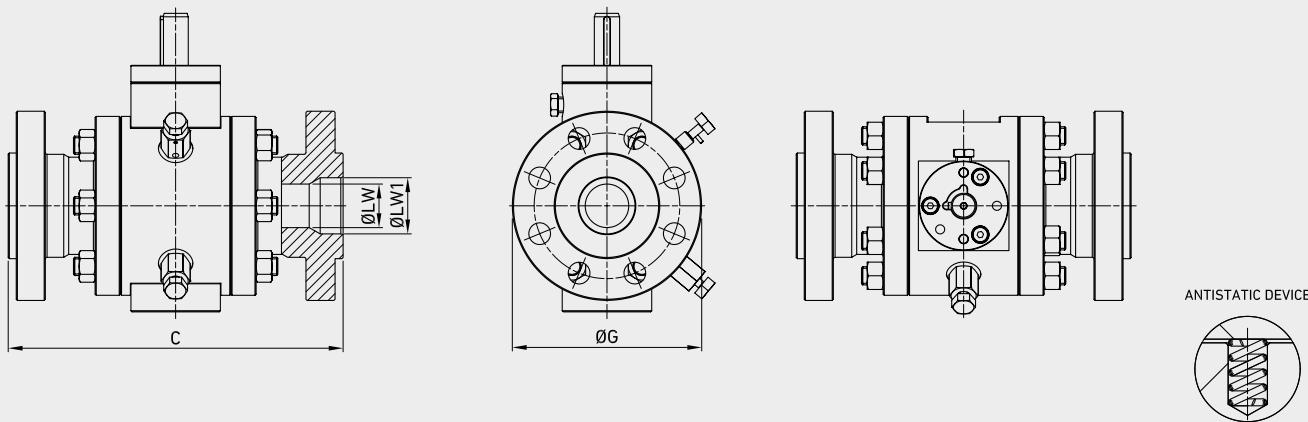

## ■ SBT ANSI 150 FB




| TYPE     | INCH  | PN      | ØLW       | ØLW1 | C RF | C RTJ | ØG    |
|----------|-------|---------|-----------|------|------|-------|-------|
| SBT A150 | 2     | MPa 2   | mm 49     | -    | 178  | 191   | 150   |
|          |       | Psi 290 | inch 1,93 | -    | 7,01 | 7,52  | 5,91  |
| SBT A150 | 2 1/2 | MPa 2   | mm 62     | -    | 191  | 203   | 180   |
|          |       | Psi 290 | inch 2,44 | -    | 7,52 | 7,99  | 7,09  |
| SBT A150 | 3     | MPa 2   | mm 74     | -    | 203  | 216   | 190,5 |
|          |       | Psi 290 | inch 2,91 | -    | 7,99 | 8,50  | 7,50  |
| SBT A150 | 4     | MPa 2   | mm 100    | -    | 229  | 241   | 229   |
|          |       | Psi 290 | inch 3,94 | -    | 9,02 | 9,49  | 9,02  |

## ■ SBT ANSI 150 RB

| TYPE     | INCH    | PN      | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|----------|---------|---------|-----------|------|-------|-------|-------|
| SBT A150 | 2x1 1/2 | MPa 2   | mm 38     | 49   | 178   | 191   | 150   |
|          |         | Psi 290 | inch 1,50 | 1,93 | 7,01  | 7,52  | 5,91  |
| SBT A150 | 3x2     | MPa 2   | mm 49     | 74   | 203   | 216   | 190   |
|          |         | Psi 290 | inch 1,93 | 2,91 | 7,99  | 8,50  | 7,48  |
| SBT A150 | 4x3     | MPa 2   | mm 74     | 100  | 229   | 241   | 229   |
|          |         | Psi 290 | inch 2,91 | 3,94 | 9,02  | 9,49  | 9,02  |
| SBT A150 | 6x4     | MPa 2   | mm 100    | 150  | 394   | 406   | 280   |
|          |         | Psi 290 | inch 3,94 | 5,91 | 15,51 | 15,98 | 11,02 |


## ■ SPLIT BODY

| COMPONENTS      |                     | MATERIAL        | MIN / MAX TEMP. | PROVISIONS |
|-----------------|---------------------|-----------------|-----------------|------------|
| BODY AND FLANGE |                     | ASTM A105       | -20°+120°       |            |
|                 |                     | ASTM A105N      | -29°+120°       |            |
|                 |                     | ASTM A182 F316  | -60°+230°       |            |
|                 |                     | ASTM A350 LF2   | -40°+100°       |            |
| STEM            |                     | ASTM A479 TP316 | -60°+230°       |            |
| BALL            |                     | ASTM A182 F316  | -60°+230°       |            |
| STEM SEALS      | PTFE                |                 | -196°+230       |            |
|                 | GRAPHITE            |                 |                 |            |
| BALL SEATS      | RPTFE               |                 | -196°+230°      |            |
|                 | PEEK                |                 | -50°+250°       |            |
|                 | NYLON               |                 | -40°+90°        |            |
|                 | DEVILON             |                 | -40°+150°       |            |
| O-RING          | METAL-TO-METAL      |                 | -60°+230°       |            |
|                 | NBR                 |                 | -30°+100°       |            |
|                 | FKM                 |                 | -40°+200°       |            |
|                 | EPDM                |                 | -50°+150°       |            |
| STUD/NUT        | MVQ                 |                 | -50°+150°       |            |
|                 | ASTM A193 B7/GR. 2H |                 |                 |            |
|                 | ASTM A 193 B8/GR. 8 |                 |                 |            |
|                 | ASTM A320 L7/GR. 7  |                 |                 |            |

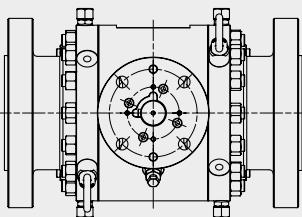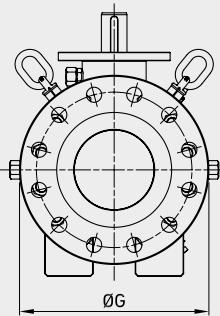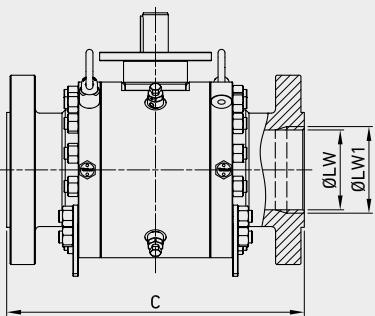

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE



## ■ SBT ANSI 150 FB




| TYPE    | INCH | PN      | ØLW        | ØLW1 | C RF  | C RTJ  | ØG    |
|---------|------|---------|------------|------|-------|--------|-------|
| SBTA150 | 6    | MPa 2   | mm 150     | -    | 394   | 406    | 280   |
|         |      | Psi 290 | inch 5,91  | -    | 15,51 | 15,98  | 11,02 |
| SBTA150 | 8    | MPa 2   | mm 201     | -    | 457   | 470    | 345   |
|         |      | Psi 290 | inch 7,91  | -    | 17,99 | 18,50  | 13,58 |
| SBTA150 | 10   | MPa 2   | mm 252     | -    | 533   | 546    | 405   |
|         |      | Psi 290 | inch 9,92  | -    | 20,98 | 21,50  | 15,94 |
| SBTA150 | 12   | MPa 2   | mm 303     | -    | 610   | 622    | 485   |
|         |      | Psi 290 | inch 11,93 | -    | 24,02 | 699,00 | 19,09 |
| SBTA150 | 14   | MPa 2   | mm 334     | -    | 689   | 699    | 533,5 |
|         |      | Psi 290 | inch 13,15 | -    | 27,13 | 27,52  | 21,00 |
| SBTA150 | 16   | MPa 2   | mm 385     | -    | 762   | 775    | 597   |
|         |      | Psi 290 | inch 15,16 | -    | 30,00 | 30,51  | 23,50 |
| SBTA150 | 18   | MPa 2   | mm 436     | -    | 864   | 876    | 635   |
|         |      | Psi 290 | inch 17,17 | -    | 34,02 | 34,49  | 25,00 |
| SBTA150 | 20   | MPa 2   | mm 487     | -    | 914   | 927    | 698,5 |
|         |      | Psi 290 | inch 19,17 | -    | 35,98 | 36,50  | 27,50 |
| SBTA150 | 22   | MPa 2   | mm 538     | -    | -     | -      | 750*  |
|         |      | Psi 290 | inch 21,18 | -    | -     | -      | 29,53 |
| SBTA150 | 24   | MPa 2   | mm 589     | -    | 1067  | 1080   | 813   |
|         |      | Psi 290 | inch 23,19 | -    | 42,01 | 42,52  | 32,01 |
| SBTA150 | 26   | MPa 2   | mm 635     | -    | 1143  | -      | -     |
|         |      | Psi 290 | inch 25,00 | -    | 45,00 | -      | -     |
| SBTA150 | 28   | MPa 2   | mm 686     | -    | 1245  | -      | -     |
|         |      | Psi 290 | inch 27,01 | -    | 49,02 | -      | -     |
| SBTA150 | 30   | MPa 2   | mm 737     | -    | 1295  | -      | -     |
|         |      | Psi 290 | inch 29,02 | -    | 50,98 | -      | -     |
| SBTA150 | 32   | MPa 2   | mm 781     | -    | 1372  | -      | -     |
|         |      | Psi 290 | inch 30,75 | -    | 54,02 | -      | -     |
| SBTA150 | 34   | MPa 2   | mm 832     | -    | 1473  | -      | -     |
|         |      | Psi 290 | inch 32,76 | -    | 57,99 | -      | -     |
| SBTA150 | 36   | MPa 2   | mm 876     | -    | 1524  | -      | -     |
|         |      | Psi 290 | inch 34,49 | -    | 60,00 | -      | -     |

\*According to MSS SP44

## ■ SBT ANSI 150 RB

| TYPE    | INCH  | PN      | ØLW        | ØLW1  | C RF  | C RTJ | ØG    |
|---------|-------|---------|------------|-------|-------|-------|-------|
| SBTA150 | 8x6   | MPa 2   | mm 150     | 201   | 457   | 470   | 345   |
|         |       | Psi 290 | inch 5,91  | 7,91  | 17,99 | 18,50 | 13,58 |
| SBTA150 | 10x8  | MPa 2   | mm 201     | 252   | 533   | 546   | 405   |
|         |       | Psi 290 | inch 7,91  | 9,92  | 20,98 | 21,50 | 15,94 |
| SBTA150 | 12x10 | MPa 2   | mm 252     | 303   | 610   | 622   | 485   |
|         |       | Psi 290 | inch 9,92  | 11,93 | 24,02 | 24,49 | 19,09 |
| SBTA150 | 14x10 | MPa 2   | mm 252     | 334   | 689   | 699   | 533,5 |
|         |       | Psi 290 | inch 9,92  | 13,15 | 27,13 | 27,52 | 21,00 |
| SBTA150 | 16x12 | MPa 2   | mm 303     | 385   | 762   | 775   | 597   |
|         |       | Psi 290 | inch 11,93 | 15,16 | 30,00 | 30,51 | 23,50 |
| SBTA150 | 18x14 | MPa 2   | mm 334     | 436   | 864   | 876   | 635   |
|         |       | Psi 290 | inch 13,15 | 17,17 | 34,02 | 34,49 | 25,00 |
| SBTA150 | 20x16 | MPa 2   | mm 385     | 487   | 914   | 927   | 698,5 |
|         |       | Psi 290 | inch 15,16 | 19,17 | 35,98 | 36,50 | 27,50 |
| SBTA150 | 24x20 | MPa 2   | mm 487     | 589   | 1067  | 1080  | 813   |
|         |       | Psi 290 | inch 19,17 | 23,19 | 42,01 | 42,52 | 32,01 |
| SBTA150 | 28x24 | MPa 2   | mm 589     | 684   | 1245  | -     | 925*  |
|         |       | Psi 290 | inch 23,19 | 26,93 | 49,02 | -     | 36,42 |
| SBTA150 | 30x24 | MPa 2   | mm 591     | 737   | 1295  | -     | -     |
|         |       | Psi 290 | inch 23,27 | 29,02 | 50,98 | -     | -     |
| SBTA150 | 36x30 | MPa 2   | mm 737     | 876   | 1524  | -     | -     |
|         |       | Psi 290 | inch 29,02 | 34,49 | 60,00 | -     | -     |

\*According to MSS SP44

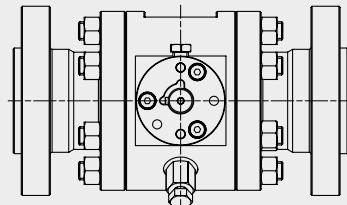
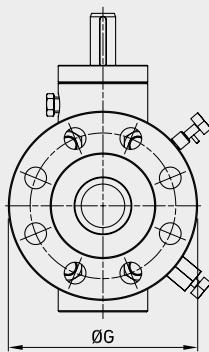
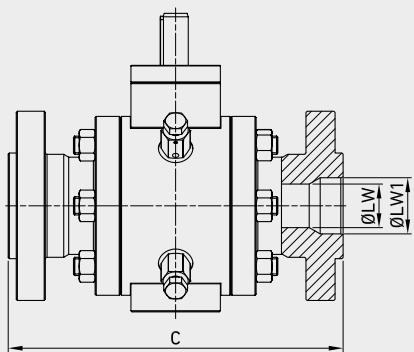


## **■ SBT ANSI 300 FB**

| TYPE     | INCH  | PN      | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|----------|-------|---------|-----------|------|-------|-------|-------|
| SBT A300 | 2     | MPa 5   | mm 49     | -    | 216   | 232   | 165   |
|          |       | Psi 725 | inch 1,93 | -    | 8,50  | 9,13  | 6,50  |
| SBT A300 | 2 1/2 | MPa 5   | mm 62     | -    | 241   | 257   | 190   |
|          |       | Psi 725 | inch 2,44 | -    | 9,49  | 10,12 | 7,48  |
| SBT A300 | 3     | MPa 5   | mm 74     | -    | 283   | 298   | 210   |
|          |       | Psi 725 | inch 2,91 | -    | 11,14 | 11,73 | 8,27  |
| SBT A300 | 4     | MPa 5   | mm 100    | -    | 305   | 321   | 255   |
|          |       | Psi 725 | inch 3,94 | -    | 12,01 | 12,64 | 10,04 |


## **■ SBT ANSI 300 RB**

| TYPE     | INCH    | PN      | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|----------|---------|---------|-----------|------|-------|-------|-------|
| SBT A300 | 2x1 1/2 | MPa 5   | mm 38     | 49   | 216   | 232   | 165   |
|          |         | Psi 725 | inch 1,50 | 1,93 | 8,50  | 9,13  | 6,50  |
| SBT A300 | 3x2     | MPa 5   | mm 49     | 74   | 283   | 298   | 210   |
|          |         | Psi 725 | inch 1,93 | 2,91 | 11,14 | 11,73 | 8,27  |
| SBT A300 | 4x3     | MPa 5   | mm 74     | 100  | 305   | 321   | 255   |
|          |         | Psi 725 | inch 2,91 | 3,94 | 12,01 | 12,64 | 10,04 |
| SBT A300 | 6x4     | MPa 5   | mm 100    | 150  | 403   | 419   | 320   |
|          |         | Psi 725 | inch 3,94 | 5,91 | 15,87 | 16,50 | 12,60 |

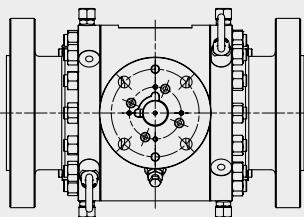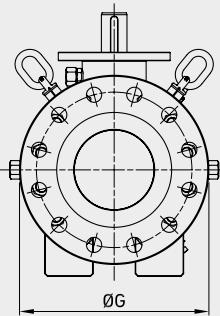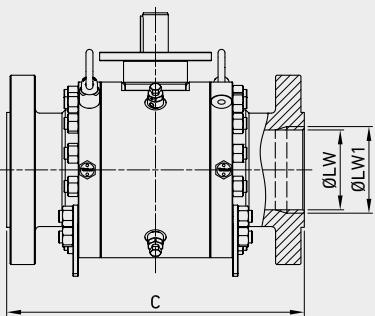

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE



## ■ SBT ANSI 300 FB




| TYPE     | INCH | PN      | ØLW        | ØLW1 | C RF  | C RTJ | ØG    |
|----------|------|---------|------------|------|-------|-------|-------|
| SBT A300 | 6    | MPa 5   | mm 150     | -    | 403   | 419   | 320   |
|          |      | Psi 725 | inch 5,91  | -    | 15,87 | 16,50 | 12,60 |
| SBT A300 | 8    | MPa 5   | mm 201     | -    | 502   | 518   | 380   |
|          |      | Psi 725 | inch 7,91  | -    | 19,76 | 20,39 | 14,96 |
| SBT A300 | 10   | MPa 5   | mm 252     | -    | 568   | 584   | 445   |
|          |      | Psi 725 | inch 9,92  | -    | 22,36 | 22,99 | 17,52 |
| SBT A300 | 12   | MPa 5   | mm 303     | -    | 648   | 664   | 520   |
|          |      | Psi 725 | inch 11,93 | -    | 25,51 | 26,14 | 20,47 |
| SBT A300 | 14   | MPa 5   | mm 334     | -    | 762   | 778   | 584,5 |
|          |      | Psi 725 | inch 13,15 | -    | 30,00 | 30,63 | 23,01 |
| SBT A300 | 16   | MPa 5   | mm 385     | -    | 838   | 854   | 648   |
|          |      | Psi 725 | inch 15,16 | -    | 32,99 | 33,62 | 25,51 |
| SBT A300 | 18   | MPa 5   | mm 436     | -    | 914   | 930   | 711,5 |
|          |      | Psi 725 | inch 17,17 | -    | 35,98 | 36,61 | 28,01 |
| SBT A300 | 20   | MPa 5   | mm 487     | -    | 991   | 1010  | 775   |
|          |      | Psi 725 | inch 19,17 | -    | 39,02 | 39,76 | 30,51 |
| SBT A300 | 22   | MPa 5   | mm 538     | -    | 1092  | 1114  | 840*  |
|          |      | Psi 725 | inch 21,18 | -    | 42,99 | 43,86 | 33,07 |
| SBT A300 | 24   | MPa 5   | mm 589     | -    | 1143  | 1165  | 914,5 |
|          |      | Psi 725 | inch 23,19 | -    | 45,00 | 45,87 | 36,00 |
| SBT A300 | 26   | MPa 5   | mm 635     | -    | 1245  | 1270  | -     |
|          |      | Psi 725 | inch 25,00 | -    | 49,02 | 50,00 | -     |
| SBT A300 | 28   | MPa 5   | mm 686     | -    | 1346  | 1372  | -     |
|          |      | Psi 725 | inch 27,01 | -    | 52,99 | 54,02 | -     |
| SBT A300 | 30   | MPa 5   | mm 737     | -    | 1397  | 1422  | -     |
|          |      | Psi 725 | inch 29,02 | -    | 55,00 | 55,98 | -     |
| SBT A300 | 32   | MPa 5   | mm 781     | -    | 1524  | 1553  | -     |
|          |      | Psi 725 | inch 30,75 | -    | 60,00 | 61,14 | -     |
| SBT A300 | 34   | MPa 5   | mm 832     | -    | 1626  | 1654  | -     |
|          |      | Psi 725 | inch 32,76 | -    | 64,02 | 65,12 | -     |
| SBT A300 | 36   | MPa 5   | mm 876     | -    | 1727  | 1756  | -     |
|          |      | Psi 725 | inch 34,49 | -    | 67,99 | 69,13 | -     |

\*According to MSS SP44

## ■ SBT ANSI 300 RB

| TYPE     | INCH  | PN      | ØLW        | ØLW1  | C RF  | C RTJ | ØG    |
|----------|-------|---------|------------|-------|-------|-------|-------|
| SBT A300 | 8x6   | MPa 5   | mm 150     | 201   | 502   | 518   | 380   |
|          |       | Psi 725 | inch 5,91  | 7,91  | 19,76 | 20,39 | 14,96 |
| SBT A300 | 10x8  | MPa 5   | mm 201     | 252   | 568   | 584   | 445   |
|          |       | Psi 725 | inch 7,91  | 9,92  | 22,36 | 22,99 | 17,52 |
| SBT A300 | 12x10 | MPa 5   | mm 252     | 303   | 648   | 664   | 520   |
|          |       | Psi 725 | inch 9,92  | 11,93 | 25,51 | 26,14 | 20,47 |
| SBT A300 | 14x10 | MPa 5   | mm 252     | 334   | 762   | 778   | 584,5 |
|          |       | Psi 725 | inch 9,92  | 13,15 | 30,00 | 30,63 | 23,01 |
| SBT A300 | 16x12 | MPa 5   | mm 303     | 385   | 838   | 854   | 648   |
|          |       | Psi 725 | inch 11,93 | 15,16 | 32,99 | 33,62 | 25,51 |
| SBT A300 | 18x14 | MPa 5   | mm 334     | 436   | 914   | 930   | 711,5 |
|          |       | Psi 725 | inch 13,15 | 17,17 | 35,98 | 36,61 | 28,01 |
| SBT A300 | 20x16 | MPa 5   | mm 385     | 487   | 991   | 1010  | 775   |
|          |       | Psi 725 | inch 15,16 | 19,17 | 39,02 | 39,76 | 30,51 |
| SBT A300 | 24x20 | MPa 5   | mm 487     | 589   | 1143  | 1165  | 914,5 |
|          |       | Psi 725 | inch 19,17 | 23,19 | 45,00 | 45,87 | 36,00 |
| SBT A300 | 28x24 | MPa 5   | mm 589     | 684   | 1346  | 1372  | 1035* |
|          |       | Psi 725 | inch 23,19 | 26,93 | 52,99 | 54,02 | 40,75 |
| SBT A300 | 30x24 | MPa 5   | mm 591     | 737   | 1397  | 1422  | -     |
|          |       | Psi 725 | inch 23,27 | 29,02 | 55,00 | 55,98 | -     |
| SBT A300 | 36x30 | MPa 5   | mm 737     | 876   | 1727  | 1756  | -     |
|          |       | Psi 725 | inch 29,02 | 34,49 | 67,99 | 69,13 | -     |

\*According to MSS SP44

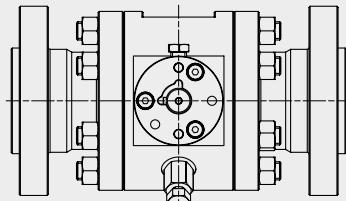
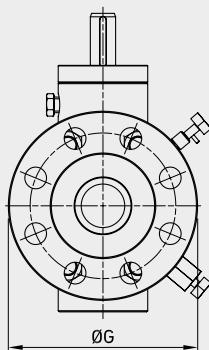
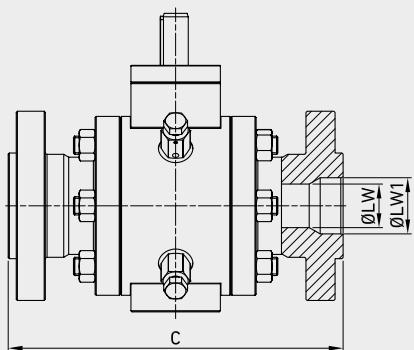


## **■ SBT ANSI 600 FB**

| TYPE     | INCH  | PN       | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|----------|-------|----------|-----------|------|-------|-------|-------|
| SBT A600 | 2     | MPa 10   | mm 49     | -    | 292   | 295   | 165   |
|          |       | Psi 1450 | inch 1,93 | -    | 11,50 | 11,61 | 6,50  |
| SBT A600 | 2 1/2 | MPa 10   | mm 62     | -    | 330   | 333   | 190   |
|          |       | Psi 1450 | inch 2,44 | -    | 12,99 | 13,11 | 7,48  |
| SBT A600 | 3     | MPa 10   | mm 74     | -    | 356   | 359   | 210   |
|          |       | Psi 1450 | inch 2,91 | -    | 14,02 | 14,13 | 8,27  |
| SBT A600 | 4     | MPa 10   | mm 100    | -    | 432   | 435   | 275   |
|          |       | Psi 1450 | inch 3,94 | -    | 17,01 | 17,13 | 10,83 |


## **■ SBT ANSI 600 RB**

| TYPE     | INCH    | PN       | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|----------|---------|----------|-----------|------|-------|-------|-------|
| SBT A600 | 2x1 1/2 | MPa 10   | mm 38     | 49   | 292   | 295   | 165   |
|          |         | Psi 1450 | inch 1,50 | 1,93 | 11,50 | 11,61 | 6,50  |
| SBT A600 | 3x2     | MPa 10   | mm 49     | 74   | 356   | 359   | 210   |
|          |         | Psi 1450 | inch 1,93 | 2,91 | 14,02 | 14,13 | 8,27  |
| SBT A600 | 4x3     | MPa 10   | mm 74     | 100  | 432   | 435   | 275   |
|          |         | Psi 1450 | inch 2,91 | 3,94 | 17,01 | 17,13 | 10,83 |
| SBT A600 | 6x4     | MPa 10   | mm 100    | 150  | 559   | 562   | 355   |
|          |         | Psi 1450 | inch 3,94 | 5,91 | 22,01 | 22,13 | 13,98 |

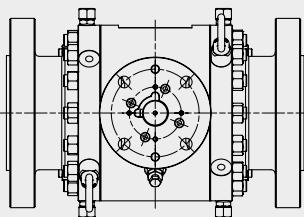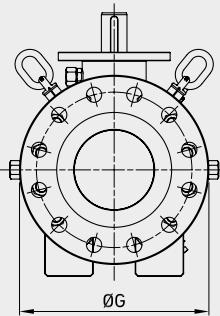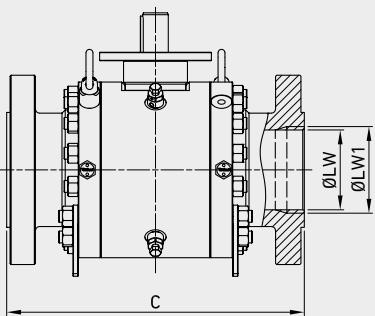

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE



## ■ SBT ANSI 600 FB




| TYPE     | INCH | PN       | ØLW        | ØLW1 | C RF  | C RTJ | ØG    |
|----------|------|----------|------------|------|-------|-------|-------|
| SBT A600 | 6    | MPa 10   | mm 150     | -    | 559   | 562   | 35    |
|          |      | Psi 1450 | inch 5,91  | -    | 22,01 | 22,13 | 1,38  |
| SBT A600 | 8    | MPa 10   | mm 201     | -    | 660   | 664   | 420   |
|          |      | Psi 1450 | inch 7,91  | -    | 25,98 | 26,14 | 16,54 |
| SBT A600 | 10   | MPa 10   | mm 252     | -    | 787   | 791   | 510   |
|          |      | Psi 1450 | inch 9,92  | -    | 30,98 | 31,14 | 20,08 |
| SBT A600 | 12   | MPa 10   | mm 303     | -    | 838   | 841   | 560   |
|          |      | Psi 1450 | inch 11,93 | -    | 32,99 | 33,11 | 22,05 |
| SBT A600 | 14   | MPa 10   | mm 334     | -    | 889   | 892   | 603,5 |
|          |      | Psi 1450 | inch 13,15 | -    | 35,00 | 35,12 | 23,76 |
| SBT A600 | 16   | MPa 10   | mm 385     | -    | 991   | 994   | 686   |
|          |      | Psi 1450 | inch 15,16 | -    | 39,02 | 39,13 | 27,01 |
| SBT A600 | 18   | MPa 10   | mm 436     | -    | 1092  | 1095  | 743   |
|          |      | Psi 1450 | inch 17,17 | -    | 42,99 | 43,11 | 29,25 |
| SBT A600 | 20   | MPa 10   | mm 487     | -    | 1194  | 1200  | 813   |
|          |      | Psi 1450 | inch 19,17 | -    | 47,01 | 47,24 | 32,01 |
| SBT A600 | 22   | MPa 10   | mm 538     | -    | 1295  | 1305  | 870*  |
|          |      | Psi 1450 | inch 21,18 | -    | 50,98 | 51,38 | 34,25 |
| SBT A600 | 24   | MPa 10   | mm 589     | -    | 1397  | 1407  | 940   |
|          |      | Psi 1450 | inch 23,19 | -    | 55,00 | 55,39 | 37,01 |
| SBT A600 | 26   | MPa 10   | mm 635     | -    | 1448  | 1461  | -     |
|          |      | Psi 1450 | inch 25,00 | -    | 57,01 | 57,52 | -     |
| SBT A600 | 28   | MPa 10   | mm 686     | -    | 1549  | 1562  | -     |
|          |      | Psi 1450 | inch 27,01 | -    | 60,98 | 61,50 | -     |
| SBT A600 | 30   | MPa 10   | mm 737     | -    | 1651  | 1664  | -     |
|          |      | Psi 1450 | inch 29,02 | -    | 65,00 | 65,51 | -     |
| SBT A600 | 32   | MPa 10   | mm 781     | -    | 1778  | 1794  | -     |
|          |      | Psi 1450 | inch 30,75 | -    | 70,00 | 70,63 | -     |
| SBT A600 | 34   | MPa 10   | mm 832     | -    | 1930  | 1946  | -     |
|          |      | Psi 1450 | inch 32,76 | -    | 75,98 | 76,61 | -     |
| SBT A600 | 36   | MPa 10   | mm 876     | -    | 2083  | 2099  | -     |
|          |      | Psi 1450 | inch 34,49 | -    | 82,01 | 82,64 | -     |

\*According to MSS SP44


## ■ SBT ANSI 600 RB

| TYPE     | INCH  | PN       | ØLW        | ØLW1  | C RF  | C RTJ | ØG    |
|----------|-------|----------|------------|-------|-------|-------|-------|
| SBT A600 | 8x6   | MPa 10   | mm 150     | 201   | 660   | 664   | 420   |
|          |       | Psi 1450 | inch 5,91  | 7,91  | 25,98 | 26,14 | 16,54 |
| SBT A600 | 10x8  | MPa 10   | mm 201     | 252   | 787   | 791   | 510   |
|          |       | Psi 1450 | inch 7,91  | 9,92  | 30,98 | 31,14 | 20,08 |
| SBT A600 | 12x10 | MPa 10   | mm 252     | 303   | 838   | 841   | 560   |
|          |       | Psi 1450 | inch 9,92  | 11,93 | 32,99 | 33,11 | 22,05 |
| SBT A600 | 14x10 | MPa 10   | mm 252     | 334   | 889   | 892   | 603,5 |
|          |       | Psi 1450 | inch 9,92  | 13,15 | 35,00 | 35,12 | 23,76 |
| SBT A600 | 16x12 | MPa 10   | mm 303     | 385   | 991   | 994   | 686   |
|          |       | Psi 1450 | inch 11,93 | 15,16 | 39,02 | 39,13 | 27,01 |
| SBT A600 | 18x14 | MPa 10   | mm 334     | 436   | 1092  | 1095  | 743   |
|          |       | Psi 1450 | inch 13,15 | 17,17 | 42,99 | 43,11 | 29,25 |
| SBT A600 | 20x16 | MPa 10   | mm 385     | 487   | 1194  | 1200  | 813   |
|          |       | Psi 1450 | inch 15,16 | 19,17 | 47,01 | 47,24 | 32,01 |
| SBT A600 | 24x20 | MPa 10   | mm 487     | 589   | 1397  | 1407  | 940   |
|          |       | Psi 1450 | inch 19,17 | 23,19 | 55,00 | 55,39 | 37,01 |
| SBT A600 | 28x24 | MPa 10   | mm 589     | 684   | 1549  | 1562  | 1075* |
|          |       | Psi 1450 | inch 23,19 | 26,93 | 60,98 | 61,50 | 42,32 |
| SBT A600 | 30x24 | MPa 10   | mm 591     | 737   | 1651  | 1664  | -     |
|          |       | Psi 1450 | inch 23,27 | 29,02 | 65,00 | 65,51 | -     |
| SBT A600 | 36x30 | MPa 10   | mm 737     | 876   | 2083  | 2099  | -     |
|          |       | Psi 1450 | inch 29,02 | 34,49 | 82,01 | 82,64 | -     |

\*According to MSS SP44

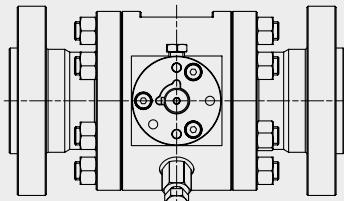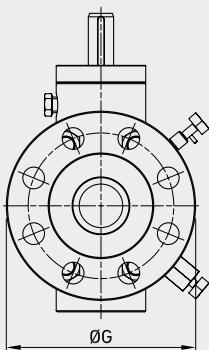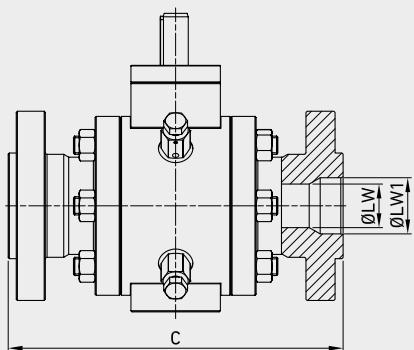

ANTISTATIC DEVICE






## ■ SBT ANSI 900 FB

| TYPE     | INCH  | PN       | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|----------|-------|----------|-----------|------|-------|-------|-------|
| SBT A900 | 2     | MPa 15   | mm 49     | -    | 368   | 371   | 215   |
|          |       | Psi 2175 | inch 1,93 | -    | 14,49 | 14,61 | 8,46  |
| SBT A900 | 2 1/2 | MPa 15   | mm 62     | -    | 419   | 422   | 245   |
|          |       | Psi 2175 | inch 2,44 | -    | 16,50 | 16,61 | 9,65  |
| SBT A900 | 3     | MPa 15   | mm 74     | -    | 381   | 384   | 240   |
|          |       | Psi 2175 | inch 2,91 | -    | 15,00 | 15,12 | 9,45  |
| SBT A900 | 4     | MPa 15   | mm 100    | -    | 457   | 460   | 290   |
|          |       | Psi 2175 | inch 3,94 | -    | 17,99 | 18,11 | 11,42 |


## ■ SBT ANSI 900 RB

| TYPE     | INCH    | PN       | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|----------|---------|----------|-----------|------|-------|-------|-------|
| SBT A900 | 2x1 1/2 | MPa 15   | mm 38     | 49   | 368   | 371   | 215   |
|          |         | Psi 2175 | inch 1,50 | 1,93 | 14,49 | 14,61 | 8,46  |
| SBT A900 | 3x2     | MPa 15   | mm 49     | 74   | 381   | 384   | 240   |
|          |         | Psi 2175 | inch 1,93 | 2,91 | 15,00 | 15,12 | 9,45  |
| SBT A900 | 4x3     | MPa 15   | mm 74     | 100  | 457   | 460   | 290   |
|          |         | Psi 2175 | inch 2,91 | 3,94 | 17,99 | 18,11 | 11,42 |
| SBT A900 | 6x4     | MPa 15   | mm 100    | 150  | 610   | 613   | 380   |
|          |         | Psi 2175 | inch 3,94 | 5,91 | 24,02 | 24,13 | 14,96 |

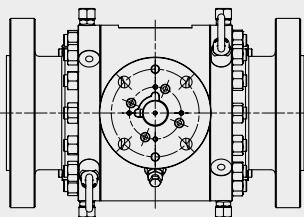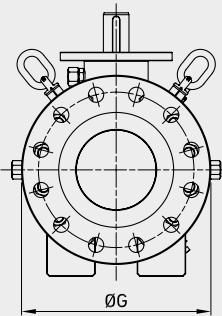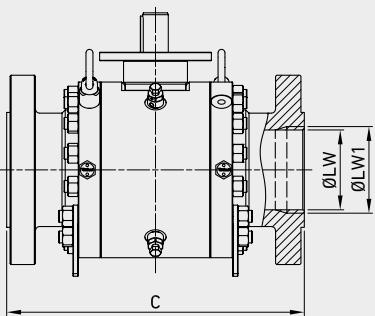

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE






## ■ SBT ANSI 900 FB


| TYPE     | INCH | PN       | ØLW        | ØLW1 | C RF  | C RTJ | ØG     |
|----------|------|----------|------------|------|-------|-------|--------|
| SBT A900 | 6    | MPa 15   | mm 150     | -    | 610   | 613   | 380    |
|          |      | Psi 2175 | inch 5,91  | -    | 24,02 | 24,13 | 14,96  |
| SBT A900 | 8    | MPa 15   | mm 201     | -    | 737   | 740   | 470    |
|          |      | Psi 2175 | inch 7,91  | -    | 29,02 | 29,13 | 18,50  |
| SBT A900 | 10   | MPa 15   | mm 252     | -    | 838   | 841   | 545    |
|          |      | Psi 2175 | inch 9,92  | -    | 32,99 | 33,11 | 21,46  |
| SBT A900 | 12   | MPa 15   | mm 303     | -    | 965   | 968   | 610    |
|          |      | Psi 2175 | inch 11,93 | -    | 37,99 | 38,11 | 24,02  |
| SBT A900 | 14   | MPa 15   | mm 322     | -    | 1029  | 1038  | 641,5  |
|          |      | Psi 2175 | inch 12,68 | -    | 40,51 | 40,87 | 25,26  |
| SBT A900 | 16   | MPa 15   | mm 373     | -    | 1130  | 1140  | 705    |
|          |      | Psi 2175 | inch 14,69 | -    | 44,49 | 44,88 | 27,76  |
| SBT A900 | 18   | MPa 15   | mm 423     | -    | 1219  | 1232  | 787,5  |
|          |      | Psi 2175 | inch 16,65 | -    | 47,99 | 48,50 | 31,00  |
| SBT A900 | 20   | MPa 15   | mm 471     | -    | 1321  | 1334  | 857,5  |
|          |      | Psi 2175 | inch 18,54 | -    | 52,01 | 52,52 | 33,76  |
| SBT A900 | 22   | MPa 15   | mm 522     | -    | -     | -     | -      |
|          |      | Psi 2175 | inch 20,55 | -    | -     | -     | -      |
| SBT A900 | 24   | MPa 15   | mm 570     | -    | 1549  | 1568  | 1041,5 |
|          |      | Psi 2175 | inch 22,44 | -    | 60,98 | 61,73 | 41,00  |
| SBT A900 | 26   | MPa 15   | mm 619     | -    | 1651  | 1673  | -      |
|          |      | Psi 2175 | inch 24,37 | -    | 65,00 | 65,87 | -      |
| SBT A900 | 28   | MPa 15   | mm 667     | -    | 1753  | 1775  | -      |
|          |      | Psi 2175 | inch 26,26 | -    | 69,02 | 69,88 | -      |
| SBT A900 | 30   | MPa 15   | mm 714     | -    | 1880  | 1902  | -      |
|          |      | Psi 2175 | inch 28,11 | -    | 74,02 | 74,88 | -      |
| SBT A900 | 32   | MPa 15   | mm 762     | -    | 2032  | 2054  | -      |
|          |      | Psi 2175 | inch 30,00 | -    | 80,00 | 80,87 | -      |
| SBT A900 | 34   | MPa 15   | mm 810     | -    | 2159  | 2188  | -      |
|          |      | Psi 2175 | inch 31,89 | -    | 85,00 | 86,14 | -      |
| SBT A900 | 36   | MPa 15   | mm 857     | -    | 2286  | 2315  | -      |
|          |      | Psi 2175 | inch 33,74 | -    | 90,00 | 91,14 | -      |

## ■ SBT ANSI 900 RB

| TYPE     | INCH  | PN       | ØLW        | ØLW1  | C RF  | C RTJ | ØG     |
|----------|-------|----------|------------|-------|-------|-------|--------|
| SBT A900 | 8x6   | MPa 15   | mm 150     | 201   | 737   | 740   | 470    |
|          |       | Psi 2175 | inch 5,91  | 7,91  | 29,02 | 29,13 | 18,50  |
| SBT A900 | 10x8  | MPa 15   | mm 201     | 252   | 838   | 841   | 545    |
|          |       | Psi 2175 | inch 7,91  | 9,92  | 32,99 | 33,11 | 21,46  |
| SBT A900 | 12x10 | MPa 15   | mm 252     | 303   | 965   | 968   | 610    |
|          |       | Psi 2175 | inch 9,92  | 11,93 | 37,99 | 38,11 | 24,02  |
| SBT A900 | 14x10 | MPa 15   | mm 252     | 322   | 1029  | 1038  | 641,5  |
|          |       | Psi 2175 | inch 9,92  | 12,68 | 40,51 | 40,87 | 25,26  |
| SBT A900 | 16x12 | MPa 15   | mm 303     | 373   | 1130  | 1140  | 705    |
|          |       | Psi 2175 | inch 11,93 | 14,69 | 44,49 | 44,88 | 27,76  |
| SBT A900 | 18x14 | MPa 15   | mm 322     | 423   | 1219  | 1232  | 787,5  |
|          |       | Psi 2175 | inch 12,68 | 16,65 | 47,99 | 48,50 | 31,00  |
| SBT A900 | 20x16 | MPa 15   | mm 373     | 471   | 1321  | 1334  | 857,5  |
|          |       | Psi 2175 | inch 14,69 | 18,54 | 52,01 | 52,52 | 33,76  |
| SBT A900 | 24x20 | MPa 15   | mm 471     | 570   | 1549  | 1568  | 1041,5 |
|          |       | Psi 2175 | inch 18,54 | 22,44 | 60,98 | 61,73 | 41,00  |
| SBT A900 | 28x24 | MPa 15   | mm 570     | 665   | -     | -     | -      |
|          |       | Psi 2175 | inch 22,44 | 26,18 | -     | -     | -      |
| SBT A900 | 30x24 | MPa 15   | mm 572     | 714   | 1880  | 1902  | -      |
|          |       | Psi 2175 | inch 22,52 | 28,11 | 74,02 | 74,88 | -      |
| SBT A900 | 36x30 | MPa 15   | mm 714     | 857   | 2286  | 2315  | -      |
|          |       | Psi 2175 | inch 28,11 | 33,74 | 90,00 | 91,14 | -      |

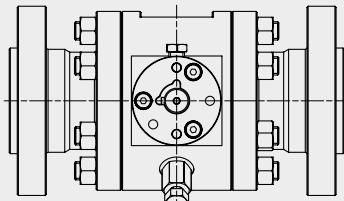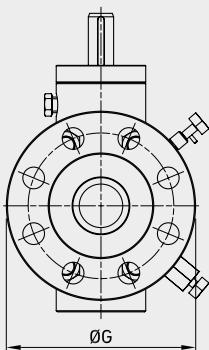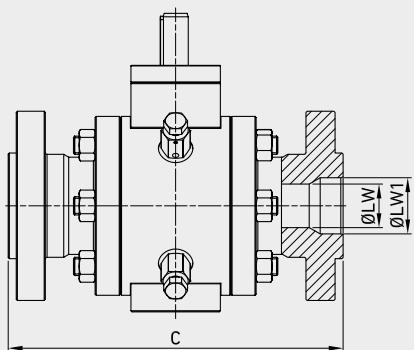

ANTISTATIC DEVICE






## **■ SBT ANSI 1500 FB**

| TYPE      | INCH  | PN       | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|-----------|-------|----------|-----------|------|-------|-------|-------|
| SBT A1500 | 2     | MPa 25   | mm 49     | -    | 368   | 371   | 215   |
|           |       | Psi 3625 | inch 1,93 | -    | 14,49 | 14,61 | 8,46  |
| SBT A1500 | 2 1/2 | MPa 25   | mm 62     | -    | 419   | 422   | 245   |
|           |       | Psi 3625 | inch 2,44 | -    | 16,50 | 16,61 | 9,65  |
| SBT A1500 | 3     | MPa 25   | mm 74     | -    | 470   | 473   | 265   |
|           |       | Psi 3625 | inch 2,91 | -    | 18,50 | 18,62 | 10,43 |
| SBT A1500 | 4     | MPa 25   | mm 100    | -    | 546   | 549   | 310   |
|           |       | Psi 3625 | inch 3,94 | -    | 21,50 | 21,61 | 12,20 |


## **■ SBT ANSI 1500 RB**

| TYPE      | INCH    | PN       | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|-----------|---------|----------|-----------|------|-------|-------|-------|
| SBT A1500 | 2x1 1/2 | MPa 25   | mm 38     | 49   | 368   | 371   | 215   |
|           |         | Psi 3625 | inch 1,50 | 1,93 | 14,49 | 14,61 | 8,46  |
| SBT A1500 | 3x2     | MPa 25   | mm 49     | 74   | 470   | 473   | 265   |
|           |         | Psi 3625 | inch 1,93 | 2,91 | 18,50 | 18,62 | 10,43 |
| SBT A1500 | 4x3     | MPa 25   | mm 74     | 100  | 546   | 549   | 310   |
|           |         | Psi 3625 | inch 2,91 | 3,94 | 21,50 | 21,61 | 12,20 |
| SBT A1500 | 6x4     | MPa 25   | mm 100    | 144  | 705   | 711   | 395   |
|           |         | Psi 3625 | inch 3,94 | 5,67 | 27,76 | 27,99 | 15,55 |

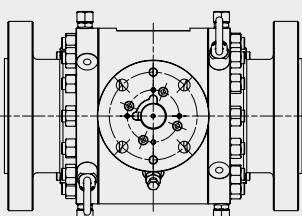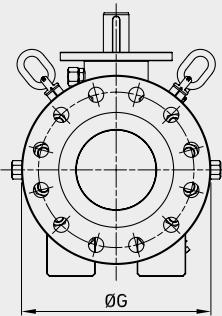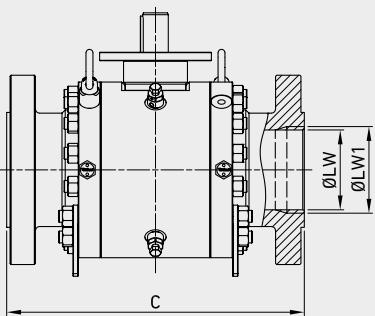

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE






## ■ SBT ANSI 1500 FB


| TYPE     | INCH | PN       | ØLW        | ØLW1 | C RF  | C RTJ | ØG     |
|----------|------|----------|------------|------|-------|-------|--------|
| SBTA1500 | 6    | MPa 25   | mm 144     | -    | 705   | 711   | 395    |
|          |      | Psi 3625 | inch 5,67  | -    | 27,76 | 27,99 | 15,55  |
| SBTA1500 | 8    | MPa 25   | mm 192     | -    | 832   | 841   | 485    |
|          |      | Psi 3625 | inch 7,56  | -    | 32,76 | 33,11 | 19,09  |
| SBTA1500 | 10   | MPa 25   | mm 239     | -    | 991   | 1000  | 585    |
|          |      | Psi 3625 | inch 9,41  | -    | 39,02 | 39,37 | 23,03  |
| SBTA1500 | 12   | MPa 25   | mm 287     | -    | 1130  | 1146  | 675    |
|          |      | Psi 3625 | inch 11,30 | -    | 44,49 | 45,12 | 26,57  |
| SBTA1500 | 14   | MPa 25   | mm 315     | -    | 1257  | 1276  | 749,5  |
|          |      | Psi 3625 | inch 12,40 | -    | 49,49 | 50,24 | 29,51  |
| SBTA1500 | 16   | MPa 25   | mm 360     | -    | 1384  | 1407  | 825,5  |
|          |      | Psi 3625 | inch 14,17 | -    | 54,49 | 55,39 | 32,50  |
| SBTA1500 | 18   | MPa 25   | mm 406     | -    | 1537  | 1559  | 914,5  |
|          |      | Psi 3625 | inch 15,98 | -    | 60,51 | 61,38 | 36,00  |
| SBTA1500 | 20   | MPa 25   | mm 454     | -    | 1664  | 1686  | 984,5  |
|          |      | Psi 3625 | inch 17,87 | -    | 65,51 | 66,38 | 38,76  |
| SBTA1500 | 22   | MPa 25   | mm 500     | -    | -     | -     | -      |
|          |      | Psi 3625 | inch 19,69 | -    | -     | -     | -      |
| SBTA1500 | 24   | MPa 25   | mm 546     | -    | -     | 1972  | 1168,5 |
|          |      | Psi 3625 | inch 21,50 | -    | -     | 77,64 | 46,00  |

## ■ SBT ANSI 1500 RB

| TYPE     | INCH  | PN       | ØLW        | ØLW1  | C RF  | C RTJ | ØG     |
|----------|-------|----------|------------|-------|-------|-------|--------|
| SBTA1500 | 8x6   | MPa 25   | mm 144     | 192   | 832   | 841   | 485    |
|          |       | Psi 3625 | inch 5,67  | 7,56  | 32,76 | 33,11 | 19,09  |
| SBTA1500 | 10x8  | MPa 25   | mm 192     | 239   | 991   | 1000  | 585    |
|          |       | Psi 3625 | inch 7,56  | 9,41  | 39,02 | 39,37 | 23,03  |
| SBTA1500 | 12x10 | MPa 25   | mm 239     | 287   | 1130  | 1146  | 675    |
|          |       | Psi 3625 | inch 9,41  | 11,30 | 44,49 | 45,12 | 26,57  |
| SBTA1500 | 14x10 | MPa 25   | mm 239     | 315   | 1257  | 1276  | 749,5  |
|          |       | Psi 3625 | inch 9,41  | 12,40 | 49,49 | 50,24 | 29,51  |
| SBTA1500 | 16x12 | MPa 25   | mm 287     | 360   | 1384  | 1407  | 825,5  |
|          |       | Psi 3625 | inch 11,30 | 14,17 | 54,49 | 55,39 | 32,50  |
| SBTA1500 | 18x14 | MPa 25   | mm 315     | 406   | 1537  | 1559  | 914,5  |
|          |       | Psi 3625 | inch 12,40 | 15,98 | 60,51 | 61,38 | 36,00  |
| SBTA1500 | 20x16 | MPa 25   | mm 360     | 454   | 1664  | 1686  | 984,5  |
|          |       | Psi 3625 | inch 14,17 | 17,87 | 65,51 | 65,67 | 38,76  |
| SBTA1500 | 24x20 | MPa 25   | mm 454     | 546   | -     | 1972  | 1168,5 |
|          |       | Psi 3625 | inch 17,87 | 21,50 | -     | 77,64 | 46,00  |
| SBTA1500 | 28x24 | MPa 25   | mm 546     | 641   | -     | -     | -      |
|          |       | Psi 3625 | inch 21,50 | 25,24 | -     | -     | -      |
| SBTA1500 | 30x24 | MPa 25   | mm 546     | 686   | -     | -     | -      |
|          |       | Psi 3625 | inch 21,50 | 27,01 | -     | -     | -      |

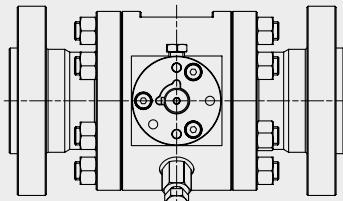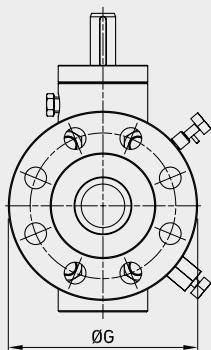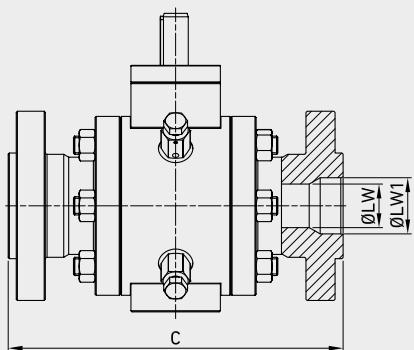

ANTISTATIC DEVICE






## ■ SBT ANSI 2500 FB

| TYPE      | INCH  | PN       | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|-----------|-------|----------|-----------|------|-------|-------|-------|
| SBT A2500 | 2     | MPa 42   | mm 42     | -    | 451   | 454   | 235   |
|           |       | Psi 6090 | inch 1,65 | -    | 17,76 | 17,87 | 9,25  |
| SBT A2500 | 2 1/2 | MPa 42   | mm 52     | -    | 508   | 514   | 265   |
|           |       | Psi 6090 | inch 2,05 | -    | 20,00 | 20,24 | 10,43 |
| SBT A2500 | 3     | MPa 42   | mm 62     | -    | 578   | 584   | 305   |
|           |       | Psi 6090 | inch 2,44 | -    | 22,76 | 22,99 | 12,01 |
| SBT A2500 | 4     | MPa 42   | mm 87     | -    | 673   | 683   | 355   |
|           |       | Psi 6090 | inch 3,43 | -    | 26,50 | 26,89 | 13,98 |


## ■ SBT ANSI 2500 RB

| TYPE      | INCH    | PN       | ØLW       | ØLW1 | C RF  | C RTJ | ØG    |
|-----------|---------|----------|-----------|------|-------|-------|-------|
| SBT A2500 | 2x1 1/2 | MPa 42   | mm 38     | 42   | 451   | 454   | 235   |
|           |         | Psi 6090 | inch 1,50 | 1,65 | 17,76 | 17,87 | 9,25  |
| SBT A2500 | 3x2     | MPa 42   | mm 42     | 62   | 578   | 584   | 305   |
|           |         | Psi 6090 | inch 1,65 | 2,44 | 22,76 | 22,99 | 12,01 |
| SBT A2500 | 4x3     | MPa 42   | mm 62     | 87   | 673   | 683   | 355   |
|           |         | Psi 6090 | inch 2,44 | 3,43 | 26,50 | 26,89 | 13,98 |
| SBT A2500 | 6x4     | MPa 42   | mm 87     | 131  | 914   | 927   | 485   |
|           |         | Psi 6090 | inch 3,43 | 5,16 | 35,98 | 36,50 | 19,09 |

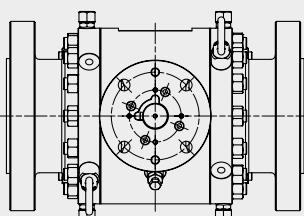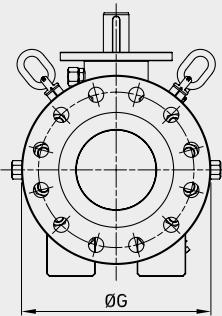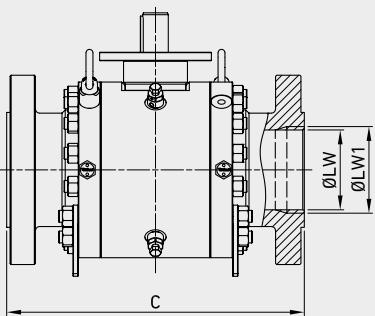

ALSO AVAILABLE IN  
FULLY WELDED VERSION

ANTISTATIC DEVICE



## ■ SBT ANSI 2500 FB

| TYPE      | INCH | PN       | ØLW        | ØLW1 | C RF  | C RTJ | ØG    |
|-----------|------|----------|------------|------|-------|-------|-------|
| SBT A2500 | 6    | MPa 42   | mm 131     | -    | 914   | 927   | 485   |
|           |      | Psi 6090 | inch 5,16  | -    | 35,98 | 36,50 | 19,09 |
| SBT A2500 | 8    | MPa 42   | mm 179     | -    | 1022  | 1038  | 550   |
|           |      | Psi 6090 | inch 7,05  | -    | 40,24 | 40,87 | 21,65 |
| SBT A2500 | 10   | MPa 42   | mm 223     | -    | 1270  | 1294  | 675   |
|           |      | Psi 6090 | inch 8,78  | -    | 50,00 | 50,94 | 26,57 |
| SBT A2500 | 12   | MPa 42   | mm 265     | -    | 1422  | 1445  | 760   |
|           |      | Psi 6090 | inch 10,43 | -    | 55,98 | 56,89 | 29,92 |
| SBT A2500 | 14   | MPa 42   | mm 292     | -    | -     | -     | -     |
|           |      | Psi 6090 | inch 11,50 | -    | -     | -     | -     |
| SBT A2500 | 16   | MPa 42   | mm 333     | -    | -     | -     | -     |
|           |      | Psi 6090 | inch 13,11 | -    | -     | -     | -     |
| SBT A2500 | 18   | MPa 42   | mm 374     | -    | -     | -     | -     |
|           |      | Psi 6090 | inch 14,72 | -    | -     | -     | -     |
| SBT A2500 | 20   | MPa 42   | mm 419     | -    | -     | -     | -     |
|           |      | Psi 6090 | inch 16,50 | -    | -     | -     | -     |

## ■ SBT ANSI 2500 RB

| TYPE      | INCH  | PN       | ØLW        | ØLW1  | C RF  | C RTJ | ØG    |
|-----------|-------|----------|------------|-------|-------|-------|-------|
| SBT A2500 | 8x6   | MPa 42   | mm 131     | 179   | 1022  | 1038  | 550   |
|           |       | Psi 6090 | inch 5,16  | 7,05  | 40,24 | 40,87 | 21,65 |
| SBT A2500 | 10x8  | MPa 42   | mm 179     | 223   | 1270  | 1292  | 675   |
|           |       | Psi 6090 | inch 7,05  | 8,78  | 50,00 | 50,87 | 26,57 |
| SBT A2500 | 12x10 | MPa 42   | mm 223     | 265   | 1422  | 1445  | 760   |
|           |       | Psi 6090 | inch 8,78  | 10,43 | 55,98 | 56,89 | 29,92 |
| SBT A2500 | 14x10 | MPa 42   | mm 223     | 292   | -     | -     | -     |
|           |       | Psi 6090 | inch 8,78  | 11,50 | -     | -     | -     |
| SBT A2500 | 16x12 | MPa 42   | mm 265     | 333   | -     | -     | -     |
|           |       | Psi 6090 | inch 10,43 | 13,11 | -     | -     | -     |
| SBT A2500 | 18x14 | MPa 42   | mm 292     | 374   | -     | -     | -     |
|           |       | Psi 6090 | inch 11,50 | 14,72 | -     | -     | -     |
| SBT A2500 | 20x16 | MPa 42   | mm 333     | 419   | -     | -     | -     |
|           |       | Psi 6090 | inch 13,11 | 16,50 | -     | -     | -     |



## DBB

## DOUBLE BLOCK AND BLEED

Edition. 21.0


CS Carbon Steel

SS Stainless Steel

## • CS, SS, DSS, ALLOY (Forged)

- Type: ball valve Double Block and Bleed
- Sizes: from DN13 up to DN200
- Pressure: ANSI 150-2500
- Temperature: from -50° up to +200° (depending on materials selected)'

## STANDARD COMPOSITION OF VALVE

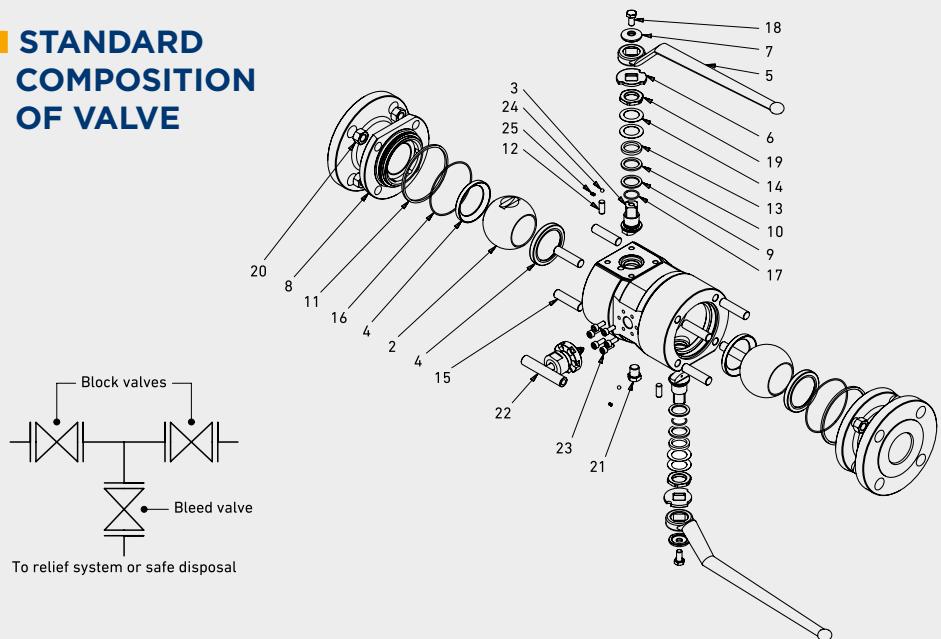

| POS | DESCRIPTION | Q.TY | MATERIAL           |                       | POS | DESCRIPTION     | Q.TY | MATERIAL           |                       |
|-----|-------------|------|--------------------|-----------------------|-----|-----------------|------|--------------------|-----------------------|
|     |             |      | CS<br>Carbon Steel | SS<br>Stainless Steel |     |                 |      | CS<br>Carbon Steel | SS<br>Stainless Steel |
| 1   | Body        | 1    | ASTM A350 LF2      | ASTM A479 Tp.316      | 13  | Stem ring       | 2    | AISI 316           | AISI 316              |
| 2   | Ball        | 2    | ASTM A479 Tp.316   | ASTM A479 Tp.316      | 14  | Spring          | 4    | AISI 316           | AISI 316              |
| 3   | Stem        | 2    | ASTM A479 Tp.316   | ASTM A479 Tp.316      | 15  | Bolts           | 8    | ASTM A320 L7M      | ASTM A193 B8M Cl2     |
| 4   | Ball seat   | 4    | RPTFE              | RPTFE                 | 16  | O-ring          | 2    | FKM                | FKM                   |
| 5   | Handle      | 2    | Fe37               | Fe37                  | 17  | O-ring          | 2    | FKM                | FKM                   |
| 6   | Washer      | 2    | AISI 316           | AISI 316              | 18  | Screw           | 2    | ISO 4017 A4        | ISO 4017 A4           |
| 7   | Washer      | 2    | AISI 316           | AISI 316              | 19  | Nut             | 2    | AISI 316           | AISI 316              |
| 8   | Flange      | 2    | ASTM A350 LF2      | ASTM A479 Tp.316      | 20  | Nut             | 8    | ASTM A194 Gr.7M    | ASTM A194 Gr.8M       |
| 9   | Stem ring   | 2    | PTFE               | PTFE                  | 21  | Plug            | 1    | AISI 316           | AISI 316              |
| 10  | Stem ring   | 2    | Graphite           | Graphite              | 22  | Bleeder bonnet  | 1    | AISI 316           | AISI 316              |
| 11  | Flange ring | 2    | Graphite           | Graphite              | 23  | Spring          | 2    | AISI 316           | AISI 316              |
| 12  | Pin         | 2    | AISI 316           | AISI 316              | 24  | Antistatic ball | 2    | AISI 316           | AISI 316              |



## CODE DESCRIPTION STRUCTURE

|            |                |           |             |           |            |             |              |            |           |
|------------|----------------|-----------|-------------|-----------|------------|-------------|--------------|------------|-----------|
| <b>DBB</b> | <b>ANSI600</b> | <b>2"</b> | <b>DN50</b> | <b>FB</b> | <b>LF2</b> | <b>F316</b> | <b>RPTFE</b> | <b>FKM</b> | <b>RF</b> |
|------------|----------------|-----------|-------------|-----------|------------|-------------|--------------|------------|-----------|

**Type and way of valve**

DBB Double block and bleed

**Valves dimension of pressure (LBS)**

ANSI150

ANSI300

ANSI600

ANSI900

ANSI1500

ANSI2500

**Sizes**

from 1/2" to 8"

**Sizes**

from DN13 to DN200

**Bore**

FB full bore

RB reduce bore

**Body material**

● A105\* LF2

● F316

**Stem material**

● F316 A105\* LF2\* F51\*

● F316 F51\*

**Ball seat material**


RPTFE PEEK\* POM\* DEVLON\* MET-TO-MET\*

**Adapter and stem seal material**

FKM NBR\* EPDM\* MVQ\*

**Flanged**

RF RTJ\* BW\* FF\*

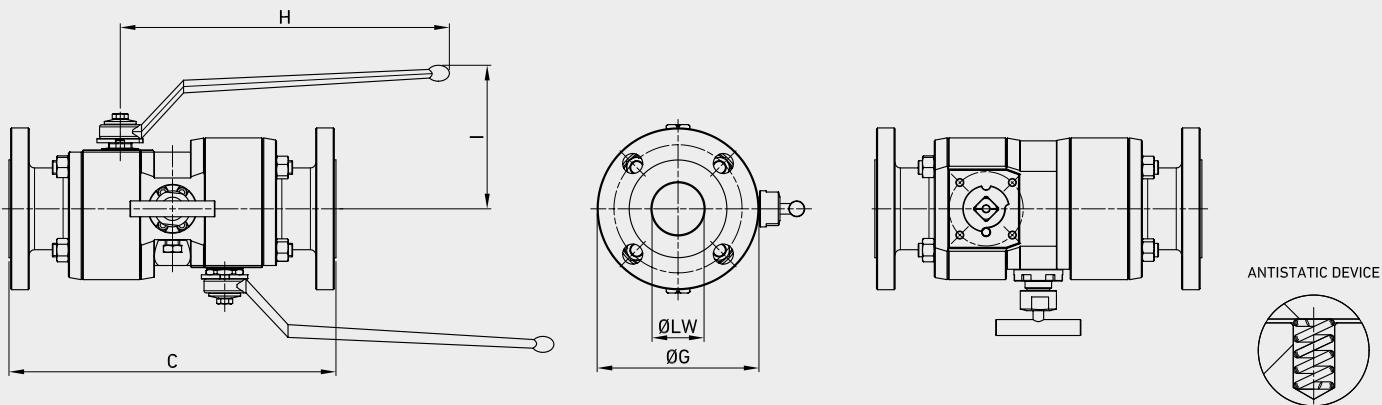

## DBB 150 FB

| TYPE     | INCH  | PN      | ØLW       | ØLW1 | CRF   | C RTJ | ØG    | H     | I     |
|----------|-------|---------|-----------|------|-------|-------|-------|-------|-------|
| FLOATING | 1/2   | MPa 2   | mm 13     | -    | 194,4 | 214,2 | 90    | 225   | 110   |
|          |       | Psi 290 | inch 0,51 | -    | 7,65  | 8,43  | 3,54  | 8,86  | 4,33  |
| FLOATING | 3/4   | MPa 2   | mm 20     | -    | 210,6 | 234   | 100   | 228   | 112   |
|          |       | Psi 290 | inch 0,79 | -    | 8,29  | 9,21  | 3,94  | 8,98  | 4,41  |
| FLOATING | 1     | MPa 2   | mm 25     | -    | 228,6 | 252   | 110   | 233   | 116   |
|          |       | Psi 290 | inch 0,98 | -    | 9,00  | 9,92  | 4,33  | 9,17  | 4,57  |
| FLOATING | 1 1/2 | MPa 2   | mm 38     | -    | 297   | 320,4 | 125   | 305   | 135   |
|          |       | Psi 290 | inch 1,50 | -    | 11,69 | 12,61 | 4,92  | 12,01 | 5,31  |
| FLOATING | 2     | MPa 2   | mm 49     | -    | 320,4 | 343,8 | 150   | 310   | 145   |
|          |       | Psi 290 | inch 1,93 | -    | 12,61 | 13,54 | 5,91  | 12,20 | 5,71  |
| FLOATING | 3     | MPa 2   | mm 74     | -    | 365,4 | 388,8 | 190   | 520   | 190   |
|          |       | Psi 290 | inch 2,91 | -    | 14,39 | 15,31 | 7,48  | 20,47 | 7,48  |
| FLOATING | 4     | MPa 2   | mm 95     | -    | 412,2 | 435,6 | 230   | 535   | 210   |
|          |       | Psi 290 | inch 3,74 | -    | 16,23 | 17,15 | 9,06  | 21,06 | 8,27  |
| FLOATING | 6     | MPa 2   | mm 150    | -    | 709,2 | 732,6 | 280   | -     | 250   |
|          |       | Psi 290 | inch 5,91 | -    | 27,92 | 28,84 | 11,02 | -     | 9,84  |
| TRUNNION | 8     | MPa 2   | mm 201    | -    | 822,6 | 846   | 345   | -     | 280   |
|          |       | Psi 290 | inch 7,91 | -    | 32,39 | 33,31 | 13,58 | -     | 11,02 |
| TRUNNION | 10    | MPa 2   | mm 252    | -    | -     | -     | -     | -     | -     |
|          |       | Psi 290 | inch 9,92 | -    | -     | -     | -     | -     | -     |

## DBB 150 RB


| TYPE     | INCH      | PN      | ØLW       | ØLW1 | CRF   | C RTJ | ØG    | H     | I    |
|----------|-----------|---------|-----------|------|-------|-------|-------|-------|------|
| FLOATING | 3/4 x 1/2 | MPa 2   | mm 13     | 20   | 210,6 | 234   | 100   | 225   | 110  |
|          |           | Psi 290 | inch 0,51 | 0,79 | 8,29  | 9,21  | 3,94  | 8,86  | 4,33 |
| FLOATING | 1 x 3/4   | MPa 2   | mm 20     | 25   | 228,6 | 252   | 110   | 228   | 112  |
|          |           | Psi 290 | inch 0,79 | 0,98 | 9,00  | 9,92  | 4,33  | 8,98  | 4,41 |
| FLOATING | 1 1/2 x 1 | MPa 2   | mm 25     | 38   | 297   | 320,4 | 125   | 233   | 116  |
|          |           | Psi 290 | inch 0,98 | 1,50 | 11,69 | 12,61 | 4,92  | 9,17  | 4,57 |
| FLOATING | 2 x 1     | MPa 2   | mm 38     | 49   | 320,4 | 343,8 | 150   | 305   | 135  |
|          |           | Psi 290 | inch 1,50 | 1,93 | 12,61 | 13,54 | 5,91  | 12,01 | 5,31 |
| FLOATING | 3x2       | MPa 2   | mm 49     | 74   | 365,4 | 388,8 | 190   | 310   | 145  |
|          |           | Psi 290 | inch 1,93 | 2,91 | 14,39 | 15,31 | 7,48  | 12,20 | 5,71 |
| FLOATING | 4x3       | MPa 2   | mm 74     | 95   | 412,2 | 435,6 | 230   | 520   | 190  |
|          |           | Psi 290 | inch 2,91 | 3,74 | 16,23 | 17,15 | 9,06  | 20,47 | 7,48 |
| FLOATING | 6x4       | MPa 2   | mm 95     | 150  | 709,2 | 732,6 | 280   | 535   | 210  |
|          |           | Psi 290 | inch 3,74 | 5,91 | 27,92 | 28,84 | 11,02 | 21,06 | 8,27 |
| FLOATING | 8x6       | MPa 2   | mm 150    | 201  | 822,6 | 846   | 345   | 870   | 250  |
|          |           | Psi 290 | inch 5,91 | 7,91 | 32,39 | 33,31 | 13,58 | 34,25 | 9,84 |

## DBB 300 FB

| TYPE     | INCH  | PN      | ØLW       | ØLW1 | CRF    | CRTJ   | ØG    | H     | I     |
|----------|-------|---------|-----------|------|--------|--------|-------|-------|-------|
| FLOATING | 1/2   | MPa 5   | mm 13     | -    | 252    | 271,8  | 95    | 225   | 110   |
|          |       | Psi 725 | inch 0,51 | -    | 9,92   | 10,70  | 3,74  | 8,86  | 4,33  |
| FLOATING | 3/4   | MPa 5   | mm 20     | -    | 273,6  | 297    | 115   | 228   | 112   |
|          |       | Psi 725 | inch 0,79 | -    | 10,77  | 11,69  | 4,53  | 8,98  | 4,41  |
| FLOATING | 1     | MPa 5   | mm 25     | -    | 297    | 320,4  | 125   | 233   | 116   |
|          |       | Psi 725 | inch 0,98 | -    | 11,69  | 12,61  | 4,92  | 9,17  | 4,57  |
| FLOATING | 1 1/2 | MPa 5   | mm 38     | -    | 343,8  | 365,4  | 155   | 305   | 135   |
|          |       | Psi 725 | inch 1,50 | -    | 13,54  | 14,39  | 6,10  | 12,01 | 5,31  |
| FLOATING | 2     | MPa 5   | mm 49     | -    | 388,8  | 417,6  | 165   | 310   | 145   |
|          |       | Psi 725 | inch 1,93 | -    | 15,31  | 16,44  | 6,50  | 12,20 | 5,71  |
| FLOATING | 3     | MPa 5   | mm 74     | -    | 509,4  | 538,2  | 210   | 520   | 190   |
|          |       | Psi 725 | inch 2,91 | -    | 20,06  | 21,19  | 8,27  | 20,47 | 7,48  |
| FLOATING | 4     | MPa 5   | mm 95     | -    | 549    | 577,8  | 255   | 535   | 210   |
|          |       | Psi 725 | inch 3,74 | -    | 21,61  | 22,75  | 10,04 | 21,06 | 8,27  |
| FLOATING | 6     | MPa 5   | mm 150    | -    | 725,4  | 754,2  | 320   | -     | 250   |
|          |       | Psi 725 | inch 5,91 | -    | 28,56  | 29,69  | 12,60 | -     | 9,84  |
| TRUNNION | 8     | MPa 5   | mm 201    | -    | 903,6  | 932,4  | 380   | -     | 280   |
|          |       | Psi 725 | inch 7,91 | -    | 35,57  | 36,71  | 14,96 | -     | 11,02 |
| TRUNNION | 10    | MPa 5   | mm 252    | -    | 1022,4 | 1051,2 | 445   | -     | -     |
|          |       | Psi 725 | inch 9,92 | -    | 40,25  | 41,39  | 17,52 | -     | -     |

## DBB 300 RB

| TYPE     | INCH      | PN      | ØLW       | ØLW1 | CRF   | CRTJ  | ØG    | H     | I    |
|----------|-----------|---------|-----------|------|-------|-------|-------|-------|------|
| FLOATING | 3/4 x 1/2 | MPa 5   | mm 13     | 20   | 273,6 | 297   | 115   | 225   | 110  |
|          |           | Psi 725 | inch 0,51 | 0,79 | 10,77 | 11,69 | 4,53  | 8,86  | 4,33 |
| FLOATING | 1 x 3/4   | MPa 5   | mm 20     | 25   | 297   | 267   | 125   | 228   | 112  |
|          |           | Psi 725 | inch 0,79 | 0,98 | 11,69 | 10,51 | 4,92  | 8,98  | 4,41 |
| FLOATING | 1 1/2 x 1 | MPa 5   | mm 25     | 38   | 343,8 | 365,4 | 155   | 233   | 116  |
|          |           | Psi 725 | inch 0,98 | 1,50 | 13,54 | 14,39 | 6,10  | 9,17  | 4,57 |
| FLOATING | 2 x 1 1/2 | MPa 5   | mm 38     | 49   | 388,8 | 417,6 | 165   | 305   | 135  |
|          |           | Psi 725 | inch 1,50 | 1,93 | 15,31 | 16,44 | 6,50  | 12,01 | 5,31 |
| FLOATING | 3x2       | MPa 5   | mm 49     | 74   | 509,4 | 538,2 | 210   | 310   | 145  |
|          |           | Psi 725 | inch 1,93 | 2,91 | 20,06 | 21,19 | 8,27  | 12,20 | 5,71 |
| FLOATING | 4x3       | MPa 5   | mm 74     | 95   | 549   | 577,8 | 255   | 520   | 190  |
|          |           | Psi 725 | inch 2,91 | 3,74 | 21,61 | 22,75 | 10,04 | 20,47 | 7,48 |
| FLOATING | 6x4       | MPa 5   | mm 95     | 150  | 725,4 | 754,2 | 320   | 535   | 210  |
|          |           | Psi 725 | inch 3,74 | 5,91 | 28,56 | 29,69 | 12,60 | 21,06 | 8,27 |
| FLOATING | 8x6       | MPa 5   | mm 150    | 201  | 903,6 | 932,2 | 380   | -     | 250  |
|          |           | Psi 725 | inch 5,91 | 7,91 | 35,57 | 36,70 | 14,96 | -     | 9,84 |

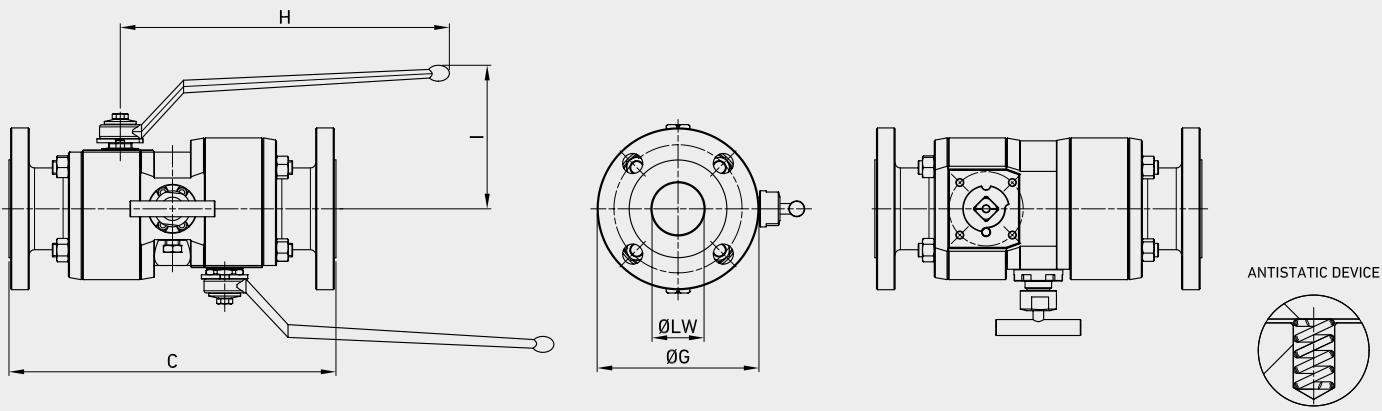

## DBB 600 FB

| TYPE     | INCH  | PN       | ØLW       | ØLW1 | CRF    | C RTJ  | ØG    | H     | I     |
|----------|-------|----------|-----------|------|--------|--------|-------|-------|-------|
| FLOATING | 1/2   | MPa 10   | mm 13     | -    | 228    | 226    | 95    | 225   | 110   |
|          |       | Psi 1450 | inch 0,51 | -    | 8,98   | 8,90   | 3,74  | 8,86  | 4,33  |
| FLOATING | 3/4   | MPa 10   | mm 20     | -    | 234    | 234    | 115   | 228   | 112   |
|          |       | Psi 1450 | inch 0,79 | -    | 9,21   | 9,21   | 4,53  | 8,98  | 4,41  |
| FLOATING | 1     | MPa 10   | mm 25     | -    | 252    | 252    | 125   | 233   | 116   |
|          |       | Psi 1450 | inch 0,98 | -    | 9,92   | 9,92   | 4,92  | 9,17  | 4,57  |
| FLOATING | 1 1/2 | MPa 10   | mm 38     | -    | 325    | 325    | 155   | 305   | 135   |
|          |       | Psi 1450 | inch 1,50 | -    | 12,80  | 12,80  | 6,10  | 12,01 | 5,31  |
| FLOATING | 2     | MPa 10   | mm 49     | -    | 353    | 356    | 165   | 310   | 145   |
|          |       | Psi 1450 | inch 1,93 | -    | 13,90  | 14,02  | 6,50  | 12,20 | 5,71  |
| FLOATING | 3     | MPa 10   | mm 74     | -    | 462    | 465    | 210   | 520   | 190   |
|          |       | Psi 1450 | inch 2,91 | -    | 18,19  | 18,31  | 8,27  | 20,47 | 7,48  |
| FLOATING | 4     | MPa 10   | mm 95     | -    | 697    | 700    | 275   | -     | 197   |
|          |       | Psi 1450 | inch 3,74 | -    | 27,44  | 27,56  | 10,83 | -     | 7,76  |
| FLOATING | 6     | MPa 10   | mm 150    | -    | 877    | 880    | 355   | -     | 250   |
|          |       | Psi 1450 | inch 5,91 | -    | 34,53  | 34,65  | 13,98 | -     | 9,84  |
| TRUNNION | 8     | MPa 10   | mm 201    | -    | 1050   | 1053   | 420   | -     | 290   |
|          |       | Psi 1450 | inch 7,91 | -    | 41,34  | 41,46  | 16,54 | -     | 11,42 |
| TRUNNION | 10    | MPa 10   | mm 252    | -    | 1259,2 | 1265,6 | 510   | -     | -     |
|          |       | Psi 1450 | inch 9,92 | -    | 49,57  | 49,83  | 20,08 | -     | -     |

## DBB 600 RB


| TYPE     | INCH      | PN       | ØLW       | ØLW1 | CRF   | C RTJ | ØG    | H     | I    |
|----------|-----------|----------|-----------|------|-------|-------|-------|-------|------|
| FLOATING | 3/4 x1/2  | MPa 10   | mm 13     | 20   | 230   | 230   | 115   | 225   | 110  |
|          |           | Psi 1450 | inch 0,51 | 0,79 | 9,06  | 9,06  | 4,53  | 8,86  | 4,33 |
| FLOATING | 1 x 3/4   | MPa 10   | mm 20     | 25   | 238   | 238   | 125   | 228   | 112  |
|          |           | Psi 1450 | inch 0,79 | 0,98 | 9,37  | 9,37  | 4,92  | 8,98  | 4,41 |
| FLOATING | 1 1/2 x1  | MPa 10   | mm 25     | 38   | 262   | 262   | 155   | 233   | 116  |
|          |           | Psi 1450 | inch 0,98 | 1,50 | 10,31 | 10,31 | 6,10  | 9,17  | 4,57 |
| FLOATING | 2 x 1 1/2 | MPa 10   | mm 38     | 49   | 332   | 338   | 165   | 305   | 135  |
|          |           | Psi 1450 | inch 1,50 | 1,93 | 13,07 | 13,31 | 6,50  | 12,01 | 5,31 |
| FLOATING | 3x2       | MPa 10   | mm 49     | 74   | 368   | 371   | 210   | 310   | 145  |
|          |           | Psi 1450 | inch 1,93 | 2,91 | 14,49 | 14,61 | 8,27  | 12,20 | 5,71 |
| FLOATING | 4x3       | MPa 10   | mm 74     | 95   | 477   | 480   | 275   | 520   | 190  |
|          |           | Psi 1450 | inch 2,91 | 3,74 | 18,78 | 18,90 | 10,83 | 20,47 | 7,48 |
| FLOATING | 6x4       | MPa 10   | mm 95     | 150  | 727   | 730   | 355   | -     | 197  |
|          |           | Psi 1450 | inch 3,74 | 5,91 | 28,62 | 28,74 | 13,98 | -     | 7,76 |
| FLOATING | 8x6       | MPa 10   | mm 150    | 201  | 907   | 910   | 420   | -     | 250  |
|          |           | Psi 1450 | inch 5,91 | 7,91 | 35,71 | 35,83 | 16,54 | -     | 9,84 |

## DBB 900 FB

| TYPE     | INCH  | PN       | ØLW       | ØLW1 | CRF    | CRTJ   | ØG    | H     | I     |
|----------|-------|----------|-----------|------|--------|--------|-------|-------|-------|
| FLOATING | 1/2   | MPa 15   | mm 13     | -    | 276    | 276    | 120   | 225   | 112   |
|          |       | Psi 2175 | inch 0,51 | -    | 10,87  | 10,87  | 4,72  | 8,86  | 4,41  |
| FLOATING | 3/4   | MPa 15   | mm 20     | -    | 287    | 287    | 130   | 228   | 114   |
|          |       | Psi 2175 | inch 0,79 | -    | 11,30  | 11,30  | 5,12  | 8,98  | 4,49  |
| FLOATING | 1     | MPa 15   | mm 25     | -    | 330    | 330    | 150   | 295   | 122   |
|          |       | Psi 2175 | inch 0,98 | -    | 12,99  | 12,99  | 5,91  | 11,61 | 4,80  |
| FLOATING | 1 1/2 | MPa 15   | mm 38     | -    | 400    | 400    | 180   | 410   | 155   |
|          |       | Psi 2175 | inch 1,50 | -    | 15,75  | 15,75  | 7,09  | 16,14 | 6,10  |
| FLOATING | 2     | MPa 15   | mm 49     | -    | 464    | 467    | 215   | 415   | 162   |
|          |       | Psi 2175 | inch 1,93 | -    | 18,27  | 18,39  | 8,46  | 16,34 | 6,38  |
| FLOATING | 3     | MPa 15   | mm 74     | -    | 647    | 650    | 240   | -     | 180   |
|          |       | Psi 2175 | inch 2,91 | -    | 25,47  | 25,59  | 9,45  | -     | 7,09  |
| FLOATING | 4     | MPa 15   | mm 95     | -    | 747    | 750    | 290   | -     | 220   |
|          |       | Psi 2175 | inch 3,74 | -    | 29,41  | 29,53  | 11,42 | -     | 8,66  |
| FLOATING | 6     | MPa 15   | mm 150    | -    | 977    | 980    | 380   | -     | 260   |
|          |       | Psi 2175 | inch 5,91 | -    | 38,46  | 38,58  | 14,96 | -     | 10,24 |
| TRUNNION | 8     | MPa 15   | mm 201    | -    | 1197   | 1200   | 470   | -     | 300   |
|          |       | Psi 2175 | inch 7,91 | -    | 47,13  | 47,24  | 18,50 | -     | 11,81 |
| TRUNNION | 10    | MPa 15   | mm 252    | -    | 1340,8 | 1513,8 | 545   | -     | -     |
|          |       | Psi 2175 | inch 9,92 | -    | 52,79  | 59,60  | 21,46 | -     | -     |

## DBB 900 RB

| TYPE     | INCH      | PN       | ØLW       | ØLW1 | CRF   | CRTJ  | ØG    | H     | I     |
|----------|-----------|----------|-----------|------|-------|-------|-------|-------|-------|
| FLOATING | 3/4 x 1/2 | MPa 15   | mm 13     | 20   | 282   | 282   | 130   | 225   | 112   |
|          |           | Psi 2175 | inch 0,51 | 0,79 | 11,10 | 11,10 | 5,12  | 8,86  | 4,41  |
| FLOATING | 1 x 3/4   | MPa 15   | mm 20     | 25   | 295   | 295   | 150   | 228   | 114   |
|          |           | Psi 2175 | inch 0,79 | 0,98 | 11,61 | 11,61 | 5,91  | 8,98  | 4,49  |
| FLOATING | 1 1/2 x 1 | MPa 15   | mm 25     | 38   | 340   | 340   | 180   | 295   | 122   |
|          |           | Psi 2175 | inch 0,98 | 1,50 | 13,39 | 13,39 | 7,09  | 11,61 | 4,80  |
| FLOATING | 2 x 1 1/2 | MPa 15   | mm 38     | 49   | 412   | 415   | 215   | 410   | 155   |
|          |           | Psi 2175 | inch 1,50 | 1,93 | 16,22 | 16,34 | 8,46  | 16,14 | 6,10  |
| FLOATING | 3x2       | MPa 15   | mm 49     | 74   | 442   | 445   | 240   | 415   | 162   |
|          |           | Psi 2175 | inch 1,93 | 2,91 | 17,40 | 17,52 | 9,45  | 16,34 | 6,38  |
| FLOATING | 4x3       | MPa 15   | mm 74     | 95   | 662   | 665   | 290   | -     | 180   |
|          |           | Psi 2175 | inch 2,91 | 3,74 | 26,06 | 26,18 | 11,42 | -     | 7,09  |
| FLOATING | 6x4       | MPa 15   | mm 95     | 150  | 772   | 775   | 380   | -     | 220   |
|          |           | Psi 2175 | inch 3,74 | 5,91 | 30,39 | 30,51 | 14,96 | -     | 8,66  |
| TRUNNION | 8x6       | MPa 15   | mm 150    | 201  | 1017  | 1020  | 470   | -     | 260   |
|          |           | Psi 2175 | inch 5,91 | 7,91 | 40,04 | 40,16 | 18,50 | -     | 10,24 |

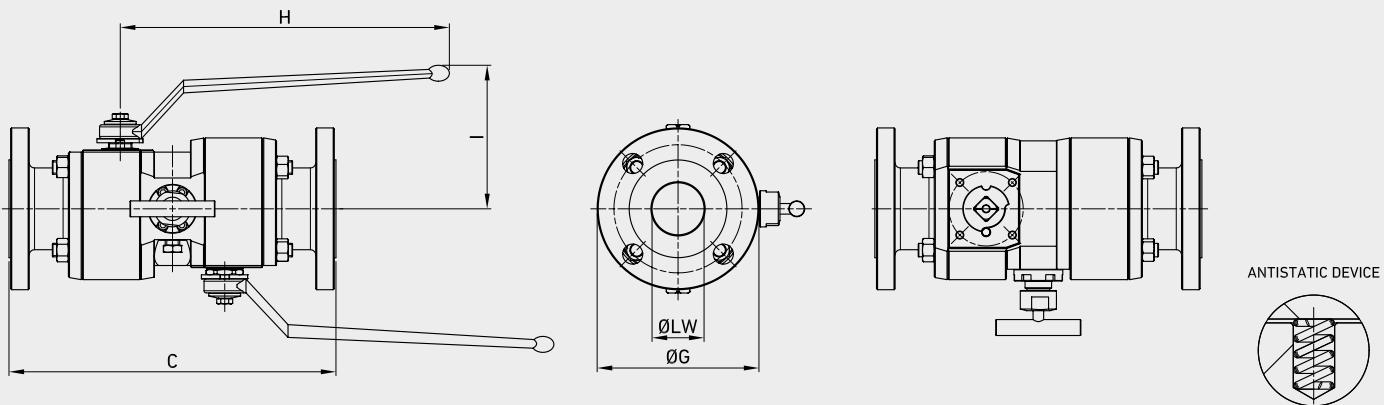

## **DBB 1500 FB**

| TYPE     | INCH  | PN       | ØLW       | ØLW1 | CRF    | C RTJ | ØG    | H     | I     |
|----------|-------|----------|-----------|------|--------|-------|-------|-------|-------|
| FLOATING | 1/2   | MPa 25   | mm 13     | -    | 276    | 276   | 120   | 225   | 112   |
|          |       | Psi 3625 | inch 0,51 | -    | 10,87  | 10,87 | 4,72  | 8,86  | 4,41  |
| FLOATING | 3/4   | MPa 25   | mm 20     | -    | 287    | 287   | 130   | 228   | 114   |
|          |       | Psi 3625 | inch 0,79 | -    | 11,30  | 11,30 | 5,12  | 8,98  | 4,49  |
| FLOATING | 1     | MPa 25   | mm 25     | -    | 330    | 330   | 150   | 295   | 122   |
|          |       | Psi 3625 | inch 0,98 | -    | 12,99  | 12,99 | 5,91  | 11,61 | 4,80  |
| FLOATING | 1 1/2 | MPa 25   | mm 38     | -    | 400    | 400   | 180   | 410   | 155   |
|          |       | Psi 3625 | inch 1,50 | -    | 15,75  | 15,75 | 7,09  | 16,14 | 6,10  |
| FLOATING | 2     | MPa 25   | mm 49     | -    | 464    | 467   | 215   | 415   | 162   |
|          |       | Psi 3625 | inch 1,93 | -    | 18,27  | 18,39 | 8,46  | 16,34 | 6,38  |
| FLOATING | 3     | MPa 25   | mm 74     | -    | 697    | 700   | 265   | -     | 180   |
|          |       | Psi 3625 | inch 2,91 | -    | 27,44  | 27,56 | 10,43 | -     | 7,09  |
| FLOATING | 4     | MPa 25   | mm 95     | -    | 827    | 830   | 310   | -     | 220   |
|          |       | Psi 3625 | inch 3,74 | -    | 32,56  | 32,68 | 12,20 | -     | 8,66  |
| FLOATING | 6     | MPa 25   | mm 144    | -    | 1084   | 1090  | 395   | -     | 270   |
|          |       | Psi 3625 | inch 5,67 | -    | 42,68  | 42,91 | 15,55 | -     | 10,63 |
| TRUNNION | 8     | MPa 25   | mm 192    | -    | 1340   | 1350  | 485   | -     | 310   |
|          |       | Psi 3625 | inch 7,56 | -    | 52,76  | 53,15 | 19,09 | -     | 12,20 |
| TRUNNION | 10    | MPa 25   | mm 239    | -    | 1585,6 | 1600  | 585   | -     | -     |
|          |       | Psi 3625 | inch 9,41 | -    | 62,43  | 62,99 | 23,03 | -     | -     |

## **DBB 1500 RB**

| TYPE     | INCH      | PN       | ØLW       | ØLW1 | CRF   | C RTJ | ØG    | H     | I     |
|----------|-----------|----------|-----------|------|-------|-------|-------|-------|-------|
| FLOATING | 3/4 x 1/2 | MPa 25   | mm 13     | 20   | 282   | 282   | 130   | 225   | 112   |
|          |           | Psi 3625 | inch 0,51 | 0,79 | 11,10 | 11,10 | 5,12  | 8,86  | 4,41  |
| FLOATING | 1 x 3/4   | MPa 25   | mm 20     | 25   | 295   | 295   | 150   | 228   | 114   |
|          |           | Psi 3625 | inch 0,79 | 0,98 | 11,61 | 11,61 | 5,91  | 8,98  | 4,49  |
| FLOATING | 1 1/2 x 1 | MPa 25   | mm 25     | 38   | 340   | 340   | 180   | 295   | 122   |
|          |           | Psi 3625 | inch 0,98 | 1,50 | 13,39 | 13,39 | 7,09  | 11,61 | 4,80  |
| FLOATING | 2 x 1     | MPa 25   | mm 38     | 49   | 412   | 415   | 215   | 410   | 155   |
|          |           | Psi 3625 | inch 1,50 | 1,93 | 16,22 | 16,34 | 8,46  | 16,14 | 6,10  |
| FLOATING | 3x2       | MPa 25   | mm 49     | 74   | 737   | 740   | 265   | 415   | 162   |
|          |           | Psi 3625 | inch 1,93 | 2,91 | 29,02 | 29,13 | 10,43 | 16,34 | 6,38  |
| FLOATING | 4x3       | MPa 25   | mm 74     | 95   | 894   | 900   | 310   | -     | 180   |
|          |           | Psi 3625 | inch 2,91 | 3,74 | 35,20 | 35,43 | 12,20 | -     | 7,09  |
| FLOATING | 6x4       | MPa 25   | mm 95     | 144  | 1120  | 1130  | 395   | -     | 220   |
|          |           | Psi 3625 | inch 3,74 | 5,67 | 44,09 | 44,49 | 15,55 | -     | 8,66  |
| TRUNNION | 8x6       | MPa 25   | mm 144    | 192  | -     | -     | 485   | -     | 270   |
|          |           | Psi 3625 | inch 5,67 | 7,56 | -     | -     | 19,09 | -     | 10,63 |

**DBB 2500 FB**

| TYPE     | INCH  | PN       | ØLW       | ØLW1 | CRF   | CRTJ  | ØG    | H     | I     |
|----------|-------|----------|-----------|------|-------|-------|-------|-------|-------|
| FLOATING | 1/2   | MPa 42   | mm 13     | -    | 291   | 291   | 135   | 225   | 112   |
|          |       | Psi 6090 | inch 0,51 | -    | 11,46 | 11,46 | 5,31  | 8,86  | 4,41  |
| FLOATING | 3/4   | MPa 42   | mm 20     | -    | 300   | 300   | 140   | 228   | 114   |
|          |       | Psi 6090 | inch 0,79 | -    | 11,81 | 11,81 | 5,51  | 8,98  | 4,49  |
| FLOATING | 1     | MPa 42   | mm 25     | -    | 350   | 350   | 160   | 295   | 122   |
|          |       | Psi 6090 | inch 0,98 | -    | 13,78 | 13,78 | 6,30  | 11,61 | 4,80  |
| FLOATING | 1 1/2 | MPa 42   | mm 38     | -    | 565   | 565   | 205   | -     | 100   |
|          |       | Psi 6090 | inch 1,50 | -    | 22,24 | 22,24 | 8,07  | -     | 3,94  |
| FLOATING | 2     | MPa 42   | mm 42     | -    | 652   | 655   | 235   | -     | 125   |
|          |       | Psi 6090 | inch 1,65 | -    | 25,67 | 25,79 | 9,25  | -     | 4,92  |
| FLOATING | 3     | MPa 42   | mm 62     | -    | 864   | 870   | 305   | -     | 190   |
|          |       | Psi 6090 | inch 2,44 | -    | 34,02 | 34,25 | 12,01 | -     | 7,48  |
| FLOATING | 4     | MPa 42   | mm 87     | -    | 990   | 1000  | 355   | -     | 240   |
|          |       | Psi 6090 | inch 3,43 | -    | 38,98 | 39,37 | 13,98 | -     | 9,45  |
| FLOATING | 6     | MPa 42   | mm 131    | -    | 1317  | 1330  | 485   | -     | 280   |
|          |       | Psi 6090 | inch 5,16 | -    | 51,85 | 52,36 | 19,09 | -     | 11,02 |
| TRUNNION | 8     | MPa 42   | mm 179    | -    | 1484  | 1500  | 550   | -     | 380   |
|          |       | Psi 6090 | inch 7,05 | -    | 58,43 | 59,06 | 21,65 | -     | 14,96 |
| TRUNNION | 10    | MPa 42   | mm 223    | -    | 1905  | 1941  | 675   | -     | -     |
|          |       | Psi 6090 | inch 8,78 | -    | 75,00 | 76,42 | 26,57 | -     | -     |

**DBB 2500 RB**

| TYPE     | INCH      | PN       | ØLW       | ØLW1 | CRF   | CRTJ  | ØG    | H     | I     |
|----------|-----------|----------|-----------|------|-------|-------|-------|-------|-------|
| FLOATING | 3/4 x 1/2 | MPa 42   | mm 13     | 20   | 294   | 294   | 140   | 225   | 112   |
|          |           | Psi 6090 | inch 0,51 | 0,79 | 11,57 | 11,57 | 5,51  | 8,86  | 4,41  |
| FLOATING | 1 x 3/4   | MPa 42   | mm 20     | 25   | 310   | 310   | 160   | 228   | 114   |
|          |           | Psi 6090 | inch 0,79 | 0,98 | 12,20 | 12,20 | 6,30  | 8,98  | 4,49  |
| FLOATING | 1 1/2 x 1 | MPa 42   | mm 25     | 38   | 370   | 373   | 205   | 295   | 122   |
|          |           | Psi 6090 | inch 0,98 | 1,50 | 14,57 | 14,69 | 8,07  | 11,61 | 4,80  |
| FLOATING | 2 x 1 1/2 | MPa 42   | mm 38     | 42   | 577   | 580   | 235   | -     | 100   |
|          |           | Psi 6090 | inch 1,50 | 1,65 | 22,72 | 22,83 | 9,25  | -     | 3,94  |
| FLOATING | 3x2       | MPa 42   | mm 42     | 62   | 694   | 700   | 305   | -     | 125   |
|          |           | Psi 6090 | inch 1,65 | 2,44 | 27,32 | 27,56 | 12,01 | -     | 4,92  |
| FLOATING | 4x3       | MPa 42   | mm 62     | 87   | 890   | 900   | 355   | -     | 190   |
|          |           | Psi 6090 | inch 2,44 | 3,43 | 35,04 | 35,43 | 13,98 | -     | 7,48  |
| FLOATING | 6x4       | MPa 42   | mm 87     | 131  | 1067  | 1080  | 485   | -     | 240   |
|          |           | Psi 6090 | inch 3,43 | 5,16 | 42,01 | 42,52 | 19,09 | -     | 9,45  |
| TRUNNION | 8x6       | MPa 42   | mm 131    | 179  | 1384  | 1400  | 675   | -     | 280   |
|          |           | Psi 6090 | inch 5,16 | 7,05 | 54,49 | 55,12 | 26,57 | -     | 11,02 |





**GEMELS**, with its product package, also provides to its customers Spare Parts, such as levers, locking devices, actuators and limit switches. In this way, **GEMELS** supplies a complete package and is able to provide a service to customers from all over the world, especially thanks to its knowledge of the field and of the multiple applications.

S  
K  
I  
T






# LOCKING DEVICE

Edition. 21.1


- **LKB** FOR GM - GN
- **LKF** FOR GE - GB - GHP - GPK
- **LKR** FOR GR
- **SECURITY BLOCK** FOR GE - GB  
GHP - GPK (except DN6) - G3/4K
- **LKS** FOR SBF - SBF-W



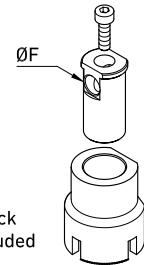

### LKB FOR GM - GN

| TYPE   | DN       | SW   | ØF   | MATERIAL        | TREATMENT  | WEIGHT | ITEM CODE |
|--------|----------|------|------|-----------------|------------|--------|-----------|
| LK6-B  | 6-10-13  | mm   | 9    | CARBON STEEL    | GALVANIZED | kg     | 0,178     |
|        |          | inch | 0,35 |                 |            | lb     | 0,39      |
| LK6-B  | 6-10-13  | mm   | 9    | STAINLESS STEEL | -          | kg     | 0,178     |
|        |          | inch | 0,35 |                 |            | lb     | 0,39      |
| LK20-B | 20-25    | mm   | 14   | CARBON STEEL    | GALVANIZED | kg     | 0,413     |
|        |          | inch | 0,55 |                 |            | lb     | 0,91      |
| LK20-B | 20-25    | mm   | 14   | STAINLESS STEEL | -          | kg     | 0,413     |
|        |          | inch | 0,55 |                 |            | lb     | 0,91      |
| LK32-B | 32-40-50 | mm   | 17   | CARBON STEEL    | GALVANIZED | kg     | 0,53      |
|        |          | inch | 0,67 |                 |            | lb     | 1,17      |
| LK32-B | 32-40-50 | mm   | 17   | STAINLESS STEEL | -          | kg     | 0,53      |
|        |          | inch | 0,67 |                 |            | lb     | 1,17      |

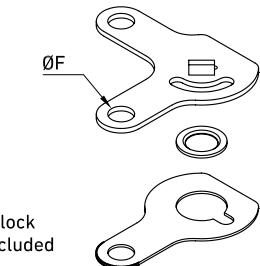


### LKF FOR GE - GB - GHP - GPK

| TYPE   | DN             | SW   | ØF   | MATERIAL        | TREATMENT  | WEIGHT | ITEM CODE |
|--------|----------------|------|------|-----------------|------------|--------|-----------|
| LK6-MF | 6 only for GPK | mm   | 6    | CARBON STEEL    | GALVANIZED | kg     | 0,043     |
|        |                | inch | 0,24 |                 |            | lb     | 0,09      |
| LK6-F  | 6-10-13        | mm   | 9    | CARBON STEEL    | GALVANIZED | kg     | 0,043     |
|        |                | inch | 0,35 |                 |            | lb     | 0,09      |
| LK6-F  | 6-10-13        | mm   | 9    | STAINLESS STEEL | -          | kg     | 0,043     |
|        |                | inch | 0,35 |                 |            | lb     | 0,09      |
| LK20-F | 20-25          | mm   | 14   | CARBON STEEL    | GALVANIZED | kg     | 0,121     |
|        |                | inch | 0,55 |                 |            | lb     | 0,27      |
| LK20-F | 20-25          | mm   | 14   | STAINLESS STEEL | -          | kg     | 0,121     |
|        |                | inch | 0,55 |                 |            | lb     | 0,27      |
| LK32-F | 32-40-50       | mm   | 17   | CARBON STEEL    | GALVANIZED | kg     | 0,187     |
|        |                | inch | 0,67 |                 |            | lb     | 0,41      |
| LK32-F | 32-40-50       | mm   | 17   | STAINLESS STEEL | -          | kg     | 0,187     |
|        |                | inch | 0,67 |                 |            | lb     | 0,41      |




Padlock  
not included

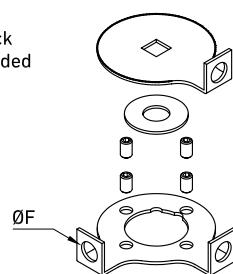


### LKR FOR GR

| TYPE   | DN       | SW        | ØF   | MATERIAL        | TREATMENT  | WEIGHT  | ITEM CODE     |
|--------|----------|-----------|------|-----------------|------------|---------|---------------|
| LKR13  | 13       | mm 9      | 9,5  | CARBON STEEL    | GALVANIZED | kg 0,1  | KOK00LKR132Z  |
|        |          | inch 0,35 | 0,37 |                 |            | lb 0,22 |               |
| LKR13  | 13       | mm 9      | 9,5  | STAINLESS STEEL | -          | kg 0,1  | KOK00LKR136H  |
|        |          | inch 0,35 | 0,37 |                 |            | lb 0,22 |               |
| LKR20  | 20-25    | mm 14     | 9,5  | CARBON STEEL    | GALVANIZED | kg 0,18 | KOK00LKR202Z  |
|        |          | inch 0,55 | 0,37 |                 |            | lb 0,40 |               |
| LKR20  | 20-25    | mm 14     | 9,5  | STAINLESS STEEL | -          | kg 0,18 | KOK00LKR206H  |
|        |          | inch 0,55 | 0,37 |                 |            | lb 0,40 |               |
| LKR32  | 32-40-50 | mm 17     | 9,5  | CARBON STEEL    | GALVANIZED | kg 0,34 | KOK00LKR322Z  |
|        |          | inch 0,67 | 0,37 |                 |            | lb 0,75 |               |
| LKR32  | 32-40-50 | mm 17     | 9,5  | STAINLESS STEEL | -          | kg 0,34 | KOK00LKR326H  |
|        |          | inch 0,67 | 0,37 |                 |            | lb 0,75 |               |
| LKR65  | 65-80    | mm 19     | 9,5  | CARBON STEEL    | GALVANIZED | kg 0,55 | KOK00LKR652Z  |
|        |          | inch 0,75 | 0,37 |                 |            | lb 1,21 |               |
| LKR65  | 65-80    | mm 19     | 9,5  | STAINLESS STEEL | -          | kg 0,55 | KOK00LKR656H  |
|        |          | inch 0,75 | 0,37 |                 |            | lb 1,21 |               |
| LKR100 | 100      | mm 24     | 9,5  | CARBON STEEL    | GALVANIZED | kg 1,08 | KOK00LKR1002Z |
|        |          | inch 0,94 | 0,37 |                 |            | lb 2,38 |               |
| LKR100 | 100      | mm 24     | 9,5  | STAINLESS STEEL | -          | kg 1,08 | KOK00LKR1006H |
|        |          | inch 0,94 | 0,37 |                 |            | lb 2,38 |               |

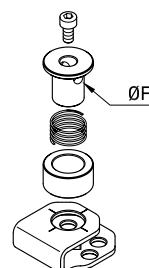

### SECURITY BLOCK FOR GE - GB - GHP - GPK (EXCEPT DN6) - G3/4K

| TYPE | DN                               | SW        | ØF   | MATERIAL     | TREATMENT  | WEIGHT   | ITEM CODE   |
|------|----------------------------------|-----------|------|--------------|------------|----------|-------------|
| SB6  | 6-10-13<br>6 only for G3/4K      | mm 9      | 6,8  | CARBON STEEL | GALVANIZED | kg 0,066 | KOB00SB61Z  |
|      |                                  | inch 0,35 | 0,27 |              |            | lb 0,15  |             |
| SB20 | 20-25<br>10-13-20 only for G3/4K | mm 14     | 9,5  | CARBON STEEL | GALVANIZED | kg 0,221 | KOB00SB201Z |
|      |                                  | inch ,055 | 0,37 |              |            | lb 0,49  |             |
| SB32 | 32-40-50<br>25 only for G3/4K    | mm 17     | 9,5  | CARBON STEEL | GALVANIZED | kg 0,24  | KOB00SB321Z |
|      |                                  | inch 0,67 | 0,37 |              |            | lb 0,53  |             |

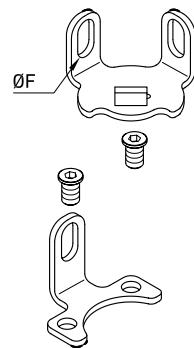

## LKS FOR SBF - SBF-W

| TYPE       | DN       | ANSI                           |      | SW   | ØF   | MATERIAL        | TREATMENT  | WEIGHT  |
|------------|----------|--------------------------------|------|------|------|-----------------|------------|---------|
| LK13-S     | 13       | 150-300-600                    | mm   | 9    | 6,5  | CARBON STEEL    | GALVANIZED | kg 0,03 |
|            |          |                                | inch | 0,35 | 0,26 |                 |            | lb 0,07 |
| LK13-S     | 13       | 150-300-600                    | mm   | 9    | 6,5  | STAINLESS STEEL | -          | kg 0,03 |
|            |          |                                | inch | 0,35 | 0,26 |                 |            | lb 0,07 |
| LK20-S 150 | 20       | 150                            | mm   | 14   | 6,5  | CARBON STEEL    | GALVANIZED | kg 0,07 |
|            |          |                                | inch | 0,55 | 0,26 |                 |            | lb 0,15 |
| LK20-S 150 | 20       | 150                            | mm   | 14   | 6,5  | STAINLESS STEEL | -          | kg 0,07 |
|            |          |                                | inch | 0,55 | 0,26 |                 |            | lb 0,15 |
| LK20-S     | 20-25    | 150 (only for DN25)<br>300-600 | mm   | 14   | 6,5  | CARBON STEEL    | GALVANIZED | kg 0,07 |
|            |          |                                | inch | 0,55 | 0,26 |                 |            | lb 0,15 |
| LK20-S     | 20-25    | 150 (only for DN25)<br>300-600 | mm   | 14   | 6,5  | STAINLESS STEEL | -          | kg 0,07 |
|            |          |                                | inch | 0,55 | 0,26 |                 |            | lb 0,15 |
| LK32-S     | 32-40-50 | 150-300-600                    | mm   | 17   | 6,5  | CARBON STEEL    | GALVANIZED | kg 0,08 |
|            |          |                                | inch | 0,67 | 0,26 |                 |            | lb 0,18 |
| LK32-S     | 32-40-50 | 150-300-600                    | mm   | 17   | 6,5  | STAINLESS STEEL | -          | kg 0,08 |
|            |          |                                | inch | 0,67 | 0,26 |                 |            | lb 0,18 |
| LK80-S     | 80       | 150-300-600                    | mm   | 19   | 10   | CARBON STEEL    | GALVANIZED | kg 0,16 |
|            |          |                                | inch | 0,75 | 0,39 |                 |            | lb 0,35 |
| LK80-S     | 80       | 150-300-600                    | mm   | 19   | 10   | STAINLESS STEEL | -          | kg 0,16 |
|            |          |                                | inch | 0,75 | 0,39 |                 |            | lb 0,35 |
| LK100-S    | 100      | 150-300-600                    | mm   | 24   | 12   | CARBON STEEL    | GALVANIZED | kg 0,3  |
|            |          |                                | inch | 0,94 | 0,47 |                 |            | lb 0,66 |
| LK100-S    | 100      | 150-300-600                    | mm   | 24   | 12   | STAINLESS STEEL | -          | kg 0,3  |
|            |          |                                | inch | 0,94 | 0,47 |                 |            | lb 0,66 |




# HANDLES

Edition. 21.1


- BENT HANDLES
- BUTTERFLY HANDLES
- CUT STRAIGHT HANDLES
- CUT BENT HANDLES
- PIPE HANDLES
- SHORT HANDLES
- STRAIGHT HANDLES



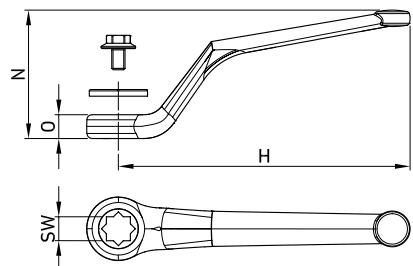


## BENT HANDLES

| SW        | H     | N    | O    | MATERIAL        | TREATMENT  | WEIGHT   | HANDLE CODE | KIT CODE        |
|-----------|-------|------|------|-----------------|------------|----------|-------------|-----------------|
| mm 9      | 110   | 53   | 9    | ZAMAK           | CHROMING   | kg 0,082 | C001010ZC   | KOL0011ZZ       |
| inch 0,35 | 4,33  | 2,09 | 0,35 |                 |            | lb 0,18  |             |                 |
| mm 9      | 110   | 53   | 9    | CARBON STEEL    | GALVANIZED | kg 0,097 | C001010Z2   | KOL0011ZZ       |
| inch 0,35 | 4,33  | 2,09 | 0,35 |                 |            | lb 0,21  |             |                 |
| mm 9      | 110   | 53   | 9    | STAINLESS STEEL | -          | kg 0,098 | C0010104H   | KOL00116H       |
| inch 0,35 | 4,33  | 2,09 | 0,35 |                 |            | lb 0,22  |             |                 |
| mm 14     | 180   | 48   | 13   | ZAMAK           | CHROMING   | kg 0,18  | C008550ZC   | KOL0016ZZ       |
| inch 0,55 | 7,09  | 1,89 | 0,51 |                 |            | lb 0,40  |             |                 |
| mm 14     | 180   | 48   | 14   | CARBON STEEL    | GALVANIZED | kg 0,248 | C0069202Z   | KOL00152Z       |
| inch 0,55 | 7,09  | 1,89 | 0,55 |                 |            | lb 0,55  |             |                 |
| mm 14     | 180   | 48   | 14   | STAINLESS STEEL | -          | kg 0,257 | C0069204H   | KOL00156H       |
| inch 0,55 | 7,09  | 1,89 | 0,55 |                 |            | lb 0,57  |             |                 |
| mm 17     | 200   | 60   | 13   | CARBON STEEL    | GALVANIZED | kg 0,36  | C0505502Z   | K06A0019902000Z |
| inch 0,67 | 7,87  | 2,36 | 0,51 |                 |            | lb 0,79  |             |                 |
| mm 17     | 300   | 71   | 14   | CARBON STEEL    | GALVANIZED | kg 0,662 | C0092502Z   | KBL00132Z       |
| inch 0,67 | 11,81 | 2,80 | 0,55 |                 |            | lb 1,46  |             |                 |
| mm 17     | 300   | 71   | 14   | STAINLESS STEEL | -          | kg 0,675 | C0092504H   | KBL00136H       |
| inch 0,67 | 11,81 | 2,80 | 0,55 |                 |            | lb 1,49  |             |                 |

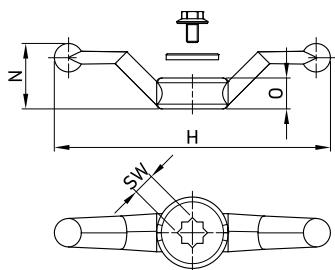


## BUTTERFLY HANDLES

| SW        | H    | N    | O    | MATERIAL | TREATMENT  | WEIGHT   | HANDLE CODE | KIT CODE  |
|-----------|------|------|------|----------|------------|----------|-------------|-----------|
| mm 9      | 116  | 27,5 | 13   | ZAMAK    | GALVANIZED | kg 0,107 | C010740Z2   | KOL0018ZZ |
| inch 0,35 | 4,57 | 1,08 | 0,51 |          |            | lb 0,24  |             |           |
| mm 14     | 116  | 27,5 | 13   | ZAMAK    | GALVANIZED | kg 0,097 | C010750Z2   | KOL0019ZZ |
| inch 0,55 | 4,57 | 1,08 | 0,51 |          |            | lb 0,21  |             |           |

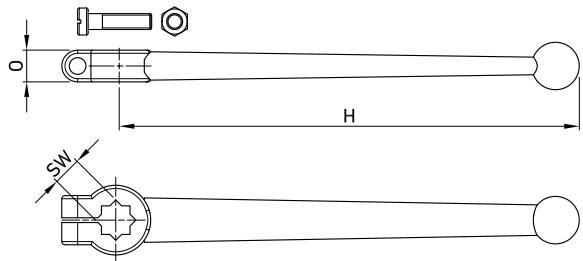


### CUT STRAIGHT HANDLES

| SW        | H    | N | O    | MATERIAL | TREATMENT | WEIGHT   | HANDLE CODE | KIT CODE |
|-----------|------|---|------|----------|-----------|----------|-------------|----------|
| mm 9      | 145  | - | 10   | ZAMAK    | CHROMING  | kg 0,042 | C000020ZC   | KEL006ZZ |
| inch 0,35 | 5,71 | - | 0,39 |          |           | lb 0,09  |             |          |

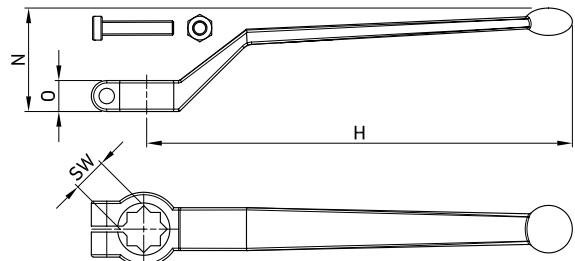


### CUT BENT HANDLES

| SW        | H    | N    | O    | MATERIAL | TREATMENT | WEIGHT   | HANDLE CODE | KIT CODE |
|-----------|------|------|------|----------|-----------|----------|-------------|----------|
| mm 14     | 180  | 43   | 13   | ZAMAK    | CHROMING  | kg 0,195 | C001200ZC   | KEL007ZZ |
| inch 0,55 | 7,09 | 1,69 | 0,51 |          |           | lb 0,43  |             |          |

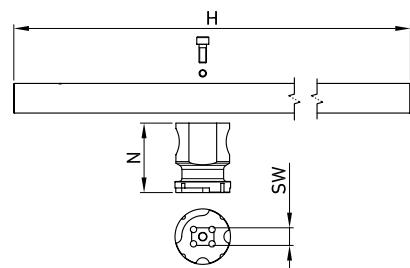


### PIPE HANDLES

| SW        | H     | N    | O | MATERIAL        | TREATMENT  | WEIGHT   | HANDLE CODE | KIT CODE   |
|-----------|-------|------|---|-----------------|------------|----------|-------------|------------|
| mm 19     | 650   | 75   | - | CARBON STEEL    | GALVANIZED | kg 2,112 | C0012502Z   | KOL00202ZZ |
| inch 0,75 | 25,59 | 2,95 | - |                 |            | lb 4,66  |             |            |
| mm 19     | 650   | 75   | - | STAINLESS STEEL | -          | kg 2,312 | C0012504H   | KOL00206H  |
| inch 0,75 | 25,59 | 2,95 | - |                 |            | lb 5,10  |             |            |
| mm 24     | 650   | 79   | - | CARBON STEEL    | GALVANIZED | kg 3,912 | C0012502Z   | KOL00212ZZ |
| inch 0,94 | 25,59 | 3,11 | - |                 |            | lb 8,62  |             |            |

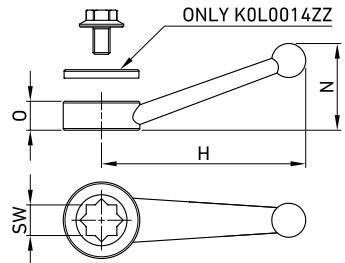

## SHORT HANDLES

| SW   | H    | N    | O    | MATERIAL | TREATMENT  | WEIGHT              | HANDLE CODE | KIT CODE  |
|------|------|------|------|----------|------------|---------------------|-------------|-----------|
| mm   | 9    | 60   | 25,5 | ZAMAK    | GALVANIZED | kg 0,022<br>lb 0,05 | C009490ZC   | KOL0014ZZ |
| inch | 0,35 | 2,36 | 1,00 |          |            |                     |             |           |

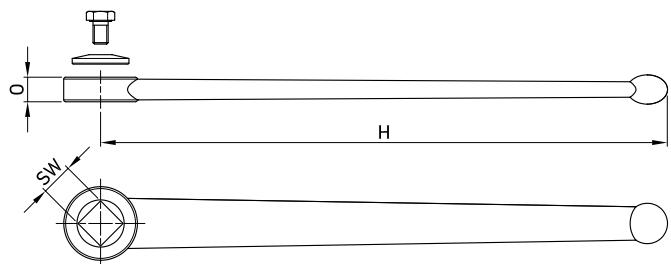

## STRAIGHT HANDLES

| SW   | H    | N     | O      | MATERIAL           | TREATMENT  | WEIGHT              | HANDLE CODE | KIT CODE  |
|------|------|-------|--------|--------------------|------------|---------------------|-------------|-----------|
| mm   | 17   | 300   | - 13   | CARBON STEEL       | GALVANIZED | kg 0,457<br>lb 1,01 | C0081302Z   | KOL00122Z |
| inch | 0,67 | 11,81 | - 0,51 |                    |            |                     |             |           |
| mm   | 17   | 300   | - 13   | STAINLESS<br>STEEL | -          | kg 0,467<br>lb 1,03 | C0081306H   | KOL00126H |
| inch | 0,67 | 11,81 | - 0,51 |                    |            |                     |             |           |



# ACTUATORS

Edition. 21.1

- INSTALLATION, OPERATION AND MAINTENANCE
- TECHNICAL DETAILS
- Quarter-Turn Rack & Pinion ACTUATORS
- Pneumatic/Electric actuators



## INTRODUCTION

### STANDARDS


Gemels actuators are designed and in compliance with the following standards:

**ISO5211:** Orientation of actuator to valve mounting flange (i.e.F05,F07....)

**VDI/VDE 3845:** Namur mounting for accessories such as switchboxes, solenoid valves and positioners.

**ATEX:** Directive 2014/34/UE.

**PED:** PRessure Equipment Directive 2014/68/EU.

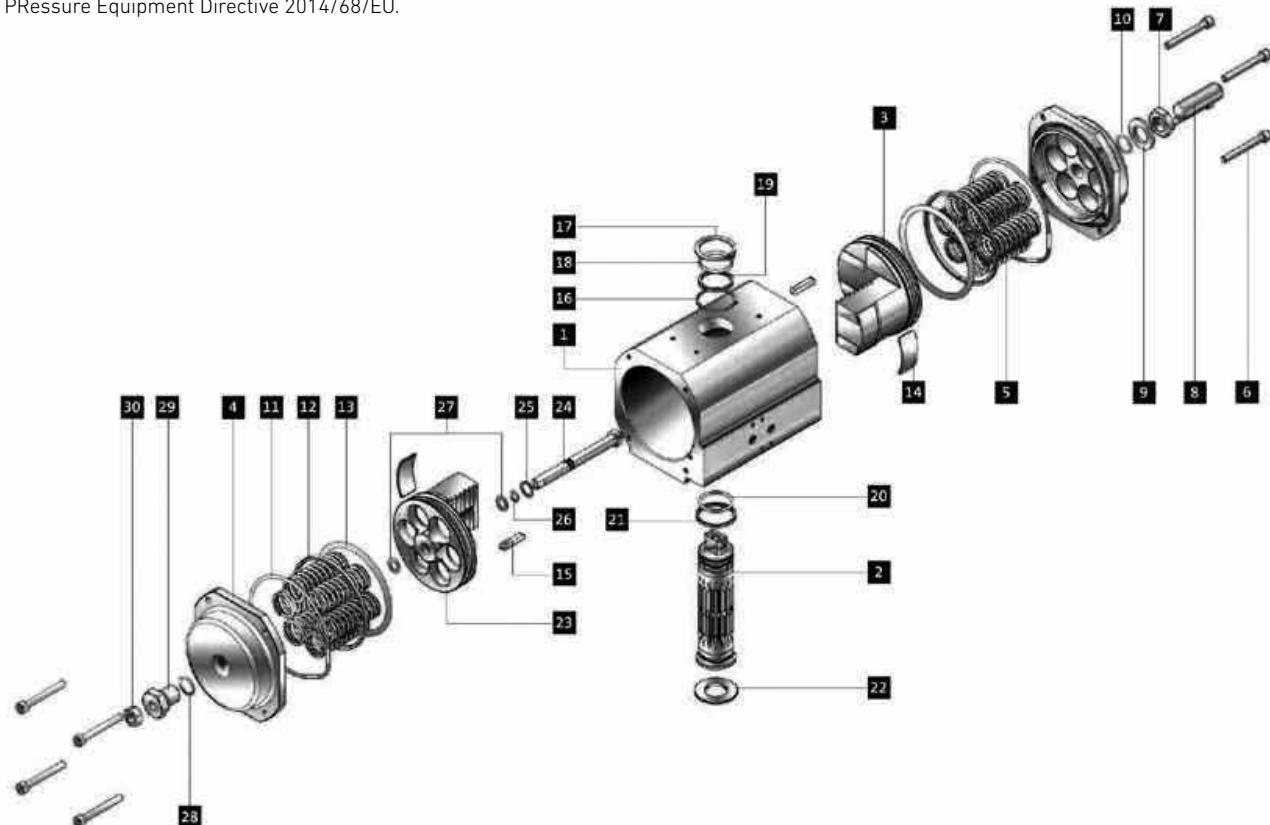

| REF NO | DESCRIPTION            | QTY    | MATERIAL STD UNIT | COMMENTS                 |
|--------|------------------------|--------|-------------------|--------------------------|
| 1      | Body                   | 1      | Aluminium Anod.   | -                        |
| 2      | Driveshaft             | 1      | Steel             | Alt. CNI 425             |
| 3      | Piston                 | 2      | Aluminium         | Alt. Hard Anodized/PTFE  |
| 4      | Endcap with Stop Adj.  | 2      | Aluminium Anod.   | -                        |
| 5      | Spring                 | 12 max | SiCr              | S1 Double Acting only    |
| 6      | Endcap Bolt            | 8      | Stainless Steel   | -                        |
| 7      | Open Stop Adj.Bolt     | 1      | Stainless Steel   | -                        |
| 8      | Open Stop Adj. Nut     | 1      | Stainless Steel   | -                        |
| 9      | Open Stop Adj. Washer  | 1      | Polyethylene      | -                        |
| 10     | Open Stop Adj.'O'Ring  | 1      | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 11*    | Endcap 'O'Ring         | 2      | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 12*    | Piston Back-up Bearing | 2      | POM Delrin        | -                        |
| 13*    | Piston 'O'Ring         | 2      | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 14*    | Piston Wearpad         | 2      | POM Delrin        | -                        |
| 15*    | Piston Guidebar        | 2      | Steel             | -                        |

| REF NO   | DESCRIPTION                | QTY | MATERIAL STD UNIT | COMMENTS                 |
|----------|----------------------------|-----|-------------------|--------------------------|
| 16*      | Driveshaft Washer          | 1   | Polyethylene      | -                        |
| 17*      | Driveshaft Circlip         | 1   | Steel             | -                        |
| 18*      | Driveshaft Upper 'O'Ring   | 1   | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 19*      | Driveshaft Upper Bearing   | 1   | POM Delrin        | -                        |
| 20*      | Driveshaft Lower 'O'Ring   | 1   | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 21*      | Driveshaft Lower Bearing   | 1   | POM Delrin        | -                        |
| 22       | Centralization Ring        | 1   | POM Delrin        | -                        |
| 23 (G10) | Piston (Closed Stop Adj.)  | 1   | Aluminium         | Alt. Hard Anodized/PTFE  |
| 24 (G10) | Closed Stop Adj.Bolt       | 1   | Stainless Steel   | -                        |
| 25 (G10) | Closed Stop Adj.Damper     | 1   | POM Delrin        | -                        |
| 26 (G10) | Stop Bolt 'O' Ring         | 1   | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 27 (G10) | Piston Stop Bolt 'O'Ring   | 2   | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 28 (G10) | Stop Bolt Retainer 'O'Ring | 1   | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 29 (G10) | Stop Bolt Retainer         | 1   | Stainless Steel   | -                        |
| 30 (G10) | Closed Stop Adj.Nut        | 1   | Stainless Steel   | -                        |

## ACTUATOR OPERATION

### Maximum Operating Time Per Second (0.55 MPaG / 80 PSIG)

| Actuator Size | FATDA0500401SH<br>FATSR0500401SH | FATDA1000401SH<br>FATSR1000401SH | FATDA2000401SH<br>FATSR2000401SH | FATDA3750401SH<br>FATSR3750401SH | FATDA6000401SH<br>FATSR6000401SH | FATDA8250401SH<br>FATSR8250401SH |
|---------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| DA open       | <1                               | <1                               | 2                                | 2,5                              | 3,5                              | 4                                |
| DA close      | <1                               | <1                               | 2                                | 2,5                              | 3,5                              | 4                                |
| SR open       | <1                               | <1                               | 2                                | 2,5                              | 3,5                              | 4                                |
| SR close      | <1                               | <1                               | 1,5                              | 2                                | 3                                | 3                                |

### Air Consumption per Stroke

| Actuator Size                  | FATDA0500401SH<br>FATSR0500401SH | FATDA1000401SH<br>FATSR1000401SH | FATDA2000401SH<br>FATSR2000401SH | FATDA3750401SH<br>FATSR3750401SH | FATDA6000401SH<br>FATSR6000401SH | FATDA8250401SH<br>FATSR8250401SH |
|--------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Port 'A' to open (liters)      | 0,18                             | 0,38                             | 0,9                              | 1,69                             | 2,8                              | 3,05                             |
| Port 'B' to close (liters)     | 0,24                             | 0,5                              | 1                                | 1,9                              | 3,4                              | 3,7                              |
| Port 'A' to open (cubic inch)  | 10,98                            | 23,18                            | 54,92                            | 103,13                           | 170,86                           | 186,12                           |
| Port 'B' to close (cubic inch) | 14,65                            | 30,52                            | 61,02                            | 115,95                           | 207,47                           | 225,79                           |

### Overall Actuator Weight

| Actuator Size     | 3   | 10  | 35   | 70   |
|-------------------|-----|-----|------|------|
| DA Kilograms (kg) | 1.0 | 2.8 | 10.4 | 20.2 |
| SR Kilograms (kg) | 1.1 | 2.9 | 11.9 | 23.9 |
| DA pounds (lbs)   | 2.2 | 6.2 | 22.8 | 44.4 |
| SR pounds (lbs)   | 2.4 | 6.4 | 26.1 | 52.5 |

### Minimum Recommended Solenoid Valve Cv

| Actuator Size | 3   | 10  | 35  | 70  |
|---------------|-----|-----|-----|-----|
| Solenoid Cv   | 0.2 | 0.2 | 0.5 | 0.8 |

## TECHNICAL DATA

**GDA** = DoubleActing

**DA Port 'A'** = Air To Open (Anti-Clockwise)

**DA Port 'B'** = Air To Close (Clockwise)

**Fail Safe Open** = Rotate Pistons 180° About Own Axis

**Drive Medium** = Air (Dry or Lubricated); Non Corrosive Gas; Light Hydraulic Oil

**GSR** = SpringReturn

**SR Port 'A'** = Air To Oper (Anti-Clockwise compressing Springs)

**SR Port 'B'** = Spring To Close (Clockwise)

### Temperature:

- Buna Nitrile 'O' Seals

-40 to +100°C

or -40 to +212°F

- Viton 'O' Seals

-25 to +250°C

or -13 to +482°F

## DOUBLE ACTING



### OPENING STROKE

- Looking at the front of the Actuator, PORT 'A' is on the left and PORT 'B' is on the right.
- To open the Actuator, connect the air supply to PORT 'A' to fill the central chamber of the Actuator.
- The two opposing Pistons will open and rotate the driveshaft in a counter-clockwise direction.
- When the pistons reach the end of their travel, the actuator driveshaft will be in the open position.




### CLOSING STROKE

- Looking at the front of the Actuator, PORT 'A' is on the left and PORT 'B' is on the right.
- To close the Actuator, connect the air supply to PORT 'B' to fill the outer chambers of the Actuator
- The two opposing Pistons will close and rotate the actuator driveshaft in a clockwise direction.
- When the pistons reach the end of their travel, the actuator driveshaft will be in the closed position.

## TORQUE VALUE GEMELS ACTUATORS

### TORQUE DIAGRAM DOUBLE ACTING ACTUATOR

With reference to the above diagram, is possible to note that the torque of a double acting actuator remain constant throughout the complete action.

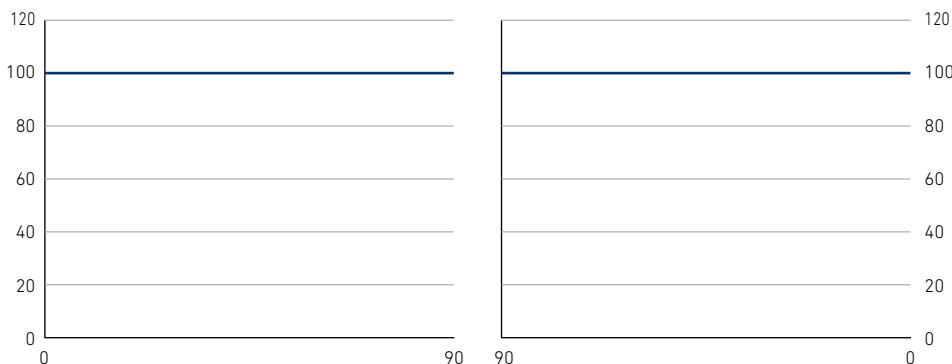

## **TORQUES (Nm) ACTUATOR GEMELS DOUBLE ACTING**

| MODEL  | AIR SUPPLY |             |           |             |               |           |              |
|--------|------------|-------------|-----------|-------------|---------------|-----------|--------------|
|        | Mpa<br>PSI | 0,3<br>43,5 | 0,4<br>58 | 0,5<br>72,5 | 0,55<br>79,75 | 0,6<br>87 | 0,7<br>101,5 |
| DA 25  | Nm         | 11,9        | 15,8      | 19,8        | 21,7          | 23,7      | 27,7         |
|        | lbf-ft     | 8,78        | 11,65     | 14,60       | 16,01         | 17,48     | 20,43        |
| DA40   | Nm         | 20,8        | 27,7      | 34,6        | 38,1          | 41,6      | 48,5         |
|        | lbf-ft     | 15,34       | 20,43     | 25,52       | 28,10         | 30,68     | 35,77        |
| DA 50  | Nm         | 25,4        | 33,8      | 42,3        | 46,5          | 50,7      | 59,2         |
|        | lbf-ft     | 18,73       | 24,93     | 31,20       | 34,30         | 37,39     | 43,66        |
| DA 100 | Nm         | 50,7        | 67,6      | 84,5        | 93            | 101,4     | 118,3        |
|        | lbf-ft     | 37,39       | 49,86     | 62,32       | 68,59         | 74,79     | 87,25        |
| DA 200 | Nm         | 101         | 134,6     | 168,3       | 185,1         | 201,9     | 235,6        |
|        | lbf-ft     | 74,49       | 99,28     | 124,13      | 136,52        | 148,91    | 173,77       |
| DA 375 | Nm         | 187         | 249       | 312         | 343           | 374       | 437          |
|        | lbf-ft     | 137,92      | 183,65    | 230,12      | 252,98        | 275,85    | 322,31       |
| DA 580 | Nm         | 298         | 398       | 497         | 547           | 597       | 696          |
|        | lbf-ft     | 219,79      | 293,55    | 366,57      | 403,45        | 440,32    | 513,34       |
| DA 825 | Nm         | 412         | 550       | 687         | 756           | 825       | 962          |
|        | lbf-ft     | 303,87      | 405,66    | 506,70      | 557,60        | 608,49    | 709,53       |

## SPRING RETURN



### OPENING STROKE

- Looking at the front of the Actuator, PORT 'A' is on the left and PORT 'B' is on the right.
- To open the Actuator, connect the air supply to PORT 'A' to fill the central chamber of the Actuator.
- The two opposing Pistons will open, compressing the springs in the outer chambers and rotate the driveshaft in a counter-clockwise direction.
- When the pistons reach the end of their travel, the springs will be fully compressed and the actuator driveshaft will be in the open position.





### CLOSING STROKE

- Looking at the front of the Actuator, PORT 'A' is on the left and PORT 'B' is on the right.
- To close the Actuator, disconnect the air supply from PORT 'A'. This will allow the compressed springs to push the pistons back to their starting position.
- As the springs decompress the two opposing Pistons will close and rotate the actuator driveshaft in a clockwise direction.
- When the pistons reach the end of their travel, the actuator driveshaft will be in the closed position.

## TORQUE VALUE GEMELS ACTUATORS

### TORQUE DIAGRAM DOUBLE ACTING ACTUATOR

With reference to the above diagram the torque of a Spring Return actuator is not constant but decreasing. This is due to the action of the springs.

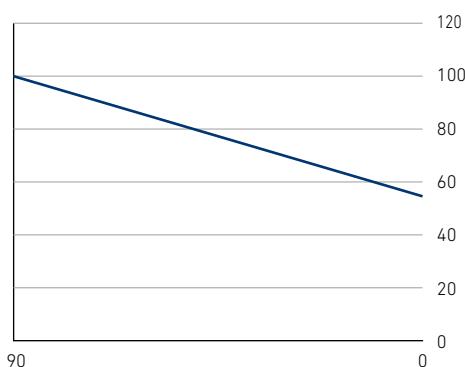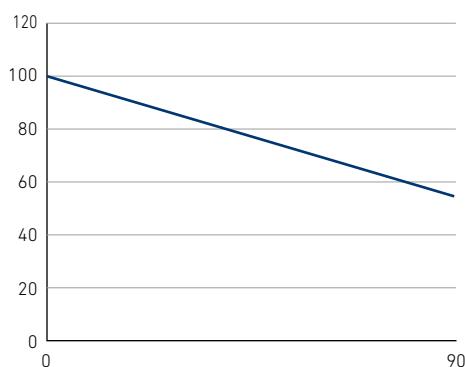

## TORQUES (Nm) ACTUATOR GEMELS SPRING RETURN

**Note:** For a continuous improvement, Gemels reserves the right to operate changes without prior notice. For the values highlighted, or are missing, or with a minus sign (-), it is reported that with the number of standard springs, at 3 bar, the actuator is not able to overcome the force of the internal springs, therefore the actuator can not to perform one complete rotation. Therefore with air supply of 3 Bar, it will be necessary evaluate the reduction of the number of springs or buy a bigger model.

| TYPE      | Springs Q.ty | Spring Torque | AIR SUPPLY |        |       |       |       |       |       |       |       |       |       |       |        |        |
|-----------|--------------|---------------|------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
|           |              |               | Mpa        | 0,3    |       | 0,4   |       | 0,5   |       | 0,55  |       | 0,6   |       | 0,7   |        |        |
|           |              |               | PSI        | 43,5   | 58    | 72,5  | 79,75 | 87    | 101,5 | Start | End   | Start | End   | Start | End    |        |
| SR35/(18) | 1            | 2,72          | 1,50       | Nm     | 23,90 | 22,60 | 32,30 | 31,10 | 40,80 | 39,50 | 45,00 | 43,80 | 49,20 | 48,00 | 57,70  | 56,40  |
|           |              | 2,01          | 1,11       | Ibf-ft | 17,63 | 16,67 | 23,82 | 22,94 | 30,09 | 29,13 | 33,19 | 32,31 | 36,29 | 35,40 | 42,56  | 41,60  |
|           | 2            | 5,44          | 3,00       | Nm     | 22,40 | 19,90 | 30,80 | 28,40 | 39,30 | 36,80 | 43,50 | 41,00 | 47,70 | 45,30 | 56,20  | 53,70  |
|           |              | 4,01          | 2,21       | Ibf-ft | 16,52 | 14,68 | 22,72 | 20,95 | 28,99 | 27,14 | 32,08 | 30,24 | 35,18 | 33,41 | 41,45  | 39,61  |
|           | 3            | 8,16          | 4,50       | Nm     | 20,90 | 17,20 | 29,30 | 25,60 | 37,80 | 34,10 | 42,00 | 38,30 | 46,20 | 42,50 | 54,70  | 51,00  |
|           |              | 6,02          | 3,32       | Ibf-ft | 15,42 | 12,69 | 21,61 | 18,88 | 27,88 | 25,15 | 30,98 | 28,25 | 34,08 | 31,35 | 40,34  | 37,62  |
|           | 4            | 10,88         | 6,00       | Nm     | 19,40 | 14,50 | 27,80 | 22,90 | 36,30 | 31,40 | 40,50 | 35,60 | 44,70 | 39,80 | 53,20  | 48,30  |
|           |              | 8,02          | 4,43       | Ibf-ft | 14,31 | 10,69 | 20,50 | 16,89 | 26,77 | 23,16 | 29,87 | 26,26 | 32,97 | 29,35 | 39,24  | 35,62  |
|           | 5            | 13,60         | 7,50       | Nm     | 17,90 | 11,80 | 26,30 | 20,20 | 34,80 | 28,70 | 39,00 | 32,90 | 43,20 | 37,10 | 51,70  | 45,60  |
|           |              | 10,03         | 5,53       | Ibf-ft | 13,20 | 8,70  | 19,40 | 14,90 | 25,67 | 21,17 | 28,76 | 24,27 | 31,86 | 27,36 | 38,13  | 33,63  |
|           | 6            | 16,32         | 9,00       | Nm     | 16,40 | 9,00  | 24,80 | 17,50 | 33,30 | 25,90 | 37,50 | 30,20 | 41,70 | 34,40 | 50,20  | 42,80  |
|           |              | 12,04         | 6,64       | Ibf-ft | 12,10 | 6,64  | 18,29 | 12,91 | 24,56 | 19,10 | 27,66 | 22,27 | 30,76 | 25,37 | 37,03  | 31,57  |
|           | 7            | 19,04         | 10,50      | Nm     | -     | -     | 23,30 | 14,80 | 31,80 | 23,20 | 36,00 | 27,40 | 40,20 | 31,70 | 48,70  | 40,10  |
|           |              | 14,04         | 7,74       | Ibf-ft | -     | -     | 17,19 | 10,92 | 23,45 | 17,11 | 26,55 | 20,21 | 29,65 | 23,38 | 35,92  | 29,58  |
|           | 8            | 21,76         | 12,00      | Nm     | -     | -     | 21,80 | 12,00 | 30,30 | 20,50 | 34,50 | 24,70 | 38,70 | 28,90 | 47,20  | 37,40  |
|           |              | 16,05         | 8,85       | Ibf-ft | -     | -     | 16,08 | 8,85  | 22,35 | 15,12 | 25,45 | 18,22 | 28,54 | 21,32 | 34,81  | 27,58  |
|           | 9            | 24,48         | 13,50      | Nm     | -     | -     | -     | -     | 28,80 | 17,80 | 33,00 | 22,00 | 37,20 | 26,20 | 45,70  | 34,70  |
|           |              | 18,06         | 9,96       | Ibf-ft | -     | -     | -     | -     | 21,24 | 13,13 | 24,34 | 16,23 | 27,44 | 19,32 | 33,71  | 25,59  |
|           | 10           | 27,20         | 15,00      | Nm     | -     | -     | -     | -     | 27,30 | 15,10 | 31,50 | 19,30 | 35,70 | 23,50 | 44,20  | 32,00  |
|           |              | 20,06         | 11,06      | Ibf-ft | -     | -     | -     | -     | 20,14 | 11,14 | 23,23 | 14,23 | 26,33 | 17,33 | 32,60  | 23,60  |
|           | 11           | 29,92         | 16,50      | Nm     | -     | -     | -     | -     | -     | 30,00 | 16,60 | 34,20 | 20,80 | 42,70 | 29,20  |        |
|           |              | 22,07         | 12,17      | Ibf-ft | -     | -     | -     | -     | -     | 22,13 | 12,24 | 25,22 | 15,34 | 31,49 | 21,54  |        |
|           | 12           | 32,64         | 18,00      | Nm     | -     | -     | -     | -     | -     | 28,50 | 13,80 | 32,70 | 18,10 | 41,20 | 26,50  |        |
|           |              | 24,07         | 13,28      | Ibf-ft | -     | -     | -     | -     | -     | 21,02 | 10,18 | 24,12 | 13,35 | 30,39 | 19,55  |        |
| SR60/(40) | 1            | 5,12          | 3,34       | Nm     | 47,40 | 45,60 | 64,30 | 62,50 | 81,20 | 79,40 | 89,60 | 87,80 | 98,10 | 96,30 | 115,00 | 113,20 |
|           |              | 3,78          | 2,46       | Ibf-ft | 34,96 | 33,63 | 47,43 | 46,10 | 59,89 | 58,56 | 66,09 | 64,76 | 72,35 | 71,03 | 84,82  | 83,49  |
|           | 2            | 10,24         | 6,68       | Nm     | 44,00 | 40,50 | 60,90 | 57,40 | 77,80 | 74,30 | 86,30 | 82,70 | 94,70 | 91,20 | 111,60 | 108,10 |
|           |              | 7,55          | 4,93       | Ibf-ft | 32,45 | 29,87 | 44,92 | 42,34 | 57,38 | 54,80 | 63,65 | 61,00 | 69,85 | 67,27 | 82,31  | 79,73  |
|           | 3            | 15,36         | 10,02      | Nm     | 40,70 | 35,30 | 57,60 | 52,20 | 74,50 | 69,10 | 82,90 | 77,60 | 91,40 | 86,00 | 108,30 | 102,90 |
|           |              | 11,33         | 7,39       | Ibf-ft | 30,02 | 26,04 | 42,48 | 38,50 | 54,95 | 50,97 | 61,14 | 57,23 | 67,41 | 63,43 | 79,88  | 75,89  |
|           | 4            | 20,48         | 13,36      | Nm     | 37,30 | 30,20 | 54,20 | 47,10 | 71,10 | 64,00 | 79,60 | 72,50 | 88,00 | 80,90 | 104,90 | 97,80  |
|           |              | 15,11         | 9,85       | Ibf-ft | 27,51 | 22,27 | 39,98 | 34,74 | 52,44 | 47,20 | 58,71 | 53,47 | 64,91 | 59,67 | 77,37  | 72,13  |
|           | 5            | 25,60         | 16,70      | Nm     | 34,00 | 25,10 | 50,90 | 42,00 | 67,80 | 58,90 | 76,30 | 67,40 | 84,70 | 75,80 | 101,60 | 92,70  |
|           |              | 18,88         | 12,32      | Ibf-ft | 25,08 | 18,51 | 37,54 | 30,98 | 50,01 | 43,44 | 56,28 | 49,71 | 62,47 | 55,91 | 74,94  | 68,37  |
|           | 6            | 30,72         | 20,04      | Nm     | 30,70 | 20,00 | 47,60 | 36,90 | 64,50 | 53,80 | 72,90 | 62,20 | 81,40 | 70,70 | 98,30  | 87,60  |
|           |              | 22,66         | 14,78      | Ibf-ft | 22,64 | 14,75 | 35,11 | 27,22 | 47,57 | 39,68 | 53,77 | 45,88 | 60,04 | 52,15 | 72,50  | 64,61  |
|           | 7            | 35,84         | 23,38      | Nm     | -     | -     | 44,20 | 31,80 | 61,10 | 48,70 | 69,60 | 57,10 | 78,00 | 65,60 | 94,90  | 82,50  |
|           |              | 26,43         | 17,24      | Ibf-ft | -     | -     | 32,60 | 23,45 | 45,06 | 35,92 | 51,33 | 42,11 | 57,53 | 48,38 | 69,99  | 60,85  |
|           | 8            | 40,96         | 26,72      | Nm     | -     | -     | 40,90 | 26,60 | 57,80 | 43,50 | 66,20 | 52,00 | 74,70 | 60,40 | 91,60  | 77,30  |
|           |              | 30,21         | 19,71      | Ibf-ft | -     | -     | 30,17 | 19,62 | 42,63 | 32,08 | 48,83 | 38,35 | 55,10 | 44,55 | 67,56  | 57,01  |
|           | 9            | 46,08         | 30,06      | Nm     | -     | -     | -     | -     | 54,40 | 38,40 | 62,90 | 46,90 | 71,30 | 55,30 | 88,20  | 72,20  |
|           |              | 33,99         | 22,17      | Ibf-ft | -     | -     | -     | -     | 40,12 | 28,32 | 46,39 | 34,59 | 52,59 | 40,79 | 65,05  | 53,25  |
|           | 10           | 51,20         | 33,40      | Nm     | -     | -     | -     | -     | 51,10 | 33,30 | 59,60 | 41,80 | 68,00 | 50,20 | 84,90  | 67,10  |
|           |              | 37,76         | 24,63      | Ibf-ft | -     | -     | -     | -     | 37,69 | 24,56 | 43,96 | 30,83 | 50,15 | 37,03 | 62,62  | 49,49  |
|           | 11           | 56,32         | 36,74      | Nm     | -     | -     | -     | -     | -     | 56,20 | 36,60 | 64,70 | 45,10 | 81,60 | 62,00  |        |
|           |              | 41,54         | 27,10      | Ibf-ft | -     | -     | -     | -     | -     | 41,45 | 26,99 | 47,72 | 33,26 | 60,18 | 45,73  |        |
|           | 12           | 61,44         | 40,08      | Nm     | -     | -     | -     | -     | -     | 52,90 | 31,50 | 61,30 | 40,00 | 78,20 | 56,90  |        |
|           |              | 45,32         | 29,56      | Ibf-ft | -     | -     | -     | -     | -     | 39,02 | 23,23 | 45,21 | 29,50 | 57,68 | 41,97  |        |

## TORQUES (Nm) ACTUATOR GEMELS SPRING RETURN

| TYPE       | Springs | Spring Torque | AIR SUPPLY   |       |        |        |        |        |        |        |        |        |        |        |        |        |        |
|------------|---------|---------------|--------------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|            |         |               | Mpa          | 0,3   |        | 0,4    |        | 0,5    |        | 0,55   |        | 0,6    |        | 0,7    |        |        |        |
|            |         |               | PSI          | 43,5  | 58     | 72,5   | 79,75  | 87     | 101,5  | Start  | End    | Start  | End    | Start  | End    |        |        |
|            | Outer   | Inner         | Start        | End   |        | Start  | End    |        |        |
| SR130(72)  | 1       | 0             | 21,70        | 11,90 | Nm     | 89,00  | 79,30  | 122,70 | 112,90 | 156,30 | 146,60 | 173,20 | 163,40 | 190,00 | 180,20 | 223,70 | 213,90 |
|            |         |               | 16,01        | 8,78  | Ibf-ft | 65,64  | 58,49  | 90,50  | 83,27  | 115,28 | 108,13 | 127,75 | 120,52 | 140,14 | 132,91 | 164,99 | 157,76 |
|            | 1       | 1             | 32,60        | 17,90 | Nm     | 83,10  | 68,40  | 116,70 | 102,10 | 150,40 | 135,70 | 167,20 | 152,60 | 184,00 | 169,40 | 217,70 | 203,00 |
|            |         |               | 24,04        | 13,20 | Ibf-ft | 61,29  | 50,45  | 86,07  | 75,30  | 110,93 | 100,09 | 123,32 | 112,55 | 135,71 | 124,94 | 160,57 | 149,72 |
|            | 2       | 0             | 43,40        | 23,90 | Nm     | 77,10  | 57,60  | 110,80 | 91,20  | 144,40 | 124,90 | 161,20 | 141,70 | 178,10 | 158,50 | 211,70 | 192,20 |
|            |         |               | 32,01        | 17,63 | Ibf-ft | 56,87  | 42,48  | 81,72  | 67,27  | 106,50 | 92,12  | 118,89 | 104,51 | 131,36 | 116,90 | 156,14 | 141,76 |
|            | 2       | 1             | 54,30        | 29,80 | Nm     | 71,10  | 46,70  | 104,80 | 80,40  | 138,40 | 114,00 | 155,30 | 130,90 | 172,10 | 147,70 | 205,80 | 181,30 |
|            |         |               | 40,05        | 21,98 | Ibf-ft | 52,44  | 34,44  | 77,30  | 59,30  | 102,08 | 84,08  | 114,54 | 96,55  | 126,93 | 108,94 | 151,79 | 133,72 |
|            | 2       | 2             | 65,10        | 35,80 | Nm     | 65,20  | 35,90  | 98,80  | 69,50  | 132,50 | 103,20 | 149,30 | 120,00 | 166,10 | 136,80 | 199,80 | 170,50 |
|            |         |               | 48,02        | 26,40 | Ibf-ft | 48,09  | 26,48  | 72,87  | 51,26  | 97,73  | 76,12  | 110,12 | 88,51  | 122,51 | 100,90 | 147,36 | 125,75 |
|            | 3       | 0             | 65,10        | 35,80 | Nm     | 65,20  | 35,90  | 98,80  | 69,50  | 132,50 | 103,20 | 149,30 | 120,00 | 166,10 | 136,80 | 199,80 | 170,50 |
|            |         |               | 48,02        | 26,40 | Ibf-ft | 48,09  | 26,48  | 72,87  | 51,26  | 97,73  | 76,12  | 110,12 | 88,51  | 122,51 | 100,90 | 147,36 | 125,75 |
|            | 3       | 1             | 76,00        | 41,80 | Nm     | 59,20  | 25,00  | 92,90  | 58,70  | 126,50 | 92,30  | 143,30 | 109,20 | 160,20 | 126,00 | 193,80 | 159,60 |
| SR240(132) |         |               | 56,05        | 30,83 | Ibf-ft | 43,66  | 18,44  | 68,52  | 43,29  | 93,30  | 68,08  | 105,69 | 80,54  | 118,16 | 92,93  | 142,94 | 117,71 |
|            | 3       | 2             | 86,80        | 47,70 | Nm     | 53,20  | 14,20  | 86,90  | 47,80  | 120,50 | 81,50  | 137,40 | 98,30  | 154,20 | 115,10 | 187,90 | 148,80 |
|            |         |               | 64,02        | 35,18 | Ibf-ft | 39,24  | 10,47  | 64,09  | 35,26  | 88,88  | 60,11  | 101,34 | 72,50  | 113,73 | 84,89  | 138,59 | 109,75 |
|            | 3       | 3             | 97,70        | 53,70 | Nm     | 47,30  | 3,30   | 80,90  | 37,00  | 114,60 | 70,60  | 131,40 | 87,50  | 148,20 | 104,30 | 181,90 | 137,90 |
|            |         |               | 72,06        | 39,61 | Ibf-ft | 34,89  | 2,43   | 59,67  | 27,29  | 84,52  | 52,07  | 96,92  | 64,54  | 109,31 | 76,93  | 134,16 | 101,71 |
|            | 4       | 0             | 86,80        | 47,70 | Nm     | 53,20  | 14,20  | 86,90  | 47,80  | 120,60 | 81,50  | 137,40 | 98,30  | 154,20 | 115,10 | 187,90 | 148,80 |
|            |         |               | 64,02        | 35,18 | Ibf-ft | 39,24  | 10,47  | 64,09  | 35,26  | 88,88  | 60,11  | 101,34 | 72,50  | 113,73 | 84,89  | 138,59 | 109,75 |
|            | 4       | 1             | 97,70        | 53,70 | Nm     | 47,30  | 3,30   | 80,90  | 37,00  | 114,60 | 70,60  | 131,40 | 87,50  | 148,20 | 104,30 | 181,90 | 137,90 |
|            |         |               | 72,06        | 39,61 | Ibf-ft | 34,89  | 2,43   | 59,67  | 27,29  | 84,52  | 52,07  | 96,92  | 64,54  | 109,31 | 76,93  | 134,16 | 101,71 |
|            | 4       | 2             | 108,50       | 59,70 | Nm     | 41,30  | -7,50  | 75,00  | 26,10  | 108,60 | 59,80  | 125,40 | 76,60  | 142,30 | 93,40  | 175,90 | 127,10 |
|            |         |               | 80,03        | 44,03 | Ibf-ft | 30,46  | -5,53  | 55,32  | 19,25  | 80,10  | 44,11  | 92,49  | 56,50  | 104,95 | 68,89  | 129,74 | 93,74  |
|            | 4       | 3             | 119,40       | 65,60 | Nm     | 35,30  | -18,40 | 69,00  | 15,30  | 102,60 | 48,90  | 119,50 | 65,80  | 136,30 | 82,60  | 170,00 | 116,20 |
|            |         |               | 88,06        | 48,38 | Ibf-ft | 26,04  | -13,57 | 50,89  | 11,28  | 75,67  | 36,07  | 88,14  | 48,53  | 100,53 | 60,92  | 125,39 | 85,70  |
|            | 4       | 4             | 130,20       | 71,60 | Nm     | 29,40  | -29,20 | 63,00  | 4,40   | 96,70  | 38,10  | 113,50 | 54,90  | 130,30 | 71,70  | 164,00 | 105,40 |
|            |         |               | 96,03        | 52,81 | Ibf-ft | 21,68  | -21,54 | 46,47  | 3,25   | 71,32  | 28,10  | 83,71  | 40,49  | 96,10  | 52,88  | 120,96 | 77,74  |
| SR240(132) | 1       | 0             | 40,20        | 22,10 | Nm     | 165,00 | 146,90 | 227,30 | 209,30 | 289,70 | 271,30 | 320,90 | 302,80 | 352,10 | 334,00 | 414,40 | 396,30 |
|            |         |               | 29,65        | 16,30 | Ibf-ft | 121,70 | 108,35 | 167,65 | 154,37 | 213,67 | 200,32 | 236,68 | 223,33 | 259,69 | 246,35 | 305,64 | 292,30 |
|            | 1       | 1             | 60,30        | 33,20 | Nm     | 153,90 | 126,80 | 216,30 | 189,20 | 278,70 | 251,50 | 309,80 | 282,70 | 341,00 | 313,90 | 403,40 | 376,20 |
|            |         |               | 44,47        | 24,49 | Ibf-ft | 113,51 | 93,52  | 159,53 | 139,55 | 205,56 | 185,50 | 228,50 | 208,51 | 251,51 | 231,52 | 297,53 | 277,47 |
|            | 2       | 0             | 80,40        | 44,20 | Nm     | 142,90 | 106,70 | 205,20 | 169,10 | 267,60 | 231,40 | 298,80 | 262,60 | 330,00 | 293,80 | 392,30 | 356,10 |
|            |         |               | 59,30        | 32,60 | Ibf-ft | 105,40 | 78,70  | 151,35 | 124,72 | 197,37 | 170,67 | 220,38 | 193,68 | 243,39 | 216,70 | 289,34 | 262,65 |
|            | 2       | 1             | 100,50       | 55,30 | Nm     | 131,80 | 86,60  | 194,20 | 149,00 | 256,50 | 211,30 | 287,70 | 242,50 | 318,90 | 273,70 | 381,30 | 336,00 |
|            |         |               | 74,12        | 40,79 | Ibf-ft | 97,21  | 63,87  | 143,23 | 109,90 | 189,18 | 155,85 | 212,20 | 178,86 | 235,21 | 201,87 | 281,23 | 247,82 |
|            | 2       | 2             | 120,60       | 66,30 | Nm     | 120,80 | 66,50  | 183,10 | 128,90 | 245,50 | 191,20 | 276,70 | 222,40 | 307,90 | 253,60 | 370,20 | 315,90 |
|            |         |               | 88,95        | 48,90 | Ibf-ft | 89,10  | 49,05  | 135,05 | 95,07  | 181,07 | 141,02 | 204,08 | 164,03 | 227,09 | 187,05 | 273,04 | 233,00 |
|            | 3       | 0             | 120,60       | 66,30 | Nm     | 120,80 | 66,50  | 183,10 | 128,90 | 245,50 | 191,20 | 276,70 | 222,40 | 307,90 | 253,60 | 370,20 | 315,90 |
|            |         |               | 88,95        | 48,90 | Ibf-ft | 89,10  | 49,05  | 135,05 | 95,07  | 181,07 | 141,02 | 204,08 | 164,03 | 227,09 | 187,05 | 273,04 | 233,00 |
|            | 3       | 1             | 140,70       | 77,40 | Nm     | 109,70 | 46,40  | 172,10 | 108,80 | 234,40 | 171,10 | 265,60 | 202,30 | 296,80 | 233,50 | 359,20 | 295,80 |
|            |         |               | 103,77       | 57,09 | Ibf-ft | 80,91  | 34,22  | 126,93 | 80,25  | 172,88 | 126,20 | 195,90 | 149,21 | 218,91 | 172,22 | 264,93 | 218,17 |
|            | 3       | 2             | 160,80       | 88,40 | Nm     | 98,70  | 26,30  | 161,00 | 88,70  | 223,40 | 151,00 | 254,60 | 182,20 | 285,80 | 213,40 | 348,10 | 275,70 |
|            |         |               | 118,60       | 65,20 | Ibf-ft | 72,80  | 19,40  | 118,75 | 65,42  | 164,77 | 111,37 | 187,78 | 134,38 | 210,79 | 157,40 | 256,74 | 203,35 |
|            | 3       | 3             | 180,90       | 99,50 | Nm     | 87,60  | 6,20   | 150,00 | 68,60  | 212,30 | 130,90 | 243,50 | 162,10 | 274,70 | 193,30 | 337,10 | 255,60 |
|            |         |               | 133,42       | 73,39 | Ibf-ft | 64,61  | 4,57   | 110,63 | 50,60  | 156,58 | 96,55  | 179,60 | 119,56 | 202,61 | 142,57 | 248,63 | 188,52 |
|            | 4       | 0             | 160,80       | 88,40 | Nm     | 98,70  | 26,30  | 161,00 | 88,70  | 223,40 | 151,00 | 254,60 | 182,20 | 285,70 | 213,40 | 348,10 | 275,70 |
|            |         |               | 118,60       | 65,20 | Ibf-ft | 72,80  | 19,40  | 118,75 | 65,42  | 164,77 | 111,37 | 187,78 | 134,38 | 210,72 | 157,40 | 256,74 | 203,35 |
|            | 4       | 1             | 180,90       | 99,50 | Nm     | 87,60  | 6,20   | 150,00 | 68,60  | 212,30 | 130,90 | 243,50 | 162,10 | 274,70 | 193,30 | 337,10 | 255,60 |
|            |         |               | 133,42       | 73,39 | Ibf-ft | 64,61  | 4,57   | 110,63 | 50,60  | 156,58 | 96,55  | 179,60 | 119,56 | 202,61 | 142,57 | 248,63 | 188,52 |
|            | 4       | 2             | 201,00110,50 | Nm    | 76,60  | -13,90 | 138,90 | 48,50  | 201,30 | 110,80 | 232,50 | 142,00 | 263,60 | 173,20 | 326,00 | 235,50 |        |
|            |         |               | 148,25       | 81,50 | Ibf-ft | 56,50  | -10,25 | 102,45 | 35,77  | 148,47 | 81,72  | 171,48 | 104,73 | 194,42 | 127,75 | 240,44 | 173,70 |
|            | 4       | 3             | 221,10121,60 | Nm    | 65,50  | -34,00 | 127,90 | 28,40  | 190,20 | 90,70  | 221,40 | 121,90 | 252,60 | 153,10 | 315,00 | 215,40 |        |
|            |         |               | 163,07       | 89,69 | Ibf-ft | 48,31  | -25,08 | 94,33  | 20,95  | 140,28 | 66,90  | 163,30 | 89,91  | 186,31 | 112,92 | 232,33 | 158,87 |
|            | 4       | 4             | 241,20132,60 | Nm    | 54,50  | -54,10 | 116,80 | 8,30   | 179,20 | 70,60  | 210,40 | 101,80 | 241,50 | 133,00 | 303,90 | 195,30 |        |
|            |         |               | 177,90       | 97,80 | Ibf-ft | 40,20  | -39,90 | 86,15  | 6,12   | 132,17 | 52,07  | 155,18 | 75,08  | 178,12 | 98,10  | 224,14 | 144,05 |

**Note:** For a continuous improvement, Gemels reserves the right to operate changes without prior notice.

For the values highlighted, or are missing, or with a minus sign (-), it is reported that with the number of standard springs, at 3 bar, the actuator is not able to overcome the force of the internal springs, therefore the actuator can not perform one complete rotation. Therefore with air supply of 3 Bar, it will be necessary evaluate the reduction of the number of springs or buy a bigger model.

### Other Information

Actuator Lubricant: BERULUB FR16  
 Spring Lubrications: VALVOLINE L-EP2  
 Always insure you wear the correct safety equipment as stipulated by your local organisation and applicable laws

</div

## TORQUES (Nm) ACTUATOR GEMELS SPRING RETURN

**Note:** For a continuous improvement, Gemels reserves the right to operate changes without prior notice. For the values highlighted, or are missing, or with a minus sign (-), it is reported that with the number of standard springs, at 3 bar, the actuator is not able to overcome the force of the internal springs, therefore the actuator can not to perform one complete rotation. Therefore with air supply of 3 Bar, it will be necessary evaluate the reduction of the number of springs or buy a bigger model.





| TYPE        | Springs<br>Outer<br>Inner | Spring<br>Torque | AIR SUPPLY   |       |        |        |        |        |        |        |        |        |        |        |        |        |        |
|-------------|---------------------------|------------------|--------------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|             |                           |                  | Mpa          |       | 0,3    |        | 0,4    |        | 0,5    |        | 0,55   |        | 0,6    |        |        |        |        |
|             |                           |                  | PSI          |       | 43,5   |        | 58     |        | 72,5   |        | 79,75  |        | 87     |        |        |        |        |
|             |                           |                  | Start        | End   | Start  | End    | Start  | End    | Start  | End    | Start  | End    | Start  | End    |        |        |        |
| SR365/(210) | 1                         | 0                | 64,1         | 35,3  | Nm     | 263,1  | 234,3  | 362,6  | 333,7  | 462    | 433,2  | 511,8  | 482,9  | 561,5  | 532,6  | 660,9  | 632,1  |
|             |                           |                  | 47,28        | 26,04 | lbf-ft | 194,05 | 172,81 | 267,44 | 246,12 | 340,75 | 319,51 | 377,48 | 356,17 | 414,14 | 392,82 | 487,45 | 466,21 |
|             | 1                         | 1                | 96,2         | 52,9  | Nm     | 245,5  | 202,2  | 344,9  | 301,7  | 444,4  | 401,1  | 494,1  | 450,9  | 543,8  | 500,6  | 643,3  | 600    |
|             |                           |                  | 70,95        | 39,02 | lbf-ft | 181,07 | 149,13 | 254,38 | 222,52 | 327,77 | 295,84 | 364,43 | 332,57 | 401,09 | 369,22 | 474,47 | 442,54 |
|             | 2                         | 0                | 128,2        | 70,5  | Nm     | 227,9  | 170,2  | 327,3  | 269,6  | 426,8  | 369,1  | 476,5  | 418,8  | 526,2  | 468,5  | 625,7  | 568    |
|             |                           |                  | 94,56        | 52,00 | lbf-ft | 168,09 | 125,53 | 241,40 | 198,85 | 314,79 | 272,23 | 351,45 | 308,89 | 388,10 | 345,55 | 461,49 | 418,93 |
|             | 2                         | 1                | 160,3        | 88,1  | Nm     | 210,2  | 138,1  | 309,7  | 237,6  | 409,1  | 337    | 458,9  | 386,8  | 508,6  | 436,5  | 608,1  | 535,9  |
|             |                           |                  | 118,23       | 64,98 | lbf-ft | 155,04 | 101,86 | 228,42 | 175,24 | 301,74 | 248,56 | 338,47 | 285,29 | 375,12 | 321,94 | 448,51 | 395,26 |
|             | 2                         | 2                | 192,3        | 105,8 | Nm     | 192,6  | 106,1  | 292,1  | 205,5  | 391,5  | 305    | 441,2  | 354,7  | 491    | 404,4  | 590,4  | 503,9  |
|             |                           |                  | 141,83       | 78,03 | lbf-ft | 142,05 | 78,26  | 215,44 | 151,57 | 288,75 | 224,96 | 325,41 | 261,61 | 362,14 | 298,27 | 435,46 | 371,66 |
| SR350/(290) | 3                         | 0                | 192,3        | 105,8 | Nm     | 192,6  | 106,1  | 292,1  | 205,5  | 391,5  | 305    | 441,3  | 354,7  | 491    | 404,4  | 590,4  | 503,9  |
|             |                           |                  | 141,83       | 78,03 | lbf-ft | 142,05 | 78,26  | 215,44 | 151,57 | 288,75 | 224,96 | 325,49 | 261,61 | 362,14 | 298,27 | 435,46 | 371,66 |
|             | 3                         | 1                | 224,4        | 123,4 | Nm     | 175    | 74     | 274,4  | 173,5  | 373,9  | 272,9  | 423,6  | 322,7  | 473,3  | 372,4  | 572,8  | 471,8  |
|             |                           |                  | 165,51       | 91,01 | lbf-ft | 129,07 | 54,58  | 202,39 | 127,97 | 275,77 | 201,28 | 312,43 | 238,01 | 349,09 | 274,67 | 422,47 | 347,98 |
|             | 3                         | 2                | 256,4        | 141   | Nm     | 157,4  | 42     | 256,8  | 141,4  | 356,3  | 240,9  | 406    | 290,6  | 455,7  | 340,3  | 555,2  | 439,8  |
|             |                           |                  | 189,11104,00 |       | lbf-ft | 116,09 | 30,98  | 189,41 | 104,29 | 262,79 | 177,68 | 299,45 | 214,33 | 336,11 | 250,99 | 409,49 | 324,38 |
|             | 3                         | 3                | 288,5        | 158,6 | Nm     | 139,7  | 9,9    | 239,2  | 109,4  | 338,6  | 208,8  | 388,4  | 258,6  | 438,1  | 308,3  | 537,5  | 407,7  |
|             |                           |                  | 212,79116,98 |       | lbf-ft | 103,04 | 7,30   | 176,42 | 80,69  | 249,74 | 154,00 | 286,47 | 190,73 | 323,13 | 227,39 | 396,44 | 300,70 |
|             | 4                         | 0                | 256,4        | 141   | Nm     | 157,4  | 42     | 256,8  | 141,4  | 356,3  | 240,9  | 406    | 290,6  | 455,7  | 340,3  | 555,2  | 439,8  |
|             |                           |                  | 189,11104,00 |       | lbf-ft | 116,09 | 30,98  | 189,41 | 104,29 | 262,79 | 177,68 | 299,45 | 214,33 | 336,11 | 250,99 | 409,49 | 324,38 |
| SR350/(290) | 4                         | 1                | 288,5        | 158,6 | Nm     | 139,7  | 9,9    | 239,2  | 109,4  | 338,6  | 208,8  | 388,4  | 258,6  | 438,1  | 308,3  | 537,6  | 407,7  |
|             |                           |                  | 212,79116,98 |       | lbf-ft | 103,04 | 7,30   | 176,42 | 80,69  | 249,74 | 154,00 | 286,47 | 190,73 | 323,13 | 227,39 | 396,51 | 300,70 |
|             | 4                         | 2                | 320,5        | 176,3 | Nm     | 122,1  | -22,1  | 221,6  | 77,3   | 321    | 176,8  | 370,7  | 226,5  | 420,5  | 276,2  | 519,9  | 375,7  |
|             |                           |                  | 236,39130,03 |       | lbf-ft | 90,06  | -16,30 | 163,44 | 57,01  | 236,76 | 130,40 | 273,41 | 167,06 | 310,14 | 203,71 | 383,46 | 277,10 |
|             | 4                         | 3                | 352,6        | 193,9 | Nm     | 104,5  | -54,2  | 203,9  | 45,3   | 303,4  | 144,7  | 353,1  | 194,5  | 402,8  | 244,2  | 502,3  | 343,6  |
|             |                           |                  | 260,06143,01 |       | lbf-ft | 77,08  | -39,98 | 150,39 | 33,41  | 223,78 | 106,72 | 260,43 | 143,46 | 297,09 | 180,11 | 370,48 | 253,43 |
|             | 4                         | 4                | 384,6        | 211,5 | Nm     | 86,8   | -86,2  | 186,3  | 13,2   | 285,8  | 112,7  | 335,5  | 162,4  | 385,2  | 212,1  | 484,7  | 311,6  |
|             |                           |                  | 283,67155,99 |       | lbf-ft | 64,02  | -63,58 | 137,41 | 9,74   | 210,79 | 83,12  | 247,45 | 119,78 | 284,11 | 156,44 | 357,50 | 229,82 |
|             | 1                         | 0                | 89           | 49    | Nm     | 364    | 324    | 501    | 461    | 639    | 599    | 707    | 668    | 776    | 736    | 914    | 874    |
|             |                           |                  | 65,64        | 36,14 | lbf-ft | 268,47 | 238,97 | 369,52 | 340,02 | 471,30 | 441,80 | 521,45 | 492,69 | 572,35 | 542,84 | 674,13 | 644,63 |
| SR350/(290) | 1                         | 1                | 133          | 73    | Nm     | 339    | 280    | 477    | 417    | 614    | 555    | 683    | 623    | 752    | 692    | 889    | 829    |
|             |                           |                  | 98,10        | 53,84 | lbf-ft | 250,03 | 206,52 | 351,82 | 307,56 | 452,86 | 409,35 | 503,75 | 459,50 | 554,65 | 510,39 | 655,69 | 611,44 |
|             | 2                         | 0                | 177          | 97    | Nm     | 315    | 235    | 452    | 373    | 590    | 510    | 659    | 579    | 727    | 648    | 865    | 785    |
|             |                           |                  | 130,55       | 71,54 | lbf-ft | 232,33 | 173,33 | 333,38 | 275,11 | 435,16 | 376,16 | 486,05 | 427,05 | 536,21 | 477,94 | 637,99 | 578,98 |
|             | 2                         | 1                | 221          | 122   | Nm     | 291    | 191    | 428    | 329    | 566    | 466    | 634    | 535    | 703    | 603    | 841    | 741    |
|             |                           |                  | 163,00       | 89,98 | lbf-ft | 214,63 | 140,87 | 315,68 | 242,66 | 417,46 | 343,70 | 467,61 | 394,59 | 518,50 | 444,75 | 620,29 | 546,53 |
|             | 2                         | 2                | 266          | 146   | Nm     | 266    | 147    | 404    | 284    | 541    | 422    | 610    | 491    | 679    | 559    | 816    | 697    |
|             |                           |                  | 196,19107,68 |       | lbf-ft | 196,19 | 108,42 | 297,97 | 209,47 | 399,02 | 311,25 | 449,91 | 362,14 | 500,80 | 412,30 | 601,85 | 514,08 |
|             | 3                         | 0                | 266          | 146   | Nm     | 266    | 147    | 404    | 284    | 541    | 422    | 610    | 491    | 679    | 559    | 816    | 697    |
|             |                           |                  | 196,19107,68 |       | lbf-ft | 196,19 | 108,42 | 297,97 | 209,47 | 399,02 | 311,25 | 449,91 | 362,14 | 500,80 | 412,30 | 601,85 | 514,08 |
| SR350/(290) | 3                         | 1                | 310          | 170   | Nm     | 242    | 103    | 379    | 240    | 517    | 378    | 586    | 446    | 654    | 515    | 792    | 652    |
|             |                           |                  | 228,64125,39 |       | lbf-ft | 178,49 | 75,97  | 279,54 | 177,01 | 381,32 | 278,80 | 432,21 | 328,95 | 482,36 | 379,84 | 584,15 | 480,89 |
|             | 3                         | 2                | 354          | 195   | Nm     | 218    | 58     | 355    | 196    | 493    | 333    | 561    | 402    | 630    | 471    | 767    | 608    |
|             |                           |                  | 261,10143,82 |       | lbf-ft | 160,79 | 42,78  | 261,83 | 144,56 | 363,62 | 245,61 | 413,77 | 296,50 | 464,66 | 347,39 | 565,71 | 448,44 |
|             | 3                         | 3                | 398          | 219   | Nm     | 193    | 14     | 331    | 152    | 468    | 289    | 537    | 358    | 606    | 426    | 743    | 564    |
|             |                           |                  | 293,55161,53 |       | lbf-ft | 142,35 | 10,33  | 244,13 | 112,11 | 345,18 | 213,15 | 396,07 | 264,05 | 446,96 | 314,20 | 548,01 | 415,98 |
|             | 4                         | 0                | 354          | 195   | Nm     | 218    | 58     | 355    | 196    | 493    | 333    | 561    | 402    | 630    | 471    | 768    | 608    |
|             |                           |                  | 261,10143,82 |       | lbf-ft | 160,79 | 42,78  | 261,83 | 144,56 | 363,62 | 245,61 | 413,77 | 296,50 | 464,66 | 347,39 | 566,45 | 448,44 |
|             | 4                         | 1                | 398          | 219   | Nm     | 193    | 14     | 331    | 152    | 468    | 289    | 537    | 358    | 606    | 426    | 743    | 564    |
|             |                           |                  | 293,55161,53 |       | lbf-ft | 142,35 | 10,33  | 244,13 | 112,11 | 345,18 | 213,15 | 396,07 | 264,05 | 446,96 | 314,20 | 548,01 | 415,98 |
| SR350/(290) | 4                         | 2                | 443          | 243   | Nm     | 169    | -30    | 306    | 107    | 444    | 245    | 513    | 314    | 581    | 382    | 719    | 520    |
|             |                           |                  | 326,74179,23 |       | lbf-ft | 124,65 | -22,13 | 225,69 | 78,92  | 327,48 | 180,70 | 378,37 | 231,59 | 428,52 | 281,75 | 530,31 | 383,53 |
|             | 4                         | 3                | 487          | 268   | Nm     | 145    | -74    | 282    | 63     | 420    | 201    | 488    | 269    | 557    | 338    | 694    | 475    |
|             |                           |                  | 359,19197,67 |       | lbf-ft | 106,95 | -54,58 | 207,99 | 46,47  | 309,78 | 148,25 | 359,93 | 198,40 | 410,82 | 249,30 | 511,87 | 350,34 |
|             | 4                         | 4                | 531          | 292   | Nm     | 120    | -119   | 258    | 19     | 395    | 156    | 464    | 225    | 533    | 294    | 670    | 431    |
|             |                           |                  | 391,64215,37 |       | lbf-ft | 88,51  | -87,77 | 190,29 | 14,01  | 291,34 | 115,06 | 342,23 | 165,95 | 393,12 | 216,84 | 494,17 | 317,89 |

## SOLENOID VALVE MOUNTING: NAMUR TYPE

Please ensure you read the IOM manual that is supplied with the solenoid valve in order to ensure correct function. This section is a guide to the function of a solenoid valve in conjunction with a pneumatic quarter turn actuator. The solenoid valves mentioned here are “**namur mounted**” with a modular “**5/2 way / 3/2 way**” (meaning either mode is possible with the same valve).

Certain facts need to be taken into consideration when mounting a namur solenoid valve to a quarter turn pneumatic actuator:


- Port “2” and “4” are always on the namur interface of the solenoid valve
- Port “2” and “4” are always connected to the namur interface of the quarter turn pneumatic actuator
- Port “1” is where instrument air is always connected to the solenoid valve
- Port “1” is always referred to as the air inlet or pressure port on a solenoid valve

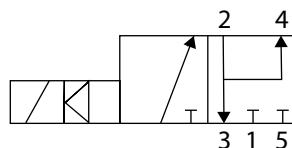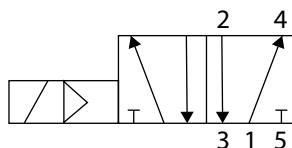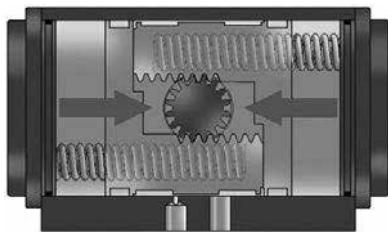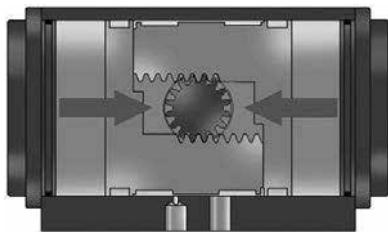

The above diagrams show a double acting actuator with 5/2 way solenoid valve (10.1) and a spring return actuator with a 5/2 way valve set up to function as a 3/2 way valve (10.2). Both valves are shown in the de-energised state (coil inactive, no electrical current). In both cases the solenoid valves port “2” is connected to the actuators port “A” through which air will vent out of port “3”. When connecting a namur solenoid valve, the pneumatic diagram will determine how to connect the ports. Only solenoid valve ports “2” and ‘4’ can be connected to the actuator. Whichever of the two ports shows a vertical arrow pointing away from it, is the port that needs to be connected to the actuators central chamber, in this case port “A”.


Please ensure you read the IOM manual that is supplied with the solenoid valve in order to ensure correct function. This section is a guide to the function of a solenoid valve in conjunction with a pneumatic quarter turn actuator. The solenoid valves mentioned here are “**namur mounted**” with a modular “**5/2 way / 3/2 way**” (meaning either mode is possible with the same valve).

## OPERATION WITH SOLENOID VALVES: DOUBLE ACTING

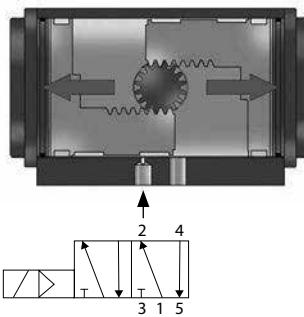

**SOLENOID COIL ENERGISED**


- This allows air to flow from solenoid inlet port "1" to solenoid port "2" which is connected to actuator port "A".
- As the air enters the center chamber of the actuator, the pistons start to move towards the open position (as indicated by the large red arrows).
- Atmospheric air from the outer chambers will vent out of actuator port "B", which is connected to solenoid port "4" and the exhausts via solenoid port "5".
- Solenoid port "3" is not used.

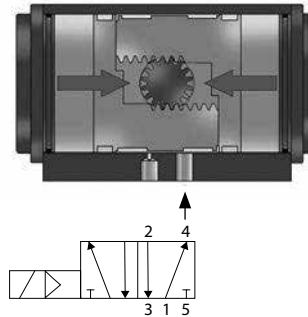

**SOLENOID COIL DE-ENERGISED**


- This allows air to flow from solenoid inlet port "1" to solenoid port "4" which is connected to actuator port "B".
- As the air enters the outer chambers of the actuator, the pistons start to move towards the closed position (as indicated by the large red arrows).
- Atmospheric air from the inner chamber will vent out of actuator port "A", which is connected to solenoid port "2" and the exhausts via solenoid port "3".
- Solenoid port "5" is not used.

## OPERATION WITH SOLENOID VALVES: SPRING RETURN

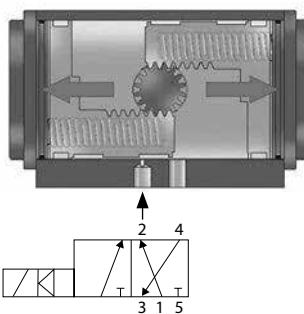

**SOLENOID COIL ENERGISED**

- This allows air to flow from solenoid inlet port "1" to solenoid port "2" which is connected to actuator port 'A'.
- As the air enters the center chamber of the actuator, the pistons start to move towards the open position and compressing the springs in the outer chambers (as indicated by the large red arrows).
- Atmospheric air from the outer chambers will vent out of actuator port "B", which is connected to solenoid port "4" and then exhausts via solenoid port "3".
- Solenoid port "5" is not used.

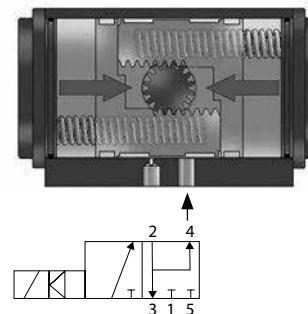

**SOLENOID COIL DE-ENERGISED**

- This closes solenoid port "1" and stops inlet air from flowing.
- The springs in the outer chambers will move the pistons back to the closed position (as indicated by the large red arrows).
- Residual air from the inner chamber will vent out of actuator port "A", which is connected to solenoid port "2" and the exhausts via solenoid port "3".
- Solenoid port "5" is not used.
- Solenoid port "2" and port "4" are also connected in a loop so no dirty air may enter the actuator (this is available only on some solenoid valves).

## MOUNTING VARIATIONS

Below are the two common variations to mounting a 90 degree or 180 degree actuator to a valve. Mounting actuators in these varying positions is due to space constraints in the global assembly or simply due to consistency with prior assemblies already in existence. Please note how the indicator puck always correctly shows the position of the valve disc and hence showing the flowpath of the medium running through the pipe.



**13.1 in-line, closed position**

Mounted in-line or parallel to the pipe, the actuator and valve are in the standard closed position.



**13.2 in-line, open position**

Mounted in-line or parallel to the pipe, the actuator and valve are in the standard open position.



**13.3 crossmount, closed position**

Mounted crossmount or offset to the pipe, the actuator and valve are in the standard closed position.



**13.4 crossmount, open position**


Mounted crossmount or offset to the pipe, the actuator and valve are in the standard open position.




## ACTUATORS DA

### Basic Operating Details

- Port "A" Air to open (anti clockwise)
- Port "B" Air to close (clockwise)
- Air supply: 6 bar; maximum 7 bar
- Drive Medium = Air (Dry or lubricated); not corrosive Gas; light hydraulic oil
- Temperature= Buna nitrile o'seals  
-40° to 80°C or -40 to 176°F
- Standard indicator position
- Basic Operating Details

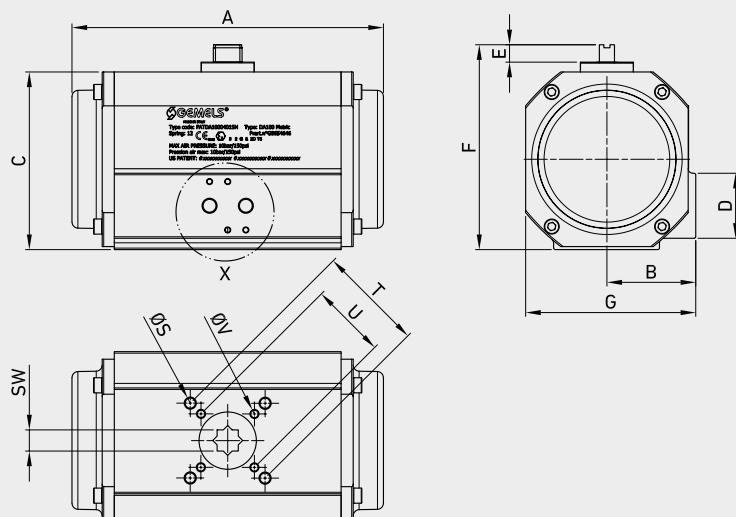

| TYPE  | AIR SUPPLY | Nm    | lbf-ft |
|-------|------------|-------|--------|
| DA25  | MPa 0,6    | 23,7  | 17,48  |
|       | Psi 87     |       |        |
| DA40  | MPa 0,6    | 41,6  | 30,68  |
|       | Psi 87     |       |        |
| DA100 | MPa 0,6    | 101,5 | 74,86  |
|       | Psi 87     |       |        |
| DA200 | MPa 0,6    | 201,9 | 148,91 |
|       | Psi 87     |       |        |
| DA375 | MPa 0,6    | 374   | 275,85 |
|       | Psi 87     |       |        |
| DA825 | MPa 0,6    | 824   | 607,75 |
|       | Psi 87     |       |        |

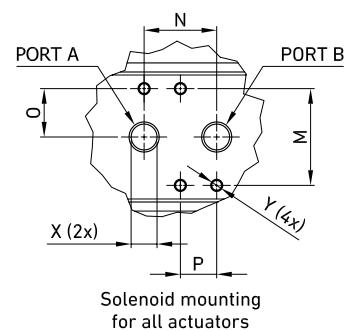


## DA ACTUATORS (double acting)

| TYPE  | ISO5211 | A          | B    | C     | D    | E    | F     | G     | M    | N    | O    | P    | ØS  | T           | ØV          | U           | X            | Y          | SW                  | WEIGHT         | ITEM CODE |
|-------|---------|------------|------|-------|------|------|-------|-------|------|------|------|------|-----|-------------|-------------|-------------|--------------|------------|---------------------|----------------|-----------|
| DA25  | F03-F05 | mm 160     | 38   | 70    | 40   | 20   | 90    | 69,5  | 32   | 24   | 16   | 12   | M6  | 50<br>1,97  | M5<br>1,42  | 36<br>x 12  | G1/8<br>M5X8 | 9          | kg 1<br>lb 2,20     | FATDA0250401SH |           |
|       |         | inch 6,30  | 1,50 | 2,76  | 1,57 | 0,79 | 3,54  | 2,74  | 1,26 | 0,94 | 0,63 | 0,47 |     |             |             |             |              |            |                     |                |           |
| DA40  | F05     | mm 138,5   | 47,5 | 90,5  | 41   | 20   | 110,5 | 87,5  | 32   | 24   | 16   | 12   | -   | -           | M6<br>1,97  | 50<br>x 12  | G1/8<br>M5X8 | 11<br>0,43 | kg 1,8<br>lb 3,97   | FATDA0400401SH |           |
|       |         | inch 5,45  | 1,87 | 3,56  | 1,61 | 0,79 | 4,35  | 3,44  | 1,26 | 0,94 | 0,63 | 0,47 |     |             |             |             |              |            |                     |                |           |
| DA100 | F05-F07 | mm 222,5   | 59   | 118   | 43   | 20   | 138   | 113   | 32   | 24   | 16   | 12   | M8  | 70<br>2,76  | M6<br>1,97  | 50<br>x 12  | G1/8<br>M5X8 | 14<br>0,55 | kg 2,8<br>lb 6,17   | FATDA1000401SH |           |
|       |         | inch 8,76  | 2,32 | 4,65  | 1,69 | 0,79 | 5,43  | 4,45  | 1,26 | 0,94 | 0,63 | 0,47 |     |             |             |             |              |            |                     |                |           |
| DA200 | F05-F07 | mm 238     | 72   | 140,5 | 43   | 20   | 160,5 | 136,5 | 32   | 24   | 16   | 12   | M8  | 70<br>2,76  | M6<br>1,97  | 50<br>x 12  | G1/4<br>M5X8 | 17<br>0,67 | kg 7<br>lb 15,43    | FATDA2000401SH |           |
|       |         | inch 9,37  | 2,83 | 5,53  | 1,69 | 0,79 | 6,32  | 5,37  | 1,26 | 0,94 | 0,63 | 0,47 |     |             |             |             |              |            |                     |                |           |
| DA375 | F07-F10 | mm 286     | 78   | 166,5 | 43   | 30   | 196,5 | 156   | 32   | 24   | 16   | 12   | M10 | 102<br>4,02 | M8<br>2,76  | 70<br>x 12  | G1/4<br>M5X8 | 22<br>0,87 | kg 10,5<br>lb 23,15 | FATDA3750401SH |           |
|       |         | inch 11,26 | 3,07 | 6,56  | 1,69 | 1,18 | 7,74  | 6,14  | 1,26 | 0,94 | 0,63 | 0,47 |     |             |             |             |              |            |                     |                |           |
| DA825 | F10-F12 | mm 360     | 95,5 | 207,5 | 43   | 30   | 237,5 | 191   | 32   | 24   | 16   | 12   | M12 | 125<br>4,92 | M10<br>4,02 | 102<br>x 12 | G1/4<br>M5X8 | 27<br>1,06 | kg 22,4<br>lb 49,38 | FATDA8250401SH |           |
|       |         | inch 14,17 | 3,76 | 8,17  | 1,69 | 1,18 | 9,35  | 7,52  | 1,26 | 0,94 | 0,63 | 0,47 |     |             |             |             |              |            |                     |                |           |

## DA ACTUATORS KITS

| TYPE  | BALL VALVES        | DN       | MATERIAL     | ISO5211            | WEIGHT             | ITEM CODE       |
|-------|--------------------|----------|--------------|--------------------|--------------------|-----------------|
| AK6   | GE-GHP-GR-SB       | 06-10-13 | CARBON STEEL | F03-F03            | kg 0,25<br>lb 0,55 | K0C00AK61X      |
| AK6S  | GN                 | 06-10    | CARBON STEEL | F03 F05-F03<br>F05 | kg 0,30<br>lb 0,66 | K0C00AK6S1X     |
| AK6S2 | GM1-GN             | 06-10-13 | CARBON STEEL | F03-F05            | kg 0,25<br>lb 0,55 | K01A00194AAAA0H |
| AK13  | GE-GHP-GR          | 13       | CARBON STEEL | F03-F05            | kg 0,31<br>lb 0,68 | K0C00AK131X     |
| AK20  | GE-GB-GHP GN-GR-SB | 20-25    | CARBON STELL | F05 F07-F05        | kg 0,52<br>lb 1,15 | K0C00AK201X     |
| AK32  | SB                 | 32-40    | CARBON STEEL | F05 F07-F05        | kg 0,60<br>lb 1,32 | K0C00AK321X     |
| AK40  | GB-GHP-G GR-SB     | 32-40    | CARBON STEEL | F05 F07-F05        | kg 0,67<br>lb 1,48 | K0C00AK401X     |
| AK50  | GB-GHP-GN GR-SB    | 50       | CARBON STEEL | F05 F07-F05        | kg 0,71<br>lb 1,57 | K0C00AK501X     |
| AK65  | SB                 | 65-80    | CARBON STEEL | F05 F07-F05        | kg 0,74<br>lb 1,63 | K0C00AK651X     |
| AK100 | GR-SB              | 100-125  | CARBON STEEL | F10 F12-F12        | kg 2,05<br>lb 4,52 | K0C00AK1001X    |

KIT WASHER  
ONLY FOR GN-GB VALVES  
KIT ACTUATOR  
C0034406H FROM DN6 TO DN32  
C0034306H FOR DN40-DN50

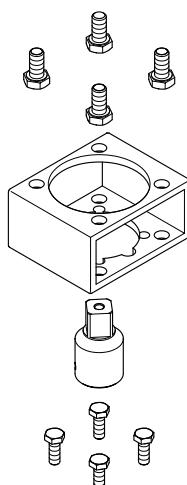

## ACTUATORS



## KITS



## ACTUATORS SR

## Basic Operating Details

- Port "A" Air to open (anti clockwise)
- Port "B" Air to close (clockwise)
- Air supply: 6 bar; maximum 7 bar
- Drive Medium = Air (Dry or lubricated); not corrosive Gas; light hydraulic oil
- Temperature= Buna nitrile o'seals  
-40° to 80°C or -40 to 176°F
- Standard indicator position

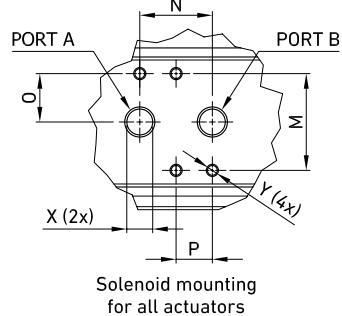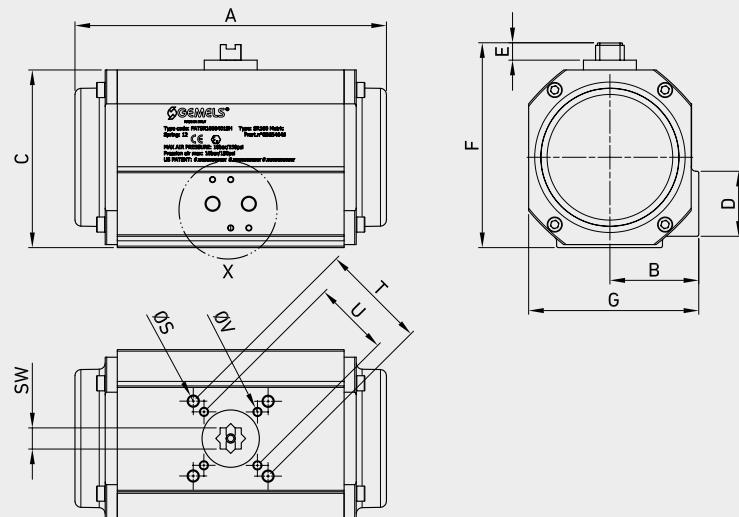


| TYPE        | AIR SUPPLY | AIR-START |        | AIR-END |        | SPRING-START |        | SPRING-END |        | N°SPRING |
|-------------|------------|-----------|--------|---------|--------|--------------|--------|------------|--------|----------|
|             |            | Nm        | lbf·ft | Nm      | lbf·ft | Nm           | lbf·ft | Nm         | lbf·ft |          |
| SR35/(18)   | MPa 0,6    | 32,7      | 24,12  | 18,1    | 13,35  | 32,64        | 24,07  | 18         | 13,28  | 12       |
|             | Psi 87     |           |        |         |        |              |        |            |        |          |
| SR60/(40)   | MPa 0,6    | 61,4      | 45,29  | 40,1    | 29,58  | 61,3         | 45,21  | 40         | 29,50  | 12       |
|             | Psi 87     |           |        |         |        |              |        |            |        |          |
| SR130/(72)  | MPa 0,6    | 130,33    | 96,13  | 71,73   | 52,91  | 130,2        | 96,03  | 71,6       | 52,81  | 4X4      |
|             | Psi 87     |           |        |         |        |              |        |            |        |          |
| SR240/(132) | MPa 0,6    | 241,54    | 178,15 | 132,98  | 98,08  | 241,2        | 177,90 | 132,64     | 97,83  | 4X4      |
|             | Psi 87     |           |        |         |        |              |        |            |        |          |
| SR385/(210) | MPa 0,6    | 385,2     | 284,11 | 212,1   | 156,44 | 384,6        | 283,67 | 211,5      | 155,99 | 4X4      |
|             | Psi 87     |           |        |         |        |              |        |            |        |          |
| SR530/(290) | MPa 0,6    | 533       | 393,12 | 294     | 216,84 | 531          | 391,64 | 292        | 215,37 | 4X4      |
|             | Psi 87     |           |        |         |        |              |        |            |        |          |

## SR ACTUATORS (SPRING RETURN)

| TYPE        | ISO5211 | A          | B    | C     | D    | E    | F     | G     | M    | N    | O    | P    | ØS  | T    | ØV  | U    | X       | Y    | SW   | WEIGHT              | ITEM CODE      |
|-------------|---------|------------|------|-------|------|------|-------|-------|------|------|------|------|-----|------|-----|------|---------|------|------|---------------------|----------------|
| SR35/(18)   | F05-F07 | mm 203     | 49   | 87    | 40   | 20   | 107   | 90,5  | 32   | 24   | 16   | 12   | M8  | 70   | M6  | 50   | G1/8x12 | M5x8 | 11   | kg 1,9<br>lb 4,19   | FATSR0500401SH |
|             |         | inch 7,99  | 1,93 | 3,43  | 1,57 | 0,79 | 4,21  | 3,56  | 1,26 | 0,94 | 0,63 | 0,47 |     | 2,76 |     | 1,97 |         |      | 0,43 |                     |                |
| SR60/(40)   | F05-F07 | mm 222,5   | 59   | 118   | 43   | 20   | 138   | 113   | 32   | 24   | 16   | 12   | M8  | 70   | M6  | 50   | G1/8x12 | M5x8 | 14   | kg 2,8<br>lb 0,55   | FATSR1000401SH |
|             |         | inch 8,76  | 2,32 | 4,65  | 1,69 | 0,79 | 5,43  | 4,45  | 1,26 | 0,94 | 0,63 | 0,47 |     | 2,76 |     | 1,97 |         |      | 0,55 | lb                  |                |
| SR130/(72)  | F07-F10 | mm 238     | 72   | 140,5 | 43   | 20   | 160,5 | 136,5 | 32   | 24   | 16   | 12   | M8  | 102  | M6  | 70   | G1/4x12 | M5x8 | 17   | kg 7<br>lb 15,43    | FATSR2000401SH |
|             |         | inch 9,37  | 2,83 | 5,53  | 1,69 | 0,79 | 6,32  | 5,37  | 1,26 | 0,94 | 0,63 | 0,47 |     | 4,02 |     | 2,76 |         |      | 0,67 |                     |                |
| SR240/(132) | F07-F10 | mm 286     | 78   | 166,5 | 43   | 30   | 196,5 | 156   | 32   | 24   | 16   | 12   | M10 | 102  | M8  | 70   | G1/4x12 | M5x8 | 22   | kg 10,5<br>lb 23,15 | FATSR3750401SH |
|             |         | inch 11,26 | 3,07 | 6,56  | 1,69 | 1,18 | 7,74  | 6,14  | 1,26 | 0,94 | 0,63 | 0,47 |     | 4,02 |     | 2,76 |         |      | 0,87 |                     |                |
| SR385/(210) | F10-F12 | mm 334     | 95,5 | 207,5 | 43   | 30   | 237,5 | 191   | 32   | 24   | 16   | 12   | M12 | 125  | M10 | 102  | G1/4x12 | M5x8 | 27   | kg 20,6<br>lb 45,42 | FATSR6000401SH |
|             |         | inch 13,15 | 3,76 | 8,17  | 1,69 | 1,18 | 9,35  | 7,52  | 1,26 | 0,94 | 0,63 | 0,47 |     | 4,92 |     | 4,02 |         |      | 1,06 |                     |                |
| SR530/(290) | F10-F12 | mm 360     | 95,5 | 207,5 | 43   | 30   | 237,5 | 191   | 32   | 24   | 16   | 12   | M12 | 125  | M10 | 102  | G1/4x12 | M5x8 | 27   | kg 22,4<br>lb 49,38 | FATSR8250401SH |
|             |         | inch 14,17 | 3,76 | 8,17  | 1,69 | 1,18 | 9,35  | 7,52  | 1,26 | 0,94 | 0,63 | 0,47 |     | 4,92 |     | 4,02 |         |      | 1,06 |                     |                |

KIT WASHER  
ONLY FOR GN-GB VALVES  
KIT ACTUATOR  
C0034406H FROM DN6 TO DN32  
C0034306H FOR DN40-DN50

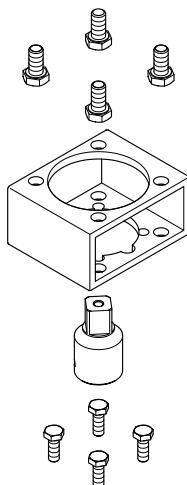


## DA ACTUATORS KITS

| TYPE  | BALL VALVES           | DN       | MATERIAL     | ISO5211            | WEIGHT             | ITEM CODE       |
|-------|-----------------------|----------|--------------|--------------------|--------------------|-----------------|
| AK6   | GE-GHP-GR-SB          | 06-10-13 | CARBON STEEL | F03-F03            | kg 0,25<br>lb 0,55 | K0C00AK61X      |
| AK6S  | GN                    | 06-10    | CARBON STEEL | F03 F05-F03<br>F05 | kg 0,30<br>lb 0,66 | K0C00AK6S1X     |
| AK6S2 | GM1-GN                | 06-10-13 | CARBON STEEL | F03-F05            | kg 0,25<br>lb 0,55 | K01A00194AAAA0H |
| AK13  | GE-GHP-GR             | 13       | CARBON STEEL | F03-F05            | kg 0,31<br>lb 0,68 | K0C00AK131X     |
| AK20  | GE-GB-GHP<br>GN-GR-SB | 20-25    | CARBON STELL | F05 F07-F05        | kg 0,52<br>lb 1,15 | K0C00AK201X     |
| AK32  | SB                    | 32-40    | CARBON STEEL | F05 F07-F05        | kg 0,60<br>lb 1,32 | K0C00AK321X     |
| AK40  | GB-GHP-G<br>GR-SB     | 32-40    | CARBON STEEL | F05 F07-F05        | kg 0,67<br>lb 1,48 | K0C00AK401X     |
| AK50  | GB-GHP-GN<br>GR-SB    | 50       | CARBON STEEL | F05 F07-F05        | kg 0,71<br>lb 1,57 | K0C00AK501X     |
| AK65  | SB                    | 65-80    | CARBON STEEL | F05 F07-F05        | kg 0,74<br>lb 1,63 | K0C00AK651X     |
| AK100 | GR-SB                 | 100-125  | CARBON STEEL | F10 F12-F12        | kg 2,05<br>lb 4,52 | K0C00AK1001X    |




## ULTRA COMPACT RACK&PINION ACTUATORS

- Port "A" Air to open (anti clockwise)
- Port "B" Air to close (clockwise)
- Air supply: 6 bar; maximum 8 bar
- Drive Medium = Air (Dry or lubricated); not corrosive Gas; light hydraulic oil
- Temperature= -50° to 160°C or -58 to 320° F
- Standard indicator position
- Basic Operating Details

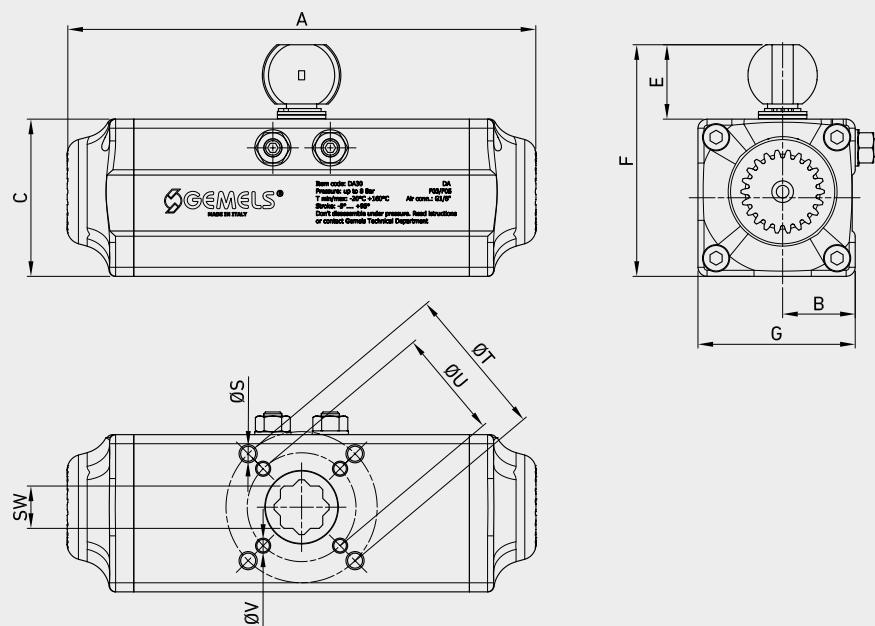

## ULTRA COMPACT RACK&PINION ACTUATORS

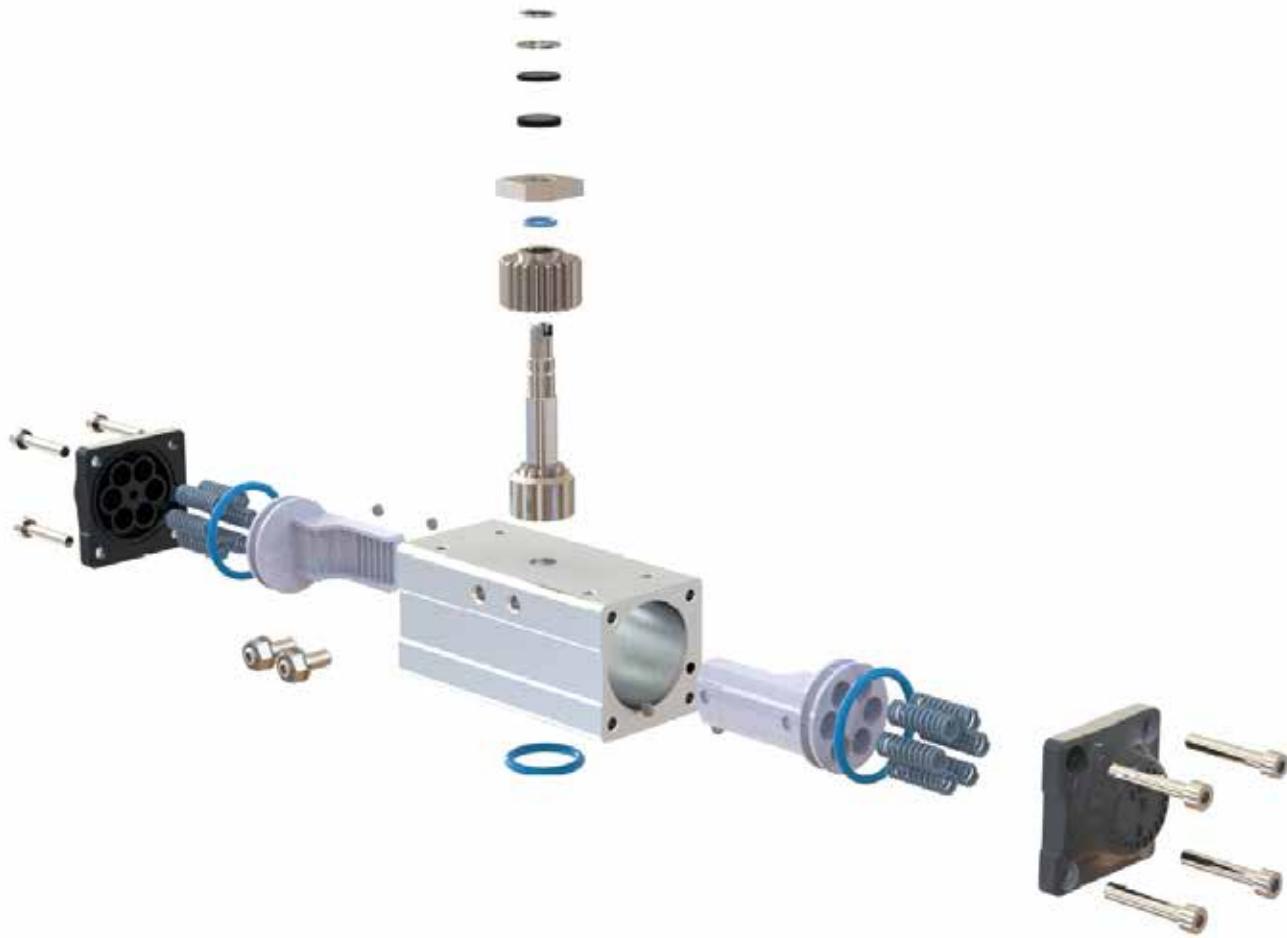

| REF NO | DESCRIPTION            | QTY    | MATERIAL STD UNIT | COMMENTS                 |
|--------|------------------------|--------|-------------------|--------------------------|
| 1      | Cylinder Body          | 1      | Aluminium Anod.   |                          |
| 2      | Driveshaft             | 1      | Steel             | Alt. CNI 425             |
| 3      | Piston                 | 2      | Aluminium         | Alt. Hard Anodized/PTFE  |
| 4      | Endcap                 | 2      | Aluminium Anod.   |                          |
| 5      | Spring                 | 12 max | SiCr              | S1 Double Acting only    |
| 6      | Endcap Bolt            | 8      | Stainless Steel   | DIN921                   |
| 7      | Open Stop Adj.Bolt     | 2      | Stainless Steel   | ISO4026                  |
| 8      | Open Stop Adj. Nut     | 2      | Stainless Steel   | DIN934                   |
| 9      | Endcap 'O'Ring         | 2      | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 10     | Piston Back-up Bearing | 2      | PTFE+CG           |                          |
| 11     | Piston 'O'Ring         | 2      | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 12     | Piston Guidebar        | 1      | Steel             |                          |
| 13     | Shim ring              | 1      | Stainless Steel   | DIN988                   |
| 14     | Driveshaft Circlip     | 1      | Steel             | DIN471                   |
| 15     | Driveshaft O'Ring      | 2      | Buna Nitrile      | Alt. Viton/Silicone/EPDM |
| 16     | Driveshaft Bearing     | 4      | PTFE+CG           |                          |

## ■ TORQUES (NM) ACTUATOR GEMELS DOUBLE ACTING

| AIR SUPPLY |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|
| MODEL      | Mpa    | 0,3    | 0,4    | 0,5    | 0,55   | 0,6    | 0,7    | 0,8    |
| DA 15      | PSI    | 43,5   | 58     | 72,5   | 79,75  | 87     | 101,5  | 116    |
|            | Nm     | 7,1    | 9,5    | 11,8   | 13,3   | 14,2   | 16,6   | 19     |
|            | lbf-ft | 5,24   | 7,01   | 8,70   | 9,81   | 10,47  | 12,24  | 14,01  |
|            |        |        |        |        |        |        |        |        |
| DA 30      | Nm     | 13,92  | 18,57  | 23,21  | 25,99  | 27,85  | 32,49  | 37,14  |
|            | lbf-ft | 10,27  | 13,70  | 17,12  | 19,17  | 20,54  | 23,96  | 27,39  |
| DA 60      | Nm     | 28,49  | 37,98  | 47,48  | 53,18  | 56,98  | 66,47  | 75,97  |
|            | lbf-ft | 21,01  | 28,01  | 35,02  | 39,22  | 42,03  | 49,03  | 56,03  |
| DA 110     | Nm     | 55,28  | 73,7   | 92,13  | 103,19 | 110,56 | 129,99 | 147,41 |
|            | lbf-ft | 40,77  | 54,36  | 67,95  | 76,11  | 81,54  | 95,88  | 108,72 |
| DA 220     | Nm     | 111,42 | 148,57 | 185,71 | 207,99 | 222,85 | 259,99 | 297,17 |
|            | lbf-ft | 82,18  | 109,58 | 136,97 | 153,41 | 164,37 | 191,76 | 219,18 |
| DA 340     | Nm     | 169,23 | 225,64 | 282,05 | 315,89 | 338,46 | 394,87 | 451,28 |
|            | lbf-ft | 124,82 | 166,42 | 208,03 | 232,99 | 249,63 | 291,24 | 332,85 |

## ■ MAXIMUM OPERATING TIME PER SECOND (0.55 MPAG / 80 PSIG)

| Actuator Size | DA15 | D30 | DA60 | DA110 | DA220 | DA340 |
|---------------|------|-----|------|-------|-------|-------|
| DA open       | <1   | <1  | <1   | <1    | <1    | <1    |
| DA close      | <1   | <1  | <1   | <1    | <1    | <1    |
| SR open       | <1   | <1  | <1   | <1    | <1    | <1    |
| SR close      | <1   | <1  | <1   | <1    | <1    | <1    |

## ■ AIR CONSUMPTION PER STROKE


| Actuator Size                  | DA15 | D30  | DA60 | DA110 | DA220 | DA340 |
|--------------------------------|------|------|------|-------|-------|-------|
| Port 'A' to open (liters)      | 0,03 | 0,14 | 0,08 | 0,28  | 0,28  | 0,55  |
| Port 'B' to close (liters)     | 0,03 | 0,14 | 0,08 | 0,28  | 0,28  | 0,55  |
| Port 'A' to open (cubic inch)  | 1,8  | 8,5  | 4,9  | 17,1  | 17,1  | 33,6  |
| Port 'B' to close (cubic inch) | 1,8  | 8,5  | 4,9  | 17,1  | 17,1  | 33,6  |

## DA ACTUATORS (DOUBLE ACTING)

| TYPE  | ISO5211 | A    | B     | C    | E    | F    | G    | M    | N    | O    | P    | ØS   | T   | ØV   | U  | X    | Y         | SW   | WEIGHT  | ITEM CODE |                 |
|-------|---------|------|-------|------|------|------|------|------|------|------|------|------|-----|------|----|------|-----------|------|---------|-----------|-----------------|
| DA15  | F03     | mm   | 131   | 22,5 | 45   | 20   | 65   | 45   | 32   | 24   | 16   | 12   | M5  | 36   | -  | -    | G1/8 x 12 | M5X8 | 9       | kg 0,29   | FATAJRDA015AA0H |
|       |         | inch | 5,16  | 0,89 | 1,77 | 0,79 | 2,56 | 1,77 | 1,26 | 0,94 | 0,63 | 0,47 |     | 1,42 |    |      |           | 0,35 | lb 0,64 |           |                 |
| DA30  | F03/F05 | mm   | 155   | 26   | 52   | 20   | 72   | 52   | 32   | 24   | 16   | 12   | M6  | 50   | M5 | 36   | G1/8 x 12 | M5X8 | 14      | kg 0,78   | FATAJRDA030AA0H |
|       |         | inch | 6,10  | 1,02 | 2,05 | 0,79 | 2,83 | 2,05 | 1,26 | 0,94 | 0,63 | 0,47 |     | 1,97 |    | 1,42 |           | 0,55 | lb 1,72 |           |                 |
| DA60  | F05/F07 | mm   | 198   | 32,5 | 65   | 20   | 85   | 65   | 32   | 24   | 20   | 12   | M8  | 70   | M6 | 50   | G1/8 x 12 | M5X8 | 17      | kg 1,67   | FATAJRDA060AA0H |
|       |         | inch | 7,80  | 1,28 | 2,56 | 0,79 | 3,35 | 2,56 | 1,26 | 0,94 | 0,79 | 0,47 |     | 2,76 |    | 1,97 |           | 0,67 | lb 3,68 |           |                 |
| DA110 | F05/F07 | mm   | 244   | 40   | 80   | 20   | 100  | 80   | 32   | 24   | 20   | 12   | M8  | 70   | M6 | 50   | G1/4 x 12 | M5X8 | 17      | kg 2,9    | FATAJRDA110AA0H |
|       |         | inch | 9,61  | 1,57 | 3,15 | 0,79 | 3,94 | 3,15 | 1,26 | 0,94 | 0,79 | 0,47 |     | 2,76 |    | 1,97 |           | 0,67 | lb 6,39 |           |                 |
| DA220 | F07/F10 | mm   | 301   | 50   | 100  | 20   | 120  | 100  | 32   | 24   | 26   | 12   | M10 | 102  | M8 | 70   | G1/4 x 12 | M5X8 | 22      | kg 3,3    | FATAJRDA220AA0H |
|       |         | inch | 11,85 | 1,97 | 3,94 | 0,79 | 4,72 | 3,94 | 1,26 | 0,94 | 1,02 | 0,47 |     | 4,02 |    | 2,76 |           | 0,87 | lb 7,33 |           |                 |
| DA340 | F07/F10 | mm   | 344   | 55   | 110  | 20   | 130  | 110  | 32   | 24   | 26   | 12   | M10 | 102  | M8 | 70   | G1/4 x 12 | M5X8 | 22      | kg 4,3    | FATAJRDA340AA0H |
|       |         | inch | 13,54 | 2,17 | 4,33 | 0,79 | 5,12 | 4,33 | 1,26 | 0,94 | 1,02 | 0,47 |     | 4,02 |    | 2,76 |           | 0,87 | lb 9,53 |           |                 |

## TORQUES (NM) ACTUATOR GEMELS DOUBLE ACTING


| TYPE  | AIR SUPPLY | Nm  | lbf·ft |
|-------|------------|-----|--------|
| DA15  | MPa<br>0,6 | 14  | 10,33  |
|       | Psi<br>87  |     |        |
| DA30  | MPa<br>0,6 | 28  | 20,65  |
|       | Psi<br>87  |     |        |
| DA60  | MPa<br>0,6 | 57  | 42,04  |
|       | Psi<br>87  |     |        |
| DA110 | MPa<br>0,6 | 110 | 81,13  |
|       | Psi<br>87  |     |        |
| DA220 | MPa<br>0,6 | 223 | 164,48 |
|       | Psi<br>87  |     |        |
| DA340 | MPa<br>0,6 | 339 | 250,03 |
|       | Psi<br>87  |     |        |

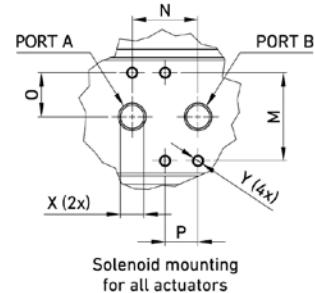



# J4C ELECTRIC ACTUATOR

- Housing: Anticorrosive polyamide (lid & body)
  - Main external shaft: Anticorrosive polyamide
  - External screws: stainless steel
  - Gears: steel and polyamide
  - Visual position indicator: Polyamide
  - Dome: Polycarbonate
  - Adjustable internal cams: Polyamide
  - Electric motor: 24VDS Brushless motor
  - Insulation: Class B

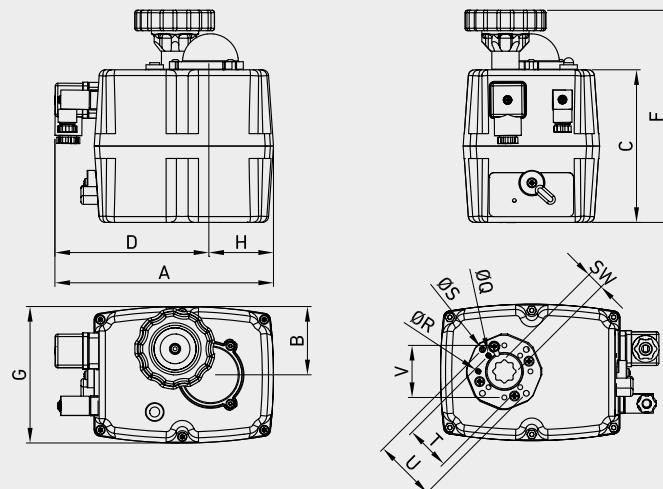

## OPTIONS

- J4C S20/S85 DPS 2015 digital positioner: 4-20mA, 0-20mA, 0-10V or 1-10V.
  - J4C S20/S85 BSR 2015 emergency fail safe kit system by battery
  - Digital potentiometer: 1K, 5K or 10K.
  - 3 position actuator: 0o-45o-90o or 0o-90o-180° (only for J4C-S35)

| TYPE   | BALL VALVES     | DN    |
|--------|-----------------|-------|
| J4C-20 | GE-GHP-GN       | 06-10 |
| J4C-35 | GE-GHP-GN-GR-SB | 13    |

## VALVE WITH ELECTRICAL ACTUATORS


| TYPE    | VOLTAGE           | ISO5211     | A                   | B          | C           | D           | F           | G           | H          | ØQ | ØR | ØS | T          | U          | V          | SW            | WEIGHT            | ITEM CODE    |
|---------|-------------------|-------------|---------------------|------------|-------------|-------------|-------------|-------------|------------|----|----|----|------------|------------|------------|---------------|-------------------|--------------|
| J4C-S20 | 24 to 240 VAC/VDC | F03-F04-F05 | mm 181<br>inch 7,13 | 55<br>2,17 | 123<br>4,84 | 130<br>5,12 | 169<br>6,65 | 110<br>4,33 | 51<br>2,01 | M5 | M5 | M6 | 36<br>1,42 | 50<br>1,97 | 42<br>1,65 | 9 or 11 or 14 | kg 1,8<br>lb 3,97 | FAEJ3H2025HH |
| J4C-B20 | 12 VAC/VDC        | F03-F04-F05 | mm 181<br>inch 7,13 | 55<br>2,17 | 123<br>4,84 | 130<br>5,12 | 169<br>6,65 | 110<br>4,33 | 51<br>2,01 | M5 | M5 | M6 | 36<br>1,42 | 50<br>1,97 | 42<br>1,65 | 9 or 11 or 14 | kg 1,8<br>lb 3,97 | FAEJ3L2025HH |
| J4C-S35 | 24 to 240 VAC/VDC | F03-F04-F05 | mm 181<br>inch 7,13 | 55<br>2,17 | 123<br>4,84 | 130<br>5,12 | 169<br>6,65 | 110<br>4,33 | 51<br>2,01 | M5 | M5 | M6 | 36<br>1,42 | 50<br>1,97 | 42<br>1,65 | 9 or 11 or 14 | kg 1,9<br>lb 4,19 | FAEJ3H3540HH |
| J4C-B35 | 12 VAC/VDC        | F03-F04-F05 | mm 181<br>inch 7,13 | 55<br>2,17 | 123<br>4,84 | 130<br>5,12 | 169<br>6,65 | 110<br>4,33 | 51<br>2,01 | M5 | M5 | M6 | 36<br>1,42 | 50<br>1,97 | 42<br>1,65 | 9 or 11 or 14 | kg 1,9<br>lb 4,19 | FAEJ3L3540HH |

|                            |        | J4C-S20   | J4C-S35   |
|----------------------------|--------|---|---|
| Voltage                    |        | 24 a to 240 VAC/VDC -0/+5%<br>12 VDC/VAC 0/+5%<br>Change the power supply PCB | 24 a to 240 VAC/VDC -0/+5%<br>12 VDC/VAC 0/+5%<br>Change the power supply PCB |
| Operation time unload      |        | 10 Sec./90°   | 10 Sec./90°   |
| Maximum torque break       | Nm     | 25  | 38  |
|                            | lbf-ft | 18,44   | 28,03   |
| Maximum operational torque | Nm     | 20  | 35  |
|                            | lbf-ft | 14,75   | 25,81   |
| Duty rating %              |        | 75,00%  | 75,00%  |
| Working angle              |        | 0° TO 270°  | 0° TO 270°  |
| Limit switch               |        | 4 SPDT NO micro (2 motor stop and 2 confirmations)                            | 4 SPDT NO micro (2 motor stop and 2 confirmations)                            |
| Heater                     |        | 3,5W  | 3,5W  |
| Big Plugs                  |        | EN175301-803 FORM A   | EN175301-803 FORM A   |
| Small Plug                 |        | DIN43650/C  | DIN43650/C  |
| IP rating                  |        | IP-67   | IP-67   |
| Temperature                | °C     | -20°+70°  | -20°+70°  |
|                            | °F     | -4° + 158°  | -4° + 158°  |
| Weight                     | kg     | 1,8   | 1,9   |
|                            | lbs    | 3,97  | 4,19  |



## J4C ELECTRIC ACTUATOR

- Housing: Anticorrosive polyamide (lid & body)
- Main external shaft: stainless steel
- External screws: stainless steel
- Gears: Steel and polyamide
- Visual position indicator: Polyamide
- Dome: Polycarbonate
- Adjustable internal cams: Polyamide
- Electric motor: 24VDS Brushless motor
- Insulation: Class B

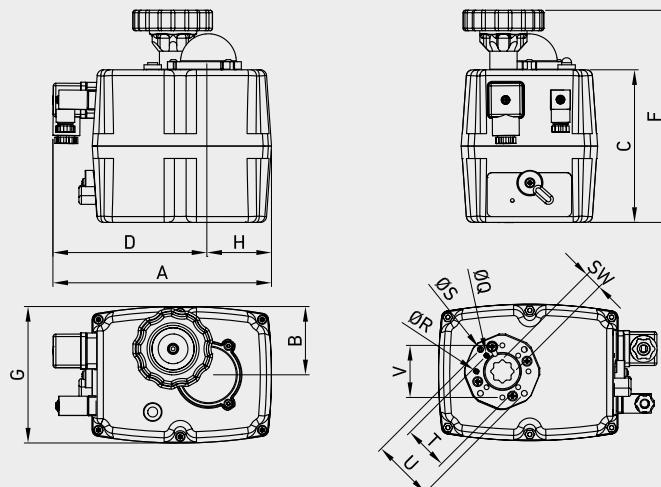

### OPTIONS

- J4C S20/S85 DPS 2015 digital positioner: 4-20mA, 0-20mA, 0-10V or 1-10V.
- J4C S20/S85 BSR 2015 emergency fail safe kit system by battery
- Digital potentiometer: 1K, 5K or 10K.
- 3 position actuator: 0o-45o-90o or 0o-90o-180o

| TYPE   | BALL VALVES     | DN |
|--------|-----------------|----|
| J4C-55 | GE-GHP-GN-GR-SB | 20 |
| J4C-85 | GE-GHP-GN-GR-SB | 25 |


## VALVE WITH ELECTRICAL ACTUATORS

| TYPE    | VOLTAGE           | ISO5211 | A         | B    | C    | D    | F    | G    | H    | ØQ | ØR | ØS | T    | U    | V | SW             | WEIGHT            | ITEM CODE    |
|---------|-------------------|---------|-----------|------|------|------|------|------|------|----|----|----|------|------|---|----------------|-------------------|--------------|
| J4C-S55 | 24 to 240 VAC/VDC | F05-F07 | mm 181    | 55   | 148  | 130  | 196  | 110  | 51   | M6 | M8 | -  | 50   | 70   | - | 11 or 14 or 17 | kg 2,4<br>lb 5,29 | FAEJ3H5560HH |
|         |                   |         | inch 7,13 | 2,17 | 5,83 | 5,12 | 7,72 | 4,33 | 2,01 |    |    |    | 1,97 | 2,76 |   |                |                   |              |
| J4C-B55 | 12 VAC/VDC        | F05-F07 | mm 181    | 55   | 148  | 130  | 196  | 110  | 51   | M6 | M8 | -  | 50   | 70   | - | 11 or 14 or 17 | kg 2,4<br>lb 5,29 | FAEJ3L5560HH |
|         |                   |         | inch 7,13 | 2,17 | 5,83 | 5,12 | 7,72 | 4,33 | 2,01 |    |    |    | 1,97 | 2,76 |   |                |                   |              |
| J4C-S85 | 24 to 240 VAC/VDC | F05-F07 | mm 181    | 55   | 148  | 130  | 196  | 110  | 51   | M6 | M8 | -  | 50   | 70   | - | 11 or 14 or 17 | kg 3<br>lb 6,61   | FAEJ3H8590HH |
|         |                   |         | inch 7,13 | 2,17 | 5,83 | 5,12 | 7,72 | 4,33 | 2,01 |    |    |    | 1,97 | 2,76 |   |                |                   |              |
| J4C-B85 | 12 VAC/VDC        | F05-F07 | mm 181    | 55   | 148  | 130  | 196  | 110  | 51   | M6 | M8 | -  | 50   | 70   | - | 11 or 14 or 17 | kg 3<br>lb 6,61   | FAEJ3L8590HH |
|         |                   |         | inch 7,13 | 2,17 | 5,83 | 5,12 | 7,72 | 4,33 | 2,01 |    |    |    | 1,97 | 2,76 |   |                |                   |              |

|                            |        | J4C-S55   | J4C-S85   |
|----------------------------|--------|---|---|
| Voltage                    |        | 24 a to 240 VAC/VDC -0/+5%<br>12 VDC/VAC 0/+5%        | 24 a to 240 VAC/VDC -0/+5%<br>12 VDC/VAC 0/+5%        |
| Operation time unload      |        | 13sec/90°   | 29sec/90°   |
| Maximum torque break       | Nm     | 60  | 90  |
|                            | lbf-ft | 44,25   | 66,38   |
| Maximum operational torque | Nm     | 55  | 85  |
|                            | lbf-ft | 40,57   | 62,69   |
| Duty rating %              |        | 75,00%  | 75,00%  |
| Working angle              |        | 0° TO 270°  | 0° TO 270°  |
| Limit switch               |        | 4 SPDT NO micro<br>(2 motor stop and 2 confirmations) | 4 SPDT NO micro<br>(2 motor stop and 2 confirmations) |
| Heater                     |        | 3,5W  | 3,5W  |
| Big Plugs                  |        | EN175301-803 FORM A                                   | EN175301-803 FORM A                                   |
| Small Plug                 |        | DIN43650/C  | DIN43650/C  |
| IP rating                  |        | IP-67   | IP-67   |
| Temperature                | C°     | -20°+70°  | -20°+70°  |
|                            | F°     | -4° + 158°  | -4° + 158°  |
| Weight                     | kg     | 2,4   | 3   |
|                            | lbs    | 5,29  | 6,61  |


## ACTUATORS

## KITS

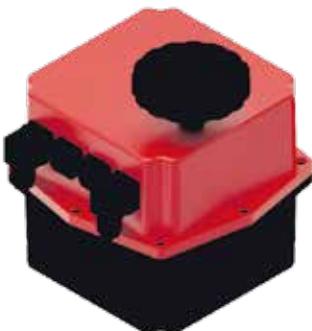

## J4C ELECTRIC ACTUATOR

- Housing:  
Body and cover: anticorrosive polyamide  
Main external shaft: stainless steel
- Fastening: stainless steel
- Gears: steel and polyamide
- Indicator: polyamide + glass filled
- Internal cams: polyamide + glass filled
- Electric motor: 24VDS Brushless motor
- Insulation: class B
- Service S4
- Duty range: 75%

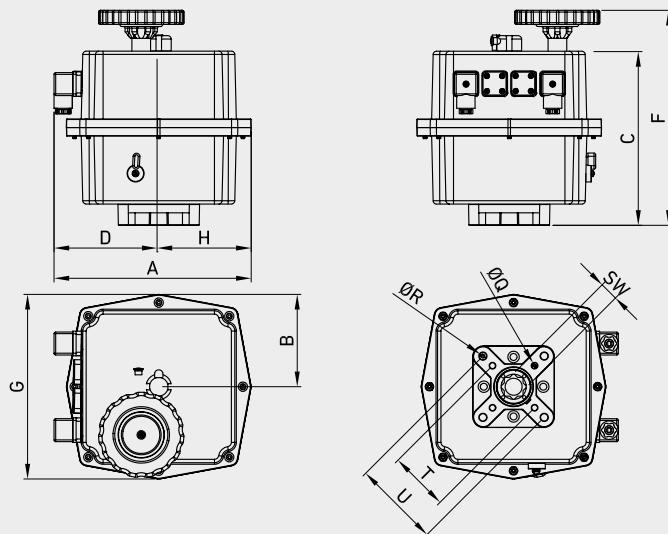

### OPTIONS

- DPS2005 digital positioner: 0÷20mA, 4÷20mA o 0÷10V
- Digital potentiometer kit: 1K, 5K and 10K
- BSR battery fail safe kit
- 3 positions: 0° 45° 90° / 0° 90° 180°

| TYPE   | BALL VALVES     | DN    |
|--------|-----------------|-------|
| J4-140 | GB-GHP-GN-GR-SB | 32-40 |
| J4-300 | GB-GHP-GN-GR-SB | 50    |


## VALVE WITH ELECTRICAL ACTUATORS

| TYPE     | VOLTAGE           | ISO5211 | A         | B    | C    | D    | F     | G    | H    | ØQ | ØR | ØS | T    | U    | V | SW       | WEIGHT             | ITEM CODE      |
|----------|-------------------|---------|-----------|------|------|------|-------|------|------|----|----|----|------|------|---|----------|--------------------|----------------|
| J4C-S140 | 24 to 240 VAC/VDC | F07-F10 | mm 235    | 107  | 205  | 128  | 254   | 214  | 107  | M6 | M8 | -  | 70   | 102  | - | 17 or 22 | kg 5,2<br>lb 11,46 | FAEJ3H140170HH |
|          |                   |         | inch 9,25 | 4,21 | 8,07 | 5,04 | 10,00 | 8,43 | 4,21 |    |    |    | 2,76 | 4,02 |   |          |                    |                |
| J4C-B140 | 12 VAC/VDC        | F07-F10 | mm 235    | 107  | 205  | 128  | 254   | 214  | 107  | M6 | M8 | -  | 70   | 102  | - | 17 or 22 | kg 5,2<br>lb 11,46 | FAEJ3L140170HH |
|          |                   |         | inch 9,25 | 4,21 | 8,07 | 5,04 | 10,00 | 8,43 | 4,21 |    |    |    | 2,76 | 4,02 |   |          |                    |                |
| J4C-S300 | 24 to 240 VAC/VDC | F07-F10 | mm 235    | 107  | 205  | 128  | 254   | 214  | 107  | M6 | M8 | -  | 70   | 102  | - | 17 or 22 | kg 5,2<br>lb 11,46 | FAEJ3H300350HH |
|          |                   |         | inch 9,25 | 4,21 | 8,07 | 5,04 | 10,00 | 8,43 | 4,21 |    |    |    | 2,76 | 4,02 |   |          |                    |                |
| J4C-B300 | 12 VAC/VDC        | F07-F10 | mm 235    | 107  | 205  | 128  | 254   | 214  | 107  | M6 | M8 | -  | 70   | 102  | - | 17 or 22 | kg 5,2<br>lb 11,46 | FAEJ3L300350HH |
|          |                   |         | inch 9,25 | 4,21 | 8,07 | 5,04 | 10,00 | 8,43 | 4,21 |    |    |    | 2,76 | 4,02 |   |          |                    |                |

|                            |        | J4C-S140   | J4C-S300   |
|----------------------------|--------|--|--|
| Voltage                    |        | 24 a to 240 VAC/VDC -0/+5%<br>12 VDC/VAC 0/+5%     | 24 a to 240 VAC/VDC -0/+5%<br>12 VDC/VAC 0/+5%     |
| Operation time unload      |        | 25sec/90°  | 48sec/90°  |
| Maximum torque break       | Nm     | 170  | 350  |
|                            | lbf-ft | 125,39   | 258,15   |
| Maximum operational torque | Nm     | 140  | 300  |
|                            | lbf-ft | 103,26   | 221,27   |
| Duty rating %              |        | 75,00%   | 75,00%   |
| Working angle              |        | 0° TO 270°   | 0° TO 270°   |
| Limit switch               |        | 4 SPDT NO micro (2 motor stop and 2 confirmations) | 4 SPDT NO micro (2 motor stop and 2 confirmations) |
| Heater                     |        | 3,5W   | 3,5W   |
| Big Plugs                  |        | EN175301-803 FORM A                                | EN175301-803 FORM A                                |
| Small Plug                 |        | DIN43650/C   | DIN43650/C   |
| IP rating                  |        | IP-67  | IP-67  |
| Temperature                | C°     | -20°+70°   | -20°+70°   |
|                            | F°     | -4° + 158°   | -4° + 158°   |
| Weight                     | kg     | 5,2  | 5,2  |
|                            | lbs    | 11,46  | 11,46  |

## ACTUATORS KITS

| TYPE  | BALL VALVES        | DN       | MATERIAL     | ISO5211            | WEIGHT             | ITEM CODE    |
|-------|--------------------|----------|--------------|--------------------|--------------------|--------------|
| AK65  | SB                 | 65-80    | CARBON STEEL | F05 F07-F05        | kg 0,74<br>lb 1,63 | KOC00AK651X  |
| AK32  | SB                 | 32-40    | CARBON STEEL | F05 F07-F05        | kg 0,60<br>lb 1,32 | KOC00AK321X  |
| AK40  | GB-GHP-GN-GR-SB    | 32-40    | CARBON STEEL | F05 F07-F05        | kg 0,67<br>lb 1,48 | KOC00AK401X  |
| AK20  | GE-GB-GHP-GN-GR-SB | 20-25    | CARBON STEEL | F05 F07-F05        | kg 0,52<br>lb 1,15 | KOC00AK201X  |
| AK6   | GE-GHP-GN-GR-SB    | 06-10-13 | CARBON STEEL | F03-F03            | kg 0,25<br>lb 0,55 | KOC00AK61X   |
| AK13  | GE-GHP-GN-GR       | 13       | CARBON STEEL | F03-F05            | kg 0,31<br>lb 0,68 | KOC00AK131X  |
| AK100 | GR-SB              | 100-125  | CARBON STEEL | F10 F12-F12        | kg 2,05<br>lb 4,52 | KOC00AK1001X |
| AK50  | GB-GHP-GN-GR-SB    | 50       | CARBON STEEL | F05 F07-F05        | kg 0,71<br>lb 1,57 | KOC00AK501X  |
| AK6S  | GN                 | 06-10-13 | CARBON STEEL | F03 F05-F03<br>F05 | kg 0,30<br>lb 0,66 | KOC00AK6S1X  |

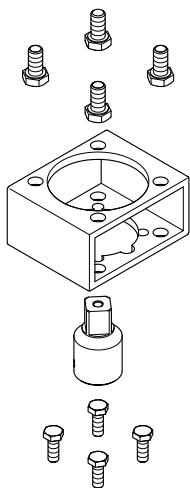

KIT WASHER  
ONLY FOR GN-GB VALVES  
KIT ACTUATOR  
C0034406H FROM DN6 TO DN32  
C0034306H FOR DN40-DN50

## J4C 20 CONSUMPTION

| Voltage | Model | Unload |      | Max. Operational Torque 20Nm |      | Max. Torque Break 25Nm |      |
|---------|-------|--------|------|------------------------------|------|------------------------|------|
|         |       | A      | W    | A                            | W    | A                      | W    |
| 12VDC   | B20   | Nm     | 0,75 | 9,06                         | 1,8  | 21,6                   | 1,95 |
|         |       | lbf-ft | 0,55 | 6,68                         | 1,33 | 15,93                  | 1,44 |
| 24VDC   | S20   | Nm     | 0,45 | 10,77                        | 0,9  | 21,49                  | 0,97 |
|         |       | lbf-ft | 0,33 | 7,94                         | 0,66 | 15,85                  | 0,72 |
| 48VDC   | S20   | Nm     | 0,21 | 9,93                         | 0,42 | 20,38                  | 0,46 |
|         |       | lbf-ft | 0,15 | 7,32                         | 0,31 | 15,03                  | 0,34 |
| 110 VDC | S20   | Nm     | 0,07 | 8                            | 0,13 | 14,3                   | 0,14 |
|         |       | lbf-ft | 0,05 | 5,90                         | 0,10 | 10,55                  | 0,10 |
| 12VAC   | B20   | Nm     | 1,04 | 12,51                        | 1,85 | 22,18                  | 2,28 |
|         |       | lbf-ft | 0,77 | 9,23                         | 1,36 | 16,36                  | 1,68 |
| 24VAC   | S20   | Nm     | 0,59 | 14,2                         | 1,12 | 26,77                  | 1,28 |
|         |       | lbf-ft | 0,44 | 10,47                        | 0,83 | 19,74                  | 0,94 |
| 48VAC   | S20   | Nm     | 0,34 | 16,37                        | 0,69 | 33,16                  | 0,75 |
|         |       | lbf-ft | 0,25 | 12,07                        | 0,51 | 24,46                  | 0,55 |
| 110 VAC | S20   | Nm     | 0,14 | 15,73                        | 0,27 | 29,52                  | 0,3  |
|         |       | lbf-ft | 0,10 | 11,60                        | 0,20 | 21,77                  | 0,22 |
| 240 VAC | S20   | Nm     | 0,1  | 23,76                        | 0,15 | 36,43                  | 0,16 |
|         |       | lbf-ft | 0,07 | 17,52                        | 0,11 | 26,87                  | 0,12 |

## J4C 35 CONSUMPTION

| Voltage | Model | Unload |      | Max. Operational Torque 35Nm |      | Max. Torque Break 38Nm |      |
|---------|-------|--------|------|------------------------------|------|------------------------|------|
|         |       | A      | W    | A                            | W    | A                      | W    |
| 12VDC   | B35   | Nm     | 0,75 | 9,06                         | 2,38 | 28,62                  | 2,62 |
|         |       | lbf-ft | 0,55 | 6,68                         | 1,76 | 21,11                  | 1,93 |
| 24VDC   | S35   | Nm     | 0,45 | 10,77                        | 1,28 | 30,78                  | 1,37 |
|         |       | lbf-ft | 0,33 | 7,94                         | 0,94 | 22,70                  | 1,01 |
| 48VDC   | S35   | Nm     | 0,21 | 9,93                         | 0,56 | 26,72                  | 0,59 |
|         |       | lbf-ft | 0,15 | 7,32                         | 0,41 | 19,71                  | 0,44 |
| 110 VDC | S35   | Nm     | 0,07 | 7,7                          | 0,17 | 18,9                   | 0,18 |
|         |       | lbf-ft | 0,05 | 5,68                         | 0,13 | 13,94                  | 0,13 |
| 12VAC   | B35   | Nm     | 1,04 | 12,51                        | 2,75 | 33                     | 3,19 |
|         |       | lbf-ft | 0,77 | 9,23                         | 2,03 | 24,34                  | 2,35 |
| 24VAC   | S35   | Nm     | 0,59 | 14,2                         | 1,58 | 37,8                   | 1,67 |
|         |       | lbf-ft | 0,44 | 10,47                        | 1,17 | 27,88                  | 1,23 |
| 48VAC   | S35   | Nm     | 0,34 | 16,37                        | 0,92 | 44,04                  | 0,99 |
|         |       | lbf-ft | 0,25 | 12,07                        | 0,68 | 32,48                  | 0,73 |
| 110 VAC | S35   | Nm     | 0,14 | 15,73                        | 0,36 | 39,45                  | 0,38 |
|         |       | lbf-ft | 0,10 | 11,60                        | 0,27 | 29,10                  | 0,28 |
| 240 VAC | S35   | Nm     | 0,1  | 23,76                        | 0,19 | 45,41                  | 0,2  |
|         |       | lbf-ft | 0,07 | 17,52                        | 0,14 | 33,49                  | 0,15 |

## J4C 55 CONSUMPTION

| Voltage | Model |        | Unload |       | Max. Operational Torque 55Nm |       | Max. Torque Break 60Nm |       |
|---------|-------|--------|--------|-------|------------------------------|-------|------------------------|-------|
|         |       |        | A      | W     | A                            | W     | A                      | W     |
| 12VDC   | B55   | Nm     | 0,7    | 8,45  | 3,04                         | 36,43 | 3,42                   | 41,05 |
|         |       | lbf-ft | 0,52   | 6,23  | 2,24                         | 26,87 | 2,52                   | 30,28 |
| 24VDC   | S55   | Nm     | 0,42   | 10,19 | 1,55                         | 37,17 | 1,63                   | 39,02 |
|         |       | lbf-ft | 0,31   | 7,52  | 1,14                         | 27,42 | 1,20                   | 28,78 |
| 48VDC   | S55   | Nm     | 0,2    | 9,72  | 0,61                         | 29,25 | 0,67                   | 32,31 |
|         |       | lbf-ft | 0,15   | 7,17  | 0,45                         | 21,57 | 0,49                   | 23,83 |
| 110 VDC | S55   | Nm     | 0,07   | 7,5   | 0,19                         | 20,8  | 0,21                   | 23,2  |
|         |       | lbf-ft | 0,05   | 5,53  | 0,14                         | 15,34 | 0,15                   | 17,11 |
| 12VAC   | B55   | Nm     | 0,94   | 11,3  | 3,43                         | 41,18 | 3,78                   | 45,41 |
|         |       | lbf-ft | 0,69   | 8,33  | 2,53                         | 30,37 | 2,79                   | 33,49 |
| 24VAC   | S55   | Nm     | 0,58   | 13,89 | 1,87                         | 44,88 | 1,98                   | 47,52 |
|         |       | lbf-ft | 0,43   | 10,24 | 1,38                         | 33,10 | 1,46                   | 35,05 |
| 48VAC   | S55   | Nm     | 0,33   | 15,73 | 1,1                          | 52,8  | 1,21                   | 58,29 |
|         |       | lbf-ft | 0,24   | 11,60 | 0,81                         | 38,94 | 0,89                   | 42,99 |
| 110 VAC | S55   | Nm     | 0,14   | 15,73 | 0,4                          | 43,8  | 0,43                   | 46,95 |
|         |       | lbf-ft | 0,10   | 11,60 | 0,30                         | 32,31 | 0,32                   | 34,63 |
| 240 VAC | S55   | Nm     | 0,09   | 22,7  | 0,2                          | 47,52 | 0,21                   | 50,16 |
|         |       | lbf-ft | 0,07   | 16,74 | 0,15                         | 35,05 | 0,15                   | 37,00 |

## J4C 85 CONSUMPTION

| Voltage | Model |        | Unload |       | Max. Operational Torque -85Nm |       | Max. Torque Break -90Nm |       |
|---------|-------|--------|--------|-------|-------------------------------|-------|-------------------------|-------|
|         |       |        | A      | W     | A                             | W     | A                       | W     |
| 12VDC   | B85   | Nm     | 0,62   | 7,42  | 2,11                          | 25,34 | 2,28                    | 27,32 |
|         |       | lbf-ft | 0,46   | 5,47  | 1,56                          | 18,69 | 1,68                    | 20,15 |
| 24VDC   | S85   | Nm     | 0,36   | 8,55  | 1,08                          | 25,87 | 1,22                    | 29,3  |
|         |       | lbf-ft | 0,27   | 6,31  | 0,80                          | 19,08 | 0,90                    | 21,61 |
| 48VDC   | S85   | Nm     | 0,17   | 8,24  | 0,48                          | 22,92 | 0,53                    | 25,56 |
|         |       | lbf-ft | 0,13   | 6,08  | 0,35                          | 16,90 | 0,39                    | 18,85 |
| 110 VDC | S85   | Nm     | 0,05   | 5,8   | 0,14                          | 15,2  | 0,16                    | 17,9  |
|         |       | lbf-ft | 0,04   | 4,28  | 0,10                          | 11,21 | 0,12                    | 13,20 |
| 12VAC   | B85   | Nm     | 0,81   | 9,69  | 2,38                          | 28,51 | 2,65                    | 31,81 |
|         |       | lbf-ft | 0,60   | 7,15  | 1,76                          | 21,03 | 1,95                    | 23,46 |
| 24VAC   | S85   | Nm     | 0,5    | 11,88 | 1,36                          | 32,74 | 1,5                     | 36,01 |
|         |       | lbf-ft | 0,37   | 8,76  | 1,00                          | 24,15 | 1,11                    | 26,56 |
| 48VAC   | S85   | Nm     | 0,25   | 11,83 | 0,77                          | 37,07 | 0,86                    | 41,18 |
|         |       | lbf-ft | 0,18   | 8,73  | 0,57                          | 27,34 | 0,63                    | 30,37 |
| 110 VAC | S85   | Nm     | 0,12   | 12,83 | 0,31                          | 33,64 | 0,33                    | 36,54 |
|         |       | lbf-ft | 0,09   | 9,46  | 0,23                          | 24,81 | 0,24                    | 26,95 |
| 240 VAC | S85   | Nm     | 0,08   | 20,06 | 0,17                          | 40,13 | 0,18                    | 42,77 |
|         |       | lbf-ft | 0,06   | 14,80 | 0,13                          | 29,60 | 0,13                    | 31,55 |

## J4C 140 CONSUMPTION

| Voltage | Model | Unload |      | Max. Operational Torque -140Nm |      | Max. Torque Break -170Nm |       |
|---------|-------|--------|------|--------------------------------|------|--------------------------|-------|
|         |       | A      | W    | A                              | W    | A                        | W     |
| 12VDC   | B140  | Nm     | 1,93 | 23,1                           | 4,73 | 56,76                    | 5,39  |
|         |       | lbf-ft | 1,42 | 17,04                          | 3,49 | 41,86                    | 3,98  |
| 24VDC   | S140  | Nm     | 0,66 | 15,84                          | 2,15 | 51,48                    | 2,53  |
|         |       | lbf-ft | 0,49 | 11,68                          | 1,59 | 37,97                    | 1,87  |
| 48VDC   | S140  | Nm     | 0,3  | 14,25                          | 0,88 | 42,24                    | 1,1   |
|         |       | lbf-ft | 0,22 | 10,51                          | 0,65 | 31,15                    | 0,81  |
| 110 VDC | S140  | Nm     | 0,1  | 10,89                          | 0,28 | 30,25                    | 0,39  |
|         |       | lbf-ft | 0,07 | 8,03                           | 0,21 | 22,31                    | 0,29  |
| 12VAC   | B140  | Nm     | 2,75 | 33                             | 6,6  | 79,2                     | 8,47  |
|         |       | lbf-ft | 2,03 | 24,34                          | 4,87 | 58,41                    | 6,25  |
| 24VAC   | S140  | Nm     | 0,83 | 19,8                           | 2,59 | 62,04                    | 3,3   |
|         |       | lbf-ft | 0,61 | 14,60                          | 1,91 | 45,76                    | 2,43  |
| 48VAC   | S140  | Nm     | 0,48 | 23,23                          | 1,43 | 68,64                    | 1,79  |
|         |       | lbf-ft | 0,35 | 17,13                          | 1,05 | 50,63                    | 1,32  |
| 110 VAC | S140  | Nm     | 0,23 | 25,41                          | 0,63 | 68,97                    | 0,72  |
|         |       | lbf-ft | 0,17 | 18,74                          | 0,46 | 50,87                    | 0,53  |
| 240 VAC | S140  | Nm     | 0,18 | 42,24                          | 0,39 | 90,4                     | 0,44  |
|         |       | lbf-ft | 0,13 | 31,15                          | 0,29 | 66,68                    | 0,32  |
|         |       |        |      |                                |      |                          | 77,89 |


## J4C 300 CONSUMPTION

| Voltage | Model | Unload |      | Max. Operational Torque -300Nm |      | Max. Torque Break -350Nm |       |
|---------|-------|--------|------|--------------------------------|------|--------------------------|-------|
|         |       | A      | W    | A                              | W    | A                        | W     |
| 12VDC   | B300  | Nm     | 1,32 | 15,84                          | 5,17 | 62,04                    | 5,45  |
|         |       | lbf-ft | 0,97 | 11,68                          | 3,81 | 45,76                    | 4,02  |
| 24VDC   | S300  | Nm     | 0,5  | 11,88                          | 2,31 | 55,44                    | 2,7   |
|         |       | lbf-ft | 0,37 | 8,76                           | 1,70 | 40,89                    | 1,99  |
| 48VDC   | S300  | Nm     | 0,22 | 10,56                          | 1,1  | 52,8                     | 1,19  |
|         |       | lbf-ft | 0,16 | 7,79                           | 0,81 | 38,94                    | 0,88  |
| 110 VDC | S300  | Nm     | 0,09 | 9,68                           | 0,33 | 36,3                     | 0,39  |
|         |       | lbf-ft | 0,07 | 7,14                           | 0,24 | 26,77                    | 0,29  |
| 12VAC   | B300  | Nm     | 1,98 | 23,76                          | 7,26 | 87,12                    | 8,64  |
|         |       | lbf-ft | 1,46 | 17,52                          | 5,35 | 64,26                    | 6,37  |
| 24VAC   | S300  | Nm     | 0,66 | 15,84                          | 2,75 | 66                       | 3,3   |
|         |       | lbf-ft | 0,49 | 11,68                          | 2,03 | 48,68                    | 2,43  |
| 48VAC   | S300  | Nm     | 0,36 | 17,42                          | 1,65 | 79,2                     | 1,87  |
|         |       | lbf-ft | 0,27 | 12,85                          | 1,22 | 58,41                    | 1,38  |
| 110 VAC | S300  | Nm     | 0,19 | 20,57                          | 0,66 | 72,6                     | 0,77  |
|         |       | lbf-ft | 0,14 | 15,17                          | 0,49 | 53,55                    | 0,57  |
| 240 VAC | S300  | Nm     | 0,15 | 36,96                          | 0,42 | 100,32                   | 0,47  |
|         |       | lbf-ft | 0,11 | 27,26                          | 0,31 | 73,99                    | 0,35  |
|         |       |        |      |                                |      |                          | 83,73 |

## TECHNICAL DATA

## ELECTRIC ACTUATOR

MANUAL OVERRIDE

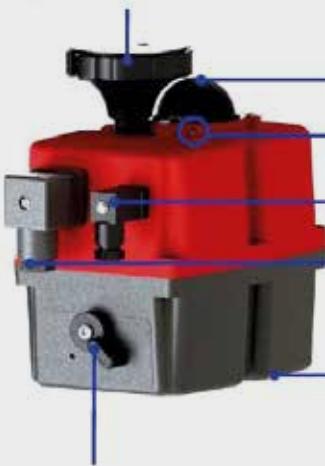

POSITION INDICATOR

VOLT FREE CONTACT PLUG

POWER SUPPLY PLUG

ISO MULTIFLANGE

AUTOMATIC - MANUAL LEVER

## 3 WIRES ON - OFF

A = power supply plug

A: VAC 3 WIRES (Grey plug)

PIN 1 = Neutral + PIN 2 = Phase = Close  
PIN 1 = Neutral + PIN 3 = Phase = Open


A: VDC 3 WIRES (Grey plug)

PIN 1 = (-) Negative + PIN 2 = Phase = Close  
PIN 1 = (-) Negative + PIN 3 = Phase = Open


B: Volt free contact, plug

PIN 1 / PIN 2 = Close  
PIN 1 / PIN 3 = Open

J4C 20/85

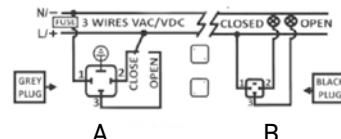

J4C 20/85

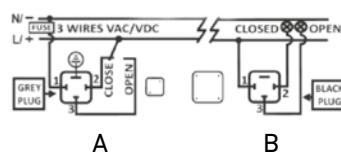

| ON-OFF ACTUATOR                                       | ACTUATOR OPERATIONAL STATUS |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|---|-----------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Without power supply                                  |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| In open position                                      |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| In close position                                     |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Opening   |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Closing   |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Torque limiter function on, moving from close to open |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Torque limiter function on, moving from open to close |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Actuator in manual mode (exceed time)                 |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| The actuators has stopped (no close/no open position) |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| In middle position                                    |                             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

## 2 WIRES ON - OFF


A = power supply plug

A: VDC 2 WIRES (Grey plug)

PIN 2 = (+) Positive + PIN 3 = (-) Negative = Close  
PIN 2 = (-) Negative + PIN 3 = (+) Positive = Open

B: Volt free contact, plug

PIN 1 / PIN 2 = Close  
PIN 1 / PIN 3 = Open

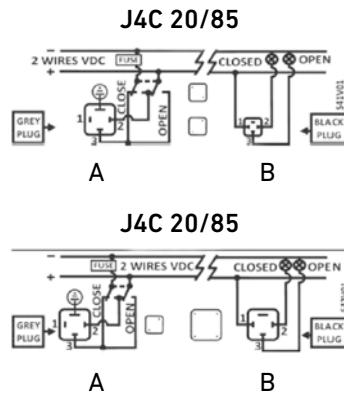




# LIMIT SWITCH

Edition. 21.2

## ACTUATED / MANUAL VALVES



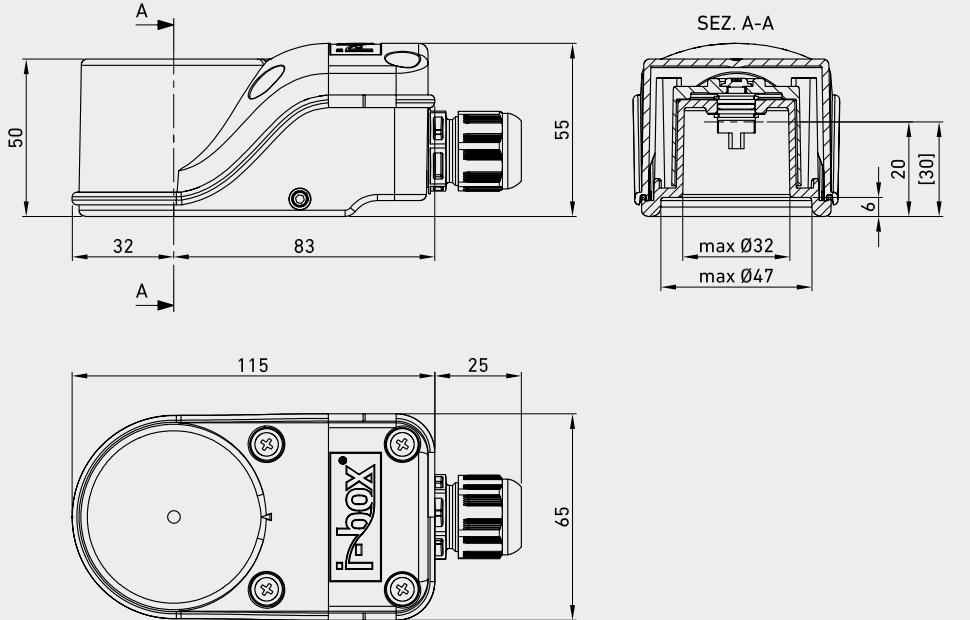


## IP


| CODE            | DESCRIPTION         | HOLDS |
|-----------------|---------------------|-------|
| FA1AAAAA010AA0H | Limit switch IP2M01 | 80x30 |

## DESCRIPTION

- Very compact limit switch box polyamide PA6
- Transparent polycarbonate cover with integrated large OPEN-CLOSED indicator (Optional 2D indicator for L- or T-bores)
- Direct mounting without mounting bracket on actuators according to VDI/VDE 3845: Hole spacing: 80 x 30mm Shaft heights: 20
- Easy and time-saving fastening system
- Enclosure IP66 + IP67 according to DIN EN 60529

- (tested by external test laboratory)
- Cable gland M20x1,5 black (for cable Ø 6-12mm)
  - Sealings TPE and NBR, Screws AISI 304, Stainless steel Shaft AISI 303
  - Application: Standard applications without explosive atmosphere.
  - 1-2 mechanical switches
  - 1-2 proximity sensors in V3 design
  - Atex available on request

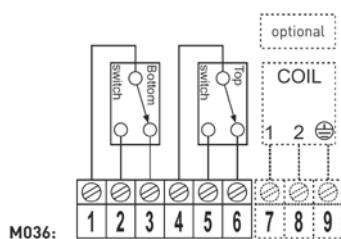

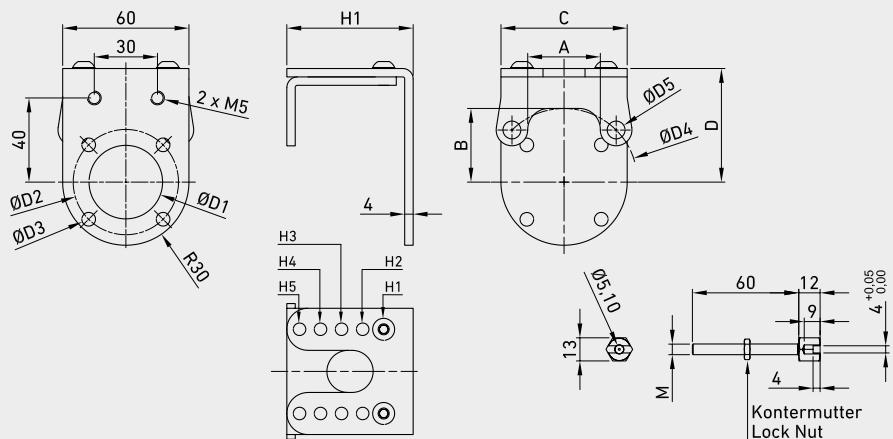


## IP

| CODE            | BALL VALVES    | DN             |
|-----------------|----------------|----------------|
| K07A0018421000H | GE-GPK-G3K/G4K | DN6 DN10 DN13  |
| K07A0018121000H | GE-GPK-G3K/G4K | DN20           |
| K07A0018121000H | GE-GPK         | DN25           |
| K07A0019521000H | GB-GPK         | DN32 DN40 DN50 |

| QUOTE |      | K07A0018421000H | K07A0018121000H |
|-------|------|-----------------|-----------------|
| A     | mm   | 16              | 24,36           |
|       | inch | 0,63            | 0,96            |
| B     | mm   | 20              | 15              |
|       | inch | 0,79            | 0,59            |
| C     | mm   | 60              | 60              |
|       | inch | 2,36            | 2,36            |
| D     | mm   | 54              | 54              |
|       | inch | 2,13            | 2,13            |
| D1    | mm   | 35,5            | 35,5            |
|       | inch | 1,40            | 1,40            |
| D2    | mm   | 50              | 50              |
|       | inch | 1,97            | 1,97            |
| D3    | mm   | 6,5             | 6,5             |
|       | inch | 0,26            | 0,26            |
| D4    | mm   | 36              | 50              |
|       | inch | 1,42            | 1,97            |
| D5    | mm   | 5,3             | 6,5             |
|       | inch | 0,21            | 0,26            |
| H1    | mm   | 60              | 60              |
|       | inch | 2,36            | 2,36            |
| H2    | mm   | 70              | 70              |
|       | inch | 2,76            | 2,76            |
| H3    | mm   | 80              | 80              |
|       | inch | 3,15            | 3,15            |
| H4    | mm   | 90              | 90              |
|       | inch | 3,54            | 3,54            |
| H5    | mm   | 100             | 100             |
|       | inch | 3,94            | 3,94            |

## DESCRIPTION

- This mounting kit helps you to add a position feedback in form of a limit switch box to your manual valve. The mounting kit includes the following parts:
- Upper part with F05 flange and hole spacing 80x30mm e.g. for i-box assembly
- Bottom part matching the ISO top flange of the valve (F03-F05)
- Drive screw (M4-M6-M8), length: 60mm
- Lock nut for height fixation
- All parts stainless steel AISI 304 or AISI 303

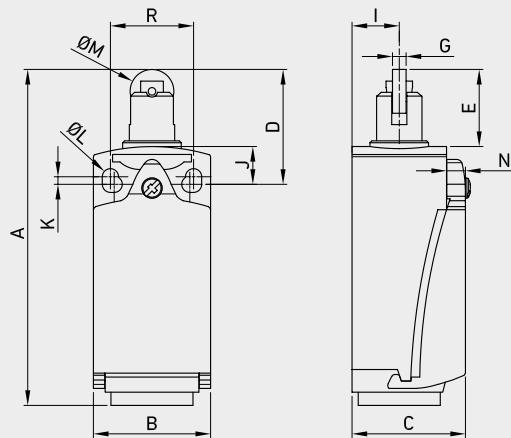

## OSISWITCH METAL


| CODE           | DESCRIPTION              | A         | B    | C    | D    | E    | F    | G    | H    | J    | K    | L    | M    | N    | WEIGHT   | ITEM CODE      |
|----------------|--------------------------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|----------|----------------|
| FLSXCKDZCE02HH | AC 15 240V<br>3A ITH 10A | mm 99,5   | 31   | 30   | 30   | 20,6 | 12,5 | 3    | 22   | 9,41 | 1,91 | 2    | 5,8  | 5    | kg 5,2   | FAEJ3H140170HH |
|                |                          | inch 3,92 | 1,22 | 1,18 | 1,18 | 0,81 | 0,49 | 0,12 | 0,87 | 0,37 | 0,08 | 0,08 | 0,23 | 0,20 | lb 11,46 |                |

## DESCRIPTION

- Ambient air temperature:  
- operation: -25°C to +70°C - storage: -40°C to +70°C
- Vibration resistance: conforming to IEC 60068-2-6
- Shock resistance: conforming to IEC 60068-2-27
- Electric shock protection:
- Class II conforming to IEC 61140 and NF C 20-030 for XCKP and XCKT
- Class I conforming to IEC 61140 and NF C 20-030 for XCKD
- Degree of protection: IP66 and IP67 conforming to IEC 60529; IK4 conforming to EN50102 for XCKP and XCKT, IK06 conforming to EN50102 for XCKD
- Repeat accuracy: 0,1mm on the tripping points, with 1 milion operating cycles for head with end plunger
- Material: metal

## LIMIT SWITCH OSISWITCH METAL KITS

| CODE         | BALL VALVES | DN             |
|--------------|-------------|----------------|
| KOM00LS6EHH  | GE - GV     | DN6 DN10 DN13  |
| KOM00LS6NHH  | GN          | DN6 DN10 DN13  |
| KOM00LS20EHH | GE - GV     | DN20 DN25      |
| KOM00LS20NHH | GN          | DN20 DN25      |
| KOM00LS32BHH | GB - GV     | DN32 DN40 DN50 |
| KOM00LS32NHH | GN          | DN32 DN40 DN50 |

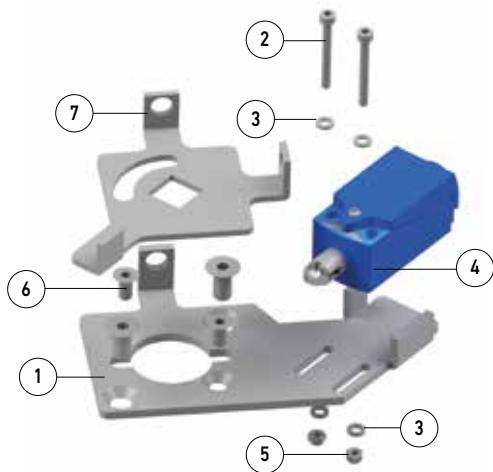

| POS | DESCRIPTION                | Q.TY |
|-----|----------------------------|------|
| 1   | Lower bracket              | 1    |
| 2   | T.C.E.I. screw             | 2    |
| 3   | Washer                     | 4    |
| 4   | Limit switch compact metal | 1    |
| 5   | Stem                       | 2    |
| 6   | Bonnet                     | 4    |
| 7   | Cover Plate                | 1    |

**UNIVERSAL, XCKD METAL**


- XCKD with 1 cable entry**  
Conforming to CENELEC EN 50047

- XCKD with head for linear movement (plunger)**  
Mounting by the head or by the body

**Environment characteristics**

|                                   |                                |  |
|-----------------------------------|--------------------------------|--|
| Conforming to standards           | Products<br>Machine assemblies | IEC 60947-5-1, EN 60947-5-1, UL 508, CSA C22-2 n° 14<br>IEC 60204-1, EN 60204-1  |
| Product certifications            |                                | UL, CSA, CCC   |
| Protective treatment              | Standard version               | "TC"   |
| Ambient air temperature           | Operation                      | -25 ... +70 °C (-13 ... +158 °F)   |
|                                   | Storage                        | -40 ... +70 °C (-40 ... +158 °F)   |
| Vibration resistance              | Conforming to IEC 60068-2-6    | 25 gn (10 ... 500 Hz) except switch with head ZCE 24: 20 gn  |
| Shock resistance                  | Conforming to IEC 60068-2-27   | 50 gn (11 ms) except heads ZCE08: 15 gn (11 ms) and ZCE24: 30 gn (18 ms)   |
| Electric shock protection         |                                | Class I conforming to IEC 61140 and NF C 20-030 for <b>XCKD</b>  |
| Degree of protection              |                                | IP 66 and IP 67 conforming to IEC 60529; IK 06 conforming to EN 50102 for XCKD   |
| Repeat accuracy                   |                                | 0.1 mm on the tripping points, with 1 million operating cycles for head with end plunger   |
| Cable entry or integral connector | Depending on model             | Either: tapped entry for PG 11 or PG 13 conduit thread, tapped ISO M16 x 1.5 or ISO M20 x 1.5, tapped 1/2" NPT, tapped PF 1/2 (G1/2) or integral M12 connector |
| Materials                         |                                | <b>XCKD:</b> Zamak® bodies and heads   |

## UNIVERSAL, XCKD-COMPLETE UNITS WITH 1/2" NPT CABLE ENTRY



|                         |  |   |
|-------------------------|--|---|
| Type of head            | Plunger (mounting by the body)   | Form C (1)  |
| Type of operator        | Steel roller plunger   |   |
| Catalog Numbers (2) (3) | XCKD2102N12<br><br>3,1(A)7,8(P)<br>21-22<br>13-14<br>21-22<br>13-14<br>0 mm<br>1,5 mm |   |
| <b>Characteristics</b>  |  |   |
| Switch actuation        | On end   | By 30° cam  |
| Type of actuation       |   |  |
| Maximum actuation speed | 0.5 m/s (1.64 ft/s)  |   |
| Minimum force or torque | Far tripping<br>For positive opening   | 15 N (3.37 lb)<br>45 N (10.12 lb)<br>12 N (2.70 lb)<br>36 N (8.09 lb)               |
| Cable entry (3)         | 1 entry tapped M16 x 1.5 mm tor ISO cable entry, clamping capacity 4 to 8 mm (0.16 to 0.31 in.)  |   |

1. Form conforming to EN 50047, contact our customer service.
2. Switches with gold contacts or ring type connections: please consult your local sales office.
3. For any entry tapped for a PG 11 conduit thread, replace N12 in the catalog number G1. Examples: XCKD2110N12 becomes XCXD2110G11, ZCDEN12 becomes ZCDEG11.


## UNIVERSAL, XCKD-COMPLETE UNITS WITH 1/2" NPT CABLE ENTRY

ZCD2• + ZCDEN12 / ZCD3• + ZCDEN12


UNIVERSAL, XCKD

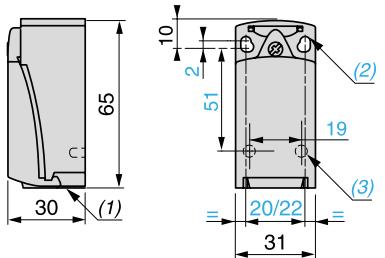

ZCE02

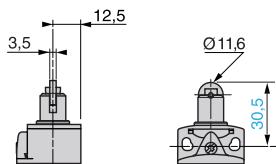

1. Tapped entry for ISO M16 x 1.5 or PG 11 conduit thread.
2. 2 elongated holes Ø 4.3 x 6.3 mm (0.17 x 0.25 in.) on 22 mm (0.87 in.) centers, 2 holes Ø 4.3 mm (0.17 in.) on 20 mm (0.79 in.) centers.
3. 2 x Ø 3 holes for support studs, depth 4 mm (0.16 in.).
4. Mounting nut thickness 3.5 mm (0.14 in.).

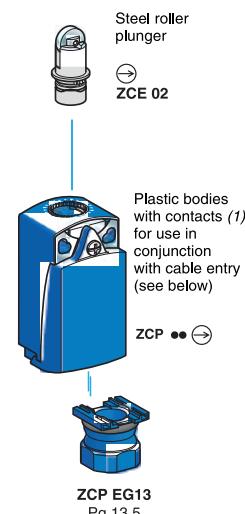

1. For further details, contact our customer service.
2. Cannot be used on bodies: ZCD21, ZCP21, ZCT21, ZCD29, ZCP29, ZCD31, ZCP31, ZCD39, ZCP39, ZCD2•M12, ZCP2•M12







# TEST



One of **GEMELS** main focus is the quality. There is a quality laboratory with different machines, like Climatic Room, Burst Test Machine, Impulse Test Machine, Salt Spray Machine, Tridimensional check and many others. Every day we run several tests on 100% of the pieces of the valves that we produce. **GEMELS** can run also NDT test and other special tests according to customers' requests. In **GEMELS** assembling department we have also test benches. Thanks to our over 50 years' experience, we can help our customers to select the correct suitable solution and product for their application, depending on materials, services and other requirements and needs.

## ■ CHEMICAL RESISTANCE TO FLUIDS

|                         | Materials resistance to fluids |                 | Ball seats - Chemical resistance to fluids |     |      |         |       |
|-------------------------|--------------------------------|-----------------|--|-----|------|---------|-------|
|                         | Steel                          | Stainless Steel | PEEK                                       | POM | PTFE | GEMPTFE | PA612 |
| <b>A</b>                |                                |                 |  |     |      |         |       |
| Acetamide 50%           | -                              | -               | -  | -   | A    | A       | A     |
| Acetic acid conc.       | B                              | A               | A  | B   | A    | A       | C     |
| Acetic acid 10%         | -                              | -               | A  | A   | A    | A       | C     |
| Acetic acid 5%          | -                              | -               | A  | A   | A    | A       | A     |
| Acetic acid ethyl ester | B                              | A               | A  | A   | A    | A       | B     |
| Acetone                 | A                              | A               | -  | -   | -    | -       | -     |
| Acetylene (ethin)       | A                              | A               | A  | A   | A    | A       | B     |
| Air                     | A                              | A               | A  | A   | A    | A       | B     |
| Ammonium chloride       | C                              | A               | B  | B   | A    | A       | B     |
| Ammonia 10%             | A                              | A               | A  | A   | A    | A       | A     |
| Amyl Alcohol            | -                              | A               | B  | -   | A    | A       | -     |
| Aniline                 | B                              | A               | A  | A   | A    | A       | B     |
| Argon, gaseous          | A                              | A               | A  | A   | A    | A       | A     |
| ATE brake fluid         | A                              | A               | A  | A   | A    | A       | A     |
| <b>B</b>                |                                |                 |  |     |      |         |       |
| Beer                    | -                              | A               | B  | A   | A    | A       | -     |
| Beet sugar juice        | B                              | A               | A  | A   | A    | A       | A     |
| Benzene                 | A                              | A               | A  | A   | A    | A       | B     |
| Benzine, leaded         | A                              | A               | A  | A   | A    | A       | A     |
| Bitumen                 | A                              | A               | -  | A   | A    | A       | B     |
| Borax                   | B                              | B               | A  | A   | A    | A       | A     |
| Boric acid 10%          | -                              | B               | A  | A   | A    | A       | A     |
| Brine                   | B                              | A               | A  | A   | A    | A       | A     |
| Bromine                 | -                              | A               | B  | -   | A    | A       | -     |
| Butane                  | A                              | A               | A  | A   | A    | A       | A     |
| Butylacetate            | -                              | -               | -  | A   | A    | A       | A     |
| Butylene glycol         | -                              | -               | A  | -   | -    | -       | -     |
| <b>C</b>                |                                |                 |  |     |      |         |       |
| Calcium chloride 10%    | -                              | B               | A  | A   | A    | A       | A     |
| Carbon dioxide, dry     | A                              | A               | A  | -   | A    | A       | -     |
| Carbon dioxide, wet     | A                              | A               | A  | -   | A    | A       | A     |
| Carbon disulphide       | -                              | -               | A  | -   | A    | A       | -     |
| Carbonlineum            | -                              | -               | A  | -   | A    | A       | -     |
| Carbon tetrachloride    | -                              | -               | A  | A   | A    | A       | A     |
| Chlorine 100°C          | B                              | B               | B  | -   | A    | A       | -     |
| Chlorine water          | -                              | A               | B  | -   | A    | A       | -     |
| Chlorobenzene           | -                              | -               | A  | -   | B    | B       | -     |
| Chloroform              | B                              | A               | -  | C   | A    | A       | B     |
| Chromic acid            | -                              | B               | B  | -   | A    | A       | -     |
| Citric acid 10%         | C                              | B               | A  | A   | A    | A       | B     |
| Clophen A 80 50%        | -                              | -               | -  | A   | A    | A       | A     |
| Coconut oil             | -                              | B               | A  | -   | A    | A       | B     |
| Coffee                  | -                              | B               | A  | -   | A    | A       | -     |
| Copper sulphate         | -                              | -               | -  | -   | A    | A       | A     |
| Cyclohexane             | -                              | -               | A  | A   | A    | A       | A     |
| Cycloexanol             | B                              | A               | -  | A   | A    | A       | B     |
| Cycloexanone            | -                              | -               | -  | -   | -    | -       | -     |

|                            | Materials resistance to fluids |                 |      | Ball seats - Chemical resistance to fluids |      |         |       |
|----------------------------|--------------------------------|-----------------|------|--|------|---------|-------|
|                            | Steel                          | Stainless Steel | PEEK | POM  | PTFE | GEMPTFE | PA612 |
| <b>D</b>                   |                                |                 |      |  |      |         |       |
| Diacetone alcohol          | -                              | A               | B    | -  | A    | A       | -     |
| Diesel oil                 | A                              | A               | A    | A  | A    | A       | B     |
| Dichlorbenzene             | -                              | A               | B    | -  | A    | A       | B     |
| Diethylene glycol          | B                              | A               | A    | A  | A    | A       | -     |
| Dimethylformamide          | -                              | -               | A    | A  | C    | C       | C     |
| Dimethyl Ketone (acetone)  | B                              | A               | A    | -  | A    | A       | -     |
| Diocetylphthalate          | -                              | -               | -    | A  | A    | A       | A     |
| Dioxan                     | -                              | -               | A    | B  | A    | A       | A     |
| <b>E</b>                   |                                |                 |      |  |      |         |       |
| Edible oil, Edible fat     | -                              | -               | A    | -  | A    | A       | A     |
| Ethanol                    | B                              | A               | -    | -  | A    | A       | B     |
| Ethane                     | B                              | B               | -    | A  | A    | A       | A     |
| Ethanol 96%                | B                              | A               | A    | A  | A    | A       | A     |
| Ether                      | A                              | A               | -    | B  | A    | A       | -     |
| Ethyl Acetate              | B                              | B               | A    | B  | A    | A       | B     |
| Ethyl alcohol              | B                              | A               | A    | A  | A    | A       | B     |
| Ethyl benzene              | A                              | A               | A    | A  | A    | A       | B     |
| Ethylene                   | B                              | A               | A    | A  | A    | A       | B     |
| Ethylene glycole           | B                              | A               | A    | B  | A    | A       | B     |
| Ethylene trichloride (Tri) | B                              | A               | A    | B  | A    | A       | B     |
| Ethylene Chloride          | -                              | -               | B    | C  | A    | A       | B     |
| <b>F</b>                   |                                |                 |      |  |      |         |       |
| Fatty acids 100°C          | C                              | A               | A    | A  | A    | A       | -     |
| Fatty acids 200°C          | C                              | A               | B    | -  | A    | A       | -     |
| Ferric chloride            | C                              | A               | B    | -  | A    | A       | A     |
| Flue gas                   | B                              | A               | A    | A  | A    | A       | A     |
| Formaldehyde 30%           | C                              | A               | A    | A  | A    | A       | A     |
| Formamide                  | -                              | -               | -    | -  | A    | A       | A     |
| Formic acid 10%            | C                              | B               | A    | A  | A    | A       | C     |
| Freon 11,13,14,32          | B                              | A               | B    | -  | A    | A       | B     |
| Freon 22,31,114,115        | B                              | A               | B    | -  | A    | A       | B     |
| Frogen                     | -                              | -               | C    | -  | -    | -       | -     |
| Fruit juices               | C                              | A               | A    | -  | A    | A       | A     |
| Fuel oil                   | B                              | A               | A    | -  | A    | A       | B     |
| <b>G</b>                   |                                |                 |      |  |      |         |       |
| Gasoline                   | A                              | A               | A    | A  | A    | A       | A     |
| Gelatine                   | -                              | A               | A    | A  | A    | A       | A     |
| Glucose                    | B                              | A               | A    | A  | A    | A       | B     |
| Glycerine                  | B                              | A               | A    | A  | A    | A       | A     |
| Glycol                     | B                              | A               | A    | A  | A    | A       | B     |
| Glycol acids               | -                              | A               | A    | -  | A    | A       | -     |
| Gly santin 40%             | -                              | -               | A    | A  | A    | A       | A     |
| Grease                     | A                              | A               | A    | A  | A    | A       | A     |

## ■ CHEMICAL RESISTANCE TO FLUIDS

|                        | Materials resistance to fluids |                 | Ball seats - Chemical resistance to fluids |     |      |         |       |
|------------------------|--------------------------------|-----------------|--|-----|------|---------|-------|
|                        | Steel                          | Stainless Steel | PEEK                                       | POM | PTFE | GEMPTFE | PA612 |
| <b>H</b>               |                                |                 |  |     |      |         |       |
| Helium, gaseous        | A                              | A               | A  | A   | A    | A       | A     |
| Heptane                | B                              | A               | A  | A   | A    | A       | A     |
| Hexane                 | B                              | B               | A  | A   | A    | A       | A     |
| Hydrochloric acid 36%  | -                              | -               | A  | -   | A    | A       | -     |
| Hydrochloric acid 2%   | -                              | A               | A  | -   | A    | A       | -     |
| Hydrofluoric acid      | -                              | -               | C  | -   | A    | A       | -     |
| Hydrogen peroxide 30%  | C                              | B               | B  | C   | A    | A       | C     |
| Hydrogen peroxide 0,5% | -                              | -               | A  | A   | A    | A       | C     |
| Hydrogen sulphide      | -                              | -               | A  | -   | A    | A       | -     |
| <b>I</b>               |                                |                 |  |     |      |         |       |
| Ink                    | C                              | A               | A  | A   | A    | A       |       |
| Isobutylalcohol        | B                              | B               | B  | -   | A    | A       | -     |
| Isocyanat              | A                              | A               | A  | A   | A    | A       | B     |
| Isooctane              | A                              | A               | A  | -   | A    | A       | B     |
| Isopropanol            | -                              | -               | A  | A   | A    | A       | A     |
| Isopropylalcohol       | B                              | B               | B  | B   | A    | A       | B     |
| <b>K</b>               |                                |                 |  |     |      |         |       |
| Kerosene               | B                              | A               | A  | B   | A    | A       | B     |
| <b>L</b>               |                                |                 |  |     |      |         |       |
| Lactic acid 90%        | -                              | -               | A  | A   | A    | A       | C     |
| Lactic acid 10%        | -                              | -               | A  | A   | A    | A       | A     |
| Linseed oil            | A                              | B               | A  | A   | A    | A       | A     |
| <b>M</b>               |                                |                 |  |     |      |         |       |
| Magnesium chloride     | B                              | B               | A  | A   | A    | A       | B     |
| Margarine              | -                              | A               | A  | A   | A    | A       | A     |
| Menthol                | -                              | B               | A  | -   | A    | A       | -     |
| Mercury                | A                              | A               | A  | A   | A    | A       | A     |
| Mercury dichloride     | -                              | B               | B  | -   | A    | A       | A     |
| Mercury monochloride   | -                              | B               | B  | -   | A    | A       | -     |
| Methane                | A                              | A               | A  | A   | A    | A       | A     |
| Methanol               | B                              | A               | A  | A   | A    | A       | A     |
| Methyl ethyl ketone    | -                              | -               | A  | B   | A    | A       | A     |
| Methylene chloride     | B                              | A               | A  | B   | A    | A       | C     |
| Milk                   | -                              | A               | A  | A   | A    | A       |       |
| Motor oil/Engine oil   | -                              | -               | A  | A   | -    | -       | -     |
| <b>N</b>               |                                |                 |  |     |      |         |       |
| Naphta (stone-oil)     | B                              | A               | A  | A   | A    | A       | A     |
| Naphthalene            | B                              | B               | A  | A   | A    | A       | A     |
| Neon, gaseous          | A                              | A               | A  | A   | A    | A       | A     |
| Nitric acid 2%         | B                              | B               | A  | C   | A    | A       | C     |
| Nitrobenzene           | B                              | A               | A  | -   | A    | A       | B     |

|                                  | Materials resistance to fluids |                 |      | Ball seats - Chemical resistance to fluids |      |         |       |
|----------------------------------|--------------------------------|-----------------|------|--|------|---------|-------|
|                                  | Steel                          | Stainless Steel | PEEK | POM  | PTFE | GEMPTFE | PA612 |
| <b>O</b>                         |                                |                 |      |  |      |         |       |
| Octane                           | -                              | A               | A    | A  | A    | A       | A     |
| Oleic acid 100°C                 | B                              | A               | A    | A  | A    | A       | A     |
| Oleic acid 200°C                 | -                              | A               | B    | -  | A    | A       | -     |
| Olive oil                        | A                              | A               | A    | A  | A    | A       | A     |
| Oxygen, gaseous 60°C             | B                              | A               | A    | A  | A    | A       | -     |
| Oxalic acid 10%                  | -                              | -               | A    | C  | A    | A       | B     |
| Ozone                            | B                              | A               | A    | C  | A    | A       | B     |
| <b>P</b>                         |                                |                 |      |  |      |         |       |
| Paraffin oil                     | -                              | A               | A    | A  | A    | A       | B     |
| Pectin                           | -                              | A               | B    | -  | A    | A       | -     |
| Perchloroethylene                | A                              | A               | A    | A  | A    | A       | B     |
| Petroleum white spirit           | A                              | A               | A    | -  | A    | A       | C     |
| Phenol, aqueous                  | -                              | A               | A    | C  | A    | A       | C     |
| Phosphoric acid 10%              | -                              | A               | A    | B  | A    | A       | C     |
| Potassium carbonate              | -                              | A               | A    | -  | A    | A       | -     |
| Potassium hydroxide solution 50% | -                              | -               | A    | A  | A    | A       | A     |
| Potassium hydroxide solution 10% | -                              | -               | A    | A  | A    | A       | A     |
| Potassium dichromate 10%         | -                              | -               | A    | A  | A    | A       | A     |
| Potassium permanganate 1%        | -                              | -               | A    | A  | A    | A       | C     |
| Potassium sulphate               | B                              | B               | B    | A  | A    | A       | A     |
| Propane                          | B                              | A               | A    | A  | A    | A       | B     |
| Propanol                         | -                              | -               | A    | A  | -    | -       | -     |
| Propylene                        | A                              | A               | A    | A  | A    | A       | A     |
| Pyridene                         | -                              | -               | -    | A  | A    | A       | A     |
| P-3 Solution aqueous             | -                              | -               | -    | -  | A    | -       | -     |
| <b>S</b>                         |                                |                 |      |  |      |         |       |
| Salicylic acid                   |                                |                 | -    | -  | A    | A       | A     |
| Sea water                        | -                              | A               | A    | A  | A    | A       | -     |
| Silicone oil                     | A                              | A               | A    | A  | A    | A       | A     |
| Soap solution                    | -                              | -               | A    | A  | A    | A       | A     |
| Soda solution 10%                | -                              | -               | A    | -  | -    | -       | -     |
| Sodium bisulphite                | -                              | -               | A    | C  | A    | A       | -     |
| Sodium carbonate 10%             | -                              | A               | A    | A  | A    | A       | A     |
| Sodium Chloride 10%              | B                              | B               | A    | A  | A    | A       | A     |
| Sodium Hydroxide solution 50%    | B                              | B               | A    | -  | A    | A       | C     |
| Sodium Hydroxide solution 10%    | B                              | A               | A    | -  | A    | A       | B     |
| Sodium nitrate 10%               | B                              | A               | -    | A  | A    | A       | A     |
| Sodium thiosulphate              | B                              | A               | -    | A  | A    | A       | A     |
| Solvent                          | A                              | A               | A    | B  | A    | A       | B     |
| Soybean-oil                      | A                              | A               | A    | A  | A    | A       | A     |
| Steam 150°C                      | B                              | A               | A    | -  | A    | A       | -     |
| Styrene                          | -                              | -               | A    | -  | A    | A       | -     |
| Sulphuric acid 98%               | B                              | B               | C    | C  | A    | A       | -     |
| Sulphuric acid 2%                | B                              | A               | A    | A  | A    | A       | -     |

## ■ CHEMICAL RESISTANCE TO FLUIDS

|                                 | Materials resistance to fluids |                 | Ball seats - Chemical resistance to fluids |     |      |         |       |
|---------------------------------|--------------------------------|-----------------|--|-----|------|---------|-------|
|                                 | Steel                          | Stainless Steel | PEEK                                       | POM | PTFE | GEMPTFE | PA612 |
| <b>T</b>                        |                                |                 |  |     |      |         |       |
| Tar                             | A                              | A               | A  | -   | A    | A       | B     |
| Tartaric acid                   | -                              | -               | A  | B   | A    | A       | A     |
| Tetrahydrofuran                 | -                              | -               | -  | B   | A    | A       | A     |
| Tetrahydronaphthalene           | -                              | -               | B  | -   | -    | -       | -     |
| Thermo-oil 200°C                | A                              | A               | A  | -   | A    | A       | -     |
| Thermo-oil 250°C                | A                              | A               | A  | -   | -    | -       | -     |
| Tincture of iodine              | -                              | -               | A  | -   | A    | A       | C     |
| Toluene                         | A                              | A               | -  | -   | A    | A       | B     |
| Triethanolamine                 | -                              | -               | -  | A   | -    | -       | -     |
| Trichloroethylene               | A                              | A               | A  | C   | A    | A       | B     |
| Trilon B 10%                    | -                              | -               | -  | -   | A    | A       | A     |
| Turpentine                      | B                              | A               | A  | A   | A    | A       | A     |
| <b>U</b>                        |                                |                 |  |     |      |         |       |
| Urea aqueous                    | -                              | B               | A  | A   | A    | A       | B     |
| <b>V</b>                        |                                |                 |  |     |      |         |       |
| Vaseline                        | B                              | A               | A  | A   | A    | A       | A     |
| Vegetable oil                   | -                              | A               | A  | B   | A    | A       | B     |
| Vinegar ( 5...10% feed vinegar) | C                              | A               | A  | A   | A    | A       | B     |
| Vinyl chloride                  | B                              | B               | B  | B   | A    | A       | B     |
| <b>W</b>                        |                                |                 |  |     |      |         |       |
| Water, cold                     | A                              | A               | A  | A   | A    | A       | A     |
| Water, distilled                | A                              | A               | A  | A   | A    | A       | B     |
| Water, hot                      | A                              | A               | A  | B   | A    | A       | B     |
| Wax, molten                     | A                              | A               | A  | A   | A    | A       | A     |
| Wine, brandy                    | C                              | A               | A  | A   | A    | A       | A     |
| <b>X</b>                        |                                |                 |  |     |      |         |       |
| Xylene                          | B                              | A               | A  | A   | A    | A       | B     |
| <b>Z</b>                        |                                |                 |  |     |      |         |       |
| Zinc chloride 10%               | C                              | B               | A  | A   | A    | A       | B     |

**LEGEND**

- A** Resistant
- B** Limited resistance
- C** Not resistant
- Data not available

All the data refer to a temperature of 20°C and are not binding. These data represent the state of the art of our knowledge, and have the scope of giving information on our products and their possible applications. These data have not a legally binding guarantee regarding the chemical resistance and the suitability for a specific application. Standard tests are done in a standard conditioned atmosphere 23/50 as stated in DIN 50014. For any specific applications we recommend a practical test for the suitability.

## BALL SEATS - MAIN MATERIALS & SPECIFICATIONS



### PA612 (Polyamide):

Polyamides are well proven engineering polymers with very interesting properties and a favourable price. They are characterized by high mechanical stability values combined with excellent impact strength. They have an above average wear rate. The different types of polyamides are distinguished by an international identification system based on the number of carbon atoms per monomer.



### PTFE (Polytetrafluoroethylene):

Above the melting point of +327°C, PTFE changes into a gellike state. Its high viscosity excludes the possibility of thermoplastic processing by traditional methods, such as injection moulding and screw extrusion. PTFE is cold extruded and subsequently sintered. Due to its unique combination of outstanding characteristics, PTFE can be called an engineered polymer of outstanding quality.



### PEEK (Polyether etherketone):

Semi-finished products are based on polyether etherketone as the raw material, a linear, aromatic polymer. It is an ideal material for applications where high performance is demanded under extreme conditions with regard to temperature, chemicals, high powered radiation and non-flammable, etc.



### GEMPTFE and RPTFE:


GEMPTFE and RPTFE seals are made with the same procedure of PTFE, but the solution is provided by using special fillers: 25% of glass blue pigment for GEMPTFE and 25% carbongraphite for RPTFE that creates a major mechanical resistance.



### POM (Polyoxymethylene):

A highly crystalline thermoplastic with special importance as a technical plastic. POM combines a high level of hardness and form stability with a high resistance to impact. Accordingly, it's a highly suitable for the construction of precision machinery and apparatus. It has remarkable sliding properties.

### Maximum and minimum admissible working temperatures for seals ball

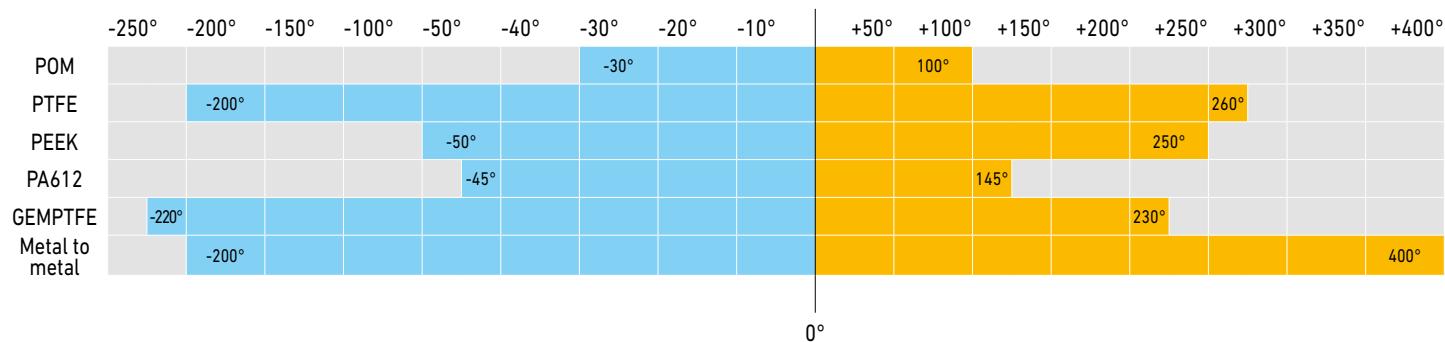

## ■ BALL SEATS PHYSICAL PROPERTIES OF PLASTIC MATERIAL FOR TECHNICAL USE

| Properties   |                   | Test method                        | Unit              | PA                   | PEEK  | POM   | PTFE  | GEMPTFE |
|--|-------------------|------------------------------------|-------------------|----------------------|-------|-------|-------|---------|
| Specific gravity   |                   | DIN 53479                          | g/cm <sup>3</sup> | 1,14                 | 1,31  | 1,41  | 2,18  | 2,19    |
| Water absorption   |                   | Standard climate at +23°C/50% U.R. | %                 | 2,6                  | 0,2   | 0,2   | <0,01 | <0,01   |
|  |                   | in water at +23° C                 | %                 | 9                    | 0,45  | 0,85  | <0,01 | <0,01   |
| Tensile strength Os                                      | tr                | DIN 53455                          | N/mm <sup>2</sup> | 76                   | 110   | 68    | ~30   | ~31     |
|  | lf                | DIN 53455                          | N/mm <sup>2</sup> | 45                   |       | 68    |       |         |
| Tensile ultimate elongation ER                           | tr                | DIN 53455                          | %                 | >50                  | 20    | 35    | 350   | 350     |
|  | lf                | DIN 53455                          | %                 | >100                 |       | 35    |       |         |
| Tensile modulus of elasticity                            | tr                | DIN 53457                          | N/mm <sup>2</sup> | 3250                 | 4400  | 3100  | 550   | 550     |
|  | lf                | DIN 53457                          | N/mm <sup>2</sup> | 1400                 |       | 3100  |       |         |
| Admissible compression load /with E 2%)( E 1% for rptfe) | lf                | DIN 53444 (ASTM D 695)             | N/mm <sup>2</sup> | 15                   | 57    | 26    | 5     | 5       |
| Deformation under load                                   |                   | ASTM D 621                         |                   |                      |       |       | 15    | 15      |
| Permanent deformation                                    |                   | ASTM D 622                         |                   |                      |       |       | 8,1   | 8,2     |
| Shock proof resistance                                   | Charpy            | tr                                 | DIN 53453         | kJ/m <sup>2</sup>    | 5,5   | 3,5   | 7     | 16      |
|  | Izod              | lf                                 | DIN 53453         | kJ/m <sup>2</sup>    | 15    |       | 7     |         |
| Brine/l hardness /3)                                     | tr                | ISO 2039-1                         | N/mm <sup>2</sup> | 150                  | 230   | 140   | 27    | 27      |
| Hardness   |                   | ASTM D 2240                        |                   |                      |       |       | 55    | 55      |
| Rockwell Hardness (4)                                    | lf                | ISO2039-2                          |                   | M85                  | M105  | M84   |       |         |
| Transversal resistivity /5)                              | tr                | DIN 53481/0303 T2                  | kV/mm             | 25                   | 24    | 20    | 1018  | 1018    |
|  | lf                |                                    | kV/mm             | 16                   |       | 20    |       |         |
| Surface resistivity                                      | tr                | DIN 53482/0303 T3                  | Ω*cm              | >1014                | 1016  | >1014 | 1017  | 1017    |
|  | lf                |                                    | Ω*cm              | >1014                |       | >1013 |       |         |
| Surface resistivity                                      | tr                | DIN 53482/0303 T3                  | Ω                 | >1013                | 1016  | >1013 |       |         |
|  | lf                |                                    | Ω                 | >1012                |       | >1013 |       |         |
| Dielectric constant E                                    | 100Hz             | lf                                 | DIN 53483/0303 T4 |                      | 3,9   | 3,2   | 3,8   | 2,1     |
|  |                   | lf                                 |                   |                      | 7,4   |       | 3,8   |         |
|  | 1MHz              | tr                                 | DIN 53483/0303 T4 |                      | 3,3   | 3,2   | 3,8   | 2,1     |
|  |                   | lf                                 |                   |                      | 3,8   |       | 3,8   |         |
| Dielectric loss factor tan&                              | 100Hz             | tr                                 | DIN 53483/0303 T4 |                      | 0,019 | 0,001 | 0,003 | <0,0003 |
|  |                   | lf                                 |                   |                      | 0,13  |       | 0,003 |         |
|  | 1MHz              | tr                                 | DIN 53483/0303 T4 |                      | 0,021 | 0,002 | 0,008 | <0,0003 |
|  |                   | lf                                 |                   |                      | 0,06  |       | 0,008 |         |
| Leakage current resistance tr+lf                         |                   | tr+lf                              | IEC 112/0303 Tl   | CTI                  | 600   | 150   | 600   | 600     |
| Melting point  |                   |                                    | DIN 53736         | °C                   | 220   | 340   | 165   | 327     |
| Thermal conductivity                                     |                   |                                    | DIN 52612         | W/(K·m)              | 0,28  | 0,25  | 0,31  | 0,23    |
| Linear thermal expansion coefficient                     | +23°C a +60°C     |                                    | DIN 52328         | 1/K·10 <sup>-6</sup> | 90    | 50    | 110   | 160     |
|  | +60°C a +100°C    |                                    |                   | 1/K·10 <sup>-6</sup> | 105   | 50    | 125   | 180     |
| Deflection temperature under load /HOT)                  |                   |                                    | DIN 53461         | °c                   | 70    | 160   | 105   |         |
| Working temperature /HOT)                                | for cont. service |                                    |                   | °c                   | 85    | 250   | 115   | +260    |
|  | for short period  |                                    |                   | °c                   | 160   | 310   | 140   | +280    |
| Low temperature resistance                               |                   |                                    |                   | °c                   | -40   | -60   | -50   | -200    |
| Flame resistance   | oxygen index      | ASTM 4589                          | %                 | 25                   | 35    | 15    | 95    | 95      |
|  |                   | UL 94                              | classe            | HB                   | V-0   | HB    |       |         |
| Friction coefficient μ                                   |                   | dynamic                            |                   | 0,40-                | 0,25- | 0,30- |       |         |
|  |                   |                                    |                   | 0,60                 | 0,50  | 0,45  |       |         |
| Static friction coefficient                              |                   |                                    |                   |                      |       |       | 0,05- | 0,05-   |
|  |                   |                                    |                   |                      |       |       | 0,10  | 0,11    |
| Dynamic friction coefficient                             |                   | ASTM D 3702                        |                   |                      |       |       | 0,06- | 0,06-   |
|  |                   |                                    |                   |                      |       |       | 0,08  | 0,09    |
| Wear rate  |                   | ASTM D 3702                        | μm/km             | 19                   | 28    | 45    |       |         |

## BALL SEATS CHEMICAL RESISTANCE

| Material  | Abbreviation | Remarks   | Maximum Admissible constant | Temp.(Water)°C Short Term |
|---|--------------|---|-----------------------------|---------------------------|
| Polyvinylidene Fluoride                         | PVDF         | Resistant to acids, solution of salts, aliphatic, aromatic and chlorinated hydrocarbons, alcohols and halogens. Conditionally suitable for ketones, esters, organic bases and alkaline solutions. | 140°                        | 150°                      |
| Polyoxymethylene                                | POM          | Resistant to most solvents and hydrous alkalis. Unsuitable for acids.   | 100°                        | 140°                      |
| Polytetrafluoroethylene                         | PTFE         | Resistant to all chemicals in the list.   | 250°                        | 300°                      |
| Nitrile Rubber                                  | NBR          | Good resistance to oil and petrol. Unsuitable for materials subject to oxidation.   | 90°                         | 120°                      |
| Butyl Rubber                                    | EPDM         | Good resistance to ozone and weather.   | 90°                         | 120°                      |
| Ethylene Propylene Rubber                       |              | Especially suitable for gressive chemicals. Unsuitable for oils and fats.   |                             |                           |
| Fluorine Rubber                                 | FPM          | It has been chemical resistance to solvent of all elastomers.   | 150°                        | 200°                      |
| Polytetrafluoroethylene<br>Special Gemels seals | GEMPTFE      | Resistant to all chemicals in the list, possibility use also high pressure.   | 250°                        | 300°                      |

## I SEATS MAXIMUM PRESSURE



| SEATS PA612     |       |
|-----------------|-------|
| O-RING NBR (GB) |       |
| DN6             | PN500 |
| DN10            | PN500 |
| DN13            | PN500 |
| DN20            | PN400 |
| DN25            | PN350 |
| DN32-40-50      | PN500 |






| SEATS POM       |       |
|-----------------|-------|
| O-RING NBR (AB) |       |
| DN6             | PN500 |
| DN10            | PN500 |
| DN13            | PN500 |
| DN20            | PN400 |
| DN25            | PN350 |
| DN32-40-50      | PN500 |



| SEATS PTFE           |       |
|----------------------|-------|
| O-RING NBR (GB) DVGW |       |
| DN6                  | PN100 |
| DN10                 | PN100 |
| DN13                 | PN100 |
| DN20                 | PN100 |
| DN25                 | PN100 |

## I PRESSURE-TEMPERATURE CHART

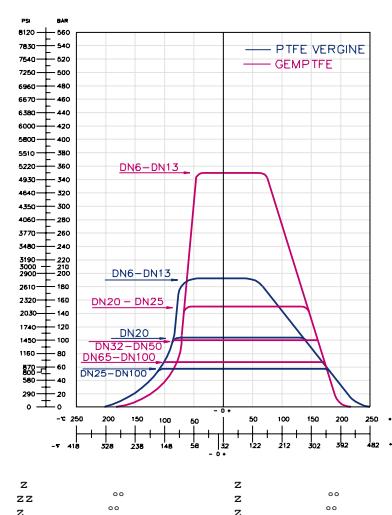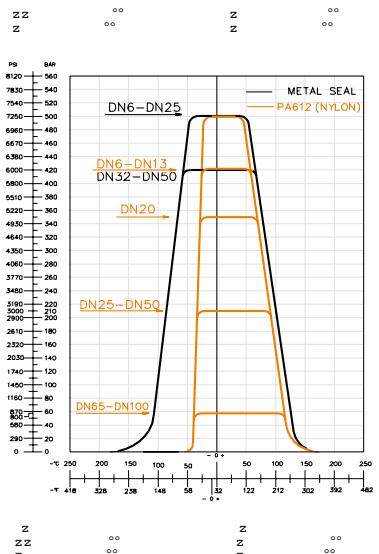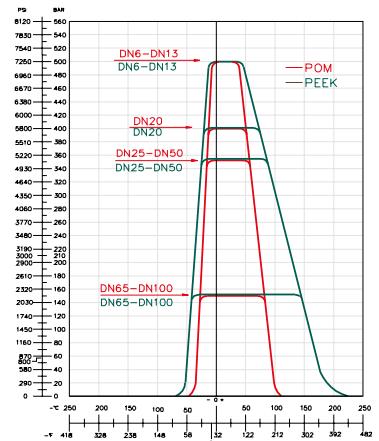

## NOTES

The values reported in the chart are just guidelines and should not be taken as compulsory. Every valve should be associated with the pressure/temperature rating in accordance with the dimension of the bore, the body material, the ball and the stem. Carbon steel valves are suitable for low temperature until -20°C while the stainless steel ones (316L) are suitable until -40°C. For any other use of the valves below these temperatures we suggest to employ a different material.

## O-RINGS RESISTANCE TO FLUIDS

|                                    | O-rings resistance to fluids |     |     |      |      |  | O-rings resistance to fluids           |     |     |      |      |
|------------------------------------|------------------------------|-----|-----|------|------|--|--|-----|-----|------|------|
|                                    | NBR                          | FKM | MVQ | EPDM | FFKM |  | NBR                                    | FKM | MVQ | EPDM | FFKM |
| <b>A</b>                           |                              |     |     |      |      |  |  |     |     |      |      |
| Acetaldehyde                       | C                            | D   | B   | B    | A1   |  | Amyl alcohol                           | D   | D   | D    | A    |
| Acetamide                          | A                            | C   | B   | A    | A1   |  | Amyl borate                            | B   | B   | D    | A    |
| Acetate of copper                  | B                            | D   | D   | A    | A    |  | Amyl chloride                          | A   | A   | —    | D    |
| Acetate of copper hot              | D                            | D   | C   | C    | A    |  | Amyl chloronaphthalene                 | D   | A   | D    | D    |
| Acetic anhydride                   | D                            | D   | B   | B    | A    |  | Aniline (aniline oil)                  | D   | A   | D    | D    |
| Acetoacetic ester                  | D                            | D   | B   | B    | A    |  | Aniline dyes                           | D   | C   | D    | B    |
| Acetone                            | D                            | D   | D   | A    | A    |  | Aniline hydrochloride                  | D   | B   | C    | B    |
| Acetophenone                       | D                            | D   | D   | A    | A    |  | Animal fat                             | A   | A   | B    | B    |
| Acetyl chloride                    | D                            | A   | C   | D    | A    |  | Aqua regia                             | D   | B   | D    | C    |
| Acetylacetone                      | D                            | D   | D   | A    | A    |  | Argon                                  | B   | B   | C    | B    |
| Acetylene, Ethene                  | A                            | A   | B   | A    | A    |  | Arsenic acid (arsenic trichloride)     | A   | D   | D    | D    |
| Acrylic acid ethyl ester           | D                            | D   | B   | B    | A1   |  | Asphalt                                | A   | A   | A    | A    |
| Acrylonitrile                      | D                            | C   | D   | D    | A1   |  | ASTM-oil No°.1                         | B   | A   | D    | D    |
| Aero Shell 7A                      | A                            | A   | B   | D    | A    |  | ASTM-oil No°.2                         | A   | A   | A    | D    |
| Aero Shell 17                      | A                            | A   | B   | D    | A    |  | ASTM-oil No°.3                         | A   | A   | D    | D    |
| Aero Shell 750                     | B                            | A   | D   | D    | A    |  | ASTM-oil No°.4                         | A   | A   | C    | D    |
| Aero Shell Fluid 4                 | A                            | A   | D   | D    | A    |  | ASTM-reference fuel A                  | B   | A   | D    | D    |
| Aerosafe 2300                      | D                            | D   | C   | A    | —    |  | ASTM-reference fuel B                  | A   | A   | D    | D    |
| Aerosafe 2300 W                    | D                            | D   | C   | A    | —    |  | ASTM-reference fuel C                  | A   | A   | D    | D    |
| Air                                | A                            | A   | A   | A    | A    |  | ATF-oil                                | B   | A   | D    | D    |
| Air oil-free 100°C                 | A                            | A   | A   | A    | A    |  | <b>B</b>                               |     |     |      |      |
| Air oil-free 150°C                 | B                            | A   | A   | B    | A    |  | Barium chloride                        | A   | A   | A    | A    |
| Air oil-free 200°C                 | D                            | A   | A   | D    | A    |  | Barium hydroxide                       | A   | A   | A    | A    |
| Alkazene®                          | D                            | B   | D   | D    | A    |  | Barium sulphide                        | A   | A   | A    | A    |
| Aluminium acetate                  | B                            | D   | D   | A    | A    |  | Beer                                   | A   | A   | A    | A    |
| Aluminium bromide                  | A                            | A   | A   | A    | A    |  | Benzaldehyde                           | D   | D   | D    | A    |
| Aluminium chloride                 | A                            | A   | B   | A    | A    |  | Benzene                                | D   | A   | D    | D    |
| Aluminium fluoride                 | A                            | A   | B   | A    | A    |  | Benzene-sulphonic acid 10%             | D   | A   | D    | D    |
| Aluminium nitrate                  | A                            | A   | B   | A    | A    |  | Benzoic acid                           | D   | A   | D    | B    |
| Aluminium phosphate                | A                            | A   | A   | A    | A    |  | Benzoic benzyl ester                   | D   | A   | —    | D    |
| Aluminium sulphate                 | A                            | A   | A   | A    | A    |  | Benzoic methyl ester                   | D   | A   | D    | D    |
| Alums                              | A                            | A   | B   | A    | A    |  | Benzophenone                           | —   | A   | —    | B    |
| Ammonia gas (cold)                 | A                            | D   | A   | A    | A1   |  | Benzoyl chloride                       | D   | A   | —    | A    |
| Ammonia gas (hot)                  | D                            | D   | B   | A    | A1   |  | Benzyl alcohol                         | D   | A   | B    | B    |
| Ammonia gas gas liquid (anhydrous) | B                            | D   | B   | A    | A1   |  | Benzyl chloride                        | D   | A   | D    | D    |
| Ammonium carbonate                 | C                            | B   | D   | A    | A    |  | Black liquor                           | B   | A   | B    | B    |
| Ammonium Chloride                  | A                            | A   | B   | A    | A    |  | Blast furnace gas                      | D   | A   | A    | D    |
| Ammonium Chloride 3 molar solution | A                            | B   | A   | A    | A    |  | Beaching lye                           | D   | A   | B    | A    |
| Ammonium hydroxide concentrated    | D                            | C   | A   | A    | A1   |  | Borax                                  | B   | A   | B    | A    |
| Ammonium nitrate                   | A                            | B   | B   | A    | A    |  | Bordeaux mixture                       | B   | A   | B    | A    |
| Ammonium nitrite                   | A                            | —   | B   | A    | A    |  | Boric acid                             | A   | A   | A    | A    |
| Ammonium persulphate               | D                            | —   | —   | A    | A    |  | Boron liquid (HEF)                     | B   | A   | D    | D    |
| Ammonium persulphate solution      | D                            | —   | —   | A    | A    |  | Bromine                                | D   | A   | D    | D    |
| Ammonium phosphate                 | D                            | —   | —   | A    | A    |  | Bromine water                          | D   | A   | D    | D    |
| Ammonium phosphate                 | A                            | B   | B   | A    | A    |  | Bromobenzol                            | D   | A   | D    | D    |
| Ammonium phosphate primary         | A                            | B   | B   | A    | A    |  | Bromochloromethane                     | D   | A   | D    | B    |
| Ammonium phosphate secondary       | A                            | B   | B   | A    | A    |  | Bromochlorotrifluoroethan              | D   | A   | D    | D    |
| Ammonium phosphate tertiary        | A                            | B   | B   | A    | A    |  | Bromopentafluoride                     | D   | D   | D    | B    |
| Ammonium sulphate                  | A                            | C   | A   | A    | A    |  | Bromotrifluoride                       | D   | D   | D    | B    |
| Ammonium sulphide                  | A                            | D   | B   | A    | A    |  | Butadine (monomer)                     | D   | A   | D    | D    |
| Amyl acetate                       | A                            | D   | B   | A    | A    |  | Butan-2-one (methyl ethyl ketone, MEK) | D   | D   | D    | A    |

## O-RINGS RESISTANCE TO FLUIDS

|  | O-rings resistance to fluids |     |     |      |      |                                       | O-rings resistance to fluids |     |     |      |      |  |  |  |  |  |
|--|------------------------------|-----|-----|------|------|---------------------------------------|------------------------------|-----|-----|------|------|--|--|--|--|--|
|  | NBR                          | FKM | MVQ | EPDM | FFKM |                                       | NBR                          | FKM | MVQ | EPDM | FFKM |  |  |  |  |  |
| Butane                                   | A                            | A   | D   | D    | A    | Chlorodecane                          | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butanol (butyl alcohol)                  | A                            | A   | B   | B    | A    | Chloracetic acid                      | D                            | D   | D   | B    | A    |  |  |  |  |  |
| Butene                                   | B                            | A   | D   | D    | A    | Chloorextol                           | B                            | A   | D   | D    | A    |  |  |  |  |  |
| Butter                                   | A                            | A   | B   | A    | A    | Chlorinated carbonic acid ethyl ester | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butyl acetate                            | D                            | D   | D   | B    | A    | Chlorine dioxide                      | D                            | A   | D   | C    | A    |  |  |  |  |  |
| Butyl acetylricinoleate                  | B                            | A   | –   | A    | B    | 8% Cl as CaClO in solution            | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butyl acrylate                           | D                            | D   | D   | D    | A1   | Chlorine dry                          | D                            | B   | D   | D    | A    |  |  |  |  |  |
| Butyl alcohol                            | A                            | A   | B   | B    | A    | Chlorine moist                        | C                            | A   | –   | B    | B    |  |  |  |  |  |
| Butyl butyrate                           | D                            | A   | –   | A    | A    | Chlorine naphthaline                  | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butyl carbitol                           | D                            | C   | D   | A    | A    | Chlorine trifluoride                  | D                            | D   | D   | D    | B    |  |  |  |  |  |
| Butyl catechol                           | D                            | A   | –   | B    | A    | Chlorine 1-chlorine-nitroethane       | D                            | D   | D   | D    | A    |  |  |  |  |  |
| Butyl cellosolve                         | D                            | D   | D   | B    | A    | Chloroacetic acid                     | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butyl glycol                             | C                            | D   | B   | B    | A    | Chlorobenzene (monochlorobenzene)     | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butyl glycoladipate                      | D                            | B   | B   | B    | A    | Chloroform (Trichloromethane)         | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butyl mercaptan                          | D                            | A   | D   | D    | A    | Chloroprene                           | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butyl oleate                             | D                            | A   | –   | D    | A    | Chlorosulphonic acid                  | D                            | D   | D   | D    | A    |  |  |  |  |  |
| Butyl stearate                           | B                            | A   | B   | D    | A    | Chlortoluene                          | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Butyoil n-Butyl ether                    | C                            | D   | D   | C    | A    | Chrome bath electrolyte               | D                            | A   | B   | B    | A    |  |  |  |  |  |
| Butylamine, n-Butylamine                 | C                            | D   | B   | D    | A1   | Chrome alum                           | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Butyraldehyde                            | D                            | D   | D   | B    | A1   | Citric acid                           | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Butyric acid                             | D                            | B   | D   | B    | A    | Citric acid 2n                        | A                            | A   | A   | A    | A    |  |  |  |  |  |
| <b>C</b>                                 |                              |     |     |      |      |                                       |                              |     |     |      |      |  |  |  |  |  |
| Calcium acetate                          | B                            | D   | D   | A    | A    | Coconut oil                           | A                            | A   | A   | C    | A    |  |  |  |  |  |
| Calcium bisulphite                       | A                            | A   | A   | D    | A    | Cod liver oil                         | A                            | A   | B   | A    | A    |  |  |  |  |  |
| Calcium chloride                         | A                            | A   | A   | A    | A    | Coffee                                | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Calcium cyanide                          | A                            | –   | A   | A    | A    | Colamine (ethanolamine)               | D                            | D   | B   | B    | A1   |  |  |  |  |  |
| Calcium hydroxide                        | A                            | A   | B   | A    | A    | Coliche-solution                      | B                            | –   | –   | B    | –    |  |  |  |  |  |
| Calcium hypochloride                     | B                            | A   | B   | A    | A    | Compressed air supply (oil-free)      | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Calcium lysulphide                       | A                            | A   | A   | A    | A    | Coolanol (Monsanto), Silicone oil     | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Calcium nitrate (nitrate of lime)        | A                            | A   | B   | A    | A    | Copper chloride                       | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Calcium silicate                         | A                            | A   | –   | A    | A    | Copper cyanide                        | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Calcium sulphite                         | A                            | A   | A   | A    | A    | Cotton seed oil                       | A                            | A   | A   | C    | A    |  |  |  |  |  |
| Calcium thiosulphate                     | B                            | A   | A   | A    | A    | Creosote, carbolineum                 | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Caliche solution (chile saltpetre)       | A                            | A   | B   | A    | A    | Cresilic acid                         | D                            | A   | D   | D    | –    |  |  |  |  |  |
| Caproic aldehyde (Hexanal)               | –                            | D   | B   | B    | A1   | Crude oil                             | B                            | A   | D   | D    | A    |  |  |  |  |  |
| Carbamates Carbitol/Diethylene           | D                            | A   | –   | B    | A    | Crumene (isopropylbenzene)            | D                            | A   | D   | D    | A    |  |  |  |  |  |
| glycol monoethyl ether                   | B                            | B   | B   | B    | A    | Cyclohexane                           | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Carbolic acid (phenol)                   | A                            | A   | D   | D    | A    | Cyclohexanol                          | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Carbon dioxide dry                       | A                            | B   | B   | B    | A    | Cyclohexanon                          | D                            | D   | D   | B    | A    |  |  |  |  |  |
| Carbon dioxide moist                     | A                            | B   | B   | B    | A    | <b>D</b>                              |                              |     |     |      |      |  |  |  |  |  |
| Carbon disulphide                        | D                            | A   | D   | D    | A    | Decane                                | A                            | A   | B   | D    | A    |  |  |  |  |  |
| Carbon monoxide                          | A                            | A   | A   | A    | A    | Delco brake fluid                     | C                            | D   | C   | A    | A    |  |  |  |  |  |
| Carbon tetrachloride                     | B                            | A   | D   | D    | B    | Denaturated alcohol                   | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Carbonic acid                            | B                            | A   | A   | A    | A    | Detergent dissolved in water          | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Castor oil                               | A                            | A   | A   | B    | A    | Developer (photo)                     | A                            | A   | A   | B    | A    |  |  |  |  |  |
| Cellosolve (Ethylene glycol ethyl ether) | D                            | D   | D   | B    | A    | Diacetone alcohol                     | D                            | D   | D   | A    | A    |  |  |  |  |  |
| Cellosolve acetate                       | D                            | D   | D   | B    | A    | Diazinone (insecticide)               | C                            | B   | D   | D    | –    |  |  |  |  |  |
| Cetane (Hexadecane)                      | A                            | A   | D   | D    | A    | Dibenzyl ether                        | D                            | D   | D   | B    | A    |  |  |  |  |  |
| Chloroacetone                            | D                            | D   | D   | A    | A    | Dibenzyl sebacate                     | D                            | B   | C   | B    | A    |  |  |  |  |  |
| Chlorax                                  | B                            | A   | –   | B    | A    | Dibromethyl benzol                    | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Chlordane                                | B                            | A   | D   | D    | A    | Dibromodifluoromethane                | D                            | –   | D   | B    | B    |  |  |  |  |  |

|   | O-rings resistance to fluids |     |     |      |      |   | O-rings resistance to fluids |     |     |      |      |
|---|------------------------------|-----|-----|------|------|---|------------------------------|-----|-----|------|------|
|   | NBR                          | FKM | MVQ | EPDM | FFKM |   | NBR                          | FKM | MVQ | EPDM | FFKM |
| Dibutyl ether                               | D                            | C   | D   | C    | A    | Ethyl benzoate                          | D                            | A   | D   | D    | A    |
| Dibutyl phthalate                           | D                            | C   | C   | B    | A    | Ethyl bromide                           | B                            | A   | D   | D    | A    |
| Dibutyl sebacate                            | D                            | B   | B   | B    | A    | Ethyl chloride                          | A                            | A   | D   | A    | A    |
| Dichlorobutane (Tetramethylene chloride)    | B                            | A   | D   | D    | A    | Ethyl cyclopentane                      | A                            | A   | D   | D    | A    |
| Dichloroisopropylether                      | D                            | C   | D   | C    | A    | Ethyl dichloride                        | D                            | B   | D   | D    | A    |
| Dichloromethane (Methylene chloride)        | D                            | B   | D   | D    | A    | Ethyl ether                             | C                            | D   | D   | C    | A    |
| Dicyclohexylamine                           | C                            | D   | D   | D    | A1   | Ethyl oxalate                           | D                            | A   | D   | A    | A    |
| Diesel fuel                                 | A                            | A   | D   | D    | A    | Ethyl pentachloro-benzene               | D                            | A   | D   | D    | A    |
| Diethyl ether                               | D                            | D   | D   | D    | A    | Ethyl silicate                          | A                            | A   | B   | A    | A    |
| Diethyl sebacate                            | D                            | B   | B   | B    | A    | Ethylbenzene                            | D                            | A   | D   | A    | A    |
| Diethylamine                                | B                            | D   | B   | B    | A1   | Ethylcellulose                          | B                            | D   | B   | B    | A    |
| Dyethilene                                  | A                            | A   | B   | A    | A    | Ethylene chlorhydrin                    | D                            | A   | C   | B    | A    |
| Diisobutylene                               | B                            | A   | D   | D    | A    | Ethylene dibromide                      | D                            | A   | D   | C    | A    |
| Diisooctyl sebacate                         | C                            | B   | C   | C    | A    | Ethylene dichloride                     | D                            | A   | D   | C    | A    |
| Diisopropyl ketone 3-molar                  | D                            | D   | D   | A    | A    | Ethylene glycol (glycol)                | A                            | A   | A   | A    | A    |
| Diisopropyl ketone concentrated             | D                            | A   | D   | D    | A    | Ethylene oxide                          | D                            | D   | D   | C    | A1   |
| Diisopropyl ketone red,fuming               | D                            | B   | D   | D    | B    | Ethylene oxide (12%) and Freon (80%)    | C                            | D   | D   | B    | A1   |
| Dimenthyl formamide (DMF)                   | C                            | D   | B   | B    | A    | Ethylene trichloride ("Tri")            | D                            | A   | D   | D    | A    |
| 2,2-Dimethylbutane                          | A                            | A   | D   | D    | A    | Ethylene 2-ethyl-1-hexanol (isoctanol)  | A                            | A   | B   | A    | A    |
| 2,3-Dimethylbutane                          | A                            | A   | D   | D    | A    | Ethylnedimine                           | A                            | D   | A   | A    | A1   |
| Dimethylether (Methylether)                 | A                            | A   | A   | A    | A    |   | F                            |     |     |      |      |
| Dimethyldiazine                             | B                            | D   | D   | A    | A    | Fatty acids                             | B                            | A   | B   | C    | A    |
| 2,4-Dimethylpentane                         | A                            | A   | D   | D    | A    | Fluorolub                               | A                            | B   | A   | A    | -    |
| Dimethylphthalate                           | D                            | B   | -   | B    | A    | Formaldehyde                            | C                            | D   | B   | B    | A1   |
| Dinitrogen monoxide (laughing gas)          | A                            | A   | A   | B    | A    | Formic acid methylester                 | D                            | D   | -   | B    | A    |
| Dinitrotoluene                              | D                            | D   | D   | D    | A    | Freon 11                                | A                            | A   | D   | A    | B    |
| Diocyl phthalate (DOP)                      | D                            | B   | C   | B    | A    | Freon 12                                | A                            | A   | D   | A    | B    |
| Diocyl sebacate (DOS)                       | D                            | B   | C   | B    | A    | Freon 12 and ASTM oil no. 2 (50:50 mix) | A                            | A   | D   | A    | B    |
| Dioxan                                      | D                            | D   | D   | B    | A    | Freon 12 and Suniso 4g (50:50 mix)      | D                            | D   | D   | D    | A    |
| Dioxolan                                    | D                            | D   | D   | B    | A    | Freon 13                                | D                            | D   | D   | A    | B    |
| Dipentene (paint solvent)                   | B                            | A   | D   | D    | A    | Freon 1381                              | A                            | A   | D   | A    | B    |
| Diphenyl (biphenyl)                         | D                            | A   | D   | D    | A    | Freon 14                                | A                            | A   | D   | A    | B    |
| Diphenyl ether                              | D                            | A   | C   | D    | A    | Freon 21                                | D                            | D   | D   | D    | A    |
| Dowtherm A thermal oil                      | D                            | A   | D   | D    | A    | Freon 22                                | D                            | D   | D   | A    | B    |
| Dowtherm E thermal oil                      | D                            | A   | D   | D    | A    | Freon 22 and ASTM oil no. 2 (50:50 mix) | D                            | B   | D   | D    | B    |
| Drilling oil                                | A                            | A   | D   | D    | A    | Freon 31                                | D                            | D   | D   | A    | B    |
| Dye solvent                                 | D                            | B   | D   | D    | A    | Freon 32                                | A                            | D   | D   | A    | B    |
| <b>E</b>                                    |                              |     |     |      |      | Freon 112                               | B                            | A   | D   | D    | B    |
| Electroplating solution chrome              | D                            | A   | B   | B    | A    | Freon 113                               | A                            | B   | D   | D    | B    |
| Electroplating solution chrome other metals | -                            | A   | D   | A    | A    | Freon 114                               | A                            | A   | D   | A    | B    |
| Epichlorhydrin                              | D                            | D   | D   | B    | A    | Freon 114 B2                            | B                            | B   | D   | D    | B    |
| Epoxy resins                                | -                            | D   | -   | A    | A    | Freon 115                               | A                            | A   | D   | A    | B    |
| Ethan                                       | A                            | A   | D   | D    | A    | Freon 502                               | B                            | B   | A   | A    | B    |
| Ethane                                      | A                            | A   | B   | B    | A    | Freon BF                                | B                            | A   | D   | D    | B    |
| Ethane thiol                                | D                            | B   | C   | D    | A    | Freon C 318                             | A                            | B   | D   | A    | B    |
| Ethanol (ethyl alcohol)                     | A                            | C   | A   | A    | A    | Freon K-142b                            | A                            | D   | -   | A    | B    |
| Ethanolamine (Colamin)                      | B                            | D   | B   | B    | A1   | Freon K-152a                            | A                            | D   | -   | A    | B    |
| Ether (various)                             | D                            | C   | D   | C    | A    | Freon MF                                | B                            | B   | D   | D    | B    |
| Ethyl acetate                               | D                            | D   | B   | B    | A    | Freon PCA                               | A                            | B   | D   | D    | B    |
| Ethyl acrylic acid                          | D                            | -   | D   | B    | A1   | Freon TF                                | A                            | B   | D   | D    | A    |
| Ethyl alcohol (ethanol)                     | A                            | C   | A   | A    | A    | Fuel oil                                | A                            | A   | D   | D    | A    |

## O-RINGS RESISTANCE TO FLUIDS

|  | O-rings resistance to fluids |     |     |      |      |  | O-rings resistance to fluids |     |     |      |      |  |  |  |  |  |
|--|------------------------------|-----|-----|------|------|--|------------------------------|-----|-----|------|------|--|--|--|--|--|
|  | NBR                          | FKM | MVQ | EPDM | FFKM |  | NBR                          | FKM | MVQ | EPDM | FFKM |  |  |  |  |  |
| Fumaric acid                               | A                            | B   | D   | D    | A    | Hydrogen fluoride (hydrofluoric acid, anhydrous) | D                            | D   | D   | A    | B    |  |  |  |  |  |
| Fural (2-furaldehyde)                      | D                            | D   | D   | B    | A1   | Hydrogen gas hot                                 | A                            | A   | C   | A    | A    |  |  |  |  |  |
| Furan                                      | D                            | D   | D   | D    | A    | Hydrogen gas dilute                              | A                            | A   | C   | A    | A    |  |  |  |  |  |
| Furfur alcohol                             | D                            | D   | D   | B    | A    | 90%  | D                            | A   | B   | C    | A    |  |  |  |  |  |
| Furyl carbinol                             | D                            | -   | D   | B    | -    | Hydrogen peroxide dilute                         | B                            | A   | A   | -    | A    |  |  |  |  |  |
| <b>G</b>                                   |                              |     |     |      |      |  |                              |     |     |      |      |  |  |  |  |  |
| Gallic acid                                | B                            | A   | A   | B    | A    | Hydrogen sulphide dry, cold                      | A                            | D   | C   | A    | A    |  |  |  |  |  |
| Gallotannic acid                           | A                            | A   | B   | A    | A    | Hydrogen sulphide dry, hot                       | D                            | D   | C   | A    | A    |  |  |  |  |  |
| Gallotannic tannin 10%                     | A                            | A   | B   | A    | A    | Hydrogen sulphide moist, cold                    | D                            | D   | C   | A    | A    |  |  |  |  |  |
| Gear oil type A                            | A                            | A   | B   | D    | A    | Hydrogen sulphide moist, hot                     | D                            | D   | C   | A    | A    |  |  |  |  |  |
| Gelatines                                  | A                            | A   | A   | A    | A    | Hydroquinone                                     | C                            | B   | D   | D    | A    |  |  |  |  |  |
| Generator gas                              | A                            | A   | B   | D    | A    | Hydyn  | B                            | D   | D   | A    | A    |  |  |  |  |  |
| Girling brake fluid                        | C                            | D   | -   | A    | A    | <b>I</b>   |                              |     |     |      |      |  |  |  |  |  |
| Glacial acetic acid (100% acetic acid)     | B                            | D   | B   | B    | A    | Iodine   | B                            | A   | -   | B    | A    |  |  |  |  |  |
| Glauber salt (sodium sulphate)             | D                            | A   | A   | B    | A    | Iodine pentafluoride                             | D                            | D   | D   | D    | B    |  |  |  |  |  |
| Glucose                                    | A                            | A   | A   | A    | A    | Iron chloride                                    | A                            | A   | B   | A    | A    |  |  |  |  |  |
| Glycerine                                  | A                            | A   | A   | A    | A    | Iron nitrate                                     | A                            | A   | B   | A    | A    |  |  |  |  |  |
| Glycerine triacetate                       | B                            | D   | B   | A    | A    | Isobutyl alcohol (isobutanol)                    | B                            | A   | A   | A    | A    |  |  |  |  |  |
| Glycol (ethylene glycol)                   | A                            | A   | A   | A    | A    | Isobutyl-n-butyrate                              | D                            | A   | -   | A    | A    |  |  |  |  |  |
| Green liquor                               | B                            | A   | -   | A    | A    | Isododecane                                      | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Groundnut oil                              | A                            | A   | A   | C    | A    | Iso-octane                                       | A                            | A   | D   | D    | A    |  |  |  |  |  |
| <b>H</b>                                   |                              |     |     |      |      |  |                              |     |     |      |      |  |  |  |  |  |
| Halon 1301                                 | A                            | A   | D   | A    | B    | Isophoron (Ketone)                               | D                            | D   | D   | A    | A    |  |  |  |  |  |
| Halothane (narcotic)                       | D                            | A   | D   | D    | A    | Isopropanol (isopropyl alcohol)                  | B                            | A   | A   | A    | A    |  |  |  |  |  |
| Halowax oil                                | D                            | A   | D   | D    | A    | Isoproyl benzene                                 | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Heavy water                                | A                            | A   | A   | A    | A    | Isoproyl chloride                                | D                            | A   | D   | D    | A    |  |  |  |  |  |
| Helium                                     | A                            | A   | A   | A    | A    | Isopropylacetat                                  | D                            | D   | D   | B    | A    |  |  |  |  |  |
| n-heptane                                  | A                            | A   | D   | D    | A    | Isopropylacetate                                 | B                            | D   | D   | D    | A    |  |  |  |  |  |
| n-hexaldehyde                              | D                            | D   | B   | A    | A1   | Isopropylalkohol (isopropanol)                   | B                            | A   | A   | A    | A    |  |  |  |  |  |
| n-hexane                                   | A                            | A   | D   | D    | A    | <b>J</b>   |                              |     |     |      |      |  |  |  |  |  |
| 1-n-hexene                                 | B                            | A   | D   | D    | A    | JP 3 (MIL-J-5624)                                | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Hexylalcohol                               | A                            | B   | -   | C    | A    | JP 4 (MIL-J-5624)                                | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Houghto-Safe 241 (water/glycol,HCF)        | A                            | B   | B   | A    | A    | JP 5 (MIL-J-5624)                                | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Houghto-Safe 620 (water/glycol, HCF)       | A                            | B   | B   | A    | A    | JP 6 (MIL-J-5624)                                | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Houghto-Safe 1010 (phosphate ester, HFD-R) | D                            | A   | C   | A    | A    | JP X (MIL-F-2564)                                | A                            | D   | D   | D    | -    |  |  |  |  |  |
| Houghto-Safe 1055 (phosphate ester, HFD-R) | D                            | A   | C   | A    | A    | <b>K</b>   |                              |     |     |      |      |  |  |  |  |  |
| Houghto-Safe 1120 (phosphate ester, HFD-R) | D                            | A   | C   | A    | A    | Kaliumcyanide                                    | A                            | A   | A   | A    | A    |  |  |  |  |  |
| Houghto-Safe 5040 (water/oil emulsion)     | A                            | A   | C   | D    | A    | Kerosene   | A                            | D   | D   | D    | -    |  |  |  |  |  |
| Hydraulic fluid (mineral oil based)        | A                            | A   | B   | D    | A    | <b>L</b>   |                              |     |     |      |      |  |  |  |  |  |
| Hydrazine                                  | B                            | B   | B   | A    | A    | Lactams  | D                            | D   | -   | B    | A    |  |  |  |  |  |
| Hydrobromic acid                           | D                            | A   | D   | A    | A    | Lactic acid cold                                 | A                            | A   | B   | A    | A    |  |  |  |  |  |
| Hydrobromic acid 40%                       | D                            | A   | D   | A    | A    | Lactic acid hot                                  | D                            | A   | B   | D    | A    |  |  |  |  |  |
| Hydrochloric acid 3-molar concentrated     | C                            | A   | D   | A    | A    | Lard, animal fat                                 | A                            | A   | B   | B    | A    |  |  |  |  |  |
| Hydrochloric acid 3-molar concentrated     | D                            | A   | D   | C    | A    | Lavender oil                                     | B                            | A   | D   | D    | A    |  |  |  |  |  |
| Hydrocyanic acid                           | B                            | A   | C   | A    | A    | Lead acetate (sugar of lead)                     | B                            | D   | D   | A    | B    |  |  |  |  |  |
| Hydrocyanic acid ≤65% cold                 | C                            | A   | D   | A    | A1   | Lead nitrate                                     | A                            | A   | B   | A    | B    |  |  |  |  |  |
| Hydrocyanic acid > 65% cold                | D                            | A   | D   | C    | B    | Lead sulphate                                    | B                            | A   | B   | A    | A    |  |  |  |  |  |
| Hydrocyanic acid ≤65% hot                  | D                            | C   | D   | D    | B    | Light crude oil (crude benzene)                  | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Hydrocyanic acid >65% hot                  | D                            | C   | D   | D    | A    | Light lubricants                                 | A                            | A   | D   | D    | A    |  |  |  |  |  |
| Hydrofluosilicic acid                      | B                            | A   | D   | A    | B    | Lime milk  | A                            | A   | B   | A    | A    |  |  |  |  |  |

|  | O-rings resistance to fluids |     |     |      |      |  | O-rings resistance to fluids                   |     |     |      |      |    |
|--|------------------------------|-----|-----|------|------|--|--|-----|-----|------|------|----|
|  | NBR                          | FKM | MVQ | EPDM | FFKM |  | NBR  | FKM | MVQ | EPDM | FFKM |    |
| Linoleic acid                                    | B                            | B   | B   | D    | A    |  |  |     |     |      |      |    |
| Linseed oil                                      | A                            | A   | A   | C    | A    |  | B  | A   | D   | D    | A    |    |
| Liquid gas (Propane, Butane, Propylene)          | A                            | A   | C   | D    | A    |  | D  | A   | D   | D    | A    |    |
| Liquimoly  | A                            | A   | D   | D    | A    |  | B  | A   | D   | D    | A    |    |
| Lubricating oils di-ester based                  | B                            | A   | D   | D    | A    |  | Natural gas                                    | A   | A   | A    | D    | A  |
| Lubricating oils petroleum based                 | A                            | A   | D   | D    | A    |  | n-Butyl benzoate                               | D   | A   | –    | A    | A  |
| Lubricating oils SAE 10, 20, 30, 40, 50          | A                            | A   | C   | D    | A    |  | Neat's foot oil                                | A   | A   | B    | B    | A  |
| <b>M</b>   |                              |     |     |      |      |  | Neon   | A   | A   | A    | A    | A  |
| Magnesium chloride                               | A                            | A   | A   | A    | A    |  | Neville and Winther's acid                     | D   | A   | D    | B    | A  |
| Magnesium hydroxide                              | B                            | A   | A   | A    | A    |  | Nickel acetate                                 | B   | D   | D    | A    | A  |
| Magnesium sulphate                               | A                            | A   | A   | A    | A    |  | Nickel chloride                                | A   | A   | A    | A    | A  |
| Maize oil  | A                            | A   | A   | C    | A    |  | Nickel sulphate                                | A   | A   | A    | A    | A  |
| Malathion (insecticide)                          | B                            | A   | D   | D    | A    |  | Nitrobenzene                                   | D   | B   | D    | D    | A  |
| Malic acid                                       | A                            | A   | D   | D    | A    |  | Nitroethane                                    | D   | A   | D    | B    | A  |
| Malic acid anhydrous                             | D                            | D   | –   | B    | A    |  | Nitrogen                                       | A   | A   | A    | A    | A  |
| Mercury  | A                            | A   | A   | A    | A    |  | Nitromethane                                   | D   | A   | D    | B    | A  |
| Mercury chloride                                 | A                            | A   | A   | A    | A    |  | Nitropropane                                   | D   | A   | D    | B    | A  |
| Mercury vapour                                   | A                            | A   | A   | A    | A    |  | Nitrotoluene (40% + dinitrotoluene 60% mix)    | D   | C   | D    | D    | A  |
| Mesityl oxide (ketone)                           | D                            | D   | D   | B    | A    |  | Non-mineral oil base brake fluid               | C   | D   | C    | A    | A  |
| Methacrylic acid                                 | D                            | C   | D   | B    | A    |  | n-propyl acetone                               | D   | D   | D    | A    | A  |
| Methane  | A                            | A   | D   | D    | A    |  | <b>O</b>                                       |     |     |      |      |    |
| Methyl 2-Methyl pentane                          | A                            | A   | D   | D    | A    |  | Octachlorotoluene                              | D   | A   | D    | D    | A  |
| Methyl 3-Methyl pentane                          | A                            | A   | D   | D    | A    |  | Octadecane                                     | A   | A   | D    | D    | A  |
| Methyl acetate                                   | D                            | D   | D   | B    | A    |  | Octyl alcohol                                  | B   | A   | B    | A    | A  |
| Methyl aceto acetate                             | D                            | D   | B   | B    | A    |  | Oleic acid                                     | C   | B   | D    | D    | A  |
| Methyl aceto acetate alcohol (methanol)          | A                            | D   | A   | A    | A    |  | Oleum (fuming sulphuric acid)                  | D   | A   | D    | D    | A  |
| Methyl aceto acetate bromide                     | B                            | A   | D   | D    | A    |  | Olive oil                                      | A   | A   | A    | B    | A  |
| Methyl aceto acetate butyl ketone                | D                            | D   | D   | A    | A    |  | Ortho-chloroethyl benzene                      | D   | A   | D    | D    | A  |
| Methyl aceto acetate carbonte                    | D                            | A   | D   | D    | A    |  | Orthochlorophenol                              | D   | A   | D    | D    | A  |
| Methyl aceto acetate cellulose                   | B                            | D   | B   | B    | A    |  | Ortho-dichlorobenzene                          | D   | A   | D    | D    | A  |
| Methyl aceto acetate chloride                    | D                            | A   | D   | C    | A    |  | Ortho-n-octane                                 | B   | A   | D    | D    | A  |
| Methyl aceto acetate chloroform                  | D                            | A   | D   | D    | A    |  | Oxalic acid                                    | B   | A   | B    | A    | A  |
| Methyl aceto acetate ether (dimethyl ether)      | A                            | A   | A   | A    | A    |  | Oxygen, liquid                                 | D   | D   | D    | D    | A1 |
| Methyl aceto acetate ethyl ketone (butanon, MEK) | D                            | D   | D   | A    | A    |  | Ozone  | D   | A   | A    | A    | A1 |
| Methyl aceto acetate ethyl ketone peroxide       | D                            | D   | B   | D    | A1   |  | <b>P</b>                                       |     |     |      |      |    |
| Methyl aceto acetate glycol                      | C                            | D   | D   | B    | A    |  | Paint thinners                                 | D   | D   | D    | D    | A  |
| Methyl aceto acetate isobutyl ketone (MIBK)      | D                            | D   | D   | C    | A    |  | Paints   | B   | A   | D    | D    | A  |
| Methyl aceto acetate methacrylate                | D                            | D   | D   | D    | A1   |  | Palmitic acid                                  | A   | A   | D    | B    | A  |
| Methyl aceto acetate oleate                      | D                            | A   | –   | B    | A    |  | n-pentane                                      | A   | A   | D    | D    | A  |
| Methylaniline                                    | D                            | B   | –   | D    | A    |  | Perchloric acid 2-molar                        | D   | A   | D    | B    | A  |
| Methylcyclopentane                               | D                            | A   | D   | D    | A    |  | Petrol   | A   | A   | D    | D    | A  |
| Methylene chloride (dichloromethane)             | D                            | B   | D   | D    | A    |  | Phenol   | D   | A   | D    | D    | A  |
| Methylisopropylketone                            | D                            | D   | D   | B    | A    |  | Phenyl ethyl ether                             | D   | D   | D    | D    | A  |
| Metilacrilato                                    | D                            | D   | D   | B    | A    |  | Phenylhydrazine                                | D   | A   | D    | D    | A  |
| Milk   | A                            | A   | A   | A    | A    |  | Phoron   | D   | D   | D    | A    | A  |
| Mineral oils                                     | A                            | A   | B   | D    | A    |  | Phosphate of calcium                           | A   | A   | A    | A    | A  |
| Mixed amines                                     | D                            | D   | B   | B    | A1   |  | Phosphoric acid 3-molar aqueous solution       | D   | A   | B    | A    | A  |
| Molten sulphur                                   | D                            | A   | C   | C    | A    |  | Phosphoric acid, 3- molar concentrated molten  | D   | A   | C    | B    | A  |
| Monochlorobenzene (chlorobenzene)                | D                            | A   | D   | D    | A    |  | Phosphoric acid, 3- molar Phosphorous chloride | D   | A   | D    | A    | A  |
| Mopar brake fluid                                | C                            | D   | C   | A    | A    |  | Picric acid aqueous solution                   | A   | A   | B    | A    | A  |

## O-RINGS RESISTANCE TO FLUIDS

|  | O-rings resistance to fluids |     |     |      |      |  | O-rings resistance to fluids                               |     |     |      |      |  |  |  |  |  |  |  |
|--|------------------------------|-----|-----|------|------|--|--|-----|-----|------|------|--|--|--|--|--|--|--|
|  | NBR                          | FKM | MVQ | EPDM | FFKM |  | NBR  | FKM | MVQ | EPDM | FFKM |  |  |  |  |  |  |  |
| Picric acid molten                                     | B                            | A   | D   | B    | B    |  | Sodium carbonate (soda)                                    | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Pine oil   | A                            | A   | D   | D    | A    |  | Sodium chloride  | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Pinene   | B                            | A   | D   | D    | A    |  | Sodium cyanide   | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Piperidine   | D                            | D   | D   | D    | A1   |  | Sodium met phosphate (Colon)                               | A   | A   | -    | A    |  |  |  |  |  |  |  |
| Polyvinyl acetate emulsion                             | -                            | -   | -   | A    | A    |  | Sodium hydroxide (caustic soda) 3 molar                    | B   | B   | A    | A    |  |  |  |  |  |  |  |
| Potassium acetate                                      | B                            | D   | D   | A    | A    |  | Sodium hypochlorite  | C   | A   | C    | A    |  |  |  |  |  |  |  |
| Potassium chloride                                     | A                            | A   | A   | A    | A    |  | Sodium met silicate  | A   | A   | -    | A    |  |  |  |  |  |  |  |
| Potassium copper ferricyanide                          | A                            | A   | A   | A    | A    |  | Sodium nitrate (saltpetre)                                 | B   | A   | D    | A    |  |  |  |  |  |  |  |
| Potassium dichromate                                   | A                            | A   | A   | A    | A    |  | Sodium perforate   | B   | A   | B    | A    |  |  |  |  |  |  |  |
| Potassium hydroxide solutions (dilute)                 | B                            | B   | B   | A    | A    |  | Sodium peroxide  | B   | A   | D    | A    |  |  |  |  |  |  |  |
| Potassium hydroxide caustic potash 50%                 | B                            | B   | D   | C    | A    |  | Sodium phosphate primary                                   | A   | A   | D    | A    |  |  |  |  |  |  |  |
| Potassium nitrate                                      | A                            | A   | A   | A    | A    |  | Sodium phosphate tertiary                                  | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Potassium sulphate                                     | A                            | A   | A   | A    | A    |  | Sodium sulphate (Gluer's salt)                             | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Potassium sulphite                                     | A                            | A   | A   | A    | A    |  | Sodium sulphide  | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Prestune antifreeze                                    | A                            | A   | A   | A    | A    |  | Sodium sulphite  | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Propane  | A                            | A   | D   | D    | A    |  | Sodium thiosulphate (fixer)                                | B   | A   | A    | A    |  |  |  |  |  |  |  |
| Propionitrile  | A                            | A   | D   | D    | A    |  | Soya oil   | A   | A   | C    | A    |  |  |  |  |  |  |  |
| Propyl acetate   | D                            | D   | D   | B    | A    |  | Stannic chloride   | A   | A   | B    | A    |  |  |  |  |  |  |  |
| Propyl alcohol (Propanol)                              | A                            | A   | A   | A    | A    |  | Stannic 50%  | A   | A   | B    | A    |  |  |  |  |  |  |  |
| Propyl nitrate   | D                            | D   | D   | B    | A    |  | Stannous Chloride  | A   | A   | B    | A    |  |  |  |  |  |  |  |
| Propylene  | D                            | A   | D   | D    | A    |  | Steam below 150°C  | D   | C   | C    | A    |  |  |  |  |  |  |  |
| Propylene oxide  | D                            | D   | D   | B    | A1   |  | Steam above 150°C  | D   | D   | D    | B    |  |  |  |  |  |  |  |
| Pyradine   | D                            | D   | D   | B    | A    |  | Satiric acid   | B   | A   | B    | B    |  |  |  |  |  |  |  |
| Pyranol, transformer oil (postchlorinated biphenylene) | A                            | A   | D   | D    | A    |  | Styrene (monomer)  | D   | B   | D    | A1   |  |  |  |  |  |  |  |
| Pyrolube   | D                            | A   | B   | B    | -    |  | Sugar cane solution  | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Pyrrole  | D                            | D   | B   | D    | A    |  | Sugar solutions  | A   | A   | A    | A    |  |  |  |  |  |  |  |
| <b>R</b>   |                              |     |     |      |      |  |  |     |     |      |      |  |  |  |  |  |  |  |
| Radioactive radiation                                  | C                            | D   | C   | C    | -    |  | Sugar-beet juice   | A   | A   | A    | A    |  |  |  |  |  |  |  |
| Rape oil   | A                            | A   | D   | A    | A    |  | Sulphur  | D   | A   | B    | A    |  |  |  |  |  |  |  |
| <b>S</b>   |                              |     |     |      |      |  |  |     |     |      |      |  |  |  |  |  |  |  |
| Salicylic acid   | B                            | A   | A   | A    | A    |  | Sulphur chloride D   | A   | C   | D    | D    |  |  |  |  |  |  |  |
| Salts of ammonium                                      | A                            | B   | B   | A    | A    |  | Sulphur dioxide aqueous                                    | D   | D   | B    | A    |  |  |  |  |  |  |  |
| Salts of ammonium barium                               | A                            | A   | A   | A    | A    |  | Sulphur dioxide dry  | D   | D   | B    | A    |  |  |  |  |  |  |  |
| Salts of ammonium calcium                              | A                            | A   | B   | A    | A    |  | Sulphur dioxide liquid under pressure                      | D   | D   | B    | A    |  |  |  |  |  |  |  |
| Salts of ammonium copper                               | A                            | A   | A   | A    | A    |  | Sulphur hexafluoride                                       | B   | C   | B    | A    |  |  |  |  |  |  |  |
| Salts of ammonium magnesium                            | A                            | A   | A   | A    | A    |  | Sulphur trioxide, dry                                      | D   | A   | B    | B    |  |  |  |  |  |  |  |
| Salts of ammonium nickel                               | A                            | A   | A   | A    | A    |  | Sulphuric acid 3-molar                                     | D   | A   | D    | B    |  |  |  |  |  |  |  |
| Salts of ammonium potassium                            | A                            | A   | A   | A    | A    |  | Sulphuric acid concentrated                                | D   | A   | D    | D    |  |  |  |  |  |  |  |
| Salts of ammonium sodium                               | A                            | A   | A   | A    | A    |  | Sulphuric acid fuming (20/25% oleum)                       | D   | A   | D    | D    |  |  |  |  |  |  |  |
| Salts of ammonium zinc                                 | A                            | A   | A   | A    | A    |  | Sulphurous acid  | B   | A   | D    | B    |  |  |  |  |  |  |  |
| Seawater containing chlorine and salt                  | D                            | A   | D   | D    | A    |  | Super grade petrol   | A   | A   | D    | D    |  |  |  |  |  |  |  |
| Seawater containing chlorine and salt salt water       | A                            | A   | A   | A    | A    |  | <b>T</b>   |     |     |      |      |  |  |  |  |  |  |  |
| Silicate ester   | B                            | A   | D   | D    | A    |  | Tar (bituminous)   | B   | A   | B    | D    |  |  |  |  |  |  |  |
| Silicone greases                                       | A                            | A   | D   | A    | A    |  | Tartaric acid  | A   | A   | A    | B    |  |  |  |  |  |  |  |
| Silicone oil   | A                            | A   | D   | A    | A    |  | Tetrabromethane  | D   | A   | D    | D    |  |  |  |  |  |  |  |
| Silver nitrate   | B                            | A   | A   | A    | A    |  | Tetrabutyl titanate  | B   | A   | -    | A    |  |  |  |  |  |  |  |
| Soda (sodium carbonate)                                | A                            | A   | A   | A    | A    |  | Tetrachloroethylene (perchloroethylene dry cleaning fluid) | B   | A   | D    | D    |  |  |  |  |  |  |  |
| Soapy water  | A                            | A   | A   | A    | A    |  | Tetraethyl lead  | B   | A   | D    | D    |  |  |  |  |  |  |  |
| Sodium acetate   | B                            | D   | D   | A    | A    |  | Tetraethyl chips   | B   | A   | D    | D    |  |  |  |  |  |  |  |
| Sodium borate (Borax)                                  | A                            | A   | A   | A    | A    |  | Tetrahydrofurane   | D   | D   | D    | B    |  |  |  |  |  |  |  |

|  | O-rings resistance to fluids |     |     |      |      |                                      | O-rings resistance to fluids            |     |     |      |      |
|--|------------------------------|-----|-----|------|------|--------------------------------------|---|-----|-----|------|------|
|  | NBR                          | FKM | MVQ | EPDM | FFKM |                                      | NBR                                     | FKM | MVQ | EPDM | FFKM |
| Toluylene diisocyanate                 | D                            | D   | D   | B    | A    | X                                    |   |     |     |      |      |
| Transformer oil                        | A                            | A   | B   | D    | A    | Xenon                                | A                                       | A   | A   | A    | A    |
| Transmission fluid type A              | A                            | A   | B   | D    | A    | Xylene                               | D                                       | A   | D   | D    | A    |
| Triaryl phosphate                      | D                            | A   | C   | A    | A    | Xyldine (mixture of aromatic amines) | C                                       | D   | D   | D    | A1   |
| Tributoxyethyl phosphate               | D                            | A   | -   | A    | A    | Z                                    |   |     |     |      |      |
| Tributyl mercaptan                     | D                            | A   | D   | D    | A    | Zeolites                             | A                                       | A   | A   | A    | A    |
| Tributyl phosphate                     | D                            | D   | D   | A    | A    | Zinc acetate                         | B                                       | D   | D   | A    | A    |
| Trichloroacetic acid                   | B                            | C   | C   | A    | A    | Zinc acetate sulphate                | A                                       | A   | A   | A    | A    |
| Trichloroethane                        | D                            | A   | D   | D    | A    | Zinc acetate chloride                | A                                       | A   | A   | A    | A    |
| Trichloroethylene (Trilene)            | D                            | A   | D   | D    | A    |                                      |   |     |     |      |      |
| Trichlorometane (Chloroform)           | D                            | A   | D   | D    | A    |                                      |   |     |     |      |      |
| Triethanolamine                        | C                            | D   | D   | B    | A1   |                                      |   |     |     |      |      |
| Trifluoroethane                        | D                            | A   | D   | D    | B    |                                      |   |     |     |      |      |
| Trinitrotoluene                        | D                            | B   | -   | D    | A    |                                      |   |     |     |      |      |
| Trioctyl phosphate                     | D                            | B   | C   | A    | A    |                                      |   |     |     |      |      |
| Triothiocresylphosphate ("TOCP")       | D                            | B   | C   | A    | A    |                                      |   |     |     |      |      |
| Tripolyphosphate                       | D                            | B   | C   | A    | A    |                                      |   |     |     |      |      |
| Tung oil (China wood oil)              | A                            | A   | D   | D    | A    |                                      |   |     |     |      |      |
| Turpentine                             | A                            | A   | D   | D    | A    |                                      |   |     |     |      |      |
| <b>V</b>                               |                              |     |     |      |      |                                      |   |     |     |      |      |
| Vaseline                               | A                            | A   | D   | D    | A    | LEGEND                               |   |     |     |      |      |
| Vegetable oils                         | A                            | A   | A   | C    | A    | A                                    | Stable                                  |     |     |      |      |
| Vinegar (%% acetic acid)               | B                            | A   | A   | A    | A    | B                                    | Can be used                             |     |     |      |      |
| Vinyl acetylene                        | A                            | A   | B   | A    | A    | C                                    | Limited stability (use not recommended) |     |     |      |      |
| <b>W</b>                               |                              |     |     |      |      |                                      |   |     |     |      |      |
| Waste water                            | A                            | A   | A   | A    | A    | D                                    | Not stable                              |     |     |      |      |
| Water (for industrial use) up to 70°C  | A                            | B   | A   | A    | A    | -                                    | Data not available                      |     |     |      |      |
| Water (for industrial use) up to 100°C | B                            | B   | B   | A    | A    |                                      |   |     |     |      |      |
| White oil                              | A                            | A   | D   | D    | A    |                                      |   |     |     |      |      |
| White pine oil                         | B                            | A   | D   | D    | A    |                                      |   |     |     |      |      |
| Wine and Whisky                        | A                            | A   | A   | A    | A    |                                      |   |     |     |      |      |
| Wolman's salt (wood impregnation)      | A                            | A   | A   | A    | A    |                                      |   |     |     |      |      |
| Wood oil                               | A                            | A   | D   | D    | A    |                                      |   |     |     |      |      |
| Wood vinegar                           | D                            | D   | -   | B    | A    |                                      |   |     |     |      |      |

The information on the following pages is based on tests under various different conditions. Many of the values have been determined at room temperature with a reaction time of 7 days (150 hours). In individual cases observations may differ between laboratory and practical tests. Because of differences in conditions of use and the composition of fluids the data given are only guidelines and should not be taken as binding. For these reasons we cannot give any guarantees as to the correctness of our recommendations in individual cases. If your operating conditions are unusual please feel free to discuss them with us.

## O-RINGS RESISTANCE TO FLUIDS

### GENERAL PRINCIPLES (O-RINGS)

The simple geometry is the main characteristic of an O-Ring which, in conjunction with proper elastomer selection results in a low cost, easy to use and efficient sealing system. Elastomeric materials, when compressed, react like a high viscosity fluid which transmits applied stress in every direction; consequently, the O-Ring serves as a barrier, blocking the leak paths between the sealing surfaces. Technical sealing has been defined by DIN Standards as follows:

- "Static seal" - The sealing action created between two mating surfaces with no leakage of liquid or minimal diffusion of gas;
- "Dynamic seal" - The mating surfaces have relative movement with minimal leakage of liquid (useful to protect the sealing efficiency, acting as lubricant).


O-Rings offer several advantages over other sealing systems: simplicity of construction, standardized seal dimensions, wide selection of materials, suitability for both static and dynamic applications, standard dimensioning of glands, low cost due to high volume manufacturing. Sealing is always achieved through a positive compression or squeezing action, resulting in a deformation of the O-Ring cross-section. The most important sealing characteristic of an O-Ring is its resistance to compression set or residual deformation.

### DETERMINATION OF THE MATERIALS GROUP

#### NBR (Acrylonitrile butadiene elastomer):

This material is the most often used in sealing technology because of its good resistance to the majority of mineral oilbased oils and greases. Its normal temperature range is between -30°C and +100°C, with short periods at +130°C. Special NBR compounds can be used as low as -55°C. The acrylonitrile content may be between 18% and 50%. The most common proportion is 28% to 38%. As this proportion rises the resistance to minerals oils and greases increases, but at the same time the flexibility and low-temperature resistance reduces. The compression set rises as the acrylonitrile content increases.

## Maximum and minimum admissible working temperatures for o-rings

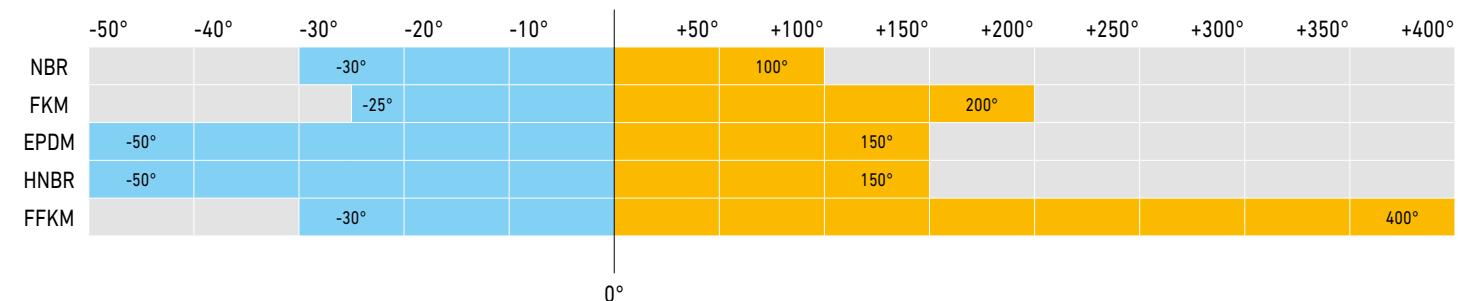

### FKM (Fluoroelastomer)

FKM has an outstanding resistance to high temperatures, ozone, chemicals and weathering. The operating range is up to +200°C, and +250°C for brief periods. FKM is highly resistant to almost all synthetic hydraulic fluids and those based on mineral oils. FKM is less suitable for use in hot water, steam and at low temperatures. Their low-temperature flexibility is only slight and their resistance to hot water and steam is moderate. Special materials should be selected for these applications.

### MVQ (Silicone elastomer)

The principal feature of MVQ is its wide temperature range. Its very good low-temperature flexibility, good ozone resistance and good electrical properties are other advantages. Its gas permeability is not as good as that of other elastomers. Operating temperatures are between -60°C and +200°C, up to +250°C for short periods.

### EPDM (Ethylene-propylene diene elastomer)

EPDM elastomers have a very good resistance to ozone, ageing and weathering, also to water, hot water and steam. They are not resistant to mineral oils and greases. Their compatibility with chemicals is good. Operating temperatures are between -40°C and +160°C, up to +180°C for short periods.

### FFKM (Perfluorelastomer)

FFKM has almost the same chemical resistance as PTFE, plus elastic properties of the fluoroelastomer FKM, and it also has outstanding resistance to high temperatures, ozone, weathering and ageing. The range of service temperatures goes up to +315°C and +350°C for short periods. In the temperature range above +200°C FFKM has a very low and constant compression set.

## CAPACITY COEFFICIENT

| TEST WITH WATER AT 20°C |             |           |
|-------------------------|-------------|-----------|
| DN FB                   | CV (G.P.M.) | KV (m³/h) |
| 6                       | 5           | 4.27      |
| 10                      | 7           | 6         |
| 13                      | 35          | 30.2      |
| 20                      | 61          | 53.7      |
| 25                      | 105         | 90.66     |
| 32                      | 210         | 176.5     |
| 40                      | 285         | 245.2     |
| 50                      | 425         | 364.52    |
| 65                      | 750         | 645.4     |
| 80                      | 1038        | 889.5     |
| 100                     | NR          | NR        |

## DETERMINATION OF THE NOMINAL DIAMETER

We recommend to use the following oil rate as guide line:

Suction pipes:

- 0.5...0.8 m/sec

Return pipes:

- 2...4 m/sec

Pressure pipes up to 10 MPa:

- 2...4 m/sec

Pressure pipes up to 50 MPa:

- 3...12 m/sec


This diagram provides a guide for the determination of the nominal diameter (DN)

### EXAMPLE 1:


A velocity  $v = 8 \text{ m/sec}$

and a flow rate of  $Q = 150 \text{ l/min}$  have been selected.

The straight line linking these two values on the outer scales intersects the nominal diameter DN20 on the middle scale.

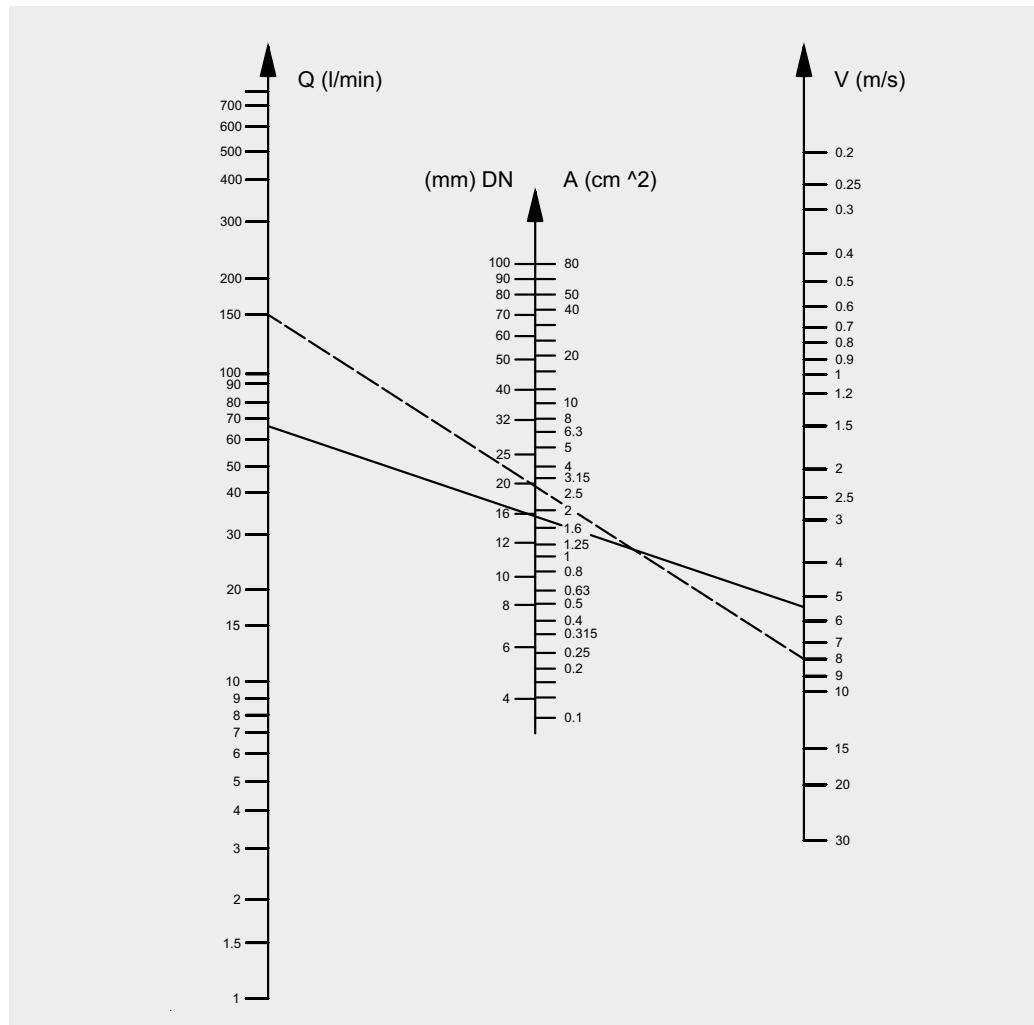

## ■ TORQUE MOMENT

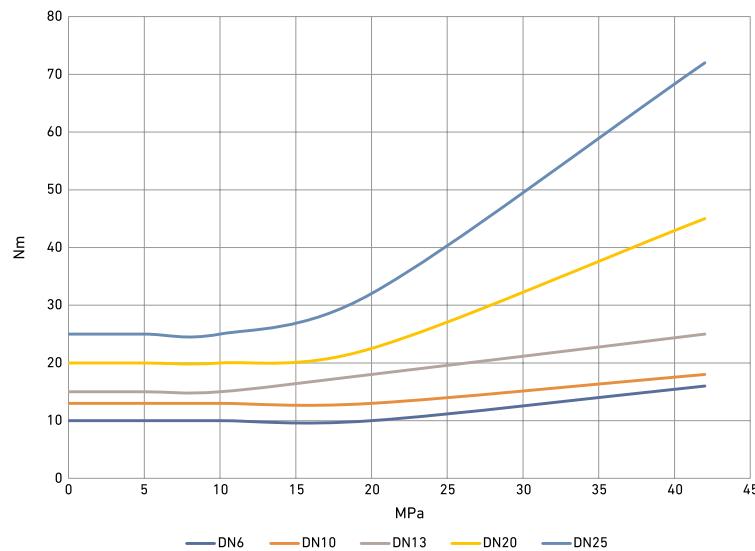

## ■ TORQUE MOMENT

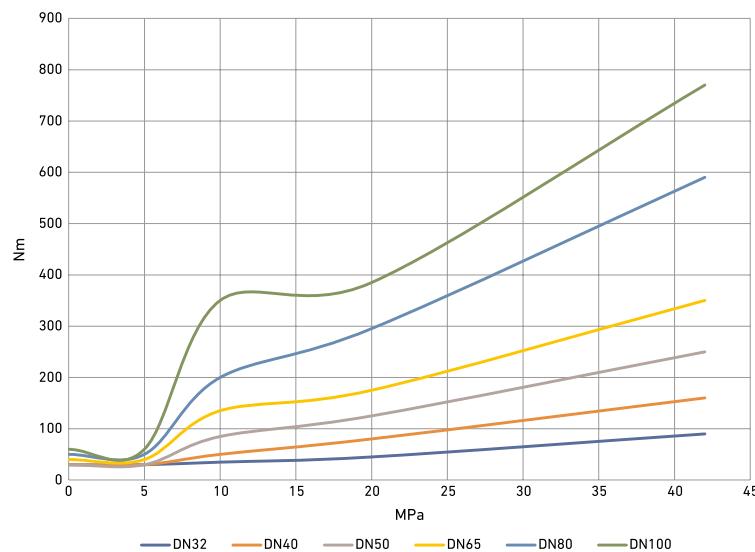


Diagram for the determination  
of the nominal diameter







The products described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this catalog are purely illustrative, and are consequently not contractually binding. Remember also that the products themselves must be used by qualified personnel, in compliance with current plant engineering and installation standards, in order to avoid injury to persons or damage to property.





**GEMELS S.p.A.**

Via Gambirasio, 20/22  
24069 Trescore Balneario (Bergamo) - ITALY  
tel. (+39) 035 940 445 fax. (+39) 035 945 205  
gemels@gemels.it

**GEMELS NORTH AMERICA INC.**

**Billing Address**

1800 West Loop South - Suite 1740 - Houston, TX 77027  
**Warehouse & Distribution Center**  
35 Watterson St. - Dayton, OH 45417  
northamerica@gemels.com  
[www.gemels.com](http://www.gemels.com)

