
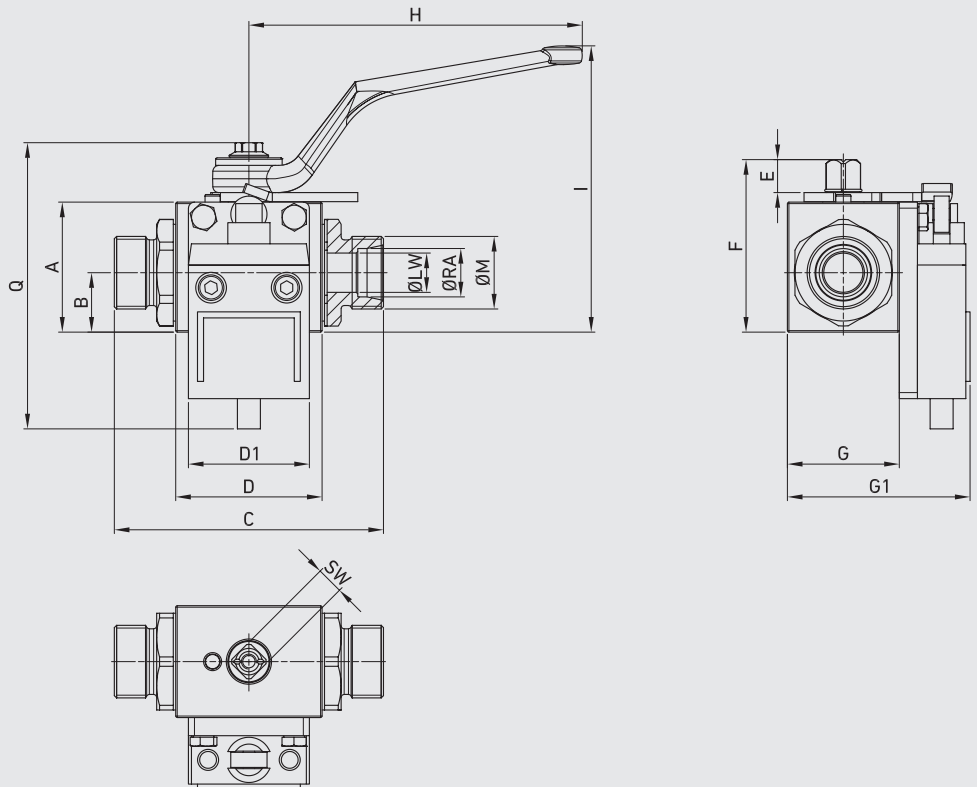


## CUSTOMIZED

## HYDRAULIC BALL VALVES

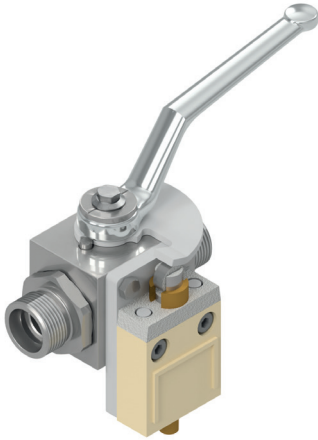

## FOR FIRE FIGHTING

| TYPE / ITEM CODE           | DN | A    | B    | C    | D     | D1   | E    | F    | G    | G1   | H    | I    | Q    | SW   | ØLW  | ØRA  | ØM   |
|----------------------------|----|------|------|------|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| GE2 DIN 12S + MICROSWITCH" | 10 | mm   | 40   | 17,4 | 76    | 44,7 | 40   | 11   | 54   | 35   | 58,4 | 110  | 93   | 94   | 9    | 10   | 12   |
|                            |    | inch | 1,57 | 0,69 | 2,99  | 1,76 | 1,57 | 0,43 | 2,13 | 1,38 | 2,30 | 4,33 | 3,66 | 3,70 | 0,35 | 0,39 | 0,47 |
| GE2 DIN 16S + MICROSWITCH  | 13 | mm   | 43   | 19,7 | 89    | 48,4 | 40   | 11   | 57   | 37   | 60,4 | 110  | 95   | 94   | 9    | 13   | 16   |
|                            |    | inch | 1,69 | 0,78 | 3,50  | 1,91 | 1,57 | 0,43 | 2,24 | 1,46 | 2,38 | 4,33 | -    | -    | 0,35 | 0,51 | 0,63 |
| GE2 DIN 30S + MICROSWITCH  | 25 | mm   | 65   | 29,5 | 120,6 | 66,5 | 40   | 15   | 83,5 | 55   | 78,4 | 180  | 113  | 93,5 | 14   | 25   | 30   |
|                            |    | inch | 2,56 | 1,16 | 4,75  | 2,62 | 1,57 | 0,59 | 3,29 | 2,17 | 3,09 | 7,09 | 4,45 | 3,68 | 0,55 | 0,98 | 1,18 |
| GE2 DIN 38S + MICROSWITCH  | 25 | mm   | 65   | 29,5 | 131,4 | 66,5 | 40   | 15   | 83,5 | 55   | 78,4 | 180  | 113  | 93,5 | 14   | 25   | 38   |
|                            |    | inch | 2,56 | 1,16 | 5,17  | 2,62 | 1,57 | 0,59 | 3,29 | 2,17 | 3,09 | 7,09 | 4,45 | 3,68 | 0,55 | 0,98 | 1,50 |

On request, VDS and FM approvals could be available