



PUSH-PULL NV


ISO 7241/A PUSH-PULL BALL
ISO 5675 NV

Edition. 21.0

CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 7241/A
PUSH-PULL BALL ISO 5675 NV
- Sizes: from DN10-DN13
- Pressure: up to PN420

Female

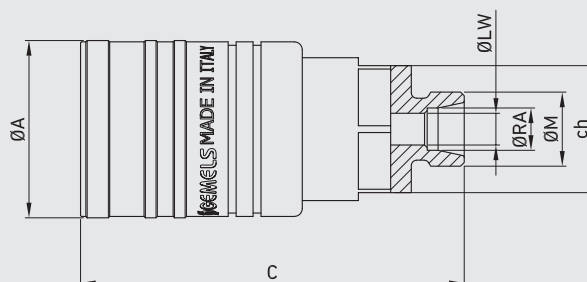

**Available also
in patented version:**
ball valve with integrated
quick coupling.




CODE DESCRIPTION STRUCTURE

					QC	10	1F	DN10	1	B
Type of coupling _____										
ISO 5675 PP										
Ends _____										
ISO 1179-1 BSPP	ASME B1.20.1 NPT	ISO 8434-1-S (DIN 2353)	ISO 8434-1-L (DIN 2353)	ISO 8434-1-L (DIN 2353) BULKHEAD						
G3/8	N 3/8	8S 10S	6L 8L 10L	8L 10L						
FEMALE _____										
DN/ISO _____										
10										
Body Material _____										
● 1 = 1,0737										
Seal material _____										
B = NBR E = FKM*										

*On request

- Cups
- Plugs



Male type see ISO 5675


QUICK COUPLINGS PUSH-PULL ISO 5675 (female) FEMALE THREAD ISO 1179-1 BSPP

FEMALE THREAD ISO 1179-1 BSPP

CS

Carbon Steel

TYPE	DN	PN	ØA	C	Ød	ch	ØM	WEIGHT	ITEM CODE
QC PP NV G 3/8 FEMALE	10	MPa 42	mm 33,5	68	-	24	G3/8	kg 0,265	NC34G020000
		Psi 6090	inch 1,32	2,68	-	0,94		lb 0,58	



Male type see ISO 5675


QUICK COUPLINGS PUSH-PULL ISO 5675 (female) FEMALE THREAD ASME B1.20.1 NPT

FEMALE THREAD ASME B1.20.1 NPT

CS


Carbon Steel

TYPE	DN	PN		ØA		C	Ød	ch	ØM	WEIGHT		ITEM CODE
QC PP NV N 3/8 FEMALE	10	MPa	42	mm	33,5	68	-	24	N3/8	kg	0,266	NC34N020001
		Psi	6090	inch	1,32	2,68	-	0,94		lb	0,59	




QUICK COUPLINGS PUSH-PULL ISO 5675 (female) MALE THREAD METRIC ISO 8434-1-S (DIN 2353)

MALE THREAD METRIC ISO 8434-1-S (DIN 2353)													CS Carbon Steel	
TYPE	DN	PN		ØA		C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE	
QC PP NV 8S FEMALE	10	MPa	42	mm	33,5	74,5	-	24	M16X1,5	5	8	kg	0,345	NC34H020000
		Psi	6090	inch	1,32	2,93	-	0,94		0,20	0,31	lb	0,76	
QC PP NV10S FEMALE		MPa	42	mm	33,5	74,5	-	24	M18X1,5	7	10	kg	0,346	NC34H020001
		Psi	6090	inch	1,32	2,93	-	0,94		0,28	0,39	lb	0,76	



■ QUICK COUPLINGS PUSH-PULL ISO 5675 (FEMALE) MALE THREAD METRIC ISO 8434-1-L (DIN 2353)

MALE THREAD ISO 8434-1-L (DIN 2353)												CS Carbon Steel
TYPE	DN	PN	ØA	C	Ød	ch	ØM	ØLW	ØRA	WEIGHT	ITEM CODE	
QC PP NV 6L FEMALE	12,5	MPa 42	mm 33,5	72,5	-	24	M12X1,5	4	6	kg 0,339	NC34L020000	
		Psi 6090	inch 1,32	2,85	-	0,94		0,16	0,24	lb 0,75		
QC PP NV 8L FEMALE		MPa 42	mm 33,5	72,5	-	24	M14X1,5	6	8	kg 0,339	NC34L020001	
Psi 6090		inch 1,32	2,85	-	0,94	0,24		0,31	lb 0,75			
QC PP NV 10L FEMALE		MPa 42	mm 33,5	73,5	-	24	M16X1,5	8	10	kg 0,34	NC34L020002	
		Psi 6090	inch 1,32	2,89	-	0,94		0,31	0,39	lb 0,75		



■ QUICK COUPLINGS PUSH-PULL ISO 5675 (FEMALE) MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD

MALE THREAD METRIC ISO 8434-1-L (DIN 2353) BULKHEAD												CS Carbon Steel		
TYPE	DN	PN		ØA		C	Ød	ch	ØM	ØLW	ØRA	WEIGHT		ITEM CODE
QC PP NV 8L BK FEMALE	12,5	MPa	42	mm	33,5	87,5	-	24	M14X1,5	6	8	kg	0,353	NC34M020000
		Psi	6090	inch	1,32	3,44	-	0,94		0,24	0,31	lb	0,78	
QC PP NV 10L BK FEMALE		MPa	42	mm	33,5	88,5	-	24	M16X1,5	8	10	kg	0,356	NC34M020001
Psi		6090	inch	1,32	3,48	-	0,94	0,31		0,39	lb	0,78		