





VGB

ISO 14540 - WITH POPPET/BALL

Edition. 21.3

CS Carbon Steel

- Type: Quick Couplings
- Models: ISO 14540
- Sizes: from DN6 up to DN10
- Pressure: up to PN700

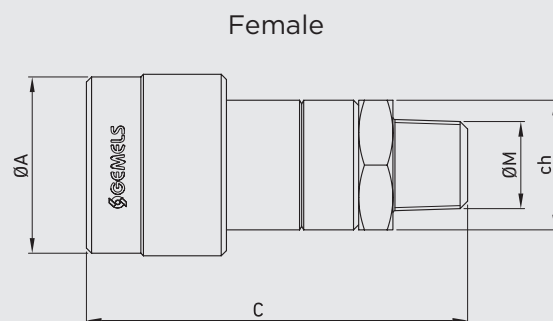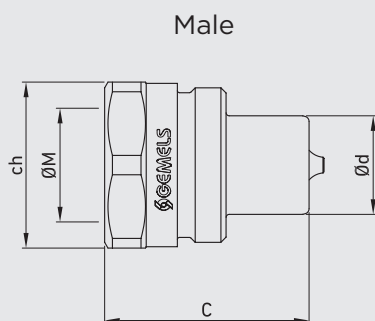

Available also
in patented version:
ball valve with integrated
quick coupling.




CODE DESCRIPTION STRUCTURE

	QC	1/4	M/F	6,3	1	B
Type of coupling						
VGB						
Ends						
ASME B1.20.1						
NPT						
N 1/4 M						
N 3/8 M						
MALE						
FEMALE						
DN/ISO						
6,3						
Body Material						
● 1 = 1,0737						
Seal material						
● B = NBR E = FKM*						



*On request
Cups
Plugs
with ball instead of poppet



QUICK COUPLINGS ISO 14540 VGB (MALE/FEMALE) MALE THREAD ASME B1.20.1 NPT WITH POPPET

TYPE	DN	PN		ØA		C	Ød	ch	ØM	WEIGHT		ITEM CODE
		MPa	70	mm	-	32,5	15,9			kg	0,113	
QC VGB N 1/4M MALE	6,3	Psi	10150	inch	-	1,28	0,63	19	NPT 1/4	lb	0,25	NC17N010000
QC VGB N 1/4M FEMALE	6,3	MPa	70	mm	28,5	60,8	-	22	NPT 1/4	kg	0,07	NC18N010000
		Psi	10150	inch	1,12	2,39	-			lb	0,15	
QC VGB N 3/8M MALE	10	MPa	70	mm	-	35	19	32	NPT 3/8	kg	0,221	NC17N020000
		Psi	10150	inch	-	1,38	0,75			lb	0,49	
QC VGB N 3/8M FEMALE	10	MPa	70	mm	35	75,3	-	25	NPT 3/8	kg	0,111	NC18N020000
		Psi	10150	inch	1,38	2,96	-			lb	0,24	

CS
Carbon
Steel

QUICK COUPLINGS ISO 14540 VGB (MALE/FEMALE) MALE THREAD ASME B1.20.1 NPT WITH BALL

TYPE	DN	PN		ØA		C	Ød	ch	ØM	WEIGHT		ITEM CODE
		MPa	70	mm	-	32,5	15,9			kg	0,113	
QC VGB N 1/4M BALL MALE	6,3	Psi	10150	inch	-	1,28	0,63	19	NPT 1/4	lb	0,25	NC17N010001
QC VGB N 1/4M BALL FEMALE	6,3	MPa	70	mm	28,5	60,8	-	22	NPT 1/4	kg	0,07	NC18N010001
		Psi	10150	inch	1,12	2,39	-			lb	0,15	
QC VGB N 3/8M BALL MALE	10	MPa	70	mm	-	35	19	32	NPT 3/8	kg	0,221	NC17N020001
		Psi	10150	inch	-	1,38	0,75			lb	0,49	
QC VGB N 3/8M BALL FEMALE	10	MPa	70	mm	35	75,3	-	25	NPT 3/8	kg	0,111	NC18N020001
		Psi	10150	inch	1,38	2,96	-			lb	0,24	

CS
Carbon
Steel